

Recursive ArUco Markers: A Scalable Fiducial Marker Design for Unmanned Aerial Vehicle Landing Pads

Rafael Muñoz-Salinas^{1,*}, Francisco J. Romero-Ramirez², Sergio Garrido-Jurado¹

¹Department of Computer Science and A.I., Universidad de Córdoba, 14071, Córdoba, Spain

²Department of Electronics and Computer Engineering, Universidad de Córdoba, 14071, Córdoba, Spain

* in1musar@uco.es

Abstract

Unmanned Aerial Vehicles (UAVs) increasingly rely on visual fiducial markers for autonomous navigation and precision landing. However, standard markers suffer from limited operational ranges, becoming undetectable when the camera is either too far or too close. While recursive and fractal markers have been proposed to address this issue, existing approaches either require the marker’s center to remain visible, making them vulnerable to occlusion, or are limited in their recursion depth and placement. We propose a novel Recursive ArUco marker design. Our method allows any standard fiducial marker to be transformed into a recursive marker with an arbitrary depth. By employing a modified bit-sampling strategy during detection, we embed complete markers within both the black and white bits of the parent marker. This approach guarantees unlimited recursion depth and robust detection even with partial occlusion, as it does not rely on the marker’s center being visible. Furthermore, by maintaining a single, unique identifier across all recursive scales, our proposal provides an extensive dictionary of multiple unique landing pads. This capability allows fleets of UAVs to operate simultaneously, with each drone landing at its designated location—a feature not supported by existing Fractal and Harco markers due to their structural and dictionary constraints.

1 Introduction

Visual fiducial markers, such as ArUco [1, 2, 3, 4], AprilTag [5], and ARTag [6], are ubiquitous in computer vision applications, particularly in robotics and Unmanned Aerial Vehicle (UAV) navigation [7]. In the context of autonomous UAV landing, visual markers are frequently employed to assist in precise pose estimation [8, 9, 10]. However, a challenge in this application is that the camera-to-marker distance varies significantly during the descent. A single standard marker large enough to be detected at high altitudes will eventually fall outside the camera’s field of view at lower altitudes, leading to tracking failure.

To mitigate this limitation, recursive, nested, or height-adaptive markers have been introduced to provide continuous pose estimation across multiple scales [11, 12]. For example, Embedded ArUco [13] extends the detection range by placing a smaller marker inside the parent marker (see Figure 1(a)). Similarly, Fractal markers [14] embed multiple smaller markers within the parent marker (see Figure 1(b)), and have been actively applied to UAV landing scenarios [15]. However, a critical limitation of both Embedded ArUco and Fractal markers is their dependence on the marker’s central region for proper identification; if the center is occluded or falls outside the field of view, the entire hierarchy becomes undetectable. Furthermore, dedicating the center to sub-markers reduces the area available for encoding data. Other approaches, such as Harco markers [16], embed smaller markers strictly within the isolated

white pixels of the parent marker to ensure smooth pose transitions (Figure 1(c)). However, this approach is typically limited to a small number of recursion levels, as adding deeper layers inevitably introduces black pixels into the parent’s white cells, thereby destroying the upper-level detectability. The placement is also heavily constrained by the parent’s binary code. Furthermore, Harco requires separate dictionaries for parent and child markers, meaning the marker’s identifier varies with the observed scale, complicating its use in multi-UAV operations.

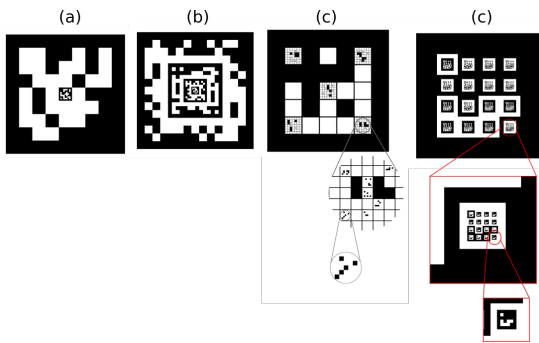


Figure 1: Visual comparison of multi-scale markers: (a) Embedded ArUco [13]. (b) Fractal marker [14], (c) Harco marker [16], and (d) Our proposed Recursive ArUco marker (RArUco).

In this work, we propose the Recursive ArUco marker (Figure 1(d)). Our contribution is a mathematically simple yet highly effective generation and detection scheme that can be applied to any existing dictionary of fiducial markers. Unlike Harco markers, our method allows for an arbitrary number of recursion levels and embeds markers within both black and white bits. Crucially, unlike Embedded ArUco and Fractal markers, our detection algorithm does not require the marker’s central region to be visible, making it highly robust to occlusions.

A key aspect of our implementation, specifically designed for drone landing pads, is that we embed the *same* marker into its own bits across all recursive levels. This means that a Recursive ArUco marker maintains a single, unique ID at any scale. Since each drone can be assigned a specific landing pad ID,

the drone can unambiguously identify where to land regardless of which part of the marker or which recursive level it sees during its descent. Consequently, a marker dictionary provides as many distinct landing pads as it has unique marker IDs, allowing a fleet to land in its own separate places. This contrasts with Fractal markers, which do not offer multiple unique landing pads, and Harco markers, which rely on separate parent and child dictionaries and thus do not preserve a unified ID across scales. Furthermore, we recommend using dictionaries with fewer bits, as the larger physical size of the individual bits increases the maximum distance from which they can be detected.

The remainder of this paper is organized as follows. Section 2 reviews the related works on fiducial markers. Section 3 details the proposed generation and detection algorithms for Recursive ArUco markers. Section 4 presents the experiments and results to validate our approach. Finally, Section 5 draws the main conclusions.

2 Related Works

Fiducial markers have been extensively studied for their robustness and computational efficiency in various applications, ranging from augmented reality [17] to camera positioning in complex indoor environments [18]. In recent years, vision-based autonomous landing for Unmanned Aerial Vehicles (UAVs) has emerged as a prominent application of fiducial markers, leading to extensive research into novel algorithms and techniques to ensure safe and precise tracking [7]. Standard marker systems, such as ArUco [1], AprilTag [5], and ARTag [6], provide reliable pose estimation and have been widely adopted for UAV landing aid systems [8, 9]. To improve robustness under diverse operational conditions, several approaches have optimized standard marker tracking using techniques such as deep learning for high-speed fixed-wing drones [19], multiple concentric ellipse fitting [20], height-adaptive tracking strategies [11], ground pattern recognition [10], and inner-outer nested marker designs [12, 21]. Recent advances have also focused on improving the computational efficiency of these standard markers. For instance,

ArUco Nano [4] introduces a lightweight contour-tracing and sub-pixel sampling method that significantly reduces computational overhead, making it well-suited for resource-constrained devices such as UAVs.

However, standard fiducial markers fundamentally struggle when the camera-to-marker distance varies significantly, as they rely on a fixed physical size. To address this limitation, multi-scale or hierarchical marker designs have been proposed. Fractal markers [14] embed smaller markers within a parent marker, enabling detection at shorter ranges, and have been actively applied to autonomous UAV landing on mobile robotic platforms [15]. Other works, such as Embedded ArUco [13], have extended this idea for high-precision landing. Nevertheless, these fractal-based approaches rely on the marker’s center, making them highly susceptible to occlusion. HArCo [16] proposes a different hierarchical structure by embedding child markers within the white cells of the parent marker. While this approach improves transition smoothness, it heavily restricts the number of recursion levels and constrains the available dictionary.

Other approaches have explored extending marker density to improve robustness. For example, ChArUco2 [22] enhances standard calibration boards by embedding markers in both black and white squares, thereby doubling the marker density and providing robustness under partial occlusion. While highly effective for calibration, this checkerboard-based design is not optimized for single-marker localization in UAV landing, where the marker must be seamlessly detected across vastly different scales. Our proposed Recursive ArUco (RArUco) marker addresses these challenges by embedding identical markers in both black and white bits at arbitrary recursion depths. Crucially, our detection method leverages a border-sampling strategy that does not require the marker’s center to be visible. This guarantees unlimited recursion depth and ensures highly robust tracking regardless of the camera’s distance, steep viewing angles, or partial occlusions.

3 Proposed Method

Our proposed approach modifies the generation and detection pipelines of standard square fiducial markers. Let M_0 denote a standard marker from a pre-defined dictionary, represented as a binary matrix where each element (bit) is either black (0) or white (1).

3.1 Marker Generation

The core principle of our generation algorithm is to recursively embed the entire marker M_{d-1} into each bit of the marker at depth d .

Let D be the maximum desired recursion depth, and let b denote the border width parameter. To ensure robust detection, the embedded marker does not occupy the entire bit area. Instead, a surrounding border of width b is preserved, matching the original color of the bit.

Formally, the base marker image I_0 is generated from M_0 . To construct the marker image I_d at depth $d \in \{1, \dots, D\}$, the image’s spatial resolution is increased to accommodate the embedded markers and the required borders. For every bit location (i, j) in the parent marker structure:

1. If the bit at (i, j) is white, the image I_{d-1} is copied directly to the center of the bit’s allocated region, surrounded by a white border of width b .
2. If the bit at (i, j) is black, the inverse image $\overline{I_{d-1}}$ (where black and white pixels are inverted) is copied into the center of the bit’s region, surrounded by a black border of width b .

This recursive process is repeated indefinitely up to depth D . While our generation method theoretically allows for any arbitrary marker from the dictionary to be embedded at each recursive step, in this implementation, we explicitly embed the *same* marker ID at all recursive levels. This design choice is particularly well-suited to UAV landing pad applications. Since each drone is assigned a specific landing pad ID, using a uniform ID across all scales ensures the drone can unambiguously identify its target regardless of the recursive layer at which it detects it. Consequently, the total number of unique landing pads

available is equal to the number of unique markers in the chosen dictionary.

Additionally, we recommend employing dictionaries with fewer bits (e.g., 4×4 or 5×5 grids). A smaller grid size translates to a larger physical size for each bit, which significantly improves the visibility and detection range of the markers at long distances. The border parameter b also plays a critical role in the system’s robustness; a larger b increases the detectable area of the parent bit, enhancing robustness against steep viewing angles and perspective distortions, albeit at the cost of reducing the physical size of the inner markers.

3.2 Marker Detection

The detection of standard ArUco markers typically involves threshold segmentation, contour extraction, polygonal approximation to find square candidates, and finally, perspective removal to extract the bit matrix (see Figure 2). To minimize computational bottlenecks and enable high-speed processing on resource-constrained devices, our approach integrates highly optimized techniques inspired by ArUco Nano [4]. Specifically, we utilize lightweight high-pass filtering for segmentation (Figure 2(b)) and a Visited-Aware contour tracing algorithm that efficiently rejects noise artifacts without relying on expensive standard contour-finding functions (Figure 2(c)).

To determine the color of each bit, standard implementations compute the median or mean intensity of all pixels within the bit’s cell, or sample the central pixel. These standard sampling strategies fail for our Recursive ArUco markers because the center of every bit is populated by the inner marker I_{d-1} , which contains both black and white pixels.

To overcome this, we introduce a modified bit extraction strategy. Once a square candidate is localized and rectified, the color of each bit is determined by sampling only the pixels residing in the border region of width b , explicitly ignoring the central region (Figure 2(d)). Mathematically, for a given bit cell $C_{i,j}$ defined over the domain $[0, S] \times [0, S]$ (where S is the bit size in pixels), we define a sampling mask W that excludes the central area $[b, S-b] \times [b, S-b]$. The bit intensity is then computed over the region

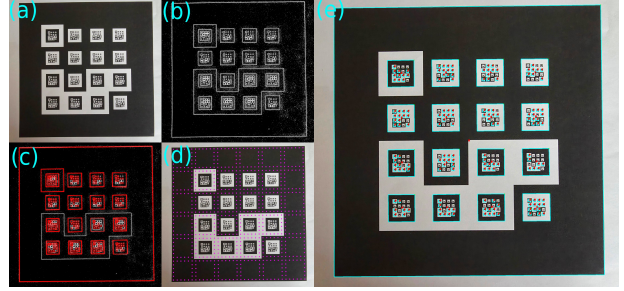


Figure 2: Steps of RArUco detection. (a) Input image. (b) Adaptive threshold. (c) Rectangles obtained after contour extraction. (d) Bit color estimation by sampling a grid of inner rectangles for each marker bit. Only the samples for the most external rectangle are shown. (e) Detected 181 out of the 273 total markers in the image. Only markers of the deepest levels are not detected in this image.

$C_{i,j} \cap W$. Moreover, instead of employing costly full-image warping via homography, our detection method uses direct sub-pixel code sampling with stochastic corner refinement to robustly extract bit values (as proposed in [4]).

Furthermore, because markers embedded within black bits are inverted during generation, the detection algorithm is adapted to recognize both standard (black-and-white) and inverted (white-and-black) markers. During the contour extraction phase, the system identifies both dark square candidates on light backgrounds and light square candidates on dark backgrounds. If an inverted candidate is processed, its bit intensities are logically reversed before decoding.

This border-sampling technique is the key to our method’s robustness. Because the algorithm only inspects the perimeter of each bit to ascertain its value, it is entirely agnostic to the contents of the bit’s center. Consequently, any inner marker—or indeed any arbitrary occlusion at the center of the marker—will not disrupt detection of the parent marker. This provides a significant advantage over Fractal markers, which mandate center visibility.

4 Experiments and Results

To validate the efficacy of the proposed Recursive ArUco markers, we conducted a series of experiments focusing on five critical aspects: operational distance range and viewing angles, robustness to occlusion, robustness to partial visibility, robustness to motion blur, and real-world flight test applicability. Note that while Embedded ArUco and Harco markers also employ nested hierarchical structures, they were excluded from our empirical baseline evaluation. Neither the source code nor pre-compiled executables for these systems are publicly available for testing. Because their internal generation and detection pipelines rely on specific algorithmic optimizations not fully detailed in the literature, an independent re-implementation could inadvertently misrepresent their true performance. Furthermore, Fractal markers already serve as a strong representative baseline for center-dependent multi-scale approaches. This renders any direct, quantitative comparison with unavailable methods scientifically unfair and potentially biased. To ensure strict reproducibility and a rigorous baseline, we restricted our comparative analysis to widely adopted, publicly verifiable frameworks: the standard ArUco detector implemented in OpenCV 4.12, and the original Fractal marker implementation in the ArUco library (<https://sourceforge.net/projects/aruco/>). The proposed generation and detection algorithms were integrated into our new ArUco2 library, whose source code is publicly available at <https://github.com/rmsalinas/aruco2>. All computational performance tests were carried out on a system equipped with a 13th Gen Intel(R) Core(TM) i7-13700H processor.

4.1 Distance and Viewing Angle Evaluation

The primary motivation for recursive markers is to enable continuous detection over varying camera-to-target distances. While UAV landing scenarios primarily involve relatively perpendicular approaches, we additionally evaluate the methods under steep viewing angles. Although such extreme angles may not be strictly necessary for standard landing pads,

this evaluation demonstrates the overall robustness of our proposal and its potential for more general-purpose applications.

Experimental Setup: To benchmark the detection capabilities of different marker methods under varying viewpoints, we developed a simulation framework. This framework generates simulated 4K (3840×2160) images of a marker placed in a 3D environment, captured from a virtual camera with a standard focal length and light lens distortion. We evaluated three types of fiducial markers (each modeled with a physical size of 1.0×1.0 meters): standard ArUco markers (evaluated using the DICT_APRILTAG_16h5 dictionary), Fractal markers (specifically FRACTAL_3L6), and our proposed Recursive ArUco (RArUco) markers (generated with 2 recursion levels using marker 0 of the DICT_APRILTAG_16h5 dictionary). The camera position was systematically varied across a grid of distances (ranging from 0.5 to 100 meters) and viewing angles (ranging from 0° to 80° with respect to the marker's normal). Figure 3 shows a representative example of the three marker types captured from a distance of 5.74 meters at a 40° viewing angle.

Results: The True Positive Rate (TPR) and average computing times were calculated for each method across the simulated viewpoint grid. As demonstrated in Figure 4, the standard ArUco marker exhibits a high overall detection rate (78.89%) and an average computation time of 11.69 ms. Still, it inherently fails at close range when the marker borders extend beyond the camera's field of view. The Fractal marker, while designed for robustness, achieved an overall TPR of only 27.78% (average computing time of 13.10 ms) and showed particular vulnerability to steep viewing angles. Conversely, our proposed RArUco markers achieved a competitive overall TPR of 48.33% (average computing time of 5.39 ms). Crucially, the RArUco marker seamlessly maintained detection at extremely close distances by transitioning to its embedded inner markers, while remaining highly robust to extreme viewing angles up to 80° , significantly outperforming the Fractal marker in challenging perspective conditions. In particular, our method demonstrated a substantially larger operational distance range than the Fractal marker, main-

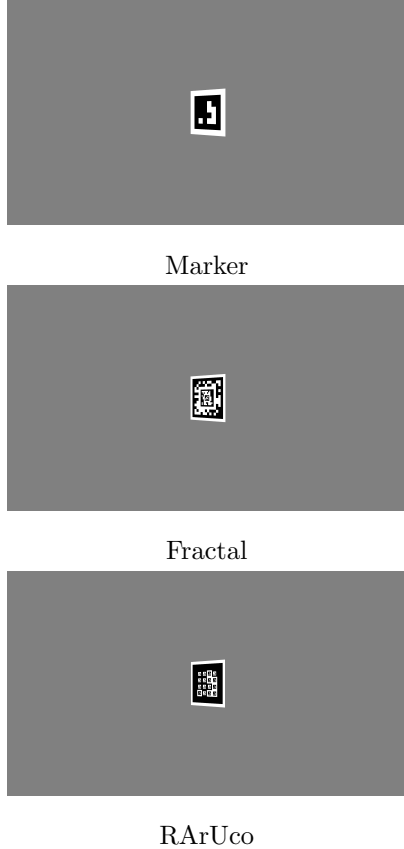


Figure 3: Examples from the simulated dataset used for evaluation. The images depict the standard ArUco, Fractal, and RArUco markers viewed from a distance of 5.74 meters at a 40° angle.

taining detection up to approximately 63.3 meters compared to the Fractal marker’s limit of roughly 31.9 meters (at a 0° viewing angle). Furthermore, operating at approximately 185 FPS, RArUco is significantly faster than both the standard ArUco marker (~ 85 FPS) and the Fractal marker (~ 76 FPS), making it highly suitable for real-time UAV control loops.

4.2 Robustness to Occlusion

A significant advantage of our border-sampling approach over existing recursive designs (such as Fractal markers) is its independence of the marker’s center. To empirically validate this, we conducted a rigorous occlusion experiment comparing standard ArUco markers, Fractal markers, and our proposed Recursive ArUco (RArUco) markers.

Experimental Setup: Each marker type was generated and padded with a white boundary to simulate a real-world scenario. We then systematically applied random occlusion noise to the images. The noise consisted of randomly placed black-and-white circles (with radii ranging from 2 to 10 pixels). We evaluated occlusion levels ranging from 5% to 80% of the total image area. For each occlusion level and marker type, we performed 50 independent trials, ensuring that the noise generator advanced its random state uniformly across all trials. Representative samples of the markers with 20% occlusion noise are shown in Figure 5.

Results: The detection rates for each method across the tested occlusion levels are shown in Figure 6. Standard ArUco markers are highly sensitive to occlusions that break their outer square contour, leading to a rapid decline in detection performance even at 5%-10% occlusion. The Fractal marker also exhibited catastrophic failure under these conditions, largely because it mandates the visibility of its central sub-markers for successful identification. Conversely, our proposed RArUco markers demonstrated exceptional robustness. By sampling only the bit borders and leveraging stochastic bit extraction, the RArUco marker maintained a 100% detection rate up to 30% random occlusion, degrading gracefully only as the noise level exceeded 40%. Note that in these extreme degradation scenarios, ‘detection’ refers to success-

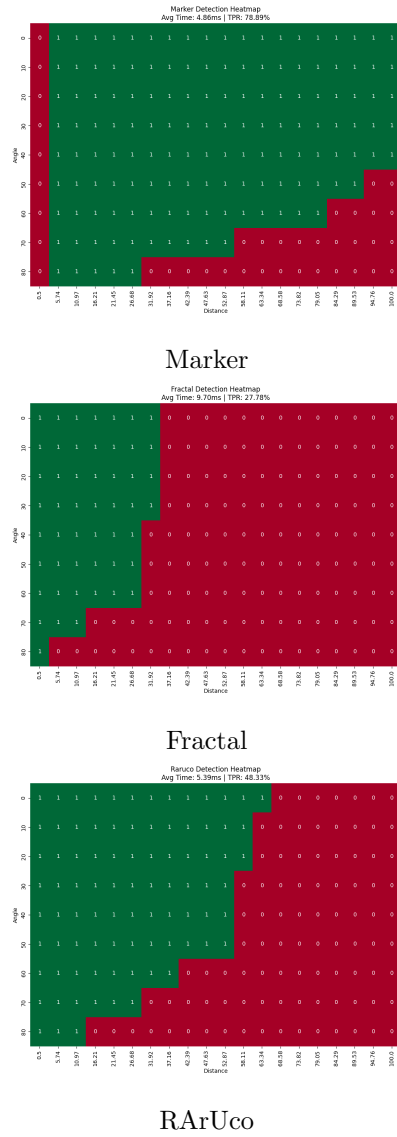


Figure 4: True Positive Rate (TPR) heatmaps for standard ArUco, Fractal, and RArUco markers across varying camera distances (x-axis) and viewing angles (y-axis).

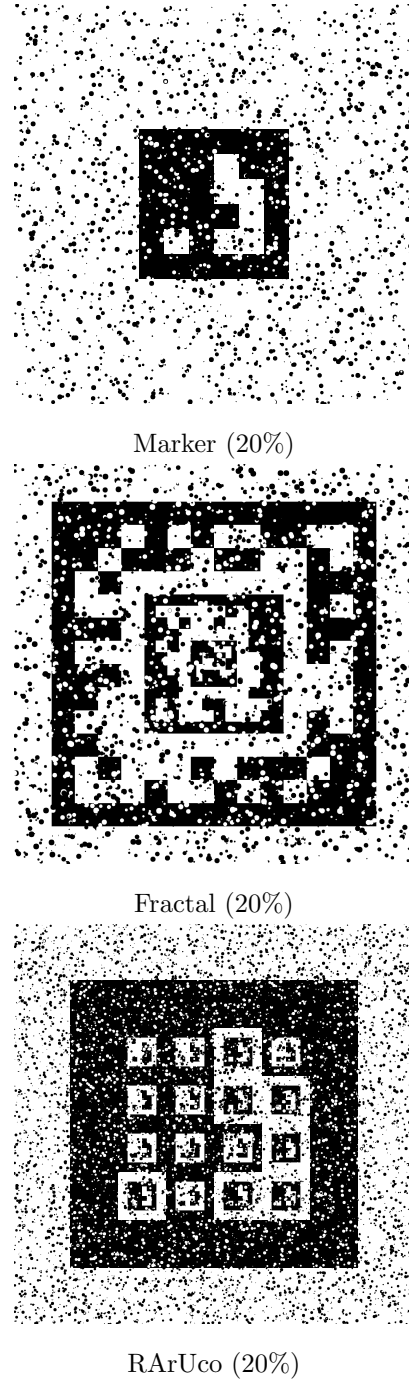


Figure 5: Examples of the simulated occlusion noise applied to the three marker types at a 20% occlusion level.

fully decoding any valid RArUco ID within the hierarchy. When the parent marker is compromised, the detection seamlessly falls back to a fully visible inner sub-marker.

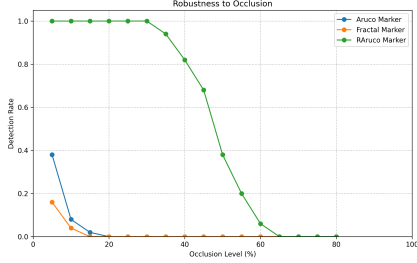


Figure 6: Detection rates for standard ArUco, Fractal, and RArUco markers as a function of the random occlusion noise level. Our proposed RArUco maintains a 100% detection rate up to 30% occlusion.

4.3 Robustness to Partial Visibility

In practical UAV landing scenarios, the drone may not always be perfectly centered over the landing pad, so the camera view captures only a portion of the marker. To evaluate performance under such conditions, we conducted a partial-visibility experiment.

Experimental Setup: We systematically cropped the markers as their boundaries slid, simulating a restricted camera field of view sliding across the markers. The marker’s visible ratio was reduced from 100% to 10%. At each visibility level, we averaged the detection rates across four directional crops (Top, Bottom, Left, Right). Figure 7 displays the marker appearances at a 50% visible ratio.

Results: Figure 8 illustrates the robustness of each marker type to partial visibility. Standard ArUco markers are strictly constrained by their outer boundaries; consequently, their detection rate plummets to 0% when the visible ratio drops below 90%. Fractal markers offer slightly better resilience, sustaining detection down to a 60% visible ratio, provided that one of their complete inner sub-markers remains fully visible. RArUco markers, however, significantly outperform both alternatives, maintaining

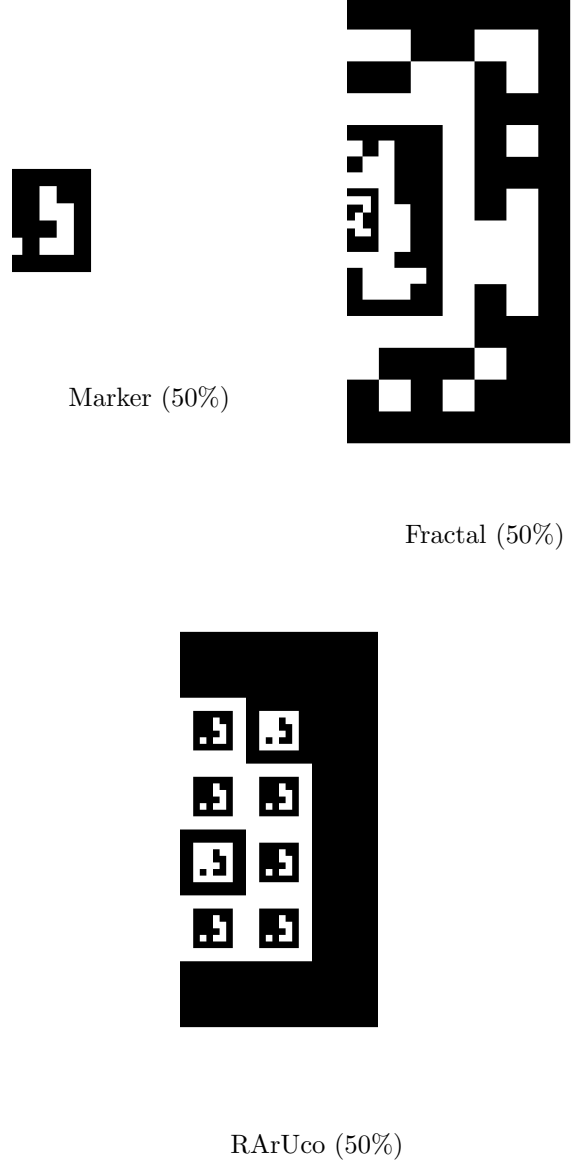


Figure 7: Examples of markers under partial visibility, cropped to show only 50% of each marker’s area.

a 100% detection rate even when only 40% of the marker is visible. This effectively means that even if a drone drifts such that more than half of the landing pad is cut out of the camera frame, RArUco still enables successful tracking and landing.

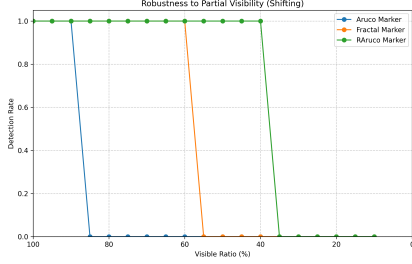


Figure 8: Detection rates for standard ArUco, Fractal, and RArUco markers under varying levels of partial visibility. The RArUco marker remains fully detectable even when 60% of its area is cropped.

4.4 Robustness to Motion Blur

UAV landings are frequently characterized by sudden maneuvers, vibrations, and high-speed descents, which introduce severe motion blur into the camera feed. To assess the reliability of our markers under these dynamic conditions, we simulated linear motion blur.

Experimental Setup: All three marker types were generated with an equivalent spatial footprint. We then applied a normalized linear motion blur filter to the images, varying the blur kernel size from 2% up to 40% of the marker's physical width. For fairness, we averaged the detection rates across four blur angles (0° , 45° , 90° , 135°). Figure 9 shows the visual degradation at a 15% motion-blur level.

Results: Figure 10 plots the detection rates under increasing blur severity. As expected, standard ArUco markers are the most resilient to blur, sustaining detection up to a 10% blur ratio, since their bits are physically larger and lack internal recursive subdivisions. The Fractal marker's detection drops off rapidly after 6% blur, as the high-frequency details of its central nested markers are easily washed out. Cru-



Marker (15% blur)



Fractal (15% blur)



RArUco (15% blur)

Figure 9: Examples of markers subjected to simulated linear motion blur with a kernel size equal to 15% of each marker's width.

cially, RArUco demonstrates a resilience that closely rivals the standard ArUco marker, maintaining robust detection up to an 8% blur ratio and continuing partial detection up to 10%. This confirms that relying on border bits for parent marker detection avoids the severe fragility associated with purely central sub-marker dependencies, making RArUco highly viable for dynamic UAV environments.

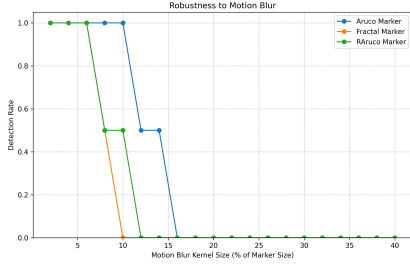


Figure 10: Detection rates for standard ArUco, Fractal, and RArUco markers as a function of motion-blur severity. RArUco performs favorably compared to Fractal markers, demonstrating blur resilience nearly on par with standard non-recursive markers.

4.5 Real-World Flight Test

To complement our simulated benchmarks, we performed a real-world flight test to validate the RArUco marker under actual flight dynamics, lighting variations, and sensor noise.

Experimental Setup: A DJI Mini 4 Pro drone was flown outdoors over a physical 30×30 cm RArUco landing pad. The flight trajectory consisted of a vertical takeoff, ascending to an approximate peak altitude of 15 meters, and a subsequent descent to land back on the pad. The onboard camera recorded the maneuver at 30 frames per second (fps), yielding a continuous sequence of approximately 900 frames. The resulting video feed, alongside telemetry data, was collected for analysis.

Results: Figure 11 shows representative frames from the video footage during takeoff and landing, while Figure 12 shows the estimated altitude and marker detection status throughout the entire flight

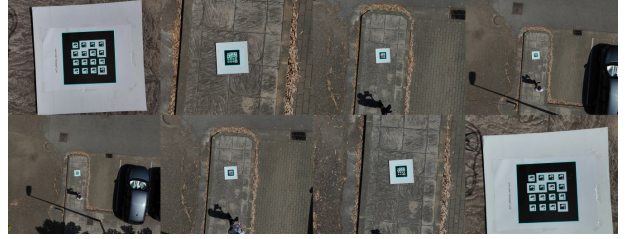


Figure 11: Takeoff and landing example. Video footage from a DJI Mini 4 Pro while taking off and landing on the proposed landing pad. The physical landing pad was 30×30 cm.

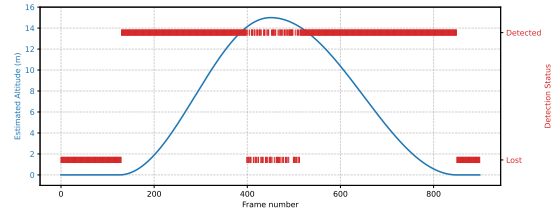


Figure 12: UAV altitude and marker detection status across the 900-frame sequence. The proposed marker maintains continuous detection across varying altitudes, exhibiting only the expected instability near the peak altitude of 15 meters, where the marker’s apparent size falls below the sensor’s decoding resolution.

sequence. The UAV remained stationary on the landing pad for the initial 125 frames, during which the camera was too close to the marker to perceive its internal structure, resulting in no detection. Upon takeoff, the marker was immediately acquired at frame 130.

The RArUco marker provided robust and continuous tracking throughout the ascent phase. At approximately frame 450, the UAV reached its zenith altitude of 15 meters. Observations indicate that tracking becomes unstable at altitudes exceeding 14 meters, characterized by intermittent detection dropouts. This instability is a natural consequence of the marker’s projection falling below the camera sensor’s minimum pixel resolution required for robust decoding. As the UAV descended, continuous and stable tracking was re-established. Finally, at frame 850, near the conclusion of the descent, the onboard camera automatically pitched 90° forward to prevent mechanical damage upon touchdown, effectively removing the landing pad from the camera’s field of view and terminating detection. Overall, the recursive structure permitted the parent marker and its inner sub-markers to synergistically maintain tracking throughout the critical phases of the flight envelope.

5 Conclusions

In this paper, we introduce the Recursive ArUco (RArUco) marker, a novel, highly scalable fiducial marker design engineered to overcome the distance limitations inherent in autonomous Unmanned Aerial Vehicle (UAV) landing applications. Unlike traditional recursive approaches that strictly depend on the visibility of the marker’s center or severely restrict recursion depth, our proposed method recursively embeds complete markers within both the black and white bits of the parent marker. This structural innovation ensures that detection remains robust even when the marker is heavily occluded or only partially visible within the camera’s field of view.

Our specialized detection algorithm, which selectively samples the border regions of each bit, reduces the complexity of the embedded sub-markers. This guarantees reliable bit extraction at any recursion

depth without imposing computational overhead. In fact, the proposed method is highly computationally efficient, proving to be faster than the tested existing standard and multi-scale approaches. This superior processing speed renders RArUco particularly well-suited for real-time applications and deployment on resource-constrained embedded devices characteristic of UAV systems. Extensive simulated benchmarks demonstrated that RArUco markers substantially outperform state-of-the-art multi-scale markers, such as Fractal markers, under challenging conditions including steep viewing angles, severe partial occlusion (maintaining a 100% detection rate up to 30% random occlusion and 60% area cropping), and dynamic motion blur.

Furthermore, a real-world flight test using a commercial UAV validated the practical applicability of the RArUco system, confirming its ability to provide continuous, uninterrupted tracking throughout a full 15-meter vertical ascent-and-descent maneuver. By offering arbitrary recursion depth and employing the same dictionary ID across all scales, the RArUco marker presents a mathematically simple, yet highly robust solution for deploying unique and reliable UAV landing pads in complex operational environments. Crucially, preserving a single unique identifier at all scales provides a scalable dictionary of multiple unique landing pads. This allows a fleet of UAVs to operate simultaneously with each drone navigating to its own designated place—a significant advantage over Fractal and Harco markers, which lack this capability due to their structural constraints.

References

- [1] S. Garrido-Jurado, R. Muñoz Salinas, F. J. Madrid-Cuevas, and M. J. Marín-Jiménez. Automatic generation and detection of highly reliable fiducial markers under occlusion. *Pattern Recognition*, 47(6):2280–2292, 2014.
- [2] Francisco J. Romero-Ramirez, Rafael Muñoz Salinas, and Rafael Medina-Carnicer. Speeded up detection of squared fiducial markers. *Image and Vision Computing*, 76:38–47, 2018.

- [3] S. Garrido-Jurado, R. Muñoz-Salinas, F. J. Madrid-Cuevas, and R. Medina-Carnicer. Generation of fiducial marker dictionaries using mixed integer linear programming. *Pattern Recognition*, 51:481–491, 2016.
- [4] Sergio Garrido-Jurado, Francisco J. Romero-Ramirez, and Rafael Muñoz-Salinas. Aruco nano: a simpler, faster, and more reliable fiducial marker detector. *SoftwareX*, 34:102690, 2026.
- [5] John Wang and Edwin Olson. AprilTag 2: Efficient and robust fiducial detection. In *Proceedings of the IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, October 2016.
- [6] M. Fiala. Artag, a fiducial marker system using digital techniques. In *2005 IEEE Computer Society Conference on Computer Vision and Pattern Recognition (CVPR'05)*, volume 2, pages 590–596 vol. 2, 2005.
- [7] Serhiy O. Semerikov, Andrii O. Kolhatin, Pavlo P. Nechypurenko, Tetiana A. Vakaliuk, and Iryna S. Mintii. Vision-based autonomous uav landing: A comprehensive review of technologies, techniques, and applications. *Journal of Intelligent & Robotic Systems*, 111(115), 2025.
- [8] Adam Marut, Konrad Wojtowicz, and Krzysztof Falkowski. Aruco markers pose estimation in uav landing aid system. In *Proceedings of the International Conference on Unmanned Aircraft Systems*, 2019.
- [9] Igor Lebedev, Aleksei Erashov, and Aleksandra Shabanova. Accurate autonomous uav landing using vision-based detection of aruco-marker. In *Interactive Collaborative Robotics: 5th International Conference, ICR 2020*, pages 170–179. Springer, 2020.
- [10] Jamie Wubben, Francisco Fabra, Carlos T. Calafate, Tomasz Krzeszowski, Johann M. Marquez-Barja, Juan-Carlos Cano, and Pietro Manzoni. Accurate landing of unmanned aerial vehicles using ground pattern recognition. *Electronics*, 8(12):1532, 2019.
- [11] Rong Liu, Jianjun Yi, Yajun Zhang, Bo Zhou, Wenlong Zheng, Hailei Wu, Shuqing Cao, and Jinzhen Mu. Vision-guided autonomous landing of multirotor uav on fixed landing marker. In *2020 IEEE International Conference on Artificial Intelligence and Computer Applications (ICAICA)*, pages 310–314. IEEE, 2020.
- [12] Bingkun Wang, Ruitao Ma, Hang Zhu, Yongbai Sha, and Tianye Yang. An autonomous tracking and landing method for unmanned aerial vehicles based on visual navigation. *Drones*, 7(12):703, 2023.
- [13] Artur Khazetdinov, AUFAR Zakiev, Tatyana Tsoy, Mikhail Svinin, and Evgeni Magid. Embedded aruco: a novel approach for high precision uav landing. In *2021 International Siberian Conference on Control and Communications (SIBCON)*, pages 1–6. IEEE, 2021.
- [14] Francisco J. Romero-Ramirez, Rafael Muñoz-Salinas, and R. Medina-Carnicer. Fractal markers: A new approach for long-range marker pose estimation under occlusion. *IEEE Access*, 7:169908–169919, 2019.
- [15] Dmitry Anikin, Artem Ryabinov, Anton Saveliev, and Alexander Semenov. Autonomous landing algorithm for uav on a mobile robotic platform with a fractal marker. In *Interactive Collaborative Robotics: 8th International Conference, ICR 2023*, pages 357–368. Springer, 2023.
- [16] Hao Wang, Zongying Shi, Geng Lu, and Yisheng Zhong. Hierarchical fiducial marker design for pose estimation in large-scale scenarios. *Journal of Field Robotics*, 35(6):835–849, 2018.
- [17] Ronald T. Azuma. A survey of augmented reality. *Presence: Teleoperators and Virtual Environments*, 6(4):355–385, 1997.
- [18] Pablo García-Ruiz, Francisco J. Romero-Ramirez, Rafael Muñoz-Salinas, Manuel J.

- Marín-Jiménez, and Rafael Medina-Carnicer. Sparse indoor camera positioning with fiducial markers. *Applied Sciences*, 15(4):1855, 2025.
- [19] Baoxi Yuan, Wenyun Ma, and Feng Wang. High speed safe autonomous landing marker tracking of fixed wing drone based on deep learning. *IEEE Access*, 10:83204–83216, 2022.
- [20] Youeyun Jung, Hyochoong Bang, and Dongjin Lee. Robust marker tracking algorithm for precise uav vision-based autonomous landing. In *2015 15th International Conference on Control, Automation and Systems (ICCAS)*, pages 568–572. IEEE, 2015.
- [21] Phong Ha Nguyen, Ki Wan Kim, Young Won Lee, and Kang Ryoung Park. Remote marker-based tracking for uav landing using visible-light camera sensor. *Sensors*, 17(9):1987, 2017.
- [22] Rafael Muñoz-Salinas, Francisco J. Romero-Ramirez, and Sergio Garrido-Jurado. Charuco2: Enhanced calibration boards with dual black-and-white marker detection. *SoftwareX*, 35:102832, 2026.