

HiTac-WAM: A Hierarchical Tactile World Action Model for Contact-Rich Robot Manipulation

Chao Xue^{1,2}, Chaofan Zhang^{1,2}, Wenxuan Ma^{1,2}, Guocai Yao³, Shaowei Cui^{1,2,3,*}, and Shuo Wang¹

¹Institute of Automation, Chinese Academy of Sciences

²ImprintX Robotics

³Beijing Academy of Artificial Intelligence

Abstract—World action models jointly predict future visual observations and actions, whereas existing tactile-aware variants typically represent future touch as an image or latent stream without modeling the physical dependencies that organize tactile states hierarchically. We present HiTac-WAM, a hierarchical tactile world action model that forecasts a sequence of future tactile states for each candidate action chunk before execution. The forecast factorizes into contact state, a 3D deformation field, and slip risk, organized as a directed hierarchy in which each downstream stage is conditioned on stop-gradient signals from preceding stages. A directed attention mask allows tactile queries to attend to the video–action context of each candidate while preventing video and action queries from attending to tactile tokens. For planning, HiTac-WAM ranks candidate action chunks using tactile forecasts and task-progress estimates. For execution, the selected tactile forecast is retained as a reference; persistent discrepancies between predicted and observed tactile states trigger corrective replanning. HiTac-WAM achieves a mean contact F1 of 0.921; under matched training budgets, the directed hierarchy reduces 3D displacement L2 error by 17.6% relative to the deformation-only predictor and improves slip AUPRC by 60.4% relative to the slip-only predictor. Across chip grasping, blackboard erasing, and USB insertion, selection guided by the hierarchical forecasts increases the average real-robot success rate from 31.1% to 61.1%, while the full system attains 72.2%.

I. INTRODUCTION

World action models jointly generate aligned future video and continuous action chunks [1]. Contact-rich manipulation, however, exposes a fundamental limitation of visual rollouts: contact at the end-effector–environment interface is often only indirectly observable, particularly under occlusion. This limitation becomes critical when repeated sampling, conditioned on the same visual history, robot state, and language instruction, uses independent noise draws to produce candidate action chunks with paired visual rollouts. The rollouts may appear similarly plausible—showing, for example, an aligned gripper, a moving eraser, or a centered connector—while the corresponding actions may lead to different physical outcomes, including missed or unilateral contact, insufficient pressure, slip, and lateral jamming. The central challenge is therefore to forecast the tactile consequences of each candidate action chunk before execution.

Tactile policies condition actions on measured touch [2], [3], while slow-fast controllers provide high-rate post-contact

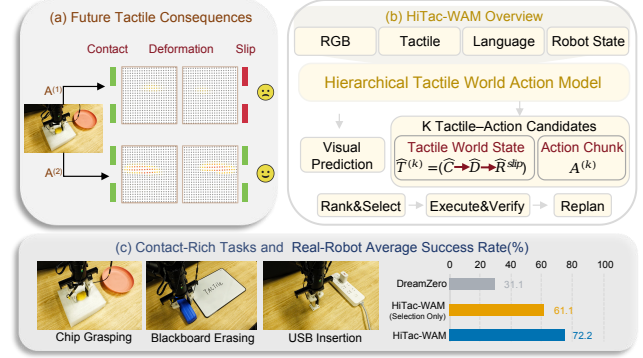


Fig. 1. **Overview of HiTac-WAM.** (a) Visually plausible candidate actions can produce distinct contact, deformation, and slip outcomes. (b) For each candidate action chunk, HiTac-WAM forecasts a hierarchical tactile trajectory ordered from contact state through deformation to slip risk, reflecting the physical dependencies among these states. It then ranks the resulting action–forecast pairs and retains the selected forecast as an execution-time reference for verification and replanning. (c) The three contact-rich tasks and observed average success rates in the main real-robot comparison.

feedback [4]; both respond only after contact occurs. Predictive models instead forecast action-conditioned changes in tactile observations, supporting model-predictive selection through comparison with a goal tactile image [5] and enabling prospective slip estimation [6]. Recent visuo-tactile action models learn future tactile images or latents alongside policy features [7]–[9], demonstrating that tactile forecasts can inform control. Existing predictive formulations, however, typically either entangle contact state, interface deformation, and slip risk within a single stream or treat them as independent targets, without encoding their directed physical dependencies. Prior work has addressed tactile forecasting, candidate evaluation, and online correction, but generally in separate systems rather than through a unified mechanism that ranks candidate action–forecast pairs using predictions structured by these dependencies and retains the selected forecast as a temporally aligned execution-time reference.

HiTac-WAM is built around three properties for tactile-forecast-based candidate selection and execution-time verification: the forecast explicitly separates the interface state into physically meaningful factors, each forecast remains paired with its candidate action chunk during ranking, and the selected forecast remains temporally aligned with subsequent

*Corresponding author: shaowei.cui@ia.ac.cn

observations. Accordingly, the model (Fig. 1) represents the tactile consequences of each candidate action chunk as a structured trajectory, factorized into contact state, contact-conditioned 3D deformation, and slip risk. The factors form a directed hierarchy reflecting their physical dependencies: interface deformation is meaningful only under contact, and slip risk depends on the resulting contact and deformation states. Without explicit conditioning, a multi-output predictor can capture these dependencies only implicitly; HiTac-WAM instead passes upstream state signals to downstream stages through stop-gradient conditioning. A directed attention mask further conditions each tactile forecast on the corresponding candidate action chunk and its predicted visual future within the same model. The model then ranks candidate action chunks using the resulting tactile forecasts and task-progress estimates derived from the predicted visual rollouts, and retains the selected forecast as an execution-time reference; persistent forecast–observation deviations trigger corrective actions.

Our main contributions are summarized as follows.

- We propose HiTac-WAM, a hierarchical tactile world action model that factorizes the tactile forecast of each candidate action chunk into contact state, contact-conditioned 3D deformation, and slip risk. Under matched training budgets, the hierarchy reduces 3D displacement L2 error by 17.6% relative to the deformation-only predictor and improves slip AUPRC by 60.4% relative to the slip-only predictor.
- We introduce forecast-guided action selection, which ranks candidate action chunks by their tactile forecasts and task-progress estimates. On three contact-rich tasks, it attains 61.1% real-robot success versus 31.1% for single-candidate execution; under a fixed generation budget, the corresponding rate for task-progress ranking is 35.6%.
- We develop online forecast verification, which retains the selected tactile forecast as an execution-time reference and triggers corrective actions when persistent forecast–observation deviations are detected. The full system attains an average real-robot success rate of 72.2% across the three tasks.

II. RELATED WORK

A. Visual World Models and Action Generation

Visual world models support planning by predicting action-conditioned future observations. Existing approaches predict video in image space [10], learn probabilistic latent dynamics [11], [12], or plan over pretrained visual features [13]; their planning utility depends on task progress being observable in the predicted stream. A parallel line of work addresses action generation: diffusion policies represent multimodal action chunks [14], while World action models jointly generate video and continuous actions [1]. In the latter, upcoming interactions are predicted primarily through visual signals, leaving contact only indirectly represented. Variables that determine task outcomes, such as contact

timing, pressure distribution, and incipient slip, may produce weak or delayed RGB signatures. Appearance-based scores can therefore confuse a successful grasp with a visually similar failure. HiTac-WAM augments each action proposal from a pretrained world action model [1] with an explicit tactile forecast.

B. Visuo-Tactile Models and Tactile Prediction

Tactile-conditioned policies fuse vision and touch to handle contact and occlusion [2], relate touch to 3D structure [3], and support bimanual or in-hand skills [15], [16]. Transferable representations, robot-free interfaces, and human-centric pretraining broaden tactile supervision [17]–[19], and tactile-augmented VLA models incorporate touch into language-conditioned control [20], [21]. These methods use measured touch during execution but do not explicitly predict the contact state of an unexecuted action. Predictive tactile models optimize action sequences [5], interpret future signals [22], infer touch from visual geometry [23], and estimate prospective slip [6]. Measured tactile sequences also support estimates of contact, force, slip, and grasp quality [24], [25]. Together, these studies establish the value of tactile state estimation and forecasting, but existing predictive formulations typically either entangle contact state, interface deformation, and slip risk within a single stream or model these quantities as independent targets, without encoding their directed physical dependencies. Recent models integrate tactile forecasting into a shared policy context. ViTacFormer uses future tactile prediction to learn cross-modal representations [7], Dream-Tac jointly predicts vision, touch, and action [8], and UniTacVLA combines tactile latent prediction with online correction [9]. Other recent systems use visuo-tactile rollouts for planning [26], couple tactile deformation with action prediction [27], provide high-frequency tactile correction [28], or study rollout scaling [29]. By contrast, HiTac-WAM predicts a temporally resolved, hierarchical tactile world state for each unexecuted action, explicitly evaluates the directed dependencies among contact, deformation, and slip risk, and retains the selected forecast as an execution-time reference.

C. Action Selection and Execution Monitoring

Model-predictive and world-model planners rank candidates using learned dynamics or scores in image, feature, or reward spaces [5], [13], while diffusion policies model multimodal action distributions [14]. KDPE instead uses action-space density [30]. After selection, Reactive Diffusion Policy and tactile primitives correct motion using measured touch [4], [31]. Multimodal anomaly detectors identify execution anomalies [32], while task-specific recovery systems map failures to corrective actions [33]. HiTac-WAM links candidate selection and execution monitoring by ranking candidates according to task progress and predicted contact, deformation, and slip risk, and then retaining the selected forecast as an execution-time reference; persistent deviations from this reference trigger safe retreat and renewed candidate generation.

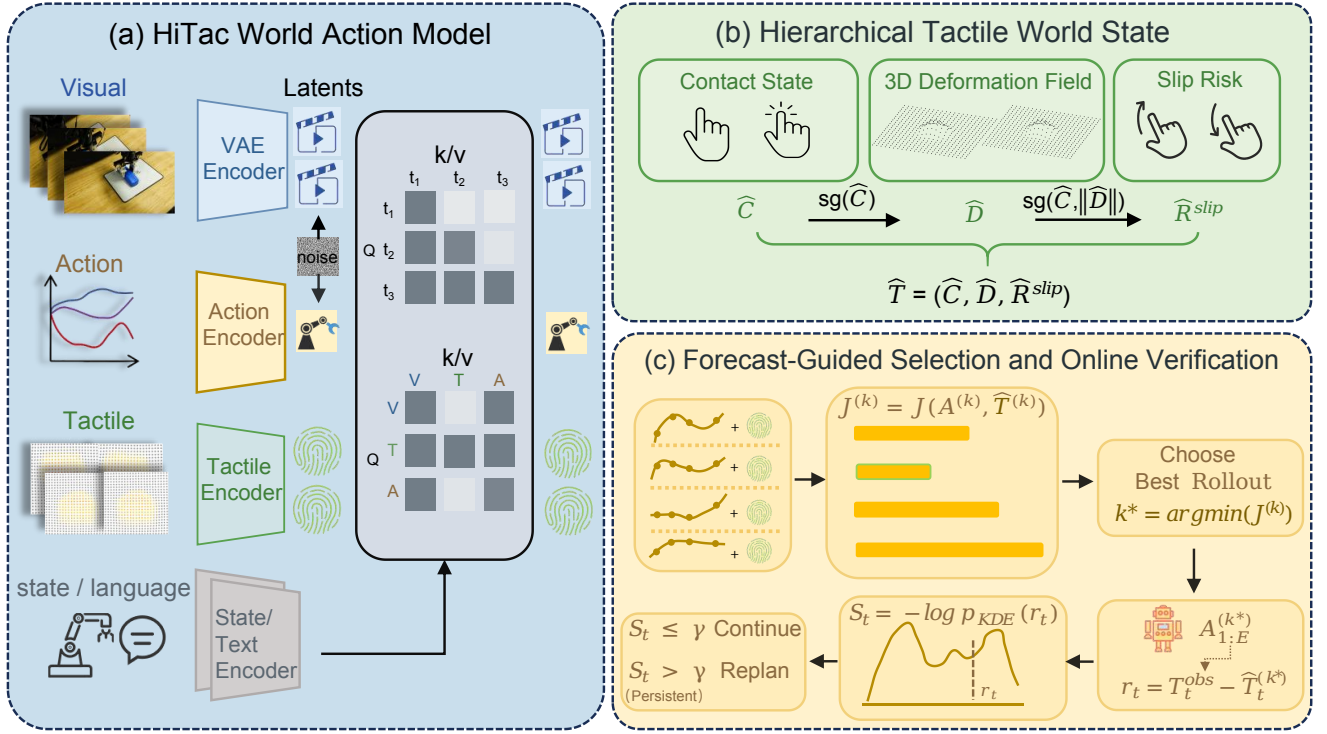


Fig. 2. **Architecture of HiTac-WAM.** (a) A directed attention mask allows tactile queries to access the video-action context while isolating video and action queries from tactile history. (b) The hierarchy predicts bilateral contact, contact-conditioned 3D deformation, and contact-gated slip risk. (c) Candidate action-forecast pairs are ranked by $J^{(k)}$; the selected tactile forecast is retained as the execution-time reference, and persistent forecast deviations trigger corrective replanning.

III. METHOD

HiTac-WAM is a tactile world action model for contact-rich manipulation. Given multimodal observations and a candidate action chunk, it forecasts the chunk’s hierarchical tactile consequences—contact state, contact-conditioned 3D deformation, and slip risk—using a tactile branch that augments a pretrained world action model [1]. At each replanning step, forecasts for all candidate chunks guide ranking, and the selected forecast is retained as an execution-time reference. Fig. 2 summarizes the information flow.

A. Directed Multimodal Context

At control time t , all candidates share the observed history $\mathcal{H}_t = \{\mathbf{V}_t, \mathbf{q}_t, \boldsymbol{\tau}_t, \ell\}$, with $\mathbf{V}_t$ containing synchronized RGB views, $\mathbf{q}_t$ the robot state, $\boldsymbol{\tau}_t$ the bilateral tactile history, and ℓ the language instruction. Candidate $k \in \{1, \dots, K\}$ is the H -step action chunk $\mathbf{A}_t^{(k)} = [\mathbf{a}_t^{(k)}, \dots, \mathbf{a}_{t+H-1}^{(k)}]^\top \in \mathbb{R}^{H \times 7}$. The tactile branch f_θ predicts

$$\begin{aligned} \hat{\mathbf{T}}_{t+1:t+H}^{(k)} &= f_\theta(\mathcal{H}_t, \mathbf{A}_t^{(k)}), \\ \hat{\mathbf{T}}_{t+h}^{(k)} &= (\hat{\mathbf{C}}_{t+h}^{(k)}, \hat{\mathbf{D}}_{t+h}^{(k)}, \hat{\mathbf{R}}_{t+h}^{slip, (k)}). \end{aligned} \quad (1)$$

At forecast offset h , action $\mathbf{a}_{t+h-1}^{(k)}$ is temporally aligned with and conditions the tactile target at time $t+h$, and the same alignment lets the selected forecast act as the execution-time reference. Together with the generated video and action, $\hat{\mathbf{T}}_{t+1:t+H}^{(k)}$ forms the model’s predicted world state: the rollout

describes how the scene will evolve, and the tactile hierarchy describes the contact consequences at the interface.

The shared backbone receives visual, action, tactile, robot-state, and language tokens. The pretrained FG-CLTP tactile encoder [34] encodes the bilateral tactile history into features that are projected into tactile tokens. A directed attention mask (Fig. 2(a)) constrains cross-modal information flow. Tactile queries may attend to the tactile history and to the video-action context, including its predicted future representations and aligned action tokens, whereas visual and action queries cannot attend to tactile keys or values. With rows indexing queries and columns indexing keys in the order visual, action, and tactile, the additive attention mask is

$$\mathbf{M} = \begin{bmatrix} \mathbf{M}_{VV} & \mathbf{M}_{VA} & -\infty \\ \mathbf{M}_{AV} & \mathbf{M}_{AA} & -\infty \\ \mathbf{0} & \mathbf{0} & \mathbf{M}_{TT} \end{bmatrix}, \quad (2)$$

where the diagonal and visual-action blocks inherit the backbone’s original masks, the $-\infty$ blocks hide tactile keys from visual and action queries, and the zero blocks give tactile queries full access to the visual and action context.

During training, we update the tactile projections and queries, the action-tactile fusion module, and the tactile prediction heads. Each tactile forecast is therefore conditioned on the corresponding candidate action chunk and its predicted visual future within the same model, rather than on an external state estimate. Throughout, $h = 1, \dots, H$ and $s \in \{L, R\}$ index forecast offsets and sensors, a hat marks a prediction, and the superscript obs marks a causal online

measurement; bold symbols are vector- or grid-valued. We denote the feature at offset h for sensor s by $\mathbf{z}_{t+h,s}^{(k)}$ and omit indices when they are unambiguous.

B. Explicit Hierarchical Tactile Forecast

The three outputs are physically ordered: contact, interface deformation, and slip risk. Each deformation grid point contains two in-plane displacement components and one surface-normal component, and $\hat{\mathbf{C}}_{t+h,s}$ and $\hat{\mathbf{R}}_{t+h,s}^{\text{slip}}$ denote the scalar sensor-specific components of the bilateral outputs. Interface deformation is meaningful only under contact, and slip risk depends on the resulting interface state; HiTac-WAM therefore imposes a directed contact-to-deformation-to-slip-risk hierarchy through three deterministic prediction heads (Fig. 2(b)). Stop-gradient operations prevent downstream losses from directly updating upstream heads, while the shared trainable tactile representation couples the three predictions.

For a fixed candidate, forecast offset, and sensor, let $\mathbf{z}$ and $\mathbf{a}$ denote the corresponding tactile feature and aligned action. Let $\mathbf{z}^C$ denote an intermediate transition feature produced within the contact head; for compactness, f_C below denotes its scalar logit readout. The current deformation is $\mathbf{D}_t = \mathbf{P}_t - \mathbf{P}_{\text{base}}$, with $\mathbf{P}_t$ and $\mathbf{P}_{\text{base}}$ denoting the observed and undeformed sensor grids. The training target at offset h is $\Delta\mathbf{D}_{t+h,s} = \mathbf{D}_{t+h,s} - \mathbf{D}_{t,s} = \mathbf{P}_{t+h,s} - \mathbf{P}_{t,s}$. The contact head affects downstream prediction in two ways: its detached transition feature $\text{sg}(\mathbf{z}^C)$ conditions the deformation head, whereas the detached contact-state estimate $\text{sg}(\hat{\mathbf{C}})$ conditions the slip head. In the conditioning interventions of Section V, $\text{sg}(\mathbf{z}^C)$ is replaced by a learned contact embedding indexed by the intervened value, so that ground-truth, predicted, shuffled, and zero contact differ only in the conditioning signal. The predicted contact-state estimate $\hat{\mathbf{C}}$ gates both physical outputs, with $\odot$ denoting its broadcast elementwise application to the sensor grid. To simplify notation, we omit $(k, t+h, s)$ below and evaluate the three heads in physical order:

$$\hat{\mathbf{C}} = \sigma(f_C(\mathbf{z}, \mathbf{a})), \quad (3a)$$

$$\Delta\hat{\mathbf{D}} = f_D(\mathbf{z}, \text{sg}(\mathbf{z}^C), \mathbf{a}),$$

$$\hat{\mathbf{D}} = \hat{\mathbf{C}} \odot (\mathbf{D}_t + \Delta\hat{\mathbf{D}}), \quad (3b)$$

$$\hat{p}^{\text{slip}} = \sigma(f_R(\mathbf{z}, \text{sg}(\hat{\mathbf{C}}), \text{sg}(\|\mathbf{D}_t + \Delta\hat{\mathbf{D}}\|_2))),$$

$$\hat{\mathbf{R}}^{\text{slip}} = \hat{\mathbf{C}} \hat{p}^{\text{slip}}. \quad (3c)$$

Here, σ is the sigmoid function, and sg denotes stop-gradient. The ungated future deformation $\mathbf{D}_t + \Delta\hat{\mathbf{D}}$ conditions slip prediction through its magnitude; Fig. 2(b) depicts this dependency schematically. The deformation and slip losses supervise $\Delta\hat{\mathbf{D}}$ and $\hat{p}^{\text{slip}}$, respectively, whereas downstream selection and control use the contact-gated outputs $\hat{\mathbf{D}}$ and $\hat{\mathbf{R}}^{\text{slip}}$. Fig. 3 presents representative forecasts.

Let $\mathbf{C}$, $\Delta\mathbf{D}$, and $\mathbf{R}^{\text{slip}}$ denote the contact, deformation-increment, and slip-event targets stacked over the forecast horizon and both sensors. We train the three outputs jointly

using the objective

$$\begin{aligned} \mathcal{L} &= \mathcal{L}_C + \mathcal{L}_D + \beta\mathcal{L}_R, \\ \mathcal{L}_C &= \text{BCE}(\hat{\mathbf{C}}, \mathbf{C}) + \lambda_{\text{on}}\mathcal{L}_{\text{onset}} + \lambda_{\text{rel}}\mathcal{L}_{\text{release}}, \\ \mathcal{L}_D &= \frac{\sum_{h,s} C_{t+h,s} \rho_\delta(\Delta\hat{\mathbf{D}}_{t+h,s} - \Delta\mathbf{D}_{t+h,s})}{\sum_{h,s} C_{t+h,s} + \epsilon_D}, \\ \mathcal{L}_R &= \text{WBCE}(\hat{\mathbf{p}}^{\text{slip}}, \mathbf{R}^{\text{slip}}). \end{aligned} \quad (4)$$

Here, ρ_δ denotes the elementwise Huber penalty, averaged over the tactile grid and coordinate dimensions. The contact targets mask the deformation loss to forecast offsets and sensors with ground-truth contact, $\epsilon_D > 0$ prevents division by zero in contact-free windows, and WBCE denotes class-weighted binary cross-entropy. The onset and release terms constrain the timing of contact transitions. Because the inputs from the upstream heads to the slip head are detached, $\mathcal{L}_R$ does not directly update the contact or deformation heads. Section IV provides the loss weights and optimization settings.

C. Forecast-Guided Candidate Selection

At each replanning step, the pretrained world action model samples K stochastic candidates from the shared visual, robot-state, and language context using independent noise draws. Kinematic checks then discard invalid action chunks, yielding $\mathcal{K}_{\text{valid}} \subseteq \{1, \dots, K\}$.

A single batched evaluation of f_θ predicts a tactile trajectory for every $k \in \mathcal{K}_{\text{valid}}$. Each forecast is reduced to normalized rollout-level costs $J_C^{(k)}$, $J_D^{(k)}$, and $J_R^{(k)}$, which respectively measure phase-inconsistent contact, excessive or bilaterally imbalanced deformation, and slip risk; $J_R^{(k)}$ aggregates peak and average risk over the bilateral forecast. The task score $\rho_{\text{task}}^{(k)}$ measures predicted progress from the candidate's predicted visual rollout. The combined selection score therefore penalizes harmful contact rather than contact itself. Candidate selection (Fig. 2(c)) follows

$$J^{(k)} = -w_{\text{prog}}\rho_{\text{task}}^{(k)} + w_C J_C^{(k)} + w_D J_D^{(k)} + w_R J_R^{(k)},$$

$$k^* = \arg \min_{k \in \mathcal{K}_{\text{valid}}} J^{(k)}. \quad (5)$$

Before weighting, all four score components are normalized to $[0, 1]$. After selecting k^* , the controller begins executing $\mathbf{A}_t^{(k^*)}$ and retains $\hat{\mathcal{T}}_{t+1:t+H}^{(k^*)}$ as the temporally aligned reference described next.

D. Online Forecast Verification

The controller executes a length- E prefix of the selected action chunk, where $E \leq H$, before replanning. At each executed offset $i = 1, \dots, E$, the observation $\mathcal{T}_{t+i}^{\text{obs}}$, obtained after executing $\mathbf{a}_{t+i-1}^{(k^*)}$, is compared with the aligned forecast $\hat{\mathcal{T}}_{t+i}^{(k^*)}$:

$$\mathbf{r}_{t+i} = d(\mathcal{T}_{t+i}^{\text{obs}}, \hat{\mathcal{T}}_{t+i}^{(k^*)}),$$

$$S_{t+i} = -\log p_{\text{KDE}}^{(\text{task})}(\text{std}_{\text{task}}(\mathbf{r}_{t+i})), \quad (6)$$

The discrepancy function d concatenates the bilateral absolute errors for contact and slip with the deformation Top-20

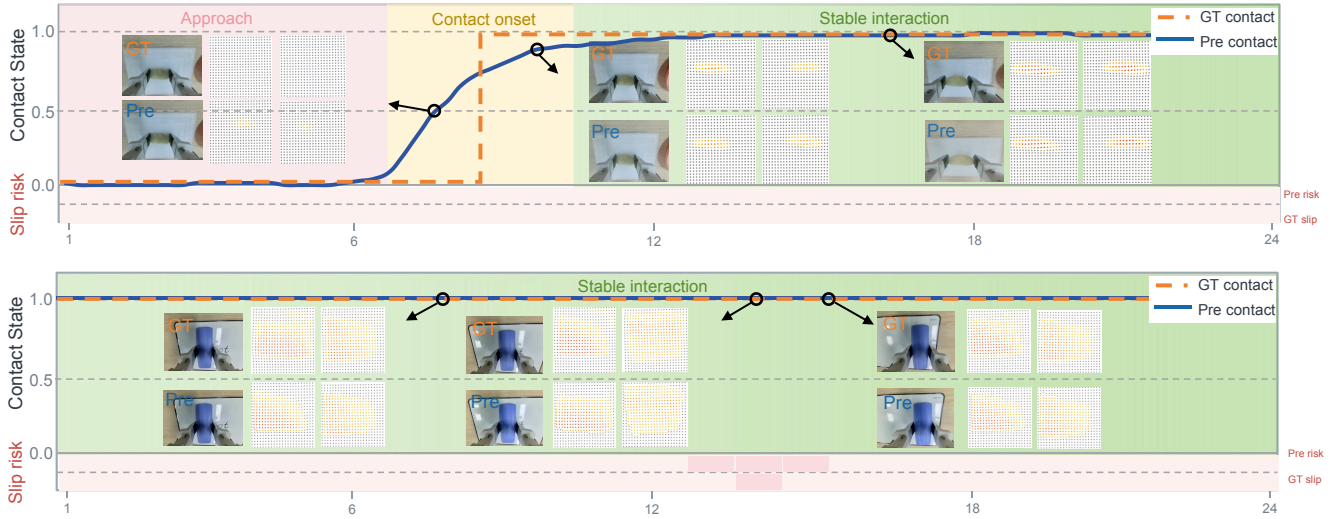


Fig. 3. **Hierarchical Tactile World-State Prediction.** Representative 24-step forecasts for an approach-to-contact transition (top) and a stable-contact interval (bottom). Predicted contact-state estimates align with ground-truth transitions. Paired RGB and deformation snapshots show forecasts alongside the corresponding observations, while binary slip events are aligned with the predicted slip risk. Quantitative results for the three tasks are reported in Table II.

Z MAE. std_{task} standardizes each component using task-specific validation statistics. The online contact and slip measurements are computed causally from the same current and historical signals used to generate the recorded labels, without using future frames.

For each task, a separate kernel density estimator (KDE) is fitted to the standardized residuals from successful validation episodes. A forecast deviation is declared only when S_{t+i} remains above the calibrated threshold γ_{task} for the configured number of consecutive executed offsets. The persistent deviation triggers a recovery mechanism (Fig. 2(c)): the controller aborts the unexecuted remainder of the prefix, returns the robot to a safe state, acquires a new observation, and restarts candidate generation.

IV. EXPERIMENTS

The experiments answer four questions. Can HiTac-WAM predict contact, 3D deformation, and slip risk across the action horizon (**Q1**)? Does the directed hierarchy improve these predictions, and how much do the video and action outputs change (**Q2**)? Do candidate-specific tactile forecasts improve action selection over stochastic sampling, task-progress ranking, and current-touch control (**Q3**)? How does the selected tactile forecast support online forecast verification during execution (**Q4**)?

A. Platform, Data, and Training

All experiments use the IMETA-Y1 robot shown in Fig. 4, equipped with bilateral DM-Tac W2 tactile sensors and three synchronized RGB views. The hardware is fixed across methods and data splits.

We evaluate chip grasping, blackboard erasing, and USB insertion. For each task, 200 complete episodes are partitioned before temporal-window extraction into 160 training, 20 validation, and 20 test episodes; no window crosses a data split. Each stream includes bilateral contact and slip labels.

Each 3D deformation annotation represents the marker-wise displacement from the no-contact state of the corresponding sensor.

The streams are synchronized at 30 Hz. Each sample comprises tactile history at relative offsets $[-12, -6, -2, 0]$, actions at offsets $[0, \dots, 23]$, and tactile targets at offsets $[1, \dots, 24]$; tactile observations form two sensor grids. The tactile prediction modules are trained separately for each task for 10,000 steps on 8 NVIDIA H100 GPUs. Contact-onset and contact-release losses have weights 2 and 1, respectively, and positive slip events have weight 30. The slip-loss coefficient is 0 for the first 3,000 steps and 0.01 thereafter. Optimization uses AdamW with a learning rate of 10^{-4} and a global batch size of 64.

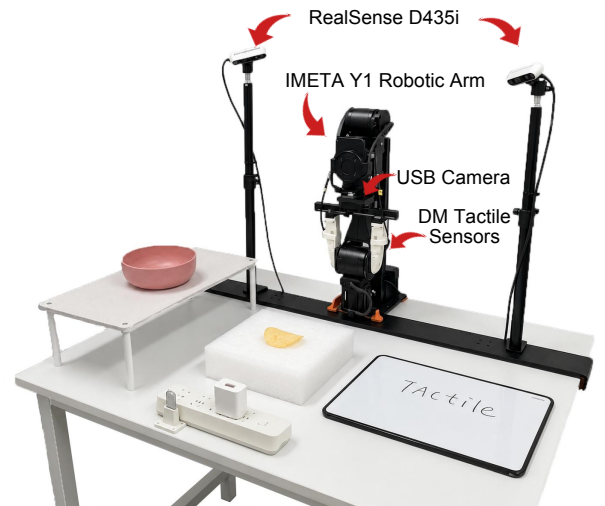


Fig. 4. **Real-Robot Experimental Platform.** The platform comprises an IMETA-Y1 robot, two Intel RealSense D435i cameras, one USB camera, and two DM-Tac W2 tactile sensors mounted on the gripper. The workspace contains the objects used in chip grasping, blackboard erasing, and USB insertion.

B. Prediction Metrics and Baselines

Contact metrics comprise F1 and onset and release MAEs in 30-Hz frames. For future frames with ground-truth contact, we report denormalized 3D displacement L2, Top-20 Z MAE, and the predicted-to-ground-truth deformation norm ratio. Top-20 Z MAE averages the absolute surface-normal displacement error over the 20 points with the largest ground-truth absolute Z deformation; the onset variant uses contact-onset frames. Because positive slip events occur in only 1.39% of frames, we use AUPRC, the area under the precision–recall curve. Learned perceptual image patch similarity (LPIPS) and normalized action-trajectory MAE measure video and action preservation, respectively.

Validation data are used exclusively for checkpoint selection, KDE fitting, and threshold calibration.

C. Closed-Loop Protocol

DreamZero executes one sampled action chunk and corresponds to the same world action model without the tactile pathway. Reactive Tactile uses current touch without tactile foresight, whereas the task-progress baseline ranks four stochastic candidates without tactile forecasts. Selection ranks four stochastic candidates using forecasts of contact, deformation, and slip risk. Full HiTac-WAM also retains the selected forecast as an execution-time reference, with persistent deviations triggering corrective actions. Selection and Full HiTac-WAM combine worst-case and mean slip risk and use $(w_{\text{prog}}, w_C, w_D, w_R) = (1.0, 1.0, 1.0, 0.5)$ in (5). Table I reports the 360-trial main comparison; Section V-C provides a fixed-budget $K = 4$ ranking comparison: the tactile-forecast arm reuses the Selection trials from Table I, and the task-progress arm adds a 90-trial set with the same task distribution, generation budget, and validity rules; candidate seeds are matched between the two arms, but their executions remain independent.

Each method is evaluated in 30 trials per task. Chip grasping is successful if an intact chip reaches the target plate without being dropped and remains stable for at least 3 s. Blackboard erasing requires effective contact along the prescribed path and removal of more than 80% of the target region. USB insertion requires full insertion without sustained jamming and activation of the connector LED.

KDE settings and task-specific thresholds are calibrated using successful validation episodes and fixed before evaluation. The executed prefix comprises 8 steps for all three tasks. Three consecutive scores above the threshold trigger correction, with at most two corrective attempts per trial. Detector statistics are estimated from post-hoc inspection of trial recordings rather than exhaustive anomaly annotation.

Held-out sequences measure forecast quality, whereas real-robot trials measure how the forecasts affect executed actions. The fixed-budget $K = 4$ comparison is descriptive.

V. RESULTS

A. Tactile World-State Prediction

Table II answers Q1 across the three tasks. Contact F1 spans 0.908–0.931 (mean 0.921), with mean onset and

TABLE I
SUCCESS RATES (%) IN THE MAIN REAL-ROBOT COMPARISON (30 TRIALS PER METHOD–TASK PAIR; 360 TOTAL).

Method	Chip Grasping	Blackboard Erasing	USB Insertion	Average
DreamZero	33.3	50.0	10.0	31.1
Reactive Tactile	40.0	60.0	20.0	40.0
HiTac-WAM Selection	70.0	73.3	40.0	61.1
Full HiTac-WAM	76.7	90.0	50.0	72.2

release errors of 2.1 and 2.3 frames at 30 Hz; individual timing errors span 1.8–2.6 frames, or roughly 60–87 ms. The 3D displacement L2 and Top-20 Z MAE are 0.054–0.062 mm and 0.071–0.081 mm, respectively, while norm ratios of 0.93–0.99 indicate comparable predicted and measured deformation magnitudes. Slip AUPRC is 0.232–0.258 (mean 0.247), well above the 0.0139 chance level; because slip events occupy only 1.39% of frames, we treat this output as a ranking signal rather than a calibrated alarm. The task-wise values remain similar across transient and sustained contact regimes, so no single task drives the means.

Fig. 3 shows predicted contact-state estimates tracking the ground-truth transitions, deformation snapshots matching the paired RGB observations, and slip risk remaining near zero during free motion and rising around labeled slip events; the markers are binary because the labels denote events rather than continuous probabilities.

B. Hierarchy and Conditioning

Table III answers Q2: the directed hierarchy performs best across all four metrics—0.921 F1, 0.056 mm 3D L2 (17.6% below the deformation-only predictor), 0.072 mm

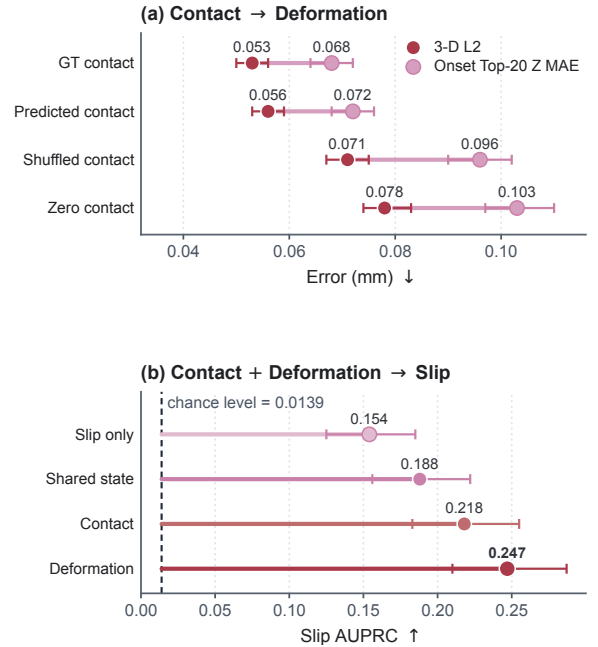


Fig. 5. **Hierarchical Conditioning Diagnostics.** (a) Contact-intervention 3D L2 and onset Top-20 Z MAE, with episode-paired bootstrap 95% CIs. (b) Slip AUPRC under cumulative conditioning; segments show lift above prevalence (0.0139), with stratified episode-bootstrap 95% CIs.

TABLE II

FUTURE TACTILE PREDICTION. TIMING ERRORS ARE IN 30-HZ FRAMES AND 3D ERRORS IN MILLIMETERS; NORM IS THE PREDICTED-TO-GROUND-TRUTH DEFORMATION NORM RATIO. MEANS ARE UNWEIGHTED ACROSS TASKS.

Task	Contact			3D deformation			Slip risk
	Contact F1 $\uparrow$	Onset MAE $\downarrow$	Release MAE $\downarrow$	3D L2 (mm) $\downarrow$	Top-20 Z MAE (mm) $\downarrow$	Norm ratio $\rightarrow 1$	AUPRC $\uparrow$
Chip grasping	0.924	2.0	2.3	0.058	0.075	0.960	0.232
Blackboard erasing	0.908	2.4	2.6	0.062	0.081	0.930	0.251
USB insertion	0.931	1.8	2.1	0.054	0.071	0.990	0.258
Mean	0.921	2.1	2.3	0.058	0.076	0.960	0.247

Top-20 Z, and a 0.97 norm ratio. The intermediate rows explain why: independent heads do not consistently surpass the single-output predictors (F1: 0.896 vs. 0.903; 3D L2: 0.064 vs. 0.068 mm), so sharing alone is insufficient. Contact conditioning (0.915 F1 and 0.059 mm) recovers most of the improvement, and the full hierarchy provides the remaining gain.

With the checkpoint fixed, Fig. 5(a) probes contact conditioning by corrupting the contact input to the deformation head. The 3D L2 rises monotonically across ground-truth, predicted, shuffled, and zero contact (0.053, 0.056, 0.071, and 0.078 mm); the endpoint intervals do not overlap. Conditioning on predicted contact nearly matches ground-truth conditioning at inference, while the graded degradation confirms that the deformation head uses this signal. Panel (b) shows the same staircase for slip: AUPRC rises from 0.154 (slip only) to 0.188 (shared hidden state), 0.218 (contact conditioning), and 0.247 (contact and deformation), a 60.4% relative gain. Current-grid and base-grid temporal priors give 3D L2/Top-20 Z errors of 0.079/0.104 and 0.073/0.099 mm, both worse than the hierarchy’s 0.056/0.072 mm. Relative to the world action model without tactile prediction, video LPIPS and action MAE are higher by 1.4% and 0.9%, respectively.

C. Forecast-Guided Action Selection

Q3 asks whether the forecast changes which action is executed. The gains over DreamZero are largest on chip grasping and USB insertion, where contact determines the outcome. Under the fixed generation budget in Fig. 6,

TABLE III

HIERARCHY ABLATION UNDER MATCHED TRAINING BUDGETS. ERRORS ARE IN MILLIMETERS, AND NORM IS THE PREDICTED-TO-GROUND-TRUTH DEFORMATION NORM RATIO. THE DEFORMATION-ONLY PREDICTOR IS SUPERVISED ON CONTACT FRAMES; INDEPENDENTLY TRAINED ROWS NEED NOT MATCH TABLE II. BOLDFACE AND UNDERLINING MARK THE BEST AND SECOND-BEST VALUES.

Model	F1 $\uparrow$	3D L2 $\downarrow$	Top-20 Z $\downarrow$	Norm $\rightarrow 1$
Contact-only	0.903	—	—	—
Deformation-only	—	0.068	0.090	0.82
Independent heads	0.896	0.064	0.083	0.87
Contact-conditioned	<u>0.915</u>	<u>0.059</u>	<u>0.076</u>	<u>0.94</u>
Directed hierarchy	0.921	0.056	0.072	0.97

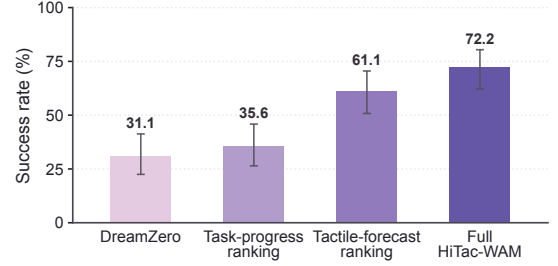


Fig. 6. **From Sampling to Ranking to Verification.** Observed success rates. At the fixed $K=4$ budget, tactile-forecast ranking reuses the Selection trials from Table I, whereas task-progress ranking uses an additional independent 90-trial set. DreamZero executes one candidate; error bars show two-sided 95% Wilson intervals.

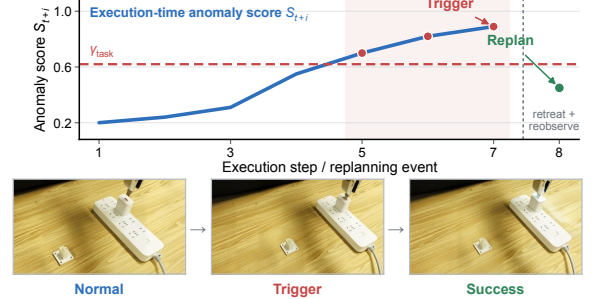


Fig. 7. **Online Forecast Verification during Execution.** Anomaly-score trace recorded in a real execution trial ($E=8$ prefix); three consecutive scores above γ_{task} trigger safe retreat and replanning.

tactile-forecast ranking reuses the Selection trials from Table I, attaining 61.1%, whereas task-progress ranking attains 35.6% on an additional matched-seed 90-trial set. Their two-sided 95% Wilson intervals do not overlap ($[50.8, 70.5]$ and $[26.4, 45.8]$).

D. Online Forecast Verification

Q4 examines execution-time use of the retained forecast; Fig. 7 shows a real replanning trigger. In Table I, Full HiTac-WAM attains 72.2% success, compared with 61.1% for Selection. Post-hoc inspection of the 90 Full-configuration trials identified 18 cases in which verification triggered replanning. Sixteen of these cases coincided with execution anomalies, 12 of which were followed by successful task completion; the remaining two were false triggers with no observed effect on the outcome. At most three of the 21 untriggered failures involved an undetected anomaly.

VI. CONCLUSION

HiTac-WAM models the tactile consequences of each candidate action chunk as a directed contact-to-deformation-to-slip-risk hierarchy that reflects their physical dependencies. For tactile prediction, the model attains a mean contact F1 of 0.921, onset and release errors of 2.1 and 2.3 frames, 3D displacement L2 of 0.058 mm, and slip AUPRC of 0.247 across the three tasks. Matched-budget ablations show that shared multi-output prediction alone is insufficient: the directed hierarchy reduces 3D displacement L2 error by 17.6% relative to the deformation-only predictor and improves slip AUPRC by 60.4% relative to the slip-only predictor. Relative to the world action model without tactile prediction, video LPIPS and action MAE are higher by 1.4% and 0.9%, respectively. For action selection, ranking guided by these hierarchical forecasts attains 61.1% success versus 31.1% for single-candidate execution; under a fixed generation budget, it attains the same 61.1% versus 35.6% for task-progress ranking, with non-overlapping confidence intervals. With online forecast verification, the full system attains 72.2%. Together, the hierarchy ablations show that organizing tactile predictions according to their physical dependencies improves predictive accuracy. The real-robot results demonstrate the utility of keeping each forecast attached to its candidate action: the forecast is consulted before execution to rank candidates and retained during execution as the reference against which reality is checked.

Despite these results, forecast quality on model-generated action chunks is not evaluated separately, and predicted slip risk is not calibrated for online detection. Future work will directly evaluate such candidates and controlled anomalies while exploring on-policy adaptation, uncertainty-calibrated slip forecasting, and learned corrective policies for long-horizon contact-rich robotic manipulation tasks.

REFERENCES

- [1] S. Ye *et al.*, “World action models are zero-shot policies,” *arXiv:2602.15922*, 2026.
- [2] Y. Chen, M. Van der Merwe, A. Sipos, and N. Fazeli, “Visuo-tactile transformers for manipulation,” in *Proc. Conf. Robot Learn. (CoRL)*, vol. 205, 2023, pp. 2026–2040.
- [3] B. Huang, Y. Wang, X. Yang, Y. Luo, and Y. Li, “3D-ViTac: Learning fine-grained manipulation with visuo-tactile sensing,” in *Proc. Conf. Robot Learn. (CoRL)*, vol. 270, 2025, pp. 2557–2578.
- [4] H. Xue *et al.*, “Reactive diffusion policy: Slow-fast visual-tactile policy learning for contact-rich manipulation,” in *Proc. Robot. Sci. Syst. (RSS)*, 2025.
- [5] S. Tian *et al.*, “Manipulation by feel: Touch-based control with deep predictive models,” in *Proc. IEEE Int. Conf. Robot. Autom. (ICRA)*, 2019, pp. 818–824.
- [6] W. Mandil, K. Nazari, and A. Ghalamzan, “Action conditioned tactile prediction: case study on slip prediction,” in *Proc. Robot. Sci. Syst. (RSS)*, 2022.
- [7] L. Heng, H. Geng, K. Zhang, P. Abbeel, and J. Malik, “ViTacFormer: Learning cross-modal representation for visuo-tactile dexterous manipulation,” *arXiv:2506.15953*, 2025.
- [8] Y. Lou *et al.*, “Dream-Tac: A unified tactile world action model for contact-rich robot manipulation,” *arXiv:2606.08737*, 2026.
- [9] X. Zhang *et al.*, “UniTacVLA: Unified tactile understanding and prediction in vision language action models,” *arXiv:2606.31723*, 2026.
- [10] C. Finn and S. Levine, “Deep visual foresight for planning robot motion,” in *Proc. IEEE Int. Conf. Robot. Autom. (ICRA)*, 2017, pp. 2786–2793.
- [11] K. Chua, R. Calandra, R. McAllister, and S. Levine, “Deep reinforcement learning in a handful of trials using probabilistic dynamics models,” in *Adv. Neural Inf. Process. Syst. (NeurIPS)*, vol. 31, 2018, pp. 4754–4765.
- [12] N. Hansen, H. Su, and X. Wang, “TD-MPC2: Scalable, robust world models for continuous control,” in *Proc. Int. Conf. Learn. Represent. (ICLR)*, 2024.
- [13] G. Zhou, H. Pan, Y. LeCun, and L. Pinto, “DINO-WM: World models on pre-trained visual features enable zero-shot planning,” in *Proc. Int. Conf. Mach. Learn. (ICML)*, vol. 267, 2025, pp. 79 115–79 135.
- [14] C. Chi *et al.*, “Diffusion policy: Visuomotor policy learning via action diffusion,” in *Proc. Robot. Sci. Syst. (RSS)*, 2023.
- [15] N. Gu, K. Kosuge, and M. Hayashibe, “TactileAloha: Learning bi-manual manipulation with tactile sensing,” *IEEE Robot. Autom. Lett.*, vol. 10, no. 8, pp. 8348–8355, 2025.
- [16] H. Qi *et al.*, “General in-hand object rotation with vision and touch,” in *Proc. Conf. Robot Learn. (CoRL)*, vol. 229, 2023, pp. 2549–2564.
- [17] F. Yang *et al.*, “Binding touch to everything: Learning unified multi-modal tactile representations,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2024, pp. 26 340–26 353.
- [18] F. Liu, C. Li, Y. Qin, J. Xu, P. Abbeel, and R. Chen, “ViTaMin: Learning contact-rich tasks through robot-free visuo-tactile manipulation interface,” *arXiv:2504.06156*, 2025.
- [19] C. Zhang *et al.*, “Human-centric transferable tactile pre-training for dexterous robotic manipulation,” *arXiv:2607.01067*, 2026.
- [20] J. Bi, K. Y. Ma, C. Hao, M. Z. Shou, and H. Soh, “VLA-Touch: Enhancing vision-language-action model with dual-level tactile feedback,” *IEEE Robot. Autom. Lett.*, vol. 11, no. 7, pp. 8487–8494, 2026.
- [21] X. Li *et al.*, “AT-VLA: Adaptive tactile injection for enhanced feedback reaction in vision-language-action models,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2026, pp. 28 764–28 774.
- [22] Y. S. Narang, K. Van Wyk, A. Mousavian, and D. Fox, “Interpreting and predicting tactile signals via a physics-based and data-driven framework,” in *Proc. Robot. Sci. Syst. (RSS)*, 2020.
- [23] A. Ayad, A. Röfer, N. Heppert, and A. Valada, “Imagine2touch: Predictive tactile sensing for robotic manipulation using efficient low-dimensional signals,” *arXiv:2405.01192*, 2024.
- [24] T. De Clercq, A. Sianov, and G. Crevecoeur, “A soft barometric tactile sensor to simultaneously localize contact and estimate normal force with validation to detect slip in a robotic gripper,” *IEEE Robot. Autom. Lett.*, vol. 7, no. 4, pp. 11 767–11 774, 2022.
- [25] Z. Zhao, W. He, and Z. Lu, “Tactile-based grasping stability prediction based on human grasp demonstration for robot manipulation,” *IEEE Robot. Autom. Lett.*, vol. 9, no. 3, pp. 2646–2653, 2024.
- [26] C. Higuera, S. Arnaud, B. Boots, M. Mukadam, F. R. Hogan, and F. Meier, “Visuo-tactile world models,” *arXiv:2602.06001*, 2026.
- [27] S. Tian *et al.*, “VT-WAM: Visual-tactile world action model for contact-rich manipulation,” *arXiv:2607.02503*, 2026.
- [28] Y. Zheng *et al.*, “OmniVTA: Visuo-tactile world modeling for contact-rich robotic manipulation,” *arXiv:2603.19201*, 2026.
- [29] Y. Huang *et al.*, “ViTacWorld: Scaling visuo-tactile world models for contact-rich robot manipulation,” *arXiv:2607.22530*, 2026.
- [30] A. Rosasco, F. Ceola, G. Pasquale, and L. Natale, “KDPE: A kernel density estimation strategy for diffusion policy trajectory selection,” *arXiv:2508.10511*, 2025.
- [31] F. R. Hogan, J. Ballester, S. Dong, and A. Rodriguez, “Tactile dexterity: Manipulation primitives with tactile feedback,” in *Proc. IEEE Int. Conf. Robot. Autom. (ICRA)*, 2020, pp. 8863–8869.
- [32] T. Ji, S. T. Vuppala, G. Chowdhary, and K. Driggs-Campbell, “Multi-modal anomaly detection for unstructured and uncertain environments,” in *Proc. Conf. Robot Learn. (CoRL)*, vol. 155, 2021, pp. 1443–1455.
- [33] H. Wu *et al.*, “Endowing robots with longer-term autonomy by recovering from external disturbances in manipulation through grounded anomaly classification and recovery policies,” *arXiv:1809.03979*, 2018.
- [34] W. Ma, C. Zhang, Y. Cai, G. Yao, S. Cui, and S. Wang, “FG-CLTP: Fine-grained contrastive language tactile pretraining for robotic manipulation,” *IEEE Robot. Autom. Lett.*, vol. 11, no. 9, pp. 10 345–10 352, 2026.