

DART-S: Reachability-Audited Active-Suspension Preconditioning for Off-Road Vehicle Jumps

Yu Hu^{1,2,*}, Fangzhou Zhao¹, Liang Chen¹, Chen Min¹, Wei Li^{1,2}, Mingyuan Sang^{1,2},
Jiajia Ma³, Shican Chen³, Di Pang³, Baolei Chen³

Abstract—Airborne torque reaction cannot recover takeoff errors beyond the wheel angular-momentum budget. DART-S applies ramp-face suspension preconditioning to change pitch, pitch rate, and wheel spin before liftoff, thereby shifting the queried state and altering the remaining authority budget. To predict how each suspension action reshapes this state-budget pair, DART-S employs a local calibration map. A support-aware selector combines the predicted shift with local outcome evidence and an interval-reachability screen; an exact-pair audit reports residual authority. Across 600 new runs in 72 independent BeamNG sessions, every positive, negative, and boundary query follows its prespecified branch. At the confirmed 40°/13 m/s boundary, DART-S attains 24/24 post-touchdown attitude-criterion successes versus 0/24 for DART (session-level Holm-adjusted $p = 0.0234$). At 11.5 m/s, a 0.35 s timing action attains 23/24 versus 0/24 for the static preset ($p = 0.0156$). The 200 rad/s command guard keeps drivetrain hard-limit exceedance at zero across all 600 runs. The source code will be available at <https://github.com/MeridianCAS/DART-S>.

Index Terms—Field robots, off-road vehicles, active suspension, attitude control, vehicle dynamics

I. INTRODUCTION

Airborne torque reaction cannot recover an unfavorable takeoff state when the required correction exceeds the available wheel angular momentum. In our prior work, DART [1] quantified this boundary on a platform with a mass of 1383 kg: the recoverable pitch-rate budget is 9–13 deg/s in the tighter nose-up direction, about twice that in the reverse-inclusive braking direction, and only 16–18 deg/s nose-up at the drivetrain hard limit. Wheel angular momentum, not motor torque, bounds the available correction. DART back-propagates the landing constraint into a feasible-takeoff set and can refuse a jump or reshape takeoff speed, but it lacks an independent ground-phase actuator for direct shaping of takeoff pitch and pitch rate before liftoff.

DART-S moves this control leverage before liftoff by repurposing per-corner active suspension as a takeoff-state actuator. Its core departure from attitude-only preconditioning is two-sided: the ramp-face preset changes takeoff pitch, takeoff pitch rate, and individual-wheel spin, so it moves the state queried by the reachability test while changing the angular-momentum budget that defines the tested set. The ground phase thus creates the initial condition and remaining authority from

which the airborne phase completes the correction. Motocross riders have long preloaded suspension on the ramp face to alter launch trajectory [2]. DART-S formalizes this technique through full-size automation and a feasibility audit.

Related actuator technologies have been announced for BYD production vehicles: the DiSus portfolio comprises intelligent damping, air-body-control, and hydraulic-body-control branches [3]. Existing patented functions employ suspension or wheel torque for in-flight stabilization, landing preparation, or driveline protection [4], [5], [6], rather than for pre-takeoff state-and-budget shaping. To our knowledge, DART-S is the first framework to map a timed pre-takeoff suspension action to both the takeoff state and remaining wheel-momentum budget, then compose it with budget-limited airborne control. We evaluate this coupling in deterministic full-scale soft-body simulation. The empirical selector determines whether preconditioning is applied, while the exact-pair certificate quantifies residual airborne authority.

DART-S adds a suspension-preconditioning channel before DART's speed gate and airborne controller, as shown in Fig. 1. Our contributions are:

1. **Two-sided actuation of a reachability query.** A per-corner ramp-face preset turns takeoff pitch and pitch rate from measured initial conditions into control variables while changing individual-wheel spin and hence the directional airborne budget. DART-S therefore acts on both the queried state and the set that evaluates it, rather than translating a state inside a fixed envelope.
2. **Timing-conditioned takeoff-state shaping under sign-changing suspension dynamics.** Ramp-face suspension does not produce a monotonic landing response: a favorable takeoff-angle shift can coincide with an adverse pitch-rate shift because release timing changes the contact transient. Independent five-speed evidence identifies the resulting 11.5–12 m/s release-phase valley. DART-S therefore treats release timing as a control variable and combines a geometry-conditioned action map with a curvature-saturation safeguard to select among no preset, a static preset, and a timed preset.
3. **Support-aware cross-phase composition.** We combine ground preconditioning, a spin-limited airborne law, and evidence-based abstention. Local outcome evidence determines deployment, while interval reachability screens the action-conditioned state and directional wheel budget; exact-pair reachability remains diagnostic. Independent BeamNG sessions confirm the boundary and timing results together with guarded branch fidelity.

¹Research Center for Intelligent Computing Systems, Institute of Computing Technology, CAS, Beijing 100190, China.

²School of Computer Science and Technology, University of Chinese Academy of Sciences, Beijing 100049, China.

³Dong Feng Off-Road Vehicle Co., Ltd, Shiyao 442000, China.

*Corresponding author: Yu Hu (e-mail: huyu@ict.ac.cn).

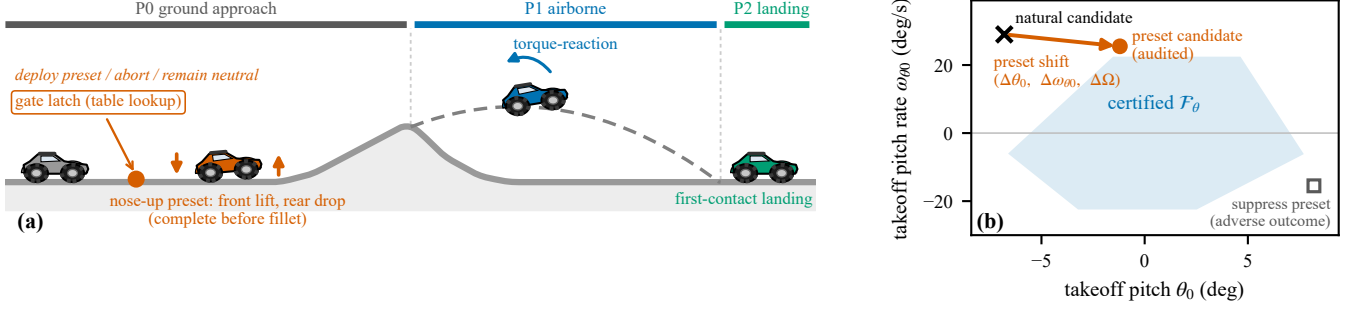


Fig. 1. DART-S overview. (a) Phase structure: during the approach (P0) the selector latches a per-condition decision (deploy the preset, abort, or remain neutral) early enough that the preset completes before the ramp fillet; DART’s pitch-axis torque-reaction law corrects the airborne phase (P1) and landing metrics latch at first contact (P2). (b) Support-aware selector: calibrated attitude and wheel-spin shifts are evaluated by an operational interval-reachability screen. Local calibration support, outcome evidence, and that screen govern deployment; the exact-pair set reports residual authority diagnostically.

II. RELATED WORK

Relevant prior work falls into three areas: airborne attitude control for wheeled vehicles, active-suspension control around jumps, and pre-takeoff state planning.

Momentum-exchange attitude work includes reaction-wheel jump-and-balance platforms [7], tail-assisted aerial systems [8], [9], and legged takeoff shaping [10], [11], [12]. Wheel-reaction control is demonstrated in hardware [13] and simulation [14]; learned in-air maneuvering relies on throttle/steering with explicit wheel-speed and actuation limits [15]. A patent also uses individual-wheel torque for jump stabilization [5]. None maps a pre-takeoff suspension action to both launch state and landing-relevant wheel momentum.

Suspension work spans semi-active and production-oriented systems [16], [17], simulation-based EV vibration suppression [18], attitude MPC with bump-road tests [19], preview-MPC obstacle crossing [20], and full-scale hydraulic sim-to-real transfer [21]. These regulate ground-contact motion. Jump-specific systems react after airborne detection or protect drive-line reconnection [4], [6]; the cited BYD release [3] documents no ramp-face preconditioning or wheel-momentum coupling. This gap defines the pre-takeoff state-and-budget interface addressed by DART-S.

Closest conceptually, motocross preload changes launch trajectory [2], a rallycross simulation finds that stiffer rear damping reduces pitch rate and rear-axle kick-up [22], and legged systems optimize takeoff and stance-force profiles [10], [11], [12]. MPPI and traversability work addresses aggressive-driving and terrain costs [23], [24], including when to jump [25], but not a remaining wheel-momentum feasibility audit. DART [1] supplies that audit and shapes takeoff speed; DART-S instead couples direct pitch/rate shaping to wheel spin and the resulting airborne budget.

Two closer precedents clarify the remaining novelty. A Jaguar Land Rover patent changes relative leading/trailing-wheel ride height for ramp clearance [26]; Jing *et al.* optimize state and actuator trajectories using contact-implicit trajectory optimization, validated in Webots [27]; and an ICMA 2025 study designs an active suspension that launches a light off-road vehicle and verifies feasibility in Amesim [28]. They establish pre-ramp suspension actuation, but not analytic state-and-budget authorization coupled to airborne control. DART-

S contributes this state-and-budget interface, rather than pre-ramp suspension actuation alone.

III. METHOD

DART-S acts on both the queried takeoff state and the wheel-spin-dependent authority budget that defines its feasible set. This section first formulates this two-sided reachability model, then describes suspension preconditioning, deployment gating, and sequential cross-phase control.

A. Phase structure and takeoff-state definition

We inherit DART’s three-phase structure: ground approach (P0), airborne (P1), and landing (P2). DART-S defines the takeoff state $x_0 = (v_0, \theta_0, \omega_{\theta 0}, \Omega_{1,0}, \dots, \Omega_{4,0})$, where v_0 is ground-plane takeoff speed, θ_0 is pitch angle, $\omega_{\theta 0}$ is the body-y pitch-rate component at the last ground contact, and $\Omega_{i,0}$ is the measured spin of wheel i ; pitch and pitch rate are positive nose-up. DART-S chooses a ground action $a_s = (u, \tau)$, where u is the four-corner reference-length command and τ is either empty for a static preset or the lip-relative schedule $(t_{\text{lead}}, T_{\text{pulse}}, \gamma_{\text{release}})$. Here t_{lead} is the lead time before predicted lip arrival, T_{pulse} is the release duration, and γ_{release} is the fraction of the full preset released toward neutral. DART-S treats this schedule as a deployable action. Measured rebound phase is retained offline to evaluate phase-augmented takeoff prediction. Deployment selects from neutral, static-preset, and confirmed timed-preset actions without interpolating command amplitude or schedule.

DART’s full landing constraint is C_L . We distinguish its airborne pitch slice $C_{\text{air}} = \{|\theta - \theta_{\text{surf}}| \leq \bar{\theta}, |\omega_{\theta}| \leq \bar{\omega}\}$ from the experimental post-touchdown criterion C_{post} , which also requires bounded roll, no tumble, and a stable observation window. Here θ_{surf} is the terrain-matched landing-surface pitch, and $\mathcal{F}_{\theta}$ denotes the certified preimage of C_{air} . At the decision latch, the selector predicts a reference takeoff state $\hat{x}_0^{\text{ref}}$ and forms each candidate $\hat{x}_0^c = \hat{x}_0^{\text{ref}} + \Delta x_0^c$ from the calibrated action-induced shift. For nominal auditing, we apply the calibrated mean-wheel shift $\Delta \hat{\Omega}^c$ to each predicted wheel and define $B_{\uparrow}^c = \sum_i I_i [\Omega_{\text{max}} - \hat{\Omega}_{i,0}^c]_+ / I_{yy}$ and $B_{\downarrow}^c = \sum_i I_i [\hat{\Omega}_{i,0}^c - \Omega_{\text{min}}]_+ / I_{yy}$, where $[z]_+ = \max(0, z)$. The mean-wheel shift supplies the nominal budget audit, while local outcome evidence and the interval transition determine deployment. We adopt the baseline flight-time estimate stored with

the local condition rather than predicting an action-conditioned ΔT . After liftoff, a realized audit recomputes membership from the measured x_0^c . Thus candidate c changes both the queried pair and the geometry of $\mathcal{F}_\theta$; hats are omitted below when the same certificate applies to either query.

For the exact terminal pair $(\theta_{\text{surf}}, 0)$, DART's null-then-correct certificate [1] first checks directional rate feasibility, $-B_\uparrow \leq \omega_{\theta 0} \leq B_\downarrow$ and $|\omega_{\theta 0}|/a_\theta \leq T$, then checks the residual pitch displacement against the closed-form budget-limited envelope of DART Theorem 3. DART-S does not alter this certificate; it changes its state and budget inputs. Consequently, F_θ remains a sufficient inner approximation: failure means uncertified, while a rate-bound or correction-time violation proves the exact terminal rate unreachable. Nonzero $(\bar{\theta}, \bar{\omega})$ supplies an interval audit. Together, both forms supply the selector's airborne audit.

B. Active suspension as a takeoff-state actuator

We repurpose the suspension as a slow takeoff boundary-condition actuator rather than a landing absorber. We command the full preset before ramp loading. A static action holds it through takeoff; a timing-conditioned action briefly moves it toward neutral and then restores the identical final command before liftoff. Each corner carries a series-hydraulic element that scales the spring's reference length by $1 + u_i \cdot \rho$, with per-corner command $u_i \in [-1, 1]$ and stroke ratio ρ . The stroke time is long relative to the torque loop, which motivates the early command. At $u = 0$ the element is identical to the stock coilover. A *nose-up* preset $u = (+1, +1, -1, -1)$ (front lift, rear drop) biases the takeoff state through two mechanisms:

1. A *static geometric term* raises the front contact patches by Δz_f and drops the rear by Δz_r , pitching the body by $\Delta \theta_{\text{static}} \approx \arctan((\Delta z_f - \Delta z_r)/L)$ with wheelbase L . Tire and bushing compliance absorb part of the commanded stroke, so the effective lever ratio is identified once per platform from static ground tests.
2. A *lip-release dynamic term* arises as the front axle clears the lip: its preset stroke unloads while the rear still rides the ramp face, imparting a pitch-rate increment $\Delta \omega_{\theta 0}$. Its dependence on geometry and speed is represented by the calibration map rather than assumed analytically.

For a timing-conditioned action, the controller estimates $t_{\text{lip}} = d_{\text{lip}}/v$. When $t_{\text{lip}} \leq t_{\text{lead}}$, it commands $(1 - \gamma_{\text{release}})u$ for T_{pulse} and then restores u . The schedule $(t_{\text{lead}}, T_{\text{pulse}}, \gamma_{\text{release}})$ is calibrated per operating condition; timing entries remain valid only within their calibrated neighborhood.

Together these mechanisms define the cross-phase interface. We identify them jointly from paired preset-neutral comparisons under matched commanded entry conditions and fit a local empirical response map over geometry, decision-point speed, and discrete action identity:

$$\text{CalMap}(g, v, a_s) = (\Delta \theta_0, \Delta \omega_{\theta 0}, \Delta \bar{\Omega}).$$

Here g denotes the lip-geometry descriptor, including ramp angle and lip radius. Static entries set $\tau = \emptyset$; timing entries require an independent confirmatory evaluation before deployment. Within a declared ramp-profile class and action identity, inverse-distance interpolation returns the scalar shift

and nearest support distance. The implementation requires the query to remain inside the calibration points' axis-aligned support box and distance threshold. Together they define the validated interpolation envelope; queries outside it are routed to DART. Because the deployed table never selects nose-down, the nose-down branch of the map serves diagnosis only and is obtained by mirroring the nose-up response rather than by separate calibration. CalMap records the *net takeoff-state* change $(\Delta \theta_0, \Delta \omega_{\theta 0}, \Delta \bar{\Omega})$ rather than a landing prediction: its attitude components shift the queried state, and its mean-wheel component supplies a nominal budget audit. At liftoff, the realized audit replaces that approximation with measured per-wheel takeoff speeds. Attitude increments may be propagated via $\Delta_{\text{land}} \approx \Delta \theta_0 + \Delta \omega_{\theta 0} T$ for interpretation. Deployment relies on the outcome evidence defined next.

C. Support-aware deployment and reachability audit

Let $(\Delta \theta_0, \Delta \omega_{\theta 0}, \Delta \bar{\Omega})$ be the calibrated nominal effect of the current ground action. Each candidate action is checked at the takeoff state it would produce, using the mean-wheel approximation for the budget it would leave:

$$\text{certified}(c) \iff (\hat{\theta}_0^c, \hat{\omega}_{\theta 0}^c; B_\uparrow^c, B_\downarrow^c) \in \mathcal{F}_\theta,$$

where c denotes the candidate configuration. An action thus enters the test twice, moving the queried state and resizing the budget that bounds the correction, so a favorable pitch shift may still consume the directional budget that the flight law needs. Because the exact-pair certificate is sufficient but conservative, DART-S retains it as a diagnostic audit: a failed query is recorded as uncertified, not unsafe.

For the operational audit, we define an interval terminal set with bounded landing pitch and pitch rate. Back-propagating this rectangle with the action-conditioned directional wheel budget gives $\mathcal{F}_\theta^{\text{int}}$. Operational screening requires the predicted natural state to lie outside this set and the predicted preset state to lie inside it. A zero-width terminal set gives the stricter exact-pair $\mathcal{F}_\theta$, which remains diagnostic. This interval screen does not replace local outcome qualification.

This separation is necessary because the measured landing benefit is non-monotonic in approach speed: a certificate bounds what the airborne law can still correct, but it does not rank outcomes inside the feasible region, and simplified takeoff-state overlays reproduce only part of the measured response map. The speed-map evaluation quantifies both limits and motivates the outcome-based deployment rule.

Accordingly, operational selection combines two local empirical objects. The CalMap predicts the takeoff-state shift and reports its interpolation support; a system-outcome table stores paired DART-S-versus-DART evidence under the post-touchdown attitude criterion. A preset is deployment-eligible only where that local outcome evidence is available and the operational interval transition holds. The exact-pair test is recorded as a diagnostic reachability audit.

At query time, the selector evaluates the four corners of declared ramp-angle and speed error bounds. Every checked corner must select the same discrete action, CalMap must provide support within that ramp-profile class, and the independent task-outcome evidence must fall within its calibrated radius; otherwise the selector abstains from preconditioning

and returns control to DART. This four-corner consistency audit is a conservative implementation heuristic, not a proof that every interior point produces the same decision. Timing entries use a tighter calibrated radius r_τ . The resulting branches are preset, DART-only fallback, and abort by the upstream no-go gate. The implementation records the evidence source, CalMap support, uncertainty decision, and nominal/realized interval and exact-pair audits for every request. After any flight-policy change, we jointly recalibrate outcome evidence and the action map before further deployment.

To exclude presets in the identified high-speed adverse-response regime, we augment the empirical selector with a mechanism-based safeguard. On a convex lip, the tire normal-acceleration margin $n(v) = g \cos \alpha - v^2/R$ collapses near $v^* = \sqrt{gR \cos \alpha}$; a nose-up preset then stretches the lift-off window and injects an adverse pitch-rate shift. The gate refuses the preset whenever $n(v) \leq n_{\min}$. A tighter-lip validation reveals a compensating wheel-spin channel, showing that the adverse mechanism is geometry-dependent; because the study was not designed as an equivalence test, the threshold is a calibrated, ramp-profile-specific safeguard rather than a universal rule, and it remains consistent with the landing benefit observed across held-out operating conditions.

Because the stroke is slow relative to the approach, we must complete it *before the ramp fillet*, where loading would corrupt release; refusal also needs braking runway. We therefore latch the gate at a distance $d_{\text{latch}} = \max(vt_{\text{act}}, v^2/(2a_{\text{brake,stop}}) + d_{\text{margin}})$ before the lip, where v is the current approach speed, t_{act} is the activation window, the full-stop decelerating specific force $a_{\text{brake,stop}}$ is distinct from DART's shaping deceleration $a_{\text{brake,shape}}$, and d_{margin} is a stopping margin.

D. Sequential cross-phase allocation

DART-S coordinates the channels sequentially rather than blending them simultaneously. Three actuators contribute over two timescales: suspension presets (slow, ground phase, no direct airborne torque), fore/aft torque distribution (fast, ground phase, weak authority, kept for traction), and airborne torque-reaction (fast, flight phase, protected by an operational spin guard). DART's pitch-axis rate-tracking law (throttle nose-up, brake nose-down) remains the airborne inner loop and tracks the terrain-matched landing pitch. This organization requires no fast feedback coupling loop. The slow preset and optional lip-relative release pulse map the incoming approach and selected schedule to a new takeoff state and budget; the airborne controller then inherits that condition and spends the remaining budget. Ground preconditioning expends no momentum in flight but changes the initial wheel-spin distribution; revised audits therefore use measured per-wheel takeoff speed.

The current runtime requires coarse inputs: a ramp-angle estimate at the calibration granularity, onboard approach speed, a lip-curvature category, a roughness flag, and associated uncertainty bounds. Each decision requires one CalMap query, one system-evidence lookup, one operational capture query, and the closed-form margin $n(v)$; exact-pair certificates, stroke traces, and statistical audits remain offline diagnostics. Queries outside local geometry support or with inconsistent input-uncertainty corners are routed to the audited DART baseline.

The selector perturbation audit specifies the corresponding input-accuracy requirement for deployment decisions.

IV. EXPERIMENTAL SETUP

All experiments were run in BeamNG.tech build 0.38.3.0 from the v0.38 release [29] at full vehicle scale on the same custom SBR4-based 4WIDS platform as DART; the exact build is retained in run provenance. Vehicle mass is 1383 kg, $I_{yy} \approx 2043 \text{ kg m}^2$, wheel inertia 1.2 kg m^2 , and radius 0.36 m. Its motor map has a nominal per-wheel plateau of 350 Nm and a trace-derived effective per-wheel airborne bound $\tau_{\max} \approx 1200 \text{ Nm}$, yielding $a_\theta = 4\tau_{\max}/I_{yy} \approx 2.35 \text{ rad/s}^2$ ($135^\circ/\text{s}^2$). For certification, we use the sustained-effective wheel-speed envelope $[\Omega_{\min}, \Omega_{\max}] = [-125.7, 125.7] \text{ rad/s}$, distinct from the 200 rad/s operational spin guard and the approximately 221 rad/s drivetrain hard limit. All configurations share the same per-corner series-hydraulic hardware. The default per-corner reference-length command magnitude is approximately 50 mm ($\rho = 15\%$ of the 333 mm neutral hydro-beam length); the stroke sweep spans approximately 33/50/67 mm ($\rho = 10/15/20\%$). At a slew rate of 2 s^{-1} , the full command completes in $\approx 0.5 \text{ s}$. At zero command, the elements match the stock spring reference length, so the comparison isolates the preset rather than a hardware change. Robustness variants span mass $\pm 20\%$ and a forward CoG shift. Gate latching uses $t_{\text{act}} = 2.0 \text{ s}$, $a_{\text{brake,stop}} \approx 6 \text{ m/s}^2$ (versus DART's $a_{\text{brake,shape}} = 4 \text{ m/s}^2$), and $d_{\text{margin}} = 2 \text{ m}$. Fig. 2(a) shows the platform and actuator layout used throughout the study.

The study covers two classes of ramp profiles. Tabletop-fillet ramps have a concave entry fillet, a straight face, and an abrupt tabletop termination without a convex exit lip; they support calibration, boundary, and rough-runup evaluations. Convex exit-lip kickers with $R = 35$ and 22 m are reserved for mechanism and held-out-lip studies. Both classes use a 3 m nominal rise and a flat, gap-style landing. A proportional approach controller regulates entry speed between 9 and 18 m/s; dedicated boundary and mechanism evaluations extend the range to 40° and 19.5 m/s. At the $35^\circ/13 \text{ m/s}$ operating point, parameter screening varies preset scale over $\{0.5, 0.75, 1.0\}$, ramp rise over $\{3, 5, 7\} \text{ m}$, and pre-lip zero-throttle distance over $\{0, 1, 2\} \text{ m}$. The 1 and 2 m cuts are evaluated at $N = 30$, whereas all other parameter combinations contain $N = 10$ trials per condition. Figure 2(b) summarizes the ramp profiles and disturbances.

Timing calibration first sweeps $t_{\text{lead}} \in \{0.05, 0.15, 0.25, 0.35, 0.45, 0.55\} \text{ s}$ at $N = 10$, then confirms the selected best and worst schedules against neutral and static presets at $N = 30$. The pulse duration is $T_{\text{pulse}} = 0.12 \text{ s}$ and the dimensionless release fraction is $\gamma_{\text{release}} = 0.50$. At the timing-conditioned operating point, the confirmed lead time is $t_{\text{lead}} = 0.35 \text{ s}$ and the dimensionless normalized support radius is $r_\tau = 0.25$; the command must be restored before liftoff. Four-corner stroke traces define a diagnostic pitch-mode phase at 0.2 m before the lip. This phase is retained for offline mechanism analysis, whereas the online selector uses the calibrated timing action.

To isolate suspension effects near the operating boundary, we apply the same symmetric closed-loop approach-speed

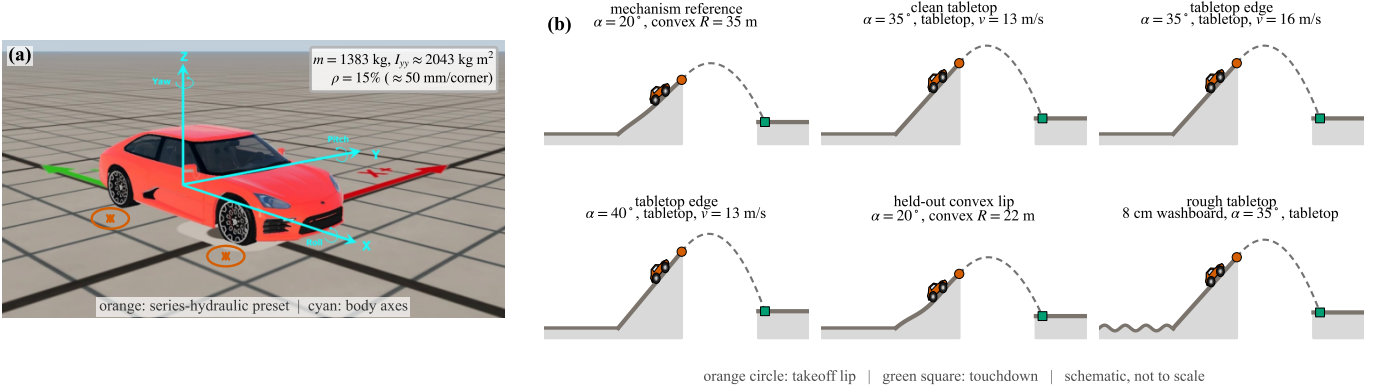


Fig. 2. DART-S platform and test conditions. (a) DART-S full-scale 4WIDS platform; orange overlays identify the series-hydraulic suspension elements and cyan arrows show the body frame. (b) Representative geometry and disturbance classes: calibration, boundary, and washboard tests use tabletop-fillet ramps; convex $R = 35/22 \text{ m}$ exit lips are separate mechanism and held-out conditions. Terrain profiles are schematic and not to scale; orange circles and green squares denote takeoff and touchdown.

controller for DART and DART-S. The common target offset is 0 m/s at the $35^\circ/15$ and $40^\circ/13$ conditions and -0.6 m/s at $35^\circ/16$. DART-S uses no lip throttle cut in this comparison. We examine the 1 m cut separately as an impact-management variant while retaining a common no-cut launch profile across all boundary comparisons.

We instantiate operational interval reachability with terminal half-widths of 35° in pitch and $25^\circ/\text{s}$ in pitch rate. Only the directional budget uses the 125.7 rad/s sustained-effective envelope; this value is not a per-wheel membership box. We constrain online commands at 200 rad/s and use realized per-wheel trajectories to verify compliance with the 221.2 rad/s drivetrain limit throughout each run.

The simulator advances deterministically at $\Delta t = 0.01 \text{ s}$ with a control update at 100 Hz . All analyses retain only records that satisfy the ballistic time-base check $\Delta t_{\text{eff}} = \Delta v_z / (g N_{\text{steps}})$. Landing metrics are latched at the first wheel contact after apex; a fixed-height latch would be biased since presets change ride height by $\pm 8 \text{ cm}$. Peak deceleration is the single-step derivative of the mass-aggregated vertical velocity: a band-limited 10 ms average (-3 dB at 44 Hz) between SAE J211 classes CFC 10 and CFC 60. Because SAE J211 requires $f_s \geq 10 \text{ CFC}$, CFC 10 is the highest compliant class for the 100 Hz state stream; we therefore re-verify load ordering under CFC 10 throughout the study.

We evaluate neutral and preset-only baselines, timing and torque-bias variants, guarded and unguarded DART/DART-S, landing variants, and the closed-loop selector. Both control channels act in the pitch plane by construction: the transverse wheel spin axes confine momentum exchange to pitch torques, and the presets command front-rear asymmetry. The experiments therefore evaluate pitch-plane actuation while retaining roll and yaw in the outcome bounds.

We assess performance through two complementary endpoints. Actuator, shaping, ablation, and selector evaluations use a *first-contact criterion*: successful liftoff followed by first wheel contact with $|\text{pitch}| \leq 35^\circ$ and $|\text{roll}| \leq 30^\circ$. System-level evaluations use the stricter post-touchdown criterion, which requires the same bounds over a 2 s window and treats $|\text{pitch}| > 85^\circ$ or $|\text{roll}| > 80^\circ$ as tumble during that interval.

We randomize controller order within each paired repeti-

tion and restart BeamNG between sessions to limit ordering and simulator-history effects. Each condition is evaluated across eight independent BeamNG sessions with three paired repetitions per session. Session-level contrasts define the inferential unit, while within-session repetitions quantify repeatability. Primary inference combines equal-weight session effects, a two-level cluster bootstrap, exact session-level sign-flip tests, leave-one-session-out direction checks, and Holm correction within each claim family. Confirmatory evidence must also satisfy prespecified speed-matching, time-integrity, post-touchdown-window, and hard-limit criteria. We fixed the protocol and analysis before data collection and retain incomplete trajectories as endpoint failures. Mechanism interpretation draws on repeated-run studies, whereas confirmatory inference relies exclusively on independent simulator sessions.

V. RESULTS

We organize the results around the evidence chain that supports and bounds DART-S. We first demonstrate system-level boundary performance and then examine how suspension reshapes the takeoff state and wheel-momentum budget. We next identify the timing-dependent response and evaluate local selection before using ablations and profile-specific tests to establish robustness and scope.

A. Boundary performance of the composed controller

As shown in Fig. 5(a), DART-S satisfies the post-touchdown attitude criterion in $24/24$ runs at $40^\circ/13 \text{ m/s}$, whereas DART satisfies it in $0/24$. We observe a positive effect in every session; the session-equal effect is $+1.00$ with cluster interval $[+1.00, +1.00]$ and boundary-family Holm-adjusted sign-flip $p = 0.0234$. Speed matching, leave-one-session-out direction, complete-window, time-base, and hard-limit gates all pass.

We also observe similarly large attitude-criterion gains at $35^\circ/15$ and $35^\circ/16$ ($23/24$ and $24/24$ additional successes over DART). Because entry-speed dispersion is greater at these conditions, the speed-matched $40^\circ/13$ result provides the confirmatory comparison, while the other two characterize response breadth. The 200 rad/s guard keeps all 600 trajectories within the 221.2 rad/s drivetrain limit.

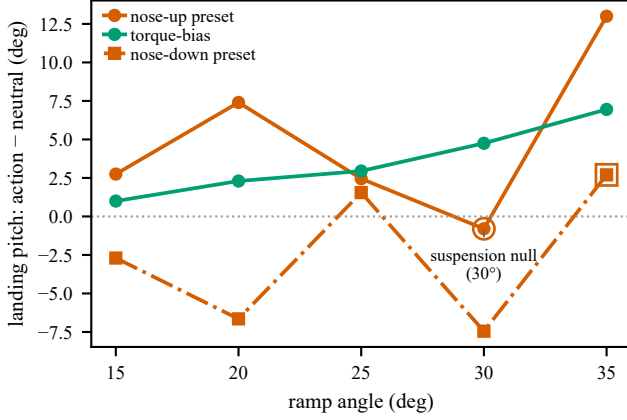


Fig. 3. Action-minus-neutral landing-pitch difference vs. ramp angle at $v = 13$ m/s ($N \geq 30$ per condition) for the suspension presets and torque-bias baseline. Open markers: not significant ($p \geq 0.05$).

B. Suspension-induced state and budget shaping

We first verify that the hydraulic elements deliver the authority assumed by the state-shift map: full lift and drop move ride height by +8.3 and -6.3 cm, and the front-up/rear-down preset shifts static pitch by +3.5°/-3.6°. Individual corners respond independently, and damper-mode switching changes the rebound oscillation. The stroke-ratio sweep shows monotonic takeoff-pitch authority.

Figure 3 plots action-minus-neutral landing-pitch differences. The takeoff angle, takeoff rate, entry speed, and flight time discussed below are paired telemetry from the same trials. We use this cross-geometry comparison to test whether suspension stroke produces a repeatable takeoff-state shift rather than merely changing approach speed or energy, and compare it with a same-hardware torque-bias alternative across five ramp angles at 13 m/s.

Across the five geometries, we observe a stable nose-up pitch bias of +2.2...+3.4° with takeoff-rate shifts of 0...+7 °/s, while entry speed and flight time remain unchanged to within 1%. A ballistic estimate, $\Delta_{\text{land}} \approx \Delta\theta_0 + \Delta\omega_{\theta 0}T$, captures the sign and ordering of the landing gains but overpredicts their magnitude by a near-constant 1.5–3.3° because of in-flight relaxation from wheel spin-down and the measured aerodynamic pitching moment; the estimate therefore serves as an upper bound. At the plotted 30° points, this relaxation cancels the rate-free static shift (-0.8°, $p = 0.054$), whereas the torque-bias configuration retains a +4.8° landing improvement; the contrast motivates per-condition gating of the preset.

Torque bias has negligible, opposite-sign takeoff-angle authority (-0.2...-0.7°). A separate matched- v_0 throttle-cut counterfactual, not plotted in Fig. 3, reduces its 30°/35° landing gains from +4.8°/+7.0° to +1.6°/+2.0°, identifying a launch-profile spin effect rather than a schedulable attitude channel. Mirroring the suspension command confirms directionality: the plotted 20° nose-down point shows a 6.7° landing-pitch degradation; companion outcome records show the pass rate falling from 1.0 to 0.067.

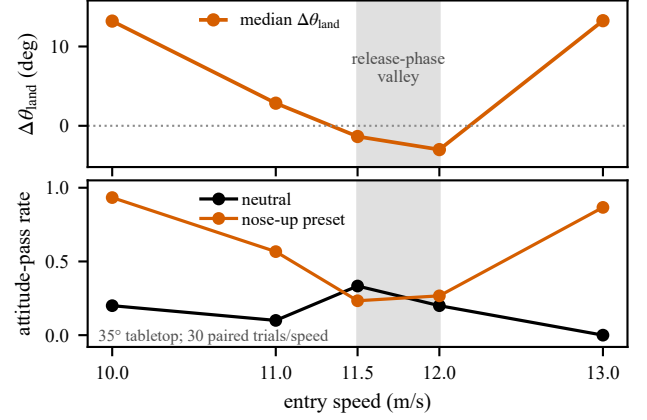


Fig. 4. Speed-dependent response on the 35° tabletop fillet (30 pairs per speed). Positive static-pitch authority persists through the shaded 11.5–12 m/s landing-response reversal, motivating timing-conditioned action selection.

C. Local selection and non-monotonic response

A useful preset must improve a condition, not merely have the correct static sign. As shown in Fig. 4, we evaluate the 35° tabletop fillet at five speeds. Median preset-minus-neutral landing-pitch changes are +13.20°, +2.85°, -1.35°, -3.00°, and +13.25° at 10, 11, 11.5, 12, and 13 m/s. The prespecified global valley contrast is -14.93° (bootstrap 95% CI -16.46...-13.34°, Holm-adjusted one-sided Wilcoxon $p = 1.86 \times 10^{-9}$); the local contrast is -1.84° (95% CI -3.52...-0.13°, $p = 0.0303$). All three sessions agree in sign. These data support an 11.5–12 m/s release-phase valley. Five of 300 runs at 10 m/s lack complete post-touchdown windows and are counted as failures, keeping the overall evidence partial. We nevertheless observe a repeated sign reversal consistent with a release-transient mechanism under this geometry.

Static takeoff-pitch authority remains +2.2...+3.1° throughout, whereas the release-rate contribution falls from +9.0 °/s at 10 m/s to +0.5/0.0 °/s at 11.5/12 m/s and then recovers to +6.0 °/s; this channel separation, not the dip alone, is the central insight. Approach speed therefore indexes the synchronization among suspension rebound, front-axle unloading, and lip departure rather than the magnitude of static authority. The same final preset can consequently improve or degrade landing. A ballistic overlay matches 12/16 exploratory points but misses the valley; a rate-only fit (RMSE 0.136 deg/s) detects the 13 and 14 m/s transition but not displacement feasibility. This rules out a globally enabled preset and any monotonic speed interpolation for deployment.

We introduce a zero-final-offset timing intervention to isolate the timing effect at 11.5 m/s. Across eight independent BeamNG sessions, the 0.35 s timing action satisfies the post-touchdown criterion in 23/24 runs versus 0/24 for the static preset; all session effects are positive (cluster interval [+0.833,+1.000], Holm-adjusted $p = 0.0156$), and the speed-match gate passes. The 0.15 s action also satisfies the criterion in 0/24, but its comparison fails the stricter timing speed-match gate and remains descriptive. Conditioning identifies the realized takeoff state, rather than the phase proxy, as the mediator linking timing to landing response at this condition.

Away from the operating boundary, we observe mildly sub-additive continuous landing-pitch gains: at 35° the combined +22.0° gain is 14% below the single-channel sum, with the same ordering at 20°. The preset removes part of the error before liftoff, leaving less for the airborne controller. This saturation of a continuous error metric does not predict the binary boundary outcome, where crossing a failure threshold yields the positive interaction reported below.

By varying the stroke ratio and command endpoint, we localize the gain to takeoff-state shaping: increasing the per-corner command from approximately 33 to 67 mm ($\rho = 10\%$ to 20%) raises $\Delta\theta_0$ monotonically (+2.5°/+3.3°/+4.0°) and increases Δ_{land} (+2.8°/+7.4°/+8.2°), linking commanded suspension authority to the eventual landing response rather than to an incidental launch-speed change. Under mass $\pm 20\%$ and a forward CoG shift, Δ_{land} remains +6.5...+7.5° around the +7.4° nominal result. Conversely, landing-end suspension variants change pitch by at most 0.6° and peak deceleration by at most $\pm 4.8\%$. Table I therefore localizes the useful authority to pre-liftoff shaping and shows that it persists under moderate changes in vehicle inertia and mass distribution.

As summarized in Table I, we verify pass-through, refusal, preparation, and the requirement that preset stroke complete before fillet loading. These tests isolate decision execution and stroke timing, providing the basis for the subsequent reachability and branch-fidelity analysis reported below.

Across 3465 queries at 21 calibrated conditions, decisions are invariant within $\pm 0.5^\circ/\pm 0.2$ m/s and through $\pm 2.5^\circ$ angle error. All 66 harmful flips occur at the timed condition for speed error ≥ 0.25 m/s, so larger uncertainty disables that entry. The curvature safeguard requires >0.6 m/s speed underestimate to admit the nearest measured adverse condition.

We observe that the prespecified selector executes all 48 positive interpolation branches, all 24 negative branches, and all 24 uncertainty-boundary abstentions as specified. The realized interval audit accepts 42/48 positive selected actions. State-only reachability always retains the natural state, whereas budget-only, joint, and outcome-only policies choose identical actions in the tested conditions. Thus the observed reachability distinction is budget-driven, but it adds no action change beyond the locally qualified outcome table.

We also compare DART, selector fallback, and forced preset on the new washboard evaluation; each satisfies the attitude criterion in 24/24 runs. The prespecified selector-versus-forced contrast is therefore zero; the earlier protective washboard claim is not retained. Two held-out interpolation conditions show large descriptive effects (24/24 versus 0/24 and 24/24 versus 2/24). Because their entry-speed dispersion exceeds the confirmatory tolerance, we treat these results as supporting trends for future speed-matched validation.

D. Ablations, robustness, and scope

As shown in Fig. 5(b), the 35°/16 m/s factorial yields criterion-success counts of 0/24 for neutral and DART, 14/24 for preset-only, and 24/24 for outcome-only, budget-only, and joint DART-S. The session-equal factorial interaction is +0.417 with cluster interval [+0.125,+0.708], but the exact session-level test gives $p = 0.0625$. This ordering is consistent with

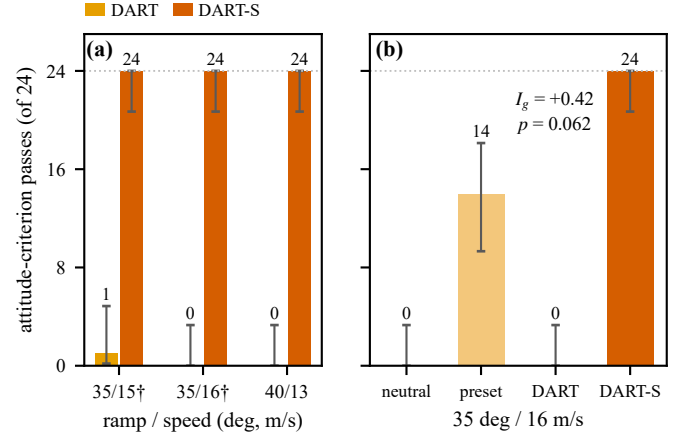


Fig. 5. Boundary confirmation across independent BeamNG sessions (post-touchdown attitude-criterion successes out of 24; Wilson 95% intervals). (a) At 40°/13 m/s, DART-S attains 24/24 versus 0/24 for DART. Dagged conditions have large descriptive effects but fail their prespecified speed-match gates. (b) The 35°/16 m/s factorial yields a positive interaction estimate, but its session-level sign-flip test is not significant ($p = 0.0625$).

complementary ground and airborne contributions; a larger session set is needed to resolve the interaction magnitude. Historical guard ablations show that guarded trajectories stay below the drivetrain limit, whereas unguarded trials frequently cross it during airborne correction, directly exposing how the guard preserves wheel-speed headroom throughout the remaining airborne control horizon of each jump.

We next compare the nominal mean-wheel approximation with realized per-wheel means and observe a median absolute error of 15.85 rad/s and a maximum error of 152.28 rad/s. Every strategy run has at least one realized wheel beyond the 125.7 rad/s certificate envelope, 60/240 exceed 200 rad/s on at least one wheel, and none exceeds the 221.2 rad/s hard limit. Reachability is therefore reported as an operational screen derived from the nominal state/budget model, with realized signed per-wheel traces providing the authority record. Landing-load shaping also remains open: historical guarded CFC-10 medians are approximately 33 g for DART and 43 g for DART-S at this boundary condition.

As shown in Fig. 6(a), we observe a profile-specific high-speed reversal on DART's 20° reference kicker ($R = 35$ m): the nose-up preset retains +2.5...+4.5° of takeoff-pitch authority ($p < 10^{-3}$), yet median landing error worsens by +3.4° at 18 m/s ($N = 30$, $p < 10^{-4}$) as the takeoff-rate shift reverses. The reversal is therefore governed by pitch-rate and wheel-momentum dynamics despite the retained static pitch bias.

For an ideal convex lip of radius R , the quasi-static normal-load margin per unit mass is $n(v) = g \cos \alpha - v^2/R$ and crosses zero at $v^* = \sqrt{gR \cos \alpha} = 17.96$ m/s for this geometry. On the paired speed ladder (Fig. 6(a)), no pitch-rate difference is detected at 13 or 15 m/s ($n \geq 2.8$ m/s²); adverse shifts of -6.6 and -7.8 °/s emerge at 16.5 and 18 m/s (sign-test $p \leq 0.002$) as $n(v)$ approaches ≈ 1.4 m/s², and no significant shift is detected past v^* at 19.5 m/s.

We use the stroke traces in Fig. 6(b) to expose the mechanism at 18 m/s. With neutral suspension both axes leave

TABLE I

COMPACT VALIDATION SUMMARY FOR ACTUATOR AUTHORITY, ABLATIONS, ROBUSTNESS, AND SELECTOR EXECUTION. Δ_{land} ($^\circ$) IS REPORTED RELATIVE TO NEUTRAL.

test	protocol	measured result and interpretation
static authority	full lift/drop; front-up/rear-down	ride height changes by +8.3 and -6.3 cm; static pitch is +3.5 $^\circ$ /-3.6 $^\circ$
stroke scaling	33/50/67 mm (10/15/20%), $N = 30$	$\Delta\theta_0 = +2.5^\circ/+3.3^\circ/+4.0^\circ$; monotonic takeoff authority
takeoff vs both ends	20 $^\circ$ and 35 $^\circ$	+7.0 $^\circ$ versus +7.4 $^\circ$ at 20 $^\circ$; +8.6 $^\circ$ versus +13.0 $^\circ$ at 35 $^\circ$
platform robustness	mass $\pm 20\%$; CoG-forward, $N = 30$	Δ_{land} between +6.5 $^\circ$ and +7.5 $^\circ$ (all $p < 10^{-4}$), versus +7.4 $^\circ$ nominal
landing-gain stroke scaling	33/50/67 mm (10/15/20%)	$\Delta_{\text{land}} = +2.8^\circ/+7.4^\circ/+8.2^\circ$
landing-end variants	$N = 30$	pitch change at most 0.6 $^\circ$; peak-deceleration change within $\pm 4.8\%$ (not an equivalence test)
selector execution	pass-through/refuse/prepare	30/30 decisions; 30/30 stopped, median margin 7.3 m; prepare 28/30 vs independent reference 0/115
selector timing	lead 2.0 vs 0.8 s	prepare success 28/30 vs 21/30; preset must finish before the fillet

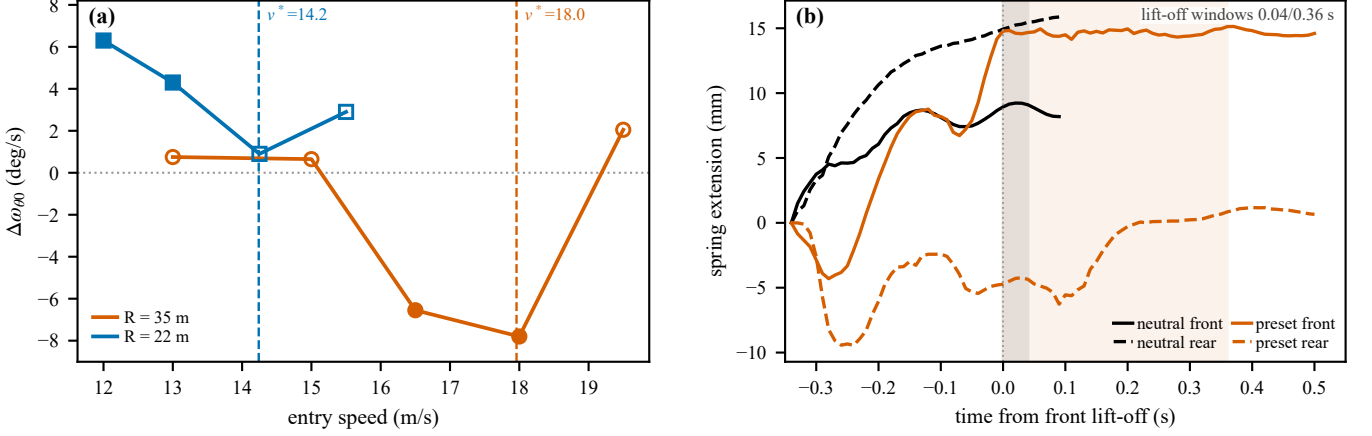


Fig. 6. Mechanism measurements. (a) Paired takeoff pitch-rate difference $\Delta\omega_{\theta_0}$ vs. entry speed on the 20 $^\circ$ kicker (calibration $R = 35$ m, held-out $R = 22$ m); dashed lines mark $v^* = \sqrt{gR \cos \alpha}$; filled markers: sign-test $p < 0.05$. (b) Overlaid axle-stroke traces at 18 m/s ($R = 35$ m): the nose-up preset stretches the lift-off window from 0.04 to 0.36 s (shaded).

the lip nearly together (front-to-rear lift-off window 0.03–0.04 s). The nose-up preset holds the front corners extended: the depleted normal margin releases the front axle early while the compressed rear stays loaded, stretching the window to a median 0.36 s, during which the vehicle pivots nose-down about the rear contact. The traced rate penalty (-9.1 $^\circ/\text{s}$, ≈ -28 $^\circ/\text{s}$ per second of window) is consistent in magnitude with the ladder response.

We then use a held-out validation to test whether $n(v)$ transfers across geometries. Moving the lip to $R = 22$ m shifts v^* to 14.2 m/s, yet the held-out ladder shows no adverse band (Fig. 6(a)); $\Delta\omega_{\theta_0}$ is *positive* at 12 and 13 m/s (+6.3 and +4.3 $^\circ/\text{s}$, $p \leq 0.04$), with no significant shift detected past v^* . A 2×2 radius-by-arc-length comparison at $n \approx 0$ (3.05 m versus 4.89 m of arc) shows that neither variable alone is sufficient: the adverse shift persists on the short $R = 35$ m arc (-10.0 $^\circ/\text{s}$, $p = 0.002$), reappears on the long $R = 22$ m arc (-6.4 $^\circ/\text{s}$, $p = 0.021$), and the short $R = 22$ m lip remains benign.

Finally, we synthesize traces across all four operating conditions to resolve the conflict into two channels with one root. Across every condition, the preset stretches the lift-off window (+0.19...+0.33 s), and strong nose-down pitch acceleration persists inside that window (-50 ... -121 $^\circ/\text{s}^2$); this is the adverse channel. But the early-unloaded front wheels are also spun up by the drivetrain during lip transit, and their nose-up reaction torque is largest where the neutral configuration stays gripped while the preset unloads (takeoff wheel-speed difference up to +95 rad/s on the tight lip, near zero on $R = 35$ m where both configurations saturate); this is the

compensating channel. Competition between the two channels sets the net response, with near cancellation on the short, tight lip. A calibrated threshold, $n(v) \leq n_{\min}$ ($n_{\min} = 2 \text{ m/s}^2$ on the $R = 35$ m ladder), intercepts every measured adverse condition. Where it activates under a canceling spin channel, no significant gain is forfeited, although this study does not establish zero intervention cost. Accordingly, $n(v)$ serves as a ramp-profile-specific indicator of contact-timing reversal and supplies a conservative exclusion boundary for deployment.

VI. CONCLUSION

DART-S turns active suspension into a pre-lift-off state-and-budget actuator: the ground phase reshapes takeoff pitch, pitch rate, and wheel headroom before the guarded DART law spends the remaining authority in flight. A support-aware selector combines local calibration, outcome evidence, and operational interval-reachability screening; exact-pair reachability provides the diagnostic audit.

Confirmation across independent BeamNG sessions establishes two local results: DART-S satisfies the post-touchdown criterion in 24/24 runs versus 0/24 for DART at 40 $^\circ$ /13 m/s, and the 0.35 s timing action does so in 23/24 versus 0/24 for the static preset. Prespecified positive, negative, and boundary branches execute as specified, and the guard keeps every trajectory within the drivetrain limit. The speed-matched boundary and timing comparisons define the confirmatory scope; additional conditions characterize response breadth and identify priorities for higher-powered session replication. On

the washboard, DART, fallback, and forced preset each satisfy the criterion in 24/24 runs.

This study establishes reachability-audited authority within the validated simulation envelope. Future hardware validation will extend this evidence through loaded-hydraulic actuator measurements, scaled-vehicle jumps, structural loads, and roll-axis evaluation.

ACKNOWLEDGMENTS

During the preparation and technical implementation of this work, the authors utilized a combination of generative artificial intelligence (AI) systems in an integrated workflow. Specifically, Auto/Composer 2.5 (Cursor), GLM 5.3, DeepSeek V3/V4, and Kimi K3 were used interactively to assist in developing, debugging, and optimizing the algorithmic source code and data-processing pipelines discussed in Section III. These same systems (GLM 5.3, DeepSeek V3/V4 and Kimi K3) were also co-employed to generate the analytical visualization scripts for creating the experimental data charts in Section V. During the manuscript revision phase, GLM 5.3, DeepSeek V3/V4 and Kimi K3 refined English prose, enhanced language fluency, and polished the text across all sections. In accordance with IEEE guidelines, all AI-assisted engineering code, data visualizations, and textual outputs were thoroughly reviewed, logically validated, and cross-checked against raw experimental results by the human authors, who retain full academic and ethical responsibility for the content and integrity of this publication.

REFERENCES

- [1] Y. Hu et al., “DART: Dual-axis airborne reachability-gated torque-reaction for off-road vehicle jumps,” arXiv:2607.29011, Jul. 2026.
- [2] J. R. Giles and C. D. Ross, “The physics of motocross,” *Phys. Teach.*, vol. 34, no. 4, pp. 220–222, Apr. 1996.
- [3] BYD, “BYD reveals DiSus intelligent body control system, exclusively for new energy vehicles,” Apr. 9, 2023. [Online]. Available: [BYD official release](#).
- [4] L. J. Brady, A. R. Scheuerell, S. R. Franker, and A. J. Nysse, “Vehicle having suspension with continuous damping control,” U.S. Patent 11,400,787 B2, Aug. 2, 2022.
- [5] J. L. Stock et al., “Torque vectoring for utility vehicles,” U.S. Patent 11,981,873 B2, May 14, 2024.
- [6] K. Weston, J. Sharpe, B. F. Diamond, J. Trent, and D. M. Russell, “Control system for vehicle powertrain during off-road jumping,” U.S. Patent 12,233,882 B2, Feb. 25, 2025.
- [7] M. Gajamohan, M. Merz, I. Thommen, and R. D’Andrea, “The Cubli: A cube that can jump up and balance,” in *IEEE/RSJ IROS*, 2012, pp. 3722–3727.
- [8] T. Libby et al., “Tail-assisted pitch control in lizards, robots and dinosaurs,” *Nature*, vol. 481, no. 7380, pp. 181–184, Jan. 2012.
- [9] E. Chang-Siu, T. Libby, M. Brown, R. J. Full, and M. Tomizuka, “A nonlinear feedback controller for aerial self-righting by a tailed robot,” in *IEEE ICRA*, 2013, pp. 32–39.
- [10] H.-W. Park, P. M. Wensing, and S. Kim, “Online planning for autonomous running jumps over obstacles in high-speed quadrupeds,” in *Proc. Robot. Sci. Syst. XI*, Rome, Italy, Jul. 2015.
- [11] Q. Nguyen, M. J. Powell, B. Katz, J. Di Carlo, and S. Kim, “Optimized jumping on the MIT Cheetah 3 robot,” in *IEEE ICRA*, 2019, pp. 7448–7454.
- [12] M. Chignoli and S. Kim, “Online trajectory optimization for dynamic aerial motions of a quadruped robot,” in *IEEE ICRA*, 2021, pp. 7693–7699.
- [13] D. J. Gonzalez, M. C. Lesak, A. H. Rodriguez, J. A. Cymerman, and C. M. Korpela, “Dynamics and aerial attitude control for rapid emergency deployment of the agile ground robot AGRO,” in *IEEE/RSJ IROS*, 2020, pp. 2577–2584.
- [14] J. Kim, D. J. Gonzalez, and C. M. Korpela, “Comparing feedback linearization and adaptive backstepping control for airborne orientation of agile ground robots using wheel reaction torque,” in *Proc. Amer. Control Conf. (ACC)*, 2021, pp. 26–31.
- [15] A. Pokhrel, A. Datar, and X. Xiao, “Dom, cars don’t fly!—Or do they? In-air vehicle maneuver for high-speed off-road navigation,” in *IEEE/RSJ IROS*, 2025, pp. 21325–21332.
- [16] D. Karnopp, M. J. Crosby, and R. A. Harwood, “Vibration control using semi-active force generators,” *J. Eng. Ind.*, vol. 96, no. 2, pp. 619–626, 1974.
- [17] H. E. Tseng and D. Hrovat, “State of the art survey: active and semi-active suspension control,” *Veh. Syst. Dyn.*, vol. 53, no. 7, pp. 1034–1062, 2015.
- [18] X. Jin et al., “ μ -synthesis robust control for active suspension of in-wheel-motor-driven electric vehicles,” *J. Mech. Eng.*, vol. 60, no. 16, pp. 259–269, 2024.
- [19] W. Jia, W. Zhang, F. Ma, and L. Wu, “Attitude control of vehicle based on series active suspensions,” *Actuators*, vol. 12, no. 2, Art. no. 67, 2023.
- [20] A. Kale and S. Ç. Başlamışlı, “Mobility improvement of wheeled military vehicles using preview controlled active ride height system,” *Proc. Inst. Mech. Eng., Part D: J. Automobile Eng.*, vol. 237, no. 1, pp. 126–144, 2023.
- [21] V. Wiberg et al., “Sim-to-real transfer of active suspension control using deep reinforcement learning,” *Robot. Auton. Syst.*, vol. 179, Art. no. 104731, 2024.
- [22] E. Sällberg and R. Ekman, “Vehicle Dynamics of a Jumping Rallycross Car,” M.S. thesis, KTH Royal Inst. Technol., Stockholm, Sweden, Rep. TRITA-AVE 2015:41, 2015.
- [23] G. Williams, P. Drews, B. Goldfain, J. M. Rehg, and E. A. Theodorou, “Aggressive driving with model predictive path integral control,” in *IEEE ICRA*, 2016, pp. 1433–1440.
- [24] H. Lee, T. Kim, J. Mun, and W. Lee, “Learning terrain-aware kinodynamic model for autonomous off-road rally driving with model predictive path integral control,” *IEEE Robot. Autom. Lett.*, vol. 8, no. 11, pp. 7663–7670, Nov. 2023.
- [25] Z. Zhao et al., “Learning when to jump for off-road navigation,” in *Proc. Robot. Sci. Syst. XXII*, 2026. [Online]. Available: [RSS XXII paper 66](#).
- [26] S. A. Ali et al., “Vehicle ramp angle control,” U.S. Patent 12,384,215 B2, Aug. 12, 2025.
- [27] F. Jing, B. Wang, Y. Deng, K. Bao, Z. Chen, and B. Liang, “Ramp jump attitude control of single-track two-wheeled robot via contact-implicit trajectory optimization,” in *Proc. IEEE Int. Conf. Robot. Biomimetics (ROBIO)*, 2024, pp. 1371–1376.
- [28] Y. Zhang, Z. Wu, L. Yang, Y. Zhao, and S. Cong, “Research on the design and simulation of jumping suspension system for light off-road vehicle,” in *Proc. IEEE Int. Conf. Mechatronics Autom. (ICMA)*, 2025, pp. 1413–1418.
- [29] BeamNG GmbH, “The 2025 Winter Release—BeamNG.tech v0.38,” Dec. 17, 2025.