

Communication in modular robotic motor control: Bilateral controllers under realistic constraints

Jingwen Li¹, Levin Kuhlmann¹, Jason Friedman², and Gideon Kowadlo^{1,3}

¹Department of Data Science and AI, Monash University

²Department of Physical Therapy & Sagol School of Neuroscience, Tel Aviv University

³Cerenaut

¹ jlli0556@student.monash.edu levin@monash.edu.au

² jason@tau.ac.il ³ gideon@cerenaut.ai

Abstract

Robotic motor control in musculoskeletal systems requires fast, accurate movement and robust postural stabilization under signal-dependent noise (where motor command variance scales with command magnitude) and energetic cost. Modular controllers can distribute these competing demands across interacting sub-modules, but it remains unclear whether they outperform monolithic architectures under realistic constraints, and how inter-module communication shapes the resulting strategy. Inspired by the bilateral hemispheric organization of the brain, we introduce a recurrent controller of two GRU-based modules connected by a learnable, delayed inter-hemispheric channel, trained end-to-end in a differentiable two-arm musculoskeletal simulator. Across reaching and holding tasks, the modular architecture substantially outperforms a capacity-matched monolithic baseline. Compared to a matched modular controller without communication, learned inter-hemispheric communication reshapes the solution: improved end-point precision, lower energetic cost in non-zero-delay regimes, and reduced muscle co-contraction. Our findings show that for robotics, biologically inspired modular controllers offer a practical route to robust movement under noise and energetic constraints, with inter-module communication providing a mechanism to tune trade-offs between precision, stability, and actuation cost.

1 Introduction

Robotic motor control operates under real-world physical constraints rather than idealized, noise-free environments [21, 5]. Even basic actions, such as moving an arm from one location to another or holding it in place, require a controller to balance competing demands for accuracy, postural stability, and perturbation resistance under signal-dependent noise and energetic limits [10, 14, 37]. These competing demands are further coupled by energetic limits: real systems cannot rely on arbitrarily large motor commands because high actuation consumes energy, increases physical load, and can amplify signal-dependent variability [11, 1, 31]. Modular neural architectures, in which control is distributed across interacting sub-networks, offer a promising way to handle these competing demands, and have recently attracted interest through modular motor-control models [41, 12, 19], mixture-of-experts methods [34, 9], and modular reinforcement learning approaches [39, 13]. This raises the broader design problem of how interacting sub-networks should coordinate: through independent parallel operation, unconstrained information sharing, or some intermediate form of constrained communication.

Biological motor systems have, over evolutionary time, converged on a particular solution to this problem [28, 38]. The cerebrocortical components of the mammalian motor system are organized

within the two hemispheres of the brain and communicate across hemispheres through a dedicated channel called the corpus callosum, with interhemispheric transfer constrained by conduction delays [18, 33]. Behavioral and neurophysiological evidence suggests that this bilateral organization is not incidental: the two hemispheres employ complementary control strategies [29, 42], with interhemispheric communication playing an active role in reducing interference between conflicting motor demands [33]. This makes asymmetry a meaningful measure, because communication may change not only overall task performance but also how control contributions are distributed across the two modules [20, 30]. Recent theoretical work further suggests that bilateral organization with constrained communication may arise naturally under the joint pressures of energetic cost, circuit reliability, and task complexity [32]. These observations make biological motor systems a useful source of hypotheses for robotic controllers that must coordinate modular subsystems under realistic communication constraints.

This biological analogy is especially relevant for humanoid robots, whose human-like morphology may allow them to operate in everyday human environments, including homes, workplaces, and public spaces. Many recent robot-learning approaches address motor control through reinforcement learning, policy optimization, and related empirical methods, emphasizing task performance in locomotion and manipulation benchmarks [8, 36, 24]. In parallel, modular control has emerged as an important design direction in robotics and learning-based control, where decomposition is used to simplify complex problems and improve adaptability [39]. This motivates two targeted architectural questions for robotic motor control. First, does modular structure itself improve performance under realistic constraints? Second, does communication between modules shape the control strategies that support robust performance under changing task and constraint demands?

To study these questions, we use MotorNet [5], a differentiable musculoskeletal simulator that captures key biomechanical features while allowing controlled comparisons between modular and monolithic controllers. We tested two hypotheses: first, that modular architecture improves control relative to a capacity-matched monolithic controller; and second, that learned communication between modules shapes the resulting control strategy and remains useful when communication signals are delayed. Our main contributions are as follows:

1. We show that a bilateral modular architecture substantially outperforms a capacity-matched monolithic controller under realistic motor-control constraints, with the strongest gains in task performance, trajectory quality, energetic cost, and muscle co-contraction.
2. We show that delayed inter-module communication moves the bilateral controller with a communication channel (Bilateral w/ CC) to a stronger operating regime, improving performance, precision, energetic cost, movement stability, and co-contraction relative to zero-delay communication, while reshaping the modular solution beyond the bilateral model without inter-module communication (Bilateral w/o CC).
3. We identify an emerging asymmetric contribution pattern: learned inter-module communication shifts Bilateral w/ CC toward stronger contralateral output contributions, suggesting a route from inter-module communication to lateralized coordination.

2 Related work

Studies of handedness, motor lateralization, and bimanual coordination suggest that the two hemispheres make complementary contributions to trajectory control, stabilization, and interlimb coordination, and that interhemispheric interaction is functionally important during movement [29, 20, 42, 18, 33, 17]. Other computational motor-control frameworks offer a complementary perspective by treating movement as optimization under body dynamics, prediction, feedback, and uncertainty [10, 40, 15, 37]. Together, these lines of work motivate bilateral organization as a useful substrate for embodied control, while recent robotics-facing discussions have begun to argue that it may also offer design principles for robot motor systems [27, 6].

What remains less clear is how these ideas translate into learnable controller architectures. In robotics and machine learning, modular control is often used to improve task performance, adaptability, or coordination, including through reinforcement learning, structured motor-control models, or distributed embodied systems [36, 8, 26, 41, 12, 19, 39, 13]. In parallel, bilateral or lateralized architectures have been studied in language, vision, and other representational domains [4, 7, 25, 2].

However, these studies generally target task performance or representation rather than biomechanical motor control under matched constraints, and rarely separate the effect of modular architecture itself from the effect of inter-module communication during task execution.

3 Method

3.1 Musculoskeletal environment

We use MotorNet [5], a differentiable musculoskeletal simulator, because our controlled comparison requires explicit differentiable task losses, muscle-activation outputs, and kinematic states rather than only reward-driven performance scores. MotorNet provides this through a differentiable pipeline from sensory input to muscle activation and explicitly specified reaching and holding objectives. The bimanual system uses two RigidTendonArm26 effectors (Figure 1), each a planar two-degree-of-freedom arm actuated by six Hill-type muscles, giving twelve muscles in total. The two shoulders are placed symmetrically with a separation of 0.4 m.

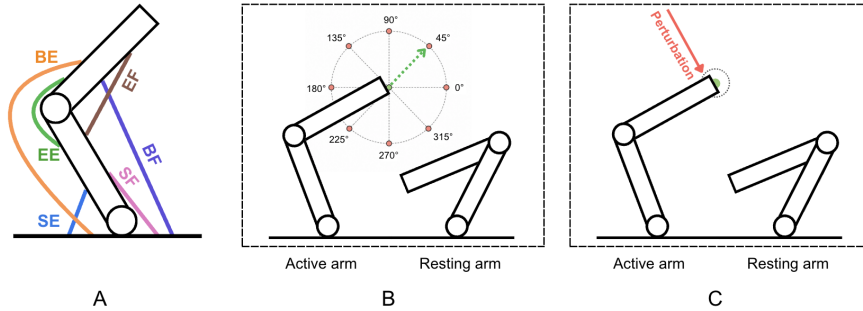


Figure 1: Musculoskeletal substrate and task design. **(A)** A MotorNet RigidTendonArm26 effector: a planar two-degree-of-freedom arm actuated by six Hill-type muscles—shoulder flexor/extensor (SF/SE), elbow flexor/extensor (EF/EE), and biarticular flexor/extensor (BF/BE). The bimanual setup places two such arms symmetrically in a shared planar workspace. **(B)** Center-out reaching task: the active hand moves from a central start position (green) to one of eight circularly arranged targets (red), while the resting hand remains undisturbed. **(C)** Postural holding task: the active hand maintains its position (green) against a zero-mean Gaussian external perturbation (red arrow) within a tolerance region (dashed circle), while the resting hand remains undisturbed. The tasks isolate trajectory- and stability-dominant demands, respectively.

3.2 Main controller architecture and baselines

- **Bilateral w/ CC (main controller):** two GRU-based hemispheric modules with hidden size 64, connected by a learned inter-module communication channel with delay δ (Figure 2). The final motor command combines hemisphere-specific readouts with a shared bias:

$$\mathbf{u}(t) = \sigma(\mathbf{W}_{\text{out}}^L \mathbf{h}_L(t) + \mathbf{W}_{\text{out}}^R \mathbf{h}_R(t) + \mathbf{b}). \quad (1)$$

Here, $\mathbf{h}_L(t)$ and $\mathbf{h}_R(t)$ are the 64-dimensional hidden states of the left and right GRU modules; $\mathbf{W}_{\text{out}}^L$ and $\mathbf{W}_{\text{out}}^R$ map these states to hemisphere-specific motor contributions; $\mathbf{b}$ is a shared bias; and σ constrains the final 12-dimensional muscle activations to $[0, 1]^{12}$.

- **Bilateral w/o CC (communication-ablation baseline):** the same two-module architecture and readout structure as Bilateral w/ CC, but with the inter-module communication channel disabled.
- **Monolithic (capacity-matched baseline):** a single GRU with hidden size 128 and no hemispheric decomposition.

We use internal baselines to isolate architecture and communication effects, since existing motor-control models differ in task setup, body morphology, objectives, or training pipeline.

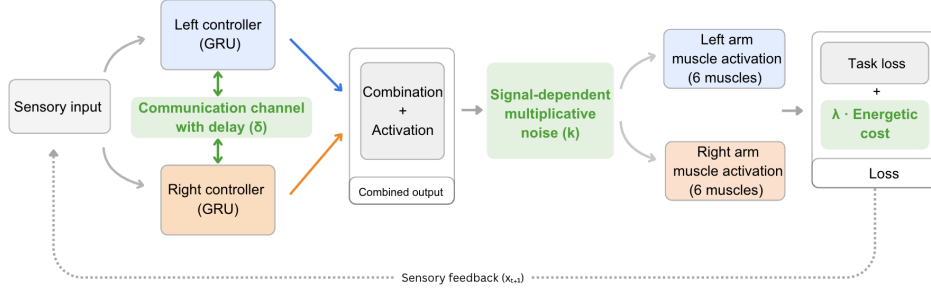


Figure 2: Architecture overview of the bilateral controller. A shared sensory input is broadcast to two GRU-based hemispheric controllers linked by delayed inter-module communication. Their outputs are combined into a 12-dimensional muscle-command vector, passed through signal-dependent multiplicative motor noise, and split into six muscle activations for each arm. The diagram highlights the three constraints used in this study: delayed inter-module communication, signal-dependent motor noise, and energetic cost in the training objective.

3.3 Realistic motor-control constraints

Signal-dependent motor noise. All controllers use multiplicative Gaussian motor noise on muscle activations. After the readout layers produce a deterministic activation vector $\mathbf{u}(t) \in [0, 1]^{12}$, each muscle command is perturbed as

$$\tilde{u}_i(t) = \text{clip}(u_i(t)(1 + k\epsilon_i(t)), 0, 1), \quad \epsilon_i(t) \sim \mathcal{N}(0, 1), \quad (2)$$

where k is the noise-gain hyperparameter. This implements a biologically motivated signal-dependent noise model, where motor variability scales with command magnitude [11]. Noise is applied after the sigmoid output and before the action enters the musculoskeletal environment, during both training and inference.

Energetic cost. Energetic cost is implemented as a quadratic penalty on muscle activation magnitude, applied in both task phases with a shared coefficient λ_{energy} , to prevent the controller from solving tasks by globally inflating activations [1]. For a trajectory of length T with $M = 12$ muscles (six per arm), the energy term is

$$E = \frac{1}{TM} \sum_{t=1}^T \sum_{i=1}^M u_i(t)^2. \quad (3)$$

The reaching and holding losses are then defined as

$$\mathcal{L}_{\text{reach}} = \mathcal{L}_{\text{reach}}^{\text{traj}} + \lambda_{\text{energy}} E_{\text{reach}}, \quad (4)$$

$$\mathcal{L}_{\text{hold}} = \mathcal{L}_{\text{hold}}^{\text{traj}} + \lambda_{\text{var}} \mathcal{L}_{\text{var}} + \lambda_{\text{energy}} E_{\text{hold}}, \quad (5)$$

where $\mathcal{L}_{\text{reach}}^{\text{traj}}$ is the mean distance to the target across timesteps during reaching, $\mathcal{L}_{\text{hold}}^{\text{traj}}$ is the mean positional error during holding, and $\mathcal{L}_{\text{var}}$ penalizes postural variability during holding.

Inter-module communication delay. Delay is implemented only for the bilateral controller, where each hemisphere receives the other hemisphere’s hidden state through a learned linear projection after a discrete communication delay. Let δ denote the communication delay in simulation steps. The inter-module communication channel are:

$$\mathbf{c}_{R \rightarrow L}(t) = \mathbf{W}_{R \rightarrow L} \mathbf{h}_R(t - \delta), \quad (6)$$

$$\mathbf{c}_{L \rightarrow R}(t) = \mathbf{W}_{L \rightarrow R} \mathbf{h}_L(t - \delta), \quad (7)$$

and the recurrent updates become:

$$\mathbf{h}_L(t) = \text{GRU}_L([\mathbf{x}(t); \mathbf{c}_{R \rightarrow L}(t)], \mathbf{h}_L(t - 1)), \quad (8)$$

$$\mathbf{h}_R(t) = \text{GRU}_R([\mathbf{x}(t); \mathbf{c}_{L \rightarrow R}(t)], \mathbf{h}_R(t - 1)). \quad (9)$$

where $\mathbf{W}_{R \rightarrow L}$ and $\mathbf{W}_{L \rightarrow R}$ are the learned linear projection matrices for the inter-module communication channel, mapping the contralateral hidden state into the form received by the ipsilateral hemisphere/module. The delay is implemented with a ring buffer, so non-zero δ forces each hemisphere to use buffered past activity from the other hemisphere rather than instantaneous contralateral state information, consistent with physiological interhemispheric communication delays [18, 33].

3.4 Tasks

We train and test on two complementary tasks using an interleaved protocol. The two tasks are chosen to separate trajectory-dominant and stabilization-dominant control demands in a standard motor-control setting [10, 14, 29, 42]. Training alternates between reaching and holding batches. In each batch of 128 trials, 64 use the left hand as active and 64 use the right hand, ensuring symmetric exposure. After each reach–hold pair, losses are normalized and summed for one parameter update.

- **Reach task.** The active hand executes a center-out movement from a central start position to one of eight targets evenly spaced on a 0.08 m radius circle, while the resting hand remains at its starting position [10, 5]. This standard center-out layout samples movement directions from eight evenly spaced targets, enabling evaluation of reaching performance across directions.
- **Hold task.** The active hand resists a zero-mean Gaussian external force perturbation with per-axis standard deviation 0.5 N, while the resting hand remains in an undisturbed resting state [14, 42]. This perturbation-based layout evaluates postural stability and resistance to external disturbances.

Evaluation metrics. We use success rate as the primary task-level feasibility metric for the reach–hold control problem. It combines reach success, defined as final reach error below 0.02 m, and hold success, defined as hold-phase variance below $2.5 \times 10^{-5} \text{ m}^2$. The thresholds correspond to a 2 cm reach tolerance and $\sim 5 \text{ mm}$ holding variability, consistent with human reaching and posture ranges [22, 3, 35]. We also report endpoint error, trajectory error, movement variance, hold variance, energetic cost, and co-contraction index (CCI), where lower values are better. Asymmetry analyses use contralaterality index (CI) from output contributions and directional lesion index (DDI) from lesion effects. Full definitions are in Appendix A.

4 Experimental results

4.1 Implementation details

All three controllers were trained on interleaved reaching and holding batches using Adam [16] with learning rate 10^{-3} and batch size 128. Training used 10-step truncated backpropagation through time, gradient clipping, and early stopping. For the main comparison, we swept a shared 4×4 grid over energetic cost $\lambda \in \{0, 10^{-4}, 10^{-3}, 10^{-2}\}$ and motor-noise gain $k \in \{0, 0.05, 0.1, 0.2\}$, with ten seeds per configuration. For Bilateral w/ CC, we additionally swept communication delays $\delta \in \{0, 5, 10, 20\}$ simulation steps, corresponding to 0, 50, 100, and 200 ms. In the main analysis, we aggregate non-zero delays ($\delta \in \{5, 10, 20\}$) because our primary question is whether communication remains useful under delayed signalling, rather than which delay magnitude is optimal. Using several delay magnitudes reduces dependence on any single delay choice. All models were trained with PyTorch [23] on NVIDIA L40S GPUs.

4.2 Modularity, the dominant source of performance gain under realistic constraints

Figure 3A shows the pattern of whether modular architecture improves success rate under the shared noise–energy grid: non-zero-delay Bilateral w/ CC is strongest, Bilateral w/o CC is close behind, zero-delay Bilateral w/ CC is weaker, and modular controllers outperform the monolithic baseline. Figure 3B resolves this result across motor-noise regimes. At low noise, all controllers achieve high success rate, as expected when the task imposes little signal-dependent pressure. At intermediate noise ($k = 0.05, 0.1$), the monolithic controller becomes fragile, with success rate falling into the 38.00%–53.00% range, whereas modular controllers remain substantially more robust.

The high-noise regime ($k = 0.2$) is more nonlinear. Modular controllers remain robust, but the monolithic baseline also shows an apparent rebound in success rate. However, this does not mean

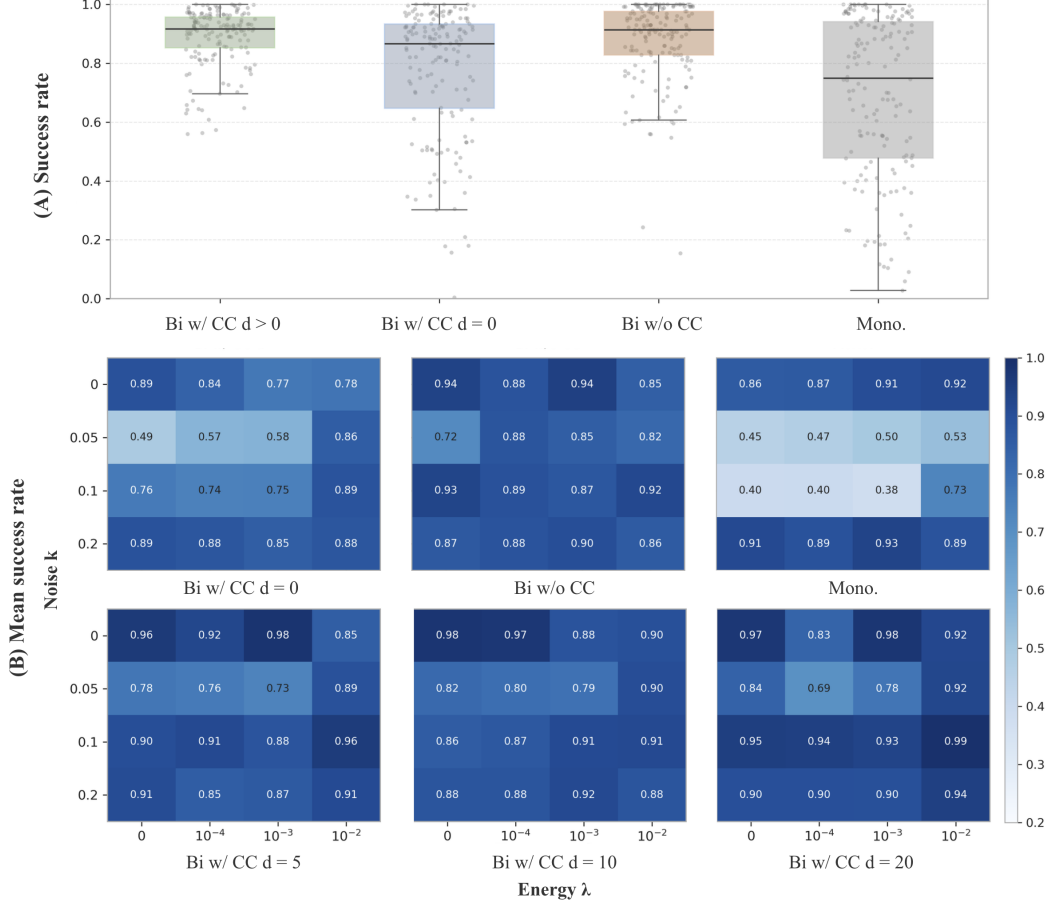


Figure 3: Task-performance profiles across controller variants and constraint settings. (A) Distribution of success rates across trained configurations from the shared noise–energy grid and ten random seeds. Boxes show medians and interquartile ranges, whiskers show non-outlier spread, and points show individual trained configurations. Bilateral w/ CC is split into zero-delay ($d = 0$) and non-zero-delay ($d > 0$) training conditions, while Bilateral w/o CC and Monolithic denote the communication-free modular and monolithic baselines. (B) Constraint-dependent success rate landscapes across energetic cost and motor-noise settings. Color and overlaid values report mean success rate across ten seeds for each parameter combination. The monolithic controller shows its highest fragility at intermediate noise, whereas modular controllers maintain higher success rate across the same regimes.

that the monolithic controller has learned stronger active control. We interpret this cautiously: because motor noise is signal-dependent, low commanded activation also reduces injected noise and energetic cost, so a low-output controller can satisfy the original hold criterion without providing stronger active stabilization. Perturbation-strength diagnostics support this interpretation: when the holding perturbation is strengthened, such low-output solutions become fragile, whereas bilateral controllers degrade more gracefully (Appendix B). Taken together, these regime-dependent patterns show that modularity improves overall task success and makes the learned solution more robust across realistic constraints.

4.3 Metric decomposition of the modularity gain

Table 1 decomposes the aggregate task-performance result from Figure 3 into kinematic and actuation-level metrics. Bilateral w/ CC, $d > 0$ provides the strongest overall profile with the highest success rate and the best mean value on all decomposition metrics. In contrast, the monolithic baseline is significantly worse on every displayed metric, with lower success rate and higher kinematic,

Table 1: Metric decomposition across matched settings (ten seeds, four λ values, four noise levels; $N = 160$). Bilateral w/ CC ($d > 0$) averages each metric over $d \in \{5, 10, 20\}$ per matched setting before paired testing and is the reference column for all asterisks. Asterisks mark scores in the other columns that differ significantly from Bilateral w/ CC ($d > 0$) under Bonferroni-corrected paired Wilcoxon tests ($p < 0.05$, corrected over the three column-wise comparisons within each metric). Arrows indicate the direction of improvement ($\uparrow$ higher is better, $\downarrow$ lower is better), and bold marks the best mean in each row.

Metric	Bi w/ CC, $d > 0$	Bi w/ CC, $d = 0$	Bi w/o CC	Mono.
Success rate $\uparrow$	88.81% $\pm 10.01\%$	77.53%* $\pm 21.99\%$	87.59%* $\pm 13.82\%$	68.91%* $\pm 27.81\%$
Endpoint error $\downarrow$	0.0085 ± 0.0017	0.0091* ± 0.0022	0.0117* ± 0.0041	0.0091* ± 0.0023
Trajectory error $\downarrow$	0.0022 ± 0.0003	0.0025* ± 0.0005	0.0046 ± 0.0025	0.0026* ± 0.0005
Move. variance $\downarrow$	0.0081 ± 0.0013	0.0092* ± 0.0038	0.0093 ± 0.0027	0.0099* ± 0.0030
Hold variance $\downarrow$	1.054e-5 $\pm 6.723e-6$	1.556e-5* $\pm 1.471e-5$	1.128e-5 $\pm 8.132e-6$	1.867e-5* $\pm 1.338e-5$
Energetic cost $\downarrow$	1.0875 ± 1.6950	1.3196* ± 1.7233	1.1930 ± 1.8288	1.7666* ± 1.9085
CCI $\downarrow$	0.7175 ± 0.0369	0.7340* ± 0.0401	0.7473* ± 0.0340	0.7606* ± 0.0466

stability, and actuation costs. This supports the main modularity result: splitting control across two recurrent modules is the dominant source of the performance gain under the tested constraints.

The modular ablations refine this result. Bilateral w/o CC remains numerically close in success rate, showing that modular structure alone avoids much of the monolithic controller’s fragility, while still differing from the non-zero-delay Bilateral w/ CC reference in endpoint error and CCI. The zero-delay Bilateral w/ CC condition also performs worse than the non-zero-delay condition across the displayed axes. These within-modular differences motivate the next question: whether learned communication changes the operating regime of an already strong modular controller, rather than simply determining whether the task succeeds.

4.4 Learned communication changes the modular control strategy

Communication reshapes actuation in a regime-dependent manner. The inter-module communication effect appears as a shift in operating regime. Table 1 shows that, relative to the non-zero-delay Bilateral w/ CC reference, both zero-delay communication and the communication-free modular baseline occupy different points in the same trade-off space. Non-zero-delay Bilateral w/ CC combines stronger success rate with lower CCI than Bilateral w/o CC, and stronger success rate with lower actuation cost than the zero-delay Bilateral w/ CC condition.

Figure 4 compares energetic cost, co-contraction, and success rate across noise and energy settings. At low-to-moderate noise, non-zero-delay Bilateral w/ CC shows its clearest gains in success rate and energetic cost, alongside clearer separation between controller variants in co-contraction and actuation strategy. The lower co-contraction index (CCI) provides an actuation-level signature of this shift, indicating more selective muscle recruitment rather than broad antagonist co-activation. Together, these patterns indicate a favorable performance–effort trade-off: delayed inter-module communication helps the controller complete the task more reliably with lower energetic cost, rather than simply increasing motor output. At high noise ($k = 0.2$), success rate becomes more similar across the modular conditions, but the energy panels show a clearer split in how that success is achieved: the two Bilateral w/ CC conditions retain measurable active actuation, whereas Bilateral w/o CC and Monolithic move closer to low-activation solutions. This suggests that learned communication does not simply raise or lower performance uniformly; it also changes whether the controller solves the task through continued actuation or through more passive low-output regimes under strong signal-dependent noise.

Robustness under different constraints. Figure 4 clarifies how communication changes the actuation profile across constraint regimes. The Bilateral w/o CC baseline establishes that the modular

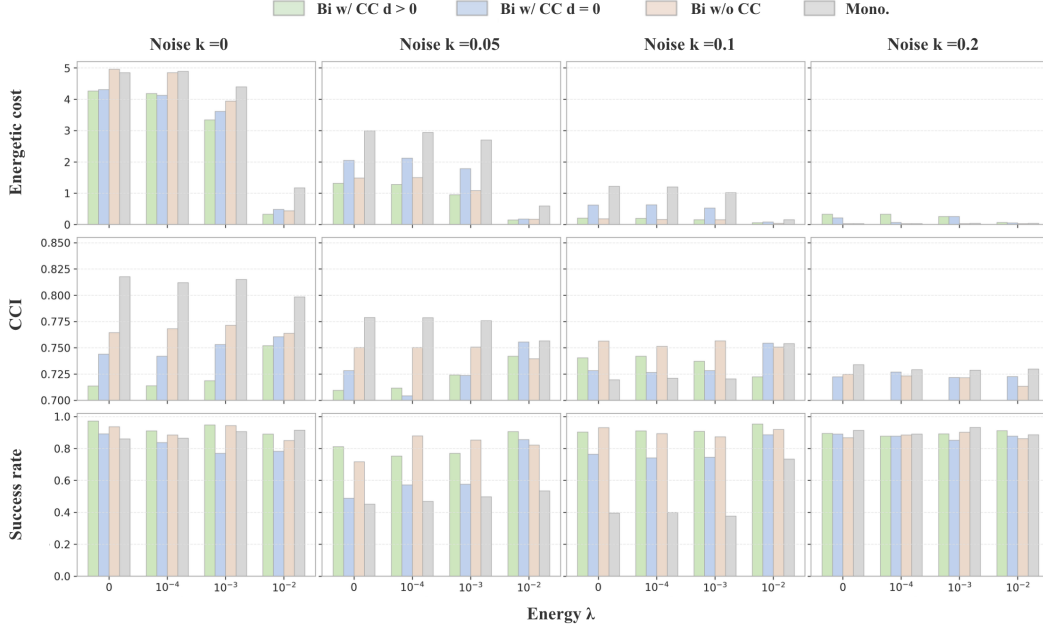


Figure 4: Energetic cost, CCI, and success rate across constraint regimes. Panels within each row share a common y-axis scale. Each column corresponds to a noise level ($k = 0, 0.05, 0.1, 0.2$); within each panel, bars show the four model conditions (Bilateral w/ CC averaged over $\delta \in \{5, 10, 20\}$, Bilateral w/ CC at $\delta = 0$, Bilateral w/o CC, Monolithic) at each energy-penalty level. Non-zero-delay Bilateral w/ CC shows its clearest gains at low-to-moderate noise; at high noise, success rate becomes similar across modular conditions but Bilateral w/ CC variants retain more active actuation.

architecture alone is powerful; learned inter-module communication adds a second layer by shaping how the controller negotiates constraints that make success alone ambiguous, including high-noise regimes in which different actuation strategies can support similar performance and shifted reach or perturbation conditions. In these settings, non-zero-delay Bilateral w/ CC preserves success rate while shifting the actuation profile toward lower CCI and different energy use. Communication therefore acts as a mechanism for organizing robustness trade-offs across constraint regimes.

Generalization to unseen conditions. The same patterns apply to the out-of-distribution tests in Figure 5. We test *reach-16*, which increases the reach radius to 0.16 m, and *hold-2N*, which increases the per-axis standard deviation of the Gaussian holding perturbation to 2 N. Non-zero-delay Bilateral w/ CC performs best in both conditions, suggesting that delayed inter-module communication helps preserve task performance when the task shifts toward longer movement or stronger stabilization demands.

4.5 Learned communication shifts asymmetric contribution patterns

Because the merged output does not impose lateralized or contralateral control, any asymmetric organization must emerge through learned hemisphere-specific motor contributions. We quantify this using a contralaterality index (CI), where positive values indicate stronger contralateral output contributions, and a directional lesion index (DDI) computed after masking one module’s communication and motor-output contribution at inference time. Full definitions are provided in Appendix A.

Under the matched zero-delay comparison pooled across the shared noise–energy grid, Bilateral w/ CC shows a more contralateral contribution profile than Bilateral w/o CC (0.0177 ± 0.0608 vs. 0.0001 ± 0.0715). Directional lesion summaries show the same qualitative ordering, with a larger average DDI for Bilateral w/ CC (0.1063 ± 0.3284 vs. 0.0510 ± 0.3084). Together, these patterns suggest that learned inter-module communication not only affects task performance but also shifts motor contributions across the body. This links communication to lateralized coordination,

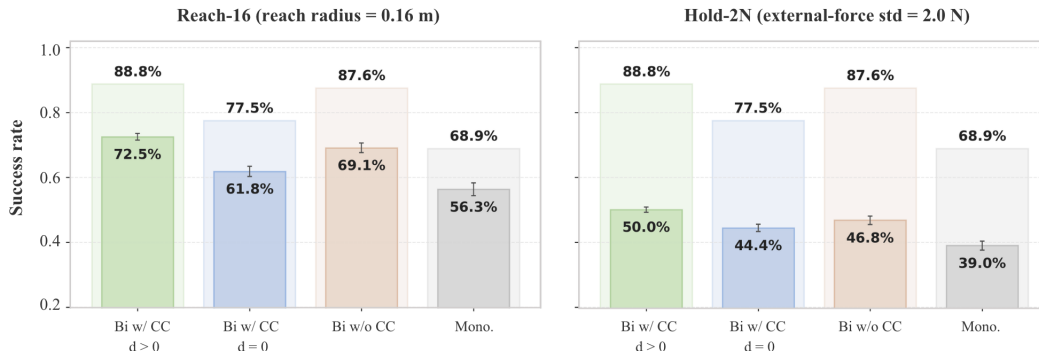


Figure 5: Generalization results for success rate on unseen reach and hold conditions. Filled bars: out-of-distribution performance; faint bars: matched in-distribution baseline. Bar labels report average success rates. For Bilateral w/ CC, zero-delay models ($d = 0$) are separated from delayed models ($d > 0$, averaged over $d \in \{5, 10, 20\}$). On *reach-16*, success uses a fixed reach threshold of $r_{20} = 20$ mm rather than a radius-scaled threshold. On *hold-2N*, the Gaussian holding perturbation has per-axis standard deviation 2 N. In both conditions, non-zero-delay Bilateral w/ CC performs best, followed in order by Bilateral w/o CC, zero-delay Bilateral w/ CC, and Monolithic.

motivating future tests of whether stronger task asymmetries or richer output mappings convert this pattern into a stable division of control.

5 Discussion

Conclusion. Inspired by the bi-hemispheric macro architecture of the brain and sensorimotor system, this paper compared a bicameral modular controller with a capacity-matched monolithic architecture. The functional gain under realistic motor-control constraints comes from modular decomposition, with inter-module communication playing a more specific secondary role. This shifts the interpretation away from a simple “more communication is better” story: splitting control across two recurrent modules provides a robust substrate when movement accuracy, postural stability, signal-dependent noise, and energetic cost must be negotiated simultaneously. In this view, the bilateral architecture’s core advantage is modular organization, not bilaterality alone. Within that substrate, communication changes how successful control is achieved. Rather than simply providing a performance gain, it pushes the controller toward a different operating regime. The clearest interpretation is not that communication uniformly improves control, but that it reorganizes trade-offs among competing objectives. This role becomes most visible when realistic constraints allow multiple viable strategies rather than forcing a single solution, suggesting that communication is especially important when control must be coordinated across objectives rather than optimized along one axis.

The asymmetry analyses suggest a related but tentative conclusion. Learned inter-module communication shifts the controller toward stronger contralateral output contributions and larger directional lesion effects, consistent with communication biasing how control is distributed across the modules. At the same time, the pattern remains modest relative to the strong functional specialization often discussed in biological motor lateralization. We interpret it as an emerging asymmetric contribution pattern rather than definitive hemispheric specialization. This distinction matters. The model shows that measurable lateralized structure can arise even when the two sides begin with identical architecture and no imposed left–right role difference, but it does not yet establish that this organization is stable, task-specific, or mechanistically equivalent to biological hemispheric specialization.

Limitations and future work. These results should be read as a controlled test of design principles inspired by bilateral motor organization, not as a direct model of mammalian motor learning. The framework simplifies biology and behavior by using supervised losses, a delayed linear communication channel, and a merged output layer in which asymmetry emerges only through learned weights. The task family is narrow, focusing on center-out reaching and perturbation-resisting holding rather than richer bimanual coordination. Future work should test whether the emerging asymmetric pattern strengthens, and whether modular advantage scales, under larger task families, harder perturbations, complex bimanual tasks, stronger task asymmetries, communication bottlenecks, structured output mappings, and detailed analyses of individual delay magnitudes.

Broader impact. Because the study is simulation-only, it makes no deployment claims for physical robots; transferring these principles to robots operating near people would require task-specific safety validation, hardware testing, and human oversight. From a robotics perspective, especially for humanoid robots in everyday human environments, biologically inspired modularity offers not only performance gains but also a controllable design space for tuning priorities such as precision, stability, energetic cost, and robustness under communication delay.

References

- [1] David Attwell and Simon B. Laughlin. An energy budget for signaling in the grey matter of the brain. *Journal of Cerebral Blood Flow & Metabolism*, 21(10):1133–1145, October 2001.
- [2] Marlene Behrmann, Nicholas M. Blauch, and David C. Plaut. The Emergence of Topography and Hemispheric Lateralization in High-Level Vision. *Quarterly Journal of Experimental Psychology*, 79(3):546–570, March 2025.
- [3] Bastien Berret, Ambra Bisio, Marco Jacono, and Thierry Pozzo. Reach endpoint formation during the visuomotor planning of free arm pointing. *European Journal of Neuroscience*, 40(10):3491–3503, November 2014.
- [4] Ya-Ning Chang and Matthew A. Lambon Ralph. A unified neurocomputational bilateral model of spoken language production in healthy participants and recovery in poststroke aphasia. *Proceedings of the National Academy of Sciences*, 117(51):32779–32790, December 2020.
- [5] Olivier Codol, Jonathan A Michaels, Mehrdad Kashefi, J Andrew Pruszynski, and Paul L Gribble. MotorNet, a Python toolbox for controlling differentiable biomechanical effectors with artificial neural networks. *eLife*, 12:RP88591, July 2024.
- [6] Brooke Dexheimer, Robert Sainburg, Sydney Sharp, and Benjamin A. Philip. Roles of Handedness and Hemispheric Lateralization: Implications for Rehabilitation of the Central and Peripheral Nervous Systems: A Rapid Review. *The American Journal of Occupational Therapy*, 78(2):7802180120, March 2024.
- [7] Katharina Dobs, Julio Martinez, Alexander J. E. Kell, and Nancy Kanwisher. Brain-like functional specialization emerges spontaneously in deep neural networks. *Science Advances*, 8(11):eabl8913, March 2022.
- [8] Íñigo Elguea-Aguinaco, Antonio Serrano-Muñoz, Dimitrios Chrysostomou, Ibai Inziarte-Hidalgo, Simon Bøgh, and Nestor Arana-Arexolaleiba. A review on reinforcement learning for contact-rich robotic manipulation tasks. *Robotics and Computer-Integrated Manufacturing*, 81:102517, June 2023.
- [9] William Fedus, Barret Zoph, and Noam Shazeer. Switch Transformers: Scaling to Trillion Parameter Models with Simple and Efficient Sparsity. *Journal of Machine Learning Research*, 23(120):1–39, 2022.
- [10] T Flash and N Hogan. The coordination of arm movements: An experimentally confirmed mathematical model. *Journal of Neuroscience*, 5(7):1688–1703, July 1985.
- [11] Christopher M. Harris and Daniel M. Wolpert. Signal-dependent noise determines motor planning. *Nature*, 394(6695):780–784, August 1998.
- [12] Masahiko Haruno, Daniel M. Wolpert, and Mitsuo Kawato. Mosaic model for sensorimotor learning and control. *Neural Computation*, 13(10):2201–2220, October 2001.
- [13] Qiguang He, Rui Yin, Yucong Hua, Weijian Jiao, Chengyang Mo, Hang Shu, and Jordan R. Raney. A modular strategy for distributed, embodied control of electronics-free soft robots. *Science Advances*, 9(27):eade9247, July 2023.
- [14] Neville Hogan. Impedance control: An approach to manipulation: Part i—theory. *Journal of Dynamic Systems, Measurement, and Control*, 107(1):1–7, March 1985.
- [15] Mitsuo Kawato. Internal models for motor control and trajectory planning. *Current Opinion in Neurobiology*, 9(6):718–727, December 1999.

- [16] Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *International Conference on Learning Representations*, 2015.
- [17] G. Liuzzi, V. Horniss, M. Zimerman, C. Gerloff, and F. C. Hummel. Coordination of Uncoupled Bimanual Movements by Strictly Timed Interhemispheric Connectivity. *Journal of Neuroscience*, 31(25):9111–9117, June 2011.
- [18] B.-U. Meyer, S. Rörich, H. Gräfin Von Einsiedel, F. Kruggel, and A. Weindl. Inhibitory and excitatory interhemispheric transfers between motor cortical areas in normal humans and patients with abnormalities of the corpus callosum. *Brain*, 118(2):429–440, 1995.
- [19] Jonathan A. Michaels, Stefan Schaffelhofer, Andres Agudelo-Toro, and Hansjörg Scherberger. A goal-driven modular neural network predicts parietofrontal neural dynamics during grasping. *Proceedings of the National Academy of Sciences*, 117(50):32124–32135, December 2020.
- [20] Pratik K. Mutha, Kathleen Y. Haaland, and Robert L. Sainburg. The effects of brain lateralization on motor control and adaptation. *Journal of Motor Behavior*, 44(6):455–469, January 2012.
- [21] Kiisa Nishikawa, Andrew A. Biewener, Peter Aerts, Anna N. Ahn, Hillel J. Chiel, Monica A. Daley, Thomas L. Daniel, Robert J. Full, Melina E. Hale, Tyson L. Hedrick, A. Kristopher Lappin, T. Richard Nichols, Roger D. Quinn, Richard A. Satterlie, and Brett Szymik. Neuromechanics: An integrative approach for understanding motor control. *Integrative and Comparative Biology*, 47(1):16–54, July 2007.
- [22] Nicole T. Ong, Jamie Hawke, and Nicola J. Hodges. Target Size Manipulations Affect Error-Processing Duration and Success Perceptions but not Behavioural Indices of Learning. *Brain Sciences*, 9(5):119, May 2019.
- [23] Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Kopf, Edward Yang, Zachary DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. Pytorch: An imperative style, high-performance deep learning library. In *Advances in Neural Information Processing Systems*, volume 32, pages 8024–8035. Curran Associates, Inc., 2019.
- [24] Ilija Radosavovic, Tete Xiao, Bike Zhang, Trevor Darrell, Jitendra Malik, and Koushil Sreenath. Real-world humanoid locomotion with reinforcement learning. *Science Robotics*, 9(89):eadi9579, April 2024.
- [25] Chandramouli Rajagopalan, David Rawlinson, Elkhonon Goldberg, and Gideon Kowadlo. Deep Learning in a Bilateral Brain with Hemispheric Specialisation. In Giuseppe Nicosia, Varun Ojha, Sven Giesselbach, M. Panos Pardalos, and Renato Umeton, editors, *Machine Learning, Optimization, and Data Science*, volume 15510 of *Lecture Notes in Computer Science*, pages 87–101. Springer Nature Switzerland, Cham, 2025.
- [26] Aravind Rajeswaran, Vikash Kumar, Abhishek Gupta, Giulia Vezzani, John Schulman, Emanuel Todorov, and Sergey Levine. Learning complex dexterous manipulation with deep reinforcement learning and demonstrations. In *Robotics: Science and Systems XIV*. Robotics: Science and Systems Foundation, June 2018.
- [27] Jarrad Rinaldo, Jason Friedman, Levin Kuhlmann, and Gideon Kowadlo. Left/Right Brain, Human Motor Control and the Implications for Robotics. In Giuseppe Nicosia, Varun Ojha, Sven Giesselbach, M. Panos Pardalos, and Renato Umeton, editors, *Machine Learning, Optimization, and Data Science*, volume 15510 of *Lecture Notes in Computer Science*, pages 261–274. Springer Nature Switzerland, Cham, 2025.
- [28] Lesley J. Rogers. Evolution of hemispheric specialization: advantages and disadvantages. *Brain and Language*, 73(2):236–253, June 2000.
- [29] Robert L. Sainburg. Handedness: Differential Specializations for Control of Trajectory and Position. *Exercise and Sport Sciences Reviews*, 33(4):206–213, October 2005.

- [30] Robert L. Sainburg. Convergent models of handedness and brain lateralization. *Frontiers in Psychology*, 5:1092, October 2014.
- [31] Shreya Saxena, Sridevi V. Sarma, and Munther Dahleh. Performance limitations in sensorimotor control: Trade-offs between neural computation and accuracy in tracking fast movements. *Neural computation*, 32(5):865–886, May 2020.
- [32] Luís F. Seoane. Optimality Pressures toward Lateralization of Complex Brain Functions. *Physical Review X*, 13(3):031028, September 2023.
- [33] Deborah J. Serrien, Richard B. Ivry, and Stephan P. Swinnen. Dynamics of hemispheric specialization and integration in the context of motor control. *Nature Reviews Neuroscience*, 7(2):160–166, February 2006.
- [34] Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. In *International Conference on Learning Representations*, 2017.
- [35] Minoru Shinohara, Kevin G. Keenan, and Roger M. Enoka. Fluctuations in motor output of a hand muscle can be altered by the mechanical properties of the position sensor. *Journal of Neuroscience Methods*, 168(1):164–173, February 2008.
- [36] Chen Tang, Ben Abbatematteo, Jiaheng Hu, Rohan Chandra, Roberto Martín-Martín, and Peter Stone. Deep Reinforcement Learning for Robotics: A Survey of Real-World Successes. *Annual Review of Control, Robotics, and Autonomous Systems*, 8(1):153–188, May 2025.
- [37] Emanuel Todorov and Michael I. Jordan. Optimal feedback control as a theory of motor coordination. *Nature Neuroscience*, 5(11):1226–1235, November 2002.
- [38] Giorgio Vallortigara and Lesley J. Rogers. Survival with an asymmetrical brain: advantages and disadvantages of cerebral lateralization. *Behavioral and Brain Sciences*, 28(4):575–589, August 2005.
- [39] Jiayu Wang, Chuxiong Hu, and Yu Zhu. CPG-Based Hierarchical Locomotion Control for Modular Quadrupedal Robots Using Deep Reinforcement Learning. *IEEE Robotics and Automation Letters*, 6(4):7193–7200, October 2021.
- [40] Daniel M. Wolpert. Computational approaches to motor control. *Trends in Cognitive Sciences*, 1(6):209–216, September 1997.
- [41] D.M. Wolpert and M. Kawato. Multiple paired forward and inverse models for motor control. *Neural Networks*, 11(7-8):1317–1329, October 1998.
- [42] Elizabeth J. Woytowicz, Kelly P. Westlake, Jill Whittall, and Robert L. Sainburg. Handedness results from complementary hemispheric dominance, not global hemispheric dominance: Evidence from mechanically coupled bilateral movements. *Journal of Neurophysiology*, 120(2):729–740, August 2018.

A Evaluation metrics

All evaluation metrics are computed on held-out inference rollouts under the same task geometry used during training, unless otherwise stated. For each trained controller, metrics are averaged across trials, then summarized across matched settings in the noise–energy grid and random seeds.

Task success. Reach success indicates that the final endpoint error after a reaching trial is below the reach tolerance. Hold success indicates that the hold-phase endpoint variance is below the stability tolerance. In the main experiments, the reach threshold is 0.02 m and the hold-variance threshold is $2.5 \times 10^{-5} \text{ m}^2$. Because reach and hold are evaluated in separate but matched inference rollouts, the reported success rate is computed from the corresponding success probabilities rather than from a literal per-trial conjunction. Let p_{reach}^L and p_{reach}^R denote the success rates for left-active and right-active reach trials, and let p_{hold}^L and p_{hold}^R denote the hold-success rates for the left and right arms. The reported success rate is thus:

$$\text{SR} = \frac{1}{2} (p_{\text{reach}}^L p_{\text{hold}}^R + p_{\text{reach}}^R p_{\text{hold}}^L). \quad (10)$$

This factorized definition gives a fairer controller-level comparison because it avoids introducing an arbitrary one-to-one pairing between independent reach and hold batches while still requiring success in both task components at the matched setting.

Kinematic and stability metrics. Endpoint error is the Euclidean distance between the final hand position and the target at the end of the reach phase. Trajectory error is the mean absolute perpendicular deviation of the reach trajectory from the straight line between start and target. Movement variance is the scaled velocity variance during the movement phase, computed as k times the time-variance of the planar hand velocity summed across Cartesian dimensions and then averaged across trials, with $k = 0.1$ in the reported experiments. Hold variance is the endpoint-position variance during the holding phase,

$$\text{Var}_{\text{hold}} = \frac{1}{B} \sum_{b=1}^B [\text{Var}_t(x_{t,b}) + \text{Var}_t(y_{t,b})], \quad (11)$$

where B is the number of trials in the batch. Lower values indicate better precision or stability for all four metrics.

Actuation metrics. The reported energetic cost is the mean squared muscle activation summed over muscles and averaged over time and trials:

$$E_{\text{eval}} = \frac{1}{BT} \sum_{b=1}^B \sum_{t=1}^T \sum_{i=1}^M u_{t,b,i}^2. \quad (12)$$

The co-contraction index (CCI) measures simultaneous activation of antagonist muscle pairs. For an antagonist pair with activations a_1 and a_2 ,

$$\text{CCI}_{\text{pair}} = \frac{2 \min(a_1, a_2)}{a_1 + a_2 + \epsilon}, \quad (13)$$

and the reported CCI averages this quantity over antagonist pairs, time, and trials. Higher CCI indicates stronger antagonist co-activation; lower CCI is therefore interpreted as more selective muscle recruitment.

Asymmetry and lesion metrics. For each hemisphere $h \in \{L, R\}$, the contralaterality index (CI) compares the mean absolute contralateral versus ipsilateral output contributions measured during inference rollouts:

$$\text{CI}_h = \frac{C_h - I_h}{C_h + I_h + \epsilon}, \quad \text{CI} = \frac{1}{2} (\text{CI}_L + \text{CI}_R), \quad (14)$$

where positive values indicate stronger contralateral output contributions.

Directional lesion effects are measured with inference-time module lesions. For a left-hemisphere lesion, the left module’s outgoing inter-module communication and motor-output contribution are

multiplied by zero; the right-hemisphere lesion is defined analogously. Model weights are not re-trained after lesioning, and intact, left-lesioned, and right-lesioned controllers are evaluated on the same reach and hold protocol. Lesion effects are summarized by a double-dissociation index (DDI). For the main DDI, the arm error used in each lesion condition is a normalized reach–hold combination,

$$e_{\text{arm}} = \frac{1}{2} \left(\frac{e_{\text{final}}}{0.02} + \frac{e_{\text{hold}}}{0.005} \right), \quad (15)$$

where e_{final} is final reach endpoint error and e_{hold} is mean hold-phase positional error. Let Δ_{contra}^L and Δ_{ipsi}^L be the increases in contralateral and ipsilateral arm error after lesioning the left hemisphere, and define Δ_{contra}^R and Δ_{ipsi}^R analogously for right-hemisphere lesions. We compute

$$\text{DDI}_L = \frac{\Delta_{\text{contra}}^L - \Delta_{\text{ipsi}}^L}{|\Delta_{\text{contra}}^L| + |\Delta_{\text{ipsi}}^L| + \epsilon}, \quad \text{DDI}_R = \frac{\Delta_{\text{contra}}^R - \Delta_{\text{ipsi}}^R}{|\Delta_{\text{contra}}^R| + |\Delta_{\text{ipsi}}^R| + \epsilon}, \quad (16)$$

and report $\text{DDI} = (\text{DDI}_L + \text{DDI}_R)/2$. Positive DDI indicates that lesioning a hemisphere impairs the contralateral arm more than the ipsilateral arm.

B High-noise diagnostic

The high-noise result for the monolithic controller requires caution. In the main experiment, the monolithic controller shows an apparent rebound in success rate at the highest motor-noise level ($k = 0.2$). Because motor noise is signal-dependent, this rebound need not indicate stronger active control. If the controller learns to issue very small muscle commands, it also reduces both the evaluated energetic cost and the amount of injected motor noise. Under the original holding condition, where the external force is sampled from a zero-mean Gaussian distribution with per-axis standard deviation 0.5 N, such a low-output strategy can still satisfy the hold-variance threshold. Thus, success rate can remain high even without robust active stabilization.

Figure 6 decomposes the monolithic result into reach and hold success. Reach success remains high across noise levels, whereas hold success drops at intermediate noise and then recovers at $k = 0.2$. Thus, the high-noise rebound in success rate is driven mainly by the hold component rather than by improved reaching.

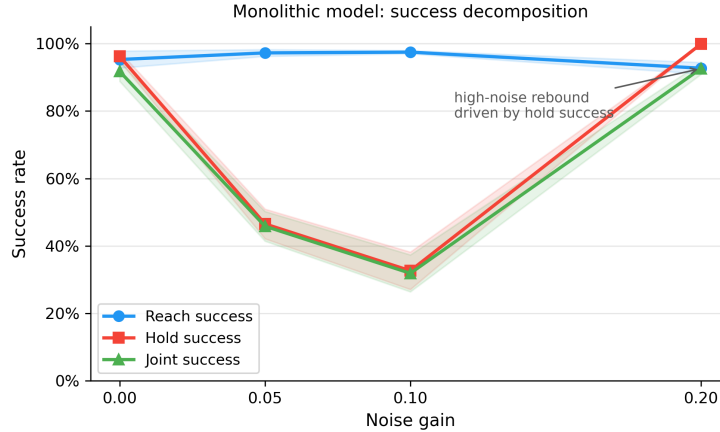


Figure 6: Success decomposition for the monolithic baseline under the original Gaussian hold perturbation with per-axis standard deviation 0.5 N. The high-noise rebound in success rate is driven mainly by hold success, while reach success remains high across noise levels.

Figure 7 tests whether this rebound is robust to stronger holding disturbances by increasing the per-axis standard deviation of the Gaussian external force. Under a moderate increase to 1.5 N, the high-noise band remains visible, indicating that the low-output strategy can still satisfy the hold criterion when the disturbance distribution is only moderately stronger than in training. Under a

severe increase to 4.0 N, however, the same high-noise region collapses toward floor performance. This argues against interpreting the rebound as genuinely improved active stabilization.

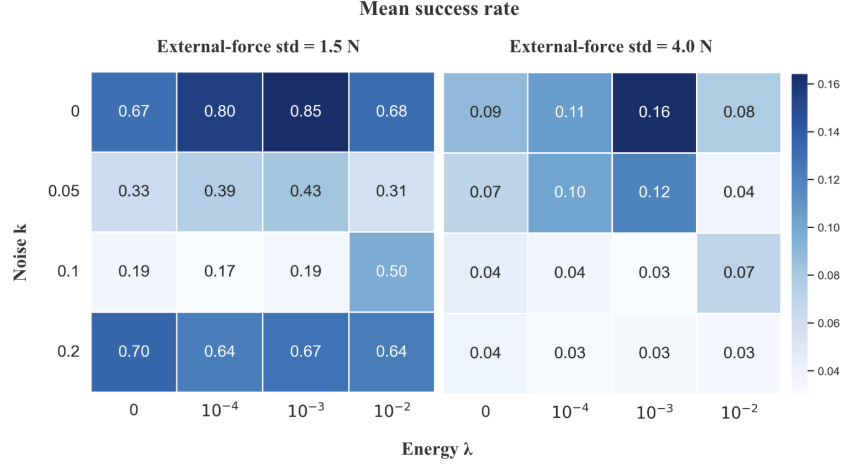


Figure 7: Perturbation-strength diagnostic for the monolithic baseline. Left: with Gaussian external force standard deviation increased to 1.5 N per axis, the high-noise rebound remains visible. Right: with standard deviation increased to 4.0 N per axis, the same high-noise region collapses toward floor performance.

Finally, the energy–variance diagnostic in Figure 8 supports the low-output interpretation. The high-noise points cluster near very low energetic cost and low hold variance, indicating that the controller can satisfy the hold threshold with minimal commanded activation. The ambiguity is therefore behavioral: a low-output controller can appear successful when the disturbance is weak enough, even though it does not provide robust active stabilization under stronger disturbances.

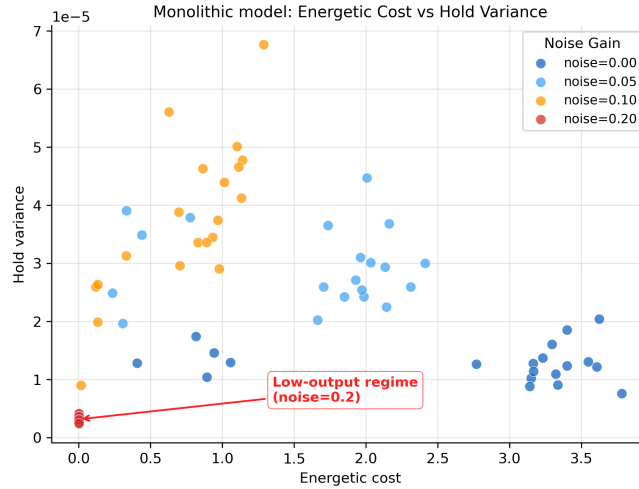


Figure 8: Energy–variance diagnostic for the high-noise regime. High-noise solutions cluster near low energetic cost and low hold variance, consistent with a low-output holding regime rather than robust active stabilization.

Taken together, these diagnostics show why high-noise success rate should not be interpreted as evidence that the monolithic controller learned better active muscle control. The rebound is hold-driven, depends on the original disturbance scale, and is better understood as a low-output holding regime exposed by signal-dependent noise. The stronger-disturbance check shows that this regime is fragile rather than robust, supporting the main-text use of actuation-level metrics to interpret high-noise success.