

CaMeRL: Collision-Aware and Memory-Enhanced Reinforcement Learning for UAV Navigation in Multi-Scale Obstacle Environments

Hong Hong, Feiyu Liao, Yongheng Liang, Boning Zhang, Haitao Wang, and Hejun Wu

Abstract—In obstacle avoidance navigation of unmanned aerial vehicles (UAVs), variations in obstacle scale have received strangely less attention than obstacle number or density. Existing methods typically extract purely geometric features from single-frame depth observations. Such representations tend to neglect small obstacles and lose spatial context under occlusions caused by large obstacles, leading to noticeable degradation in environments with multi-scale obstacles. To address this issue, we propose CaMeRL, a Collision-aware and Memory-enhanced Reinforcement Learning framework for UAV navigation. The collision-aware latent representation encodes risk-sensitive depth cues to preserve fine-grained obstacle structures, thereby improving sensitivity to small obstacles. The temporal memory module integrates observations across frames, mitigating partial observability caused by large-obstacle occlusions. We evaluate CaMeRL with multi-scale obstacles, including ultra-small and extra-large obstacle settings. Results show that CaMeRL outperforms state-of-the-art baselines across all scales, with success rate gains of 0.48 and 0.28 in the ultra-small and extra-large settings, respectively. More importantly, CaMeRL achieves reliable navigation in cluttered outdoor environments.

I. INTRODUCTION

Unmanned aerial vehicles (UAVs) are increasingly used in aerial photography, surveying and mapping, and logistics delivery, where autonomous navigation is essential for safe and efficient operation [1]. Conventional UAV navigation often follows a sequential pipeline of perception, mapping, planning, and control, whose strong module coupling can cause error accumulation and substantial onboard computational burden [2], [3]. Learning-based methods offer a more reactive alternative by directly mapping onboard observations to control commands [4], [5]. In particular, reinforcement learning (RL) trained in high-fidelity simulation has shown strong performance in complex environments [6], [7].

Most existing studies on UAV obstacle avoidance characterize scene complexity mainly by the number of obstacles and their spatial density, while paying much less attention to obstacle scale [8], [9]. Small obstacles are difficult for on-board sensing to capture reliably and are easily overlooked, whereas large obstacles can severely occlude free space under the UAV’s limited field of view [10], [11]. These scale-dependent effects directly shape both perception quality and avoidance behavior, indicating that obstacle scale deserves

Hong Hong and Feiyu Liao contributed equally to this work. (Corresponding authors: Haitao Wang and Hejun Wu.)

All authors are with the School of Computer Science and Engineering, Sun Yat-sen University, Guangzhou, China, and the Guangdong Key Laboratory of Big Data Analysis and Processing, Guangzhou, China (e-mail: {hongh26, liaofy5, liangyh38, zhangbn7}@mail2.sysu.edu.cn; {wanght76, wuhejun}@mail.sysu.edu.cn).

Website with code: <https://honghongdev.github.io/camerl/>

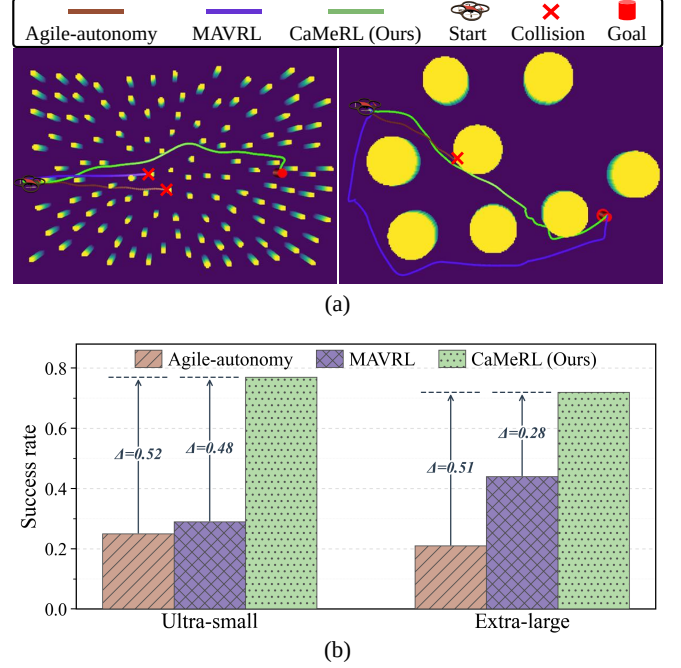


Fig. 1: (a) Representative trajectories of Agile-autonomy, MAVRL, and CaMeRL (ours) in ultra-small (left) and extra-large (right) obstacle settings. (b) Success rates of the three methods in the two scenarios.

explicit consideration alongside number and density [12]. As a result, methods tuned to nominal-scale scenes often degrade sharply once small and large obstacles appear together.

These limitations stem from two complementary requirements that current methods rarely satisfy together [13], [14]. On the one hand, small obstacles are inherently easy to miss, so preserving fine-grained, collision-relevant perceptual cues is essential for timely detection [13]. On the other hand, large obstacles generate extensive occlusions that can hide viable paths, demanding reasoning about spatial context beyond the current field of view to sustain reliable detouring decisions [14]. Yet meeting both demands within a unified navigation framework remains an open challenge.

To address this challenge, we propose CaMeRL, a Collision-aware and Memory-enhanced Reinforcement Learning framework for UAV visual navigation. CaMeRL integrates two complementary components. Collision-aware representation learning improves sensitivity to small obstacles, while temporal memory mitigates occlusions caused by large obstacles. As shown in Fig. 1(a), CaMeRL produces

safer and more reliable trajectories than existing learning-based baselines in both ultra-small and extra-large obstacle settings. Fig. 1(b) further confirms that CaMeRL attains consistently higher success rates.

Our main contributions are as follows:

- To the best of our knowledge, we are among the first to formulate multi-scale obstacle avoidance as a research problem for UAV navigation, with ultra-small and extra-large environments for systematic evaluation.
- We propose CaMeRL, a reinforcement learning framework with two mechanisms. Collision-aware representation learning improves small-obstacle safety, and temporal memory handles large-obstacle occlusions.
- We conduct systematic simulation and real-world experiments to evaluate CaMeRL across obstacle scales, demonstrating that CaMeRL achieves reliable obstacle avoidance in both conventional and multi-scale environments.

II. RELATED WORK

A. Learning-Based Visual Navigation

Learning-based visual navigation is commonly studied through imitation learning and reinforcement learning. Imitation learning directly maps visual observations to control commands using expert demonstrations, but its performance is often limited by the expert policy and may generalize poorly in complex environments [4], [8]. Reinforcement learning instead optimizes long-term returns through interaction and can better balance safety and efficiency, although end-to-end visual RL often suffers from sample inefficiency and instability [7].

To improve training efficiency and robustness, many recent methods adopt a two-stage pipeline that first learns compact visual representations and then trains policies in the latent space. Hoeller et al. [15] fuse sequential depth images with camera trajectories to learn local structural representations for dynamic obstacle avoidance. Kulkarni et al. [16] construct low-dimensional representations from depth-based collision cues, enabling efficient local navigation while accounting for body size. Yu et al. [14] incorporate depth history into the latent space to improve speed adaptation and memory, and further align simulated and real depth representations using a variational autoencoder (VAE) for cross-domain robustness [17]. For RGB navigation, Zhang et al. [18] learn depth-consistent RGB representations through cross-modal contrastive learning. Despite these advances, most existing methods assume obstacles of similar scales and rarely study how scale variations affect perception and policy learning. In contrast, CaMeRL explicitly targets multi-scale settings by coupling collision-aware representation learning with temporal memory.

B. Obstacle Avoidance in Multi-Scale Environments

In multi-scale environments, existing methods often address small and large obstacles separately. Small obstacles are easily missed in visual or depth observations, motivating methods that enhance geometric representations or safety

modeling for more reliable avoidance. For example, Kulkarni et al. [13] learn a semantically enhanced depth representation that preserves slender structures under compression, while Ren et al. [19] and Xu et al. [11] improve avoidance of tiny obstacles and narrow passages using fine-grained LiDAR-based planning or reinforcement learning.

Large obstacles mainly introduce severe occlusions and detouring difficulty, which motivates approaches based on path generation or privileged information. Chen et al. [12] improve path reliability near large obstacles through local sub-goals and a backtracking detour mechanism. Lee et al. [10] use privileged cues to maintain the correct detouring direction under occlusion. Zhai et al. [20] propose perception-aware model predictive path integral (MPPI) control to encourage exploration when the goal is occluded. However, jointly handling small-obstacle safety and large-obstacle occlusion in coexisting multi-scale environments remains underexplored. CaMeRL addresses this gap with a unified framework that combines collision-aware representation learning and temporal memory.

III. COLLISION-AWARE AND MEMORY-ENHANCED REPRESENTATION LEARNING

This section presents CaMeRL, which realizes collision-aware and memory-enhanced representation learning for multi-scale obstacle avoidance. As illustrated in Fig. 2, CaMeRL encodes each depth image with a VAE and fuses temporal observations through a long short-term memory (LSTM) network to obtain a memory-enhanced representation. This representation is concatenated with the UAV state and target information for policy prediction. The training pipeline proceeds in three stages. We first train an initial policy to collect depth-image sequences, then train the VAE and LSTM to learn collision-aware and memory-enhanced representations, and finally freeze the representation modules and retrain the policy network.

A. Dataset Collection and Collision-Aware Processing

To build the training dataset, we first train an initial policy while keeping the VAE and LSTM randomly initialized and fixed. This policy mainly learns basic goal-reaching behavior and is used to collect depth-image sequences in simulated environments with obstacles of different scales. Because the dataset is gathered from continuous trajectories, the resulting observations naturally contain temporal correlations, which are useful for subsequent LSTM training.

After obtaining the raw depth-image dataset, we perform collision-aware preprocessing to account for the UAV body size and generate collision-aware depth images, as illustrated in Fig. 3. Given a raw depth image I^{raw} , we first extract obstacle contours and back-project them into 3D. The contour regions are then inflated according to the effective UAV size d_{UAV} , and rendered to produce an edge-inflation image I^{infl} , which emphasizes collision risks near obstacle boundaries. For obstacle interiors, we apply distance correction by subtracting half of the UAV size from the

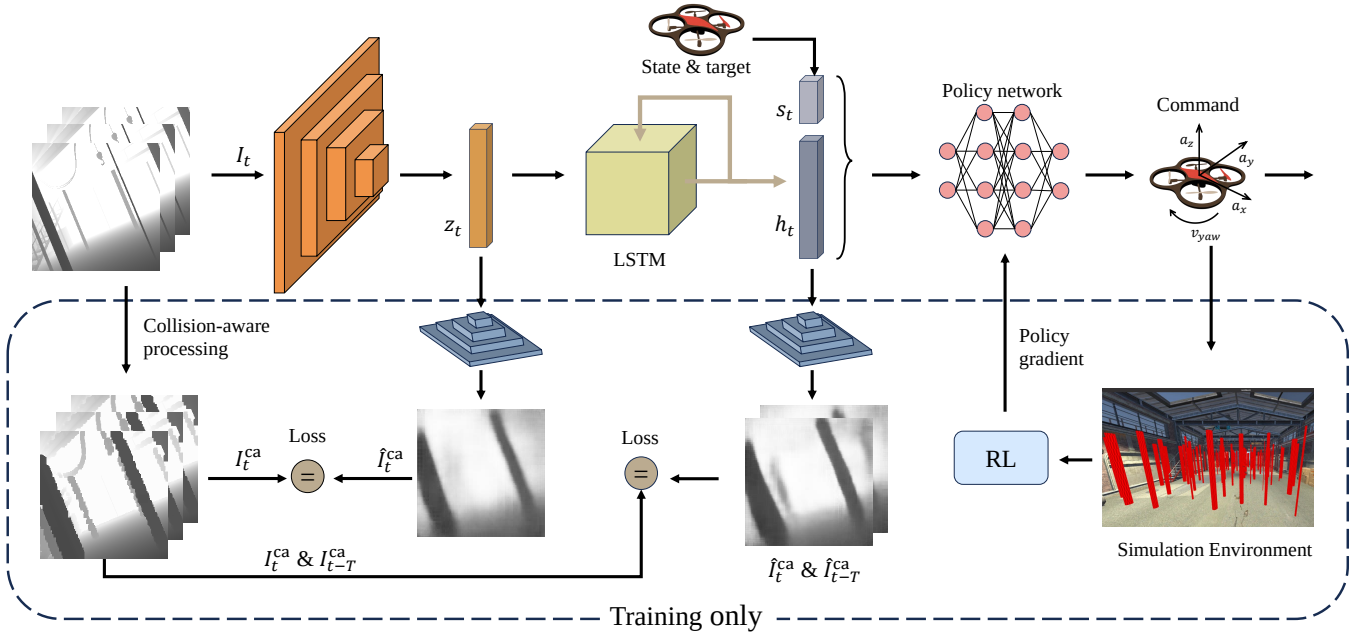


Fig. 2: Overview of the CaMeRL architecture and training pipeline. A depth image is first encoded into a latent vector, which is then fused with temporal history by an LSTM to produce a memory-enhanced representation for policy prediction. The dashed box denotes the training-only branch, where collision-aware reconstruction is used to learn these representations.

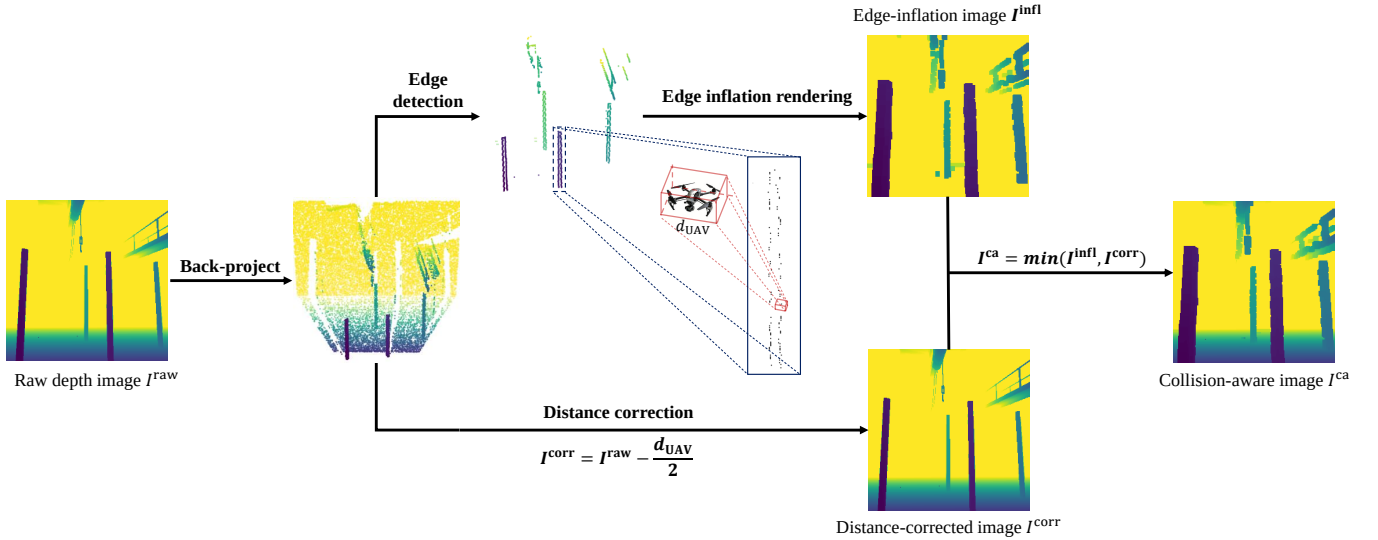


Fig. 3: Collision-aware preprocessing pipeline. Obstacle boundaries are inflated according to the UAV body size to obtain an edge-inflated depth map, while obstacle interiors are approximated by distance correction. The two results are fused to produce the final collision-aware depth image.

raw depth image, yielding $I^{corr} = I^{raw} - d_{UAV}/2$. The final collision-aware depth image is then obtained by pixel-wise fusion, $I^{ca} = \min(I^{infl}, I^{corr})$. This result provides collision-aware supervision for the subsequent representation learning stage.

B. Collision-Aware Representation Learning

After obtaining paired raw depth images I_t^{raw} and collision-aware depth images I_t^{ca} , we train a VAE to learn collision-aware latent representations from I_t^{raw} . The VAE encoder comprises six convolutional layers followed by two

fully connected layers, which output the latent mean and variance. Symmetrically, the decoder employs six deconvolutional layers and concludes with a Sigmoid activation. The latent dimension is set to $n_z = 64$. During training, the encoder maps I_t^{raw} to the mean μ_t and standard deviation σ_t of a Gaussian latent distribution, from which a latent vector z_t is sampled via the reparameterization trick:

$$z_t \sim \mathcal{N}(\mu_t, \text{diag}(\sigma_t^2)). \quad (1)$$

The decoder reconstructs the corresponding collision-aware image $\hat{I}_t^{ca}$ from z_t , using I_t^{ca} as the supervision target.

This forces the latent space to preserve geometric structures and safety-related cues essential for collision reasoning. This design embeds collision-aware information without requiring preprocessing at inference time, ensuring lightweight on-board computation.

The training objective consists of a reconstruction loss $\mathcal{L}_{\text{coll}}$ computed via the mean squared error (MSE), and a Kullback-Leibler (KL) divergence regularization term $\mathcal{L}_{\text{KL}}$. The overall loss $\mathcal{L}_{\text{CA}}$ is thus defined as:

$$\begin{aligned}\mathcal{L}_{\text{CA}} &= \mathcal{L}_{\text{coll}} + \lambda_{\text{KL}} \mathcal{L}_{\text{KL}}, \\ \mathcal{L}_{\text{coll}} &= \text{MSE}(I_t^{\text{ca}}, \hat{I}_t^{\text{ca}}), \\ \mathcal{L}_{\text{KL}} &= -\frac{1}{2} \sum_{i=1}^{n_z} (1 + \log(\sigma_{t,i}^2) - \mu_{t,i}^2 - \sigma_{t,i}^2),\end{aligned}\quad (2)$$

where λ_{KL} is the weight of the KL regularization term, n_z denotes the latent dimensionality, $\mu_{t,i}$ and $\sigma_{t,i}$ are the i -th components of μ_t and σ_t , and I_t^{ca} and $\hat{I}_t^{\text{ca}}$ denote the ground-truth and reconstructed collision-aware images, respectively.

C. Memory-Enhanced Representation Learning

Using the pretrained encoder, each raw depth observation I_t^{raw} is first mapped to a latent vector z_t . The sequence of latent vectors is then processed by a single-layer LSTM with a 256-dimensional hidden state h_t that summarizes temporal context. A prediction head maps h_t to two predicted latent codes $\tilde{z}_{t-T}$ and $\tilde{z}_t$, corresponding to a past frame at time $t - T$ and the current frame at time t , where T denotes the temporal interval. These codes are then decoded by the frozen VAE decoder into the reconstructed collision-aware images $\hat{I}_{t-T}^{\text{ca}}$ and $\hat{I}_t^{\text{ca}}$. By jointly reconstructing $\hat{I}_{t-T}^{\text{ca}}$ and $\hat{I}_t^{\text{ca}}$, the supervision encourages h_t to retain temporally consistent scene structure and collision-relevant information, which is especially useful when the current observation is partially occluded by large obstacles.

The LSTM is trained by minimizing the sum of reconstruction errors over the two time steps:

$$\mathcal{L}_{\text{LSTM}} = \text{MSE}(I_t^{\text{ca}}, \hat{I}_t^{\text{ca}}) + \text{MSE}(I_{t-T}^{\text{ca}}, \hat{I}_{t-T}^{\text{ca}}). \quad (3)$$

Minimizing this objective yields a memory-enhanced representation h_t for downstream policy learning.

IV. REINFORCEMENT LEARNING FOR NAVIGATION

A. Task Formulation

We formulate UAV navigation as a partially observable Markov decision process (POMDP). The policy $\pi_\theta(a_t | o_t)$, implemented as a multilayer perceptron, is trained with Proximal Policy Optimization (PPO) to maximize the expected discounted return under partial observations. The action a_t is defined as the high-level control command $[a_x, a_y, a_z, v_{\text{yaw}}]$, where $[a_x, a_y, a_z]$ denotes the desired acceleration and v_{yaw} denotes the yaw rate. The observation o_t concatenates the UAV state and target information s_t with the memory-enhanced representation h_t , giving $o_t = [s_t, h_t]$. Specifically,

$$s_t = [\log d_{\text{hor}}, d_z, d_{\text{norm}}, v^{\text{W}}, e, \omega^{\text{B}}], \quad (4)$$

where d_{hor} and d_z denote the horizontal and vertical distances to the target, d_{norm} is the normalized target direction, v^{W} is the linear velocity in the world frame, e denotes the Euler-angle attitude, and ω^{B} is the body-frame angular velocity.

B. Reward Function

We design the reward r_t as the combination of terminal rewards and a dense progress reward. An episode terminates when the UAV reaches the goal, collides with obstacles, or leaves the allowed flight region. The overall reward at time step t is defined as

$$r_t = \begin{cases} r_{\text{arrive}}, & \|d_t\| < d_{\text{min}}, \\ r_{\text{collision}}, & \text{a collision occurs,} \\ r_{\text{exceed}}, & p_t \notin [p_{\text{min}}, p_{\text{max}}], \\ r_{\text{prog}}, & \text{otherwise,} \end{cases} \quad (5)$$

where r_{arrive} , $r_{\text{collision}}$, and r_{exceed} are constant terminal rewards for goal arrival, collision, and leaving the flight region, respectively, while r_{prog} is the dense progress reward defined below. d_t denotes the 3D relative displacement vector to the goal, so that $\|d_t\| = \sqrt{d_{\text{hor}}^2 + d_z^2}$, and $p_t = [x_t, y_t, z_t]$ is the UAV position. d_{min} is the arrival threshold, and $[p_{\text{min}}, p_{\text{max}}]$ denotes the valid flight region defined by the lower and upper bounds along each axis.

The progress reward is defined as

$$\begin{aligned}r_{\text{prog}} &= \lambda_d \log d_{\text{hor}} + \lambda_z d_z + \lambda_v \max(0, v_{\text{hor}} - v_{\text{max}}) v_{\text{hor}} \\ &\quad + \lambda_{\text{dir}} \|d_{\text{norm}} - v_{\text{norm}}\|_1 + \lambda_{\text{ang}} \|\omega^{\text{B}}\| \\ &\quad + \lambda_{\text{lat}} (|v_y^{\text{B}}| + \max(0, -v_x^{\text{B}})),\end{aligned}\quad (6)$$

where λ_d , λ_z , λ_v , λ_{dir} , λ_{ang} , and λ_{lat} are weighting coefficients for the individual reward terms. d_{hor} and d_z are the horizontal and vertical distances to the goal, v_{hor} is the horizontal speed with limit v_{max} , d_{norm} and v_{norm} are the normalized goal and velocity directions, ω^{B} is the body-frame angular velocity, and v_x^{B} , v_y^{B} are the forward and lateral body-frame velocities. The distance and direction terms encourage goal reaching, while the remaining terms regularize speed, angular motion, and lateral/backward movements for stable and safe flight.

V. EXPERIMENTS

A. Simulation Setup

We build the simulation environment on Flightmare [21], following the reinforcement-learning setup of MAVRL [14] with a simplified dynamics model. To evaluate robustness to obstacle-scale variation, our policy is trained in a nominal-scale environment and then tested in six environments with different obstacle sizes, as shown in Fig. 4.

The scene is an indoor garage populated with cylindrical obstacles. We construct seven environment configurations by varying obstacle diameter: one nominal-scale training environment (10–50 cm) and six test environments, namely ultra-small (US, 1–5 cm), small (S, 10–30 cm), medium (M, 40–80 cm), large (L, 100–200 cm), extra-large (XL, 400–500

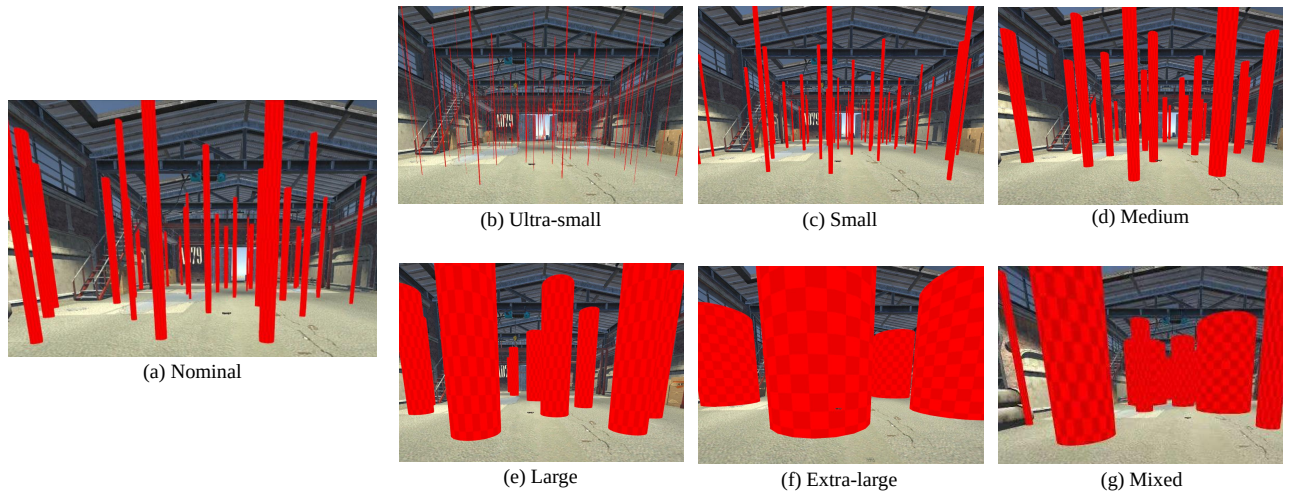


Fig. 4: Simulation environments with different obstacle scales. (a) Nominal-scale training environment. (b)–(g) Test environments with ultra-small (US), small (S), medium (M), large (L), extra-large (XL), and mixed-scale (MIX) obstacles.

TABLE I: EFFECT OF TEMPORAL INTERVAL T

T	1	5	10	15	20	30
Success rate	0.64	0.93	0.96	0.87	0.82	0.74

cm), and mixed-scale (MIX, 1–500 cm). Obstacle density is controlled by the radius parameter used for Poisson obstacle placement, yielding different clutter levels and navigation difficulty.

For representation learning, we collect trajectory data in the nominal-scale training environment using the initial exploration policy. The resulting dataset contains 200 episodes and approximately 10,000 depth images for subsequent representation learning and model training.

B. Representation Analysis

We first analyze the effect of the temporal interval T in the memory module under mixed-scale obstacle settings. Table I shows that the success rate increases from 0.64 at $T = 1$ to 0.96 at $T = 10$, and then decreases as T becomes larger. This trend indicates that a moderate temporal interval provides useful historical context, whereas excessively short or long intervals are less effective. Based on this sensitivity analysis, we use $T = 10$ in the following experiments.

To evaluate the contribution of collision awareness and memory enhancement, we compare four policy variants under the same reinforcement-learning framework: VanillaRL, CaRL, MeRL, and CaMeRL. VanillaRL uses neither module, CaRL uses collision awareness only, MeRL uses memory enhancement only, and CaMeRL combines both. All variants are evaluated in densely cluttered environments with randomly placed obstacles. Each configuration is tested with four random seeds and 25 runs per seed, resulting in 100 runs in total.

As shown in Table II, VanillaRL performs poorly in densely cluttered multi-scale environments, especially in the

ultra-small, extra-large, and mixed settings. Adding collision awareness yields larger gains in the ultra-small and mixed environments, indicating improved sensitivity to fine structures and safety margins. Adding memory enhancement improves success rates across scales, with more evident gains in the medium and large environments, suggesting that temporal context helps mitigate partial observability caused by occlusions. CaMeRL achieves the highest success rate in all environments while maintaining high flight speed in most cases. These results suggest that collision awareness and memory enhancement play complementary roles in multi-scale obstacle avoidance.

C. Baseline Comparisons

To evaluate CaMeRL against existing methods, we conduct benchmark comparisons in AvoidBench [22], which is built on Flightmare [21] for vision-based obstacle avoidance. Following the same environment setup as described above, we evaluate all methods in six test environments with varying obstacle diameters under densely cluttered and randomly generated layouts. The compared baselines include MAVRL [14], a reinforcement-learning-based method, and Agile-autonomy [4], a supervised-learning-based method. For CaMeRL, the predicted acceleration commands are converted into executable body-rate and thrust commands using the model predictive control (MPC) module provided by Agilicious [23]. All methods are evaluated under the same observation setting, termination conditions, and environment generation protocol. Since obstacle layouts are regenerated with different random seeds, the absolute success rates are not directly comparable to those in Table II.

Table III summarizes the performance across obstacle scales, averaged over 100 runs. CaMeRL achieves the highest success rate in all six environments and also maintains competitive average speed, indicating a favorable trade-off between reliability and efficiency. The gains are particularly clear in the ultra-small and extra-large settings, which rep-

TABLE II: REPRESENTATION ANALYSIS ACROSS OBSTACLE SCALES

Environment	Success rate				Average speed (m/s)			
	VanillaRL	CaRL	MeRL	CaMeRL	VanillaRL	CaRL	MeRL	CaMeRL
Ultra-small	0.25	0.65	0.42	0.91	1.74	2.35	1.25	2.33
Small	0.89	1.00	1.00	1.00	2.07	2.06	1.40	2.25
Medium	0.31	0.98	0.96	1.00	1.69	2.00	1.29	2.33
Large	0.48	0.92	0.91	0.96	1.58	2.46	1.26	2.29
Extra-large	0.39	0.60	0.62	0.74	1.35	1.93	1.28	1.72
Mixed	0.08	0.91	0.54	0.96	0.88	1.70	1.17	1.86

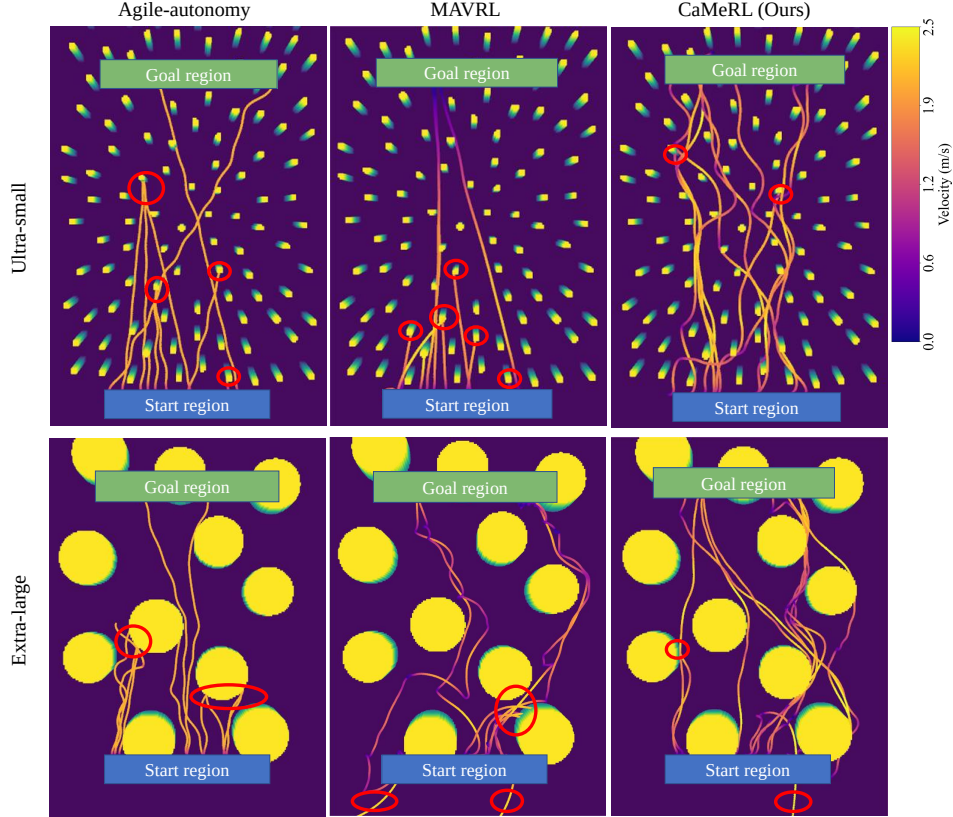


Fig. 5: Representative multi-run trajectories of Agile-autonomy, MAVRL, and CaMeRL in extreme-scale environments. Top row: ultra-small. Bottom row: extra-large. Red circles indicate failed trajectories, and trajectory colors denote velocity.

TABLE III: BASELINE COMPARISON ACROSS OBSTACLE SCALES

Environment	Success rate			Average speed (m/s)		
	Agile-autonomy	MAVRL	CaMeRL	Agile-autonomy	MAVRL	CaMeRL
Ultra-small	0.25	0.29	0.77	1.67	1.22	2.08
Small	0.32	0.46	0.83	1.72	1.34	2.04
Medium	0.34	0.71	0.91	1.70	1.32	1.87
Large	0.26	0.46	0.90	1.68	1.20	2.05
Extra-large	0.21	0.44	0.72	1.64	1.18	1.68
Mixed	0.32	0.56	0.79	1.69	1.21	1.89

resent two extreme-scale navigation conditions. In the ultra-small environment, CaMeRL improves the success rate from 0.29 to 0.77 relative to MAVRL, suggesting better sensitivity to tiny obstacles. In the extra-large environment, CaMeRL

improves the success rate from 0.44 to 0.72 while maintaining higher average speed, indicating stronger robustness under severe occlusions.

Fig. 5 shows representative multi-run trajectories in the

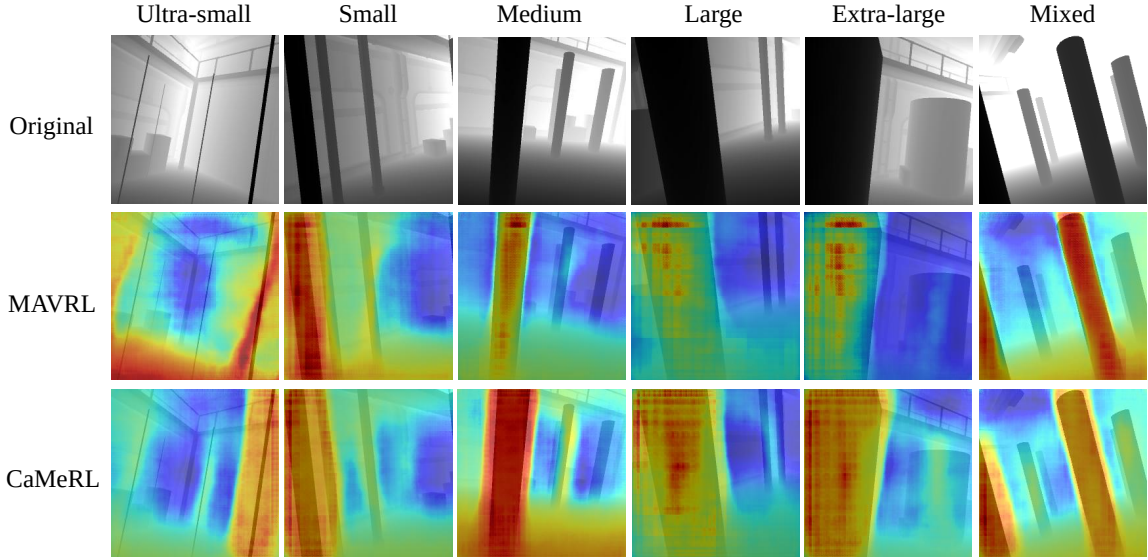


Fig. 6: Grad-CAM attention visualizations of MAVRL and CaMeRL across obstacle scales. Warm colors indicate stronger influence on the policy output.

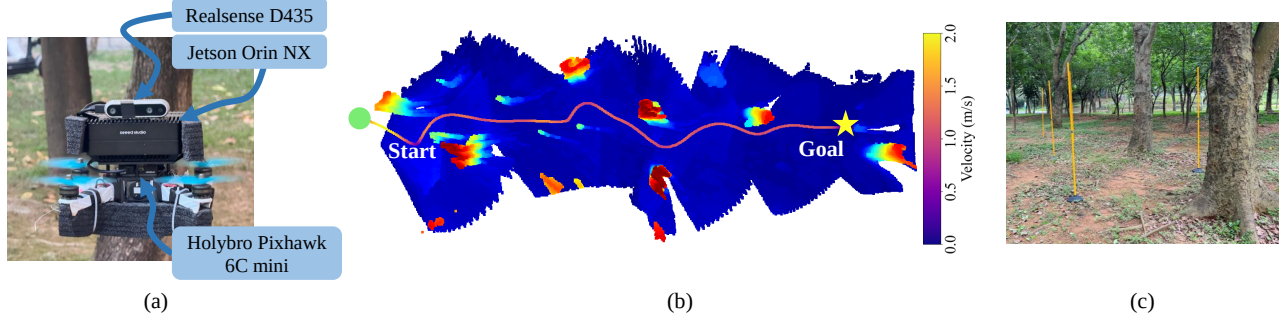


Fig. 7: Real-world outdoor experiments. (a) The deployed quadrotor platform. (b) A representative flight trajectory from the start to the goal, where the color indicates the flight speed. (c) The dense forest test environment with multi-scale obstacles, including thick tree trunks and slender poles.

ultra-small and extra-large environments. In the ultra-small setting, Agile-autonomy and MAVRL exhibit more failed trajectories and less consistent rollouts toward the goal, whereas CaMeRL produces more coherent trajectories with fewer failures. In the extra-large setting, CaMeRL also shows more reliable detouring behavior around large obstacles, while Agile-autonomy and MAVRL exhibit more failures and less efficient path selection. These trajectory patterns are consistent with the quantitative results in Table III.

D. Network Attention Visualization

To qualitatively examine the visual regions emphasized by the learned policy, we use Grad-CAM [24] to visualize the contribution of different spatial locations in the input depth image.

We apply Grad-CAM to scenes with obstacles at different scales and compare CaMeRL with MAVRL, as shown in Fig. 6. In scenes containing small-scale and medium-scale obstacles, CaMeRL tends to assign stronger attention to small obstacles and potential risk regions at longer distances, whereas MAVRL often exhibits weaker or more diffuse

responses to these structures. In scenes with large-scale obstacles, CaMeRL shows more concentrated responses on obstacle bodies and contours, while MAVRL distributes attention more broadly over both obstacle and background regions. CaMeRL also tends to highlight surrounding boundary regions near obstacles, suggesting improved sensitivity to safety margins. These qualitative patterns are consistent with the superior navigation performance of CaMeRL in multi-scale environments.

E. Real-World Tests

To examine the deployability of CaMeRL in outdoor scenarios, we deploy the method on a quadrotor with a 250 mm wheelbase, as shown in Fig. 7(a). The platform is equipped with an Intel RealSense D435 depth camera for depth sensing, an NVIDIA Jetson Orin NX for onboard computation, and a Pixhawk 6C Mini flight controller for low-level actuation. Although the Jetson Orin NX can achieve an inference frequency of 15 Hz, we set the policy to run at 10 Hz in both simulation and reality. This preserves onboard computing power for data logging and the MPC

module. Simultaneously, the MPC runs at 100 Hz to generate low-level body-rate and thrust commands. Outdoor position estimation is provided by a visual-inertial odometry system.

To bridge the sim-to-real gap, we align the depth camera resolution and field of view with the simulation setup. We collect approximately 5,000 real-world depth images from the outdoor forest scenes and fine-tune the VAE and LSTM representation modules at a reduced learning rate, following the same training procedure as in Section III. The policy network trained in simulation is kept frozen throughout, and its outputs are converted to executable commands via the Agilicious MPC controller.

We conduct flight tests in a dense forest environment, shown in Fig. 7(c). The quadrotor is tasked with reaching a designated goal while avoiding obstacles. To further examine the multi-scale obstacle avoidance capability of CaMeRL in the real world, we additionally place several slender poles with a diameter of about 2 cm among the surrounding tree trunks. The thick tree trunks and the slender poles together form an environment that contains obstacles at clearly different scales. Fig. 7(b) shows a representative flight trajectory. The quadrotor successfully traverses both the slender poles and the thick tree trunks and finally reaches the goal. The average flight speed is approximately 1.4 m/s. These results qualitatively demonstrate that CaMeRL can be deployed on a real quadrotor platform for multi-scale obstacle avoidance in challenging outdoor scenarios with onboard sensing and computation.

VI. CONCLUSION

This paper presents CaMeRL, a collision-aware and memory-enhanced reinforcement learning framework for UAV navigation in multi-scale obstacle environments. CaMeRL combines collision-aware representation learning from depth observations with temporal memory modeling. This design improves obstacle avoidance performance across obstacle scales, especially in challenging ultra-small and extra-large settings. Simulation results show that CaMeRL consistently outperforms baseline methods in success rate while maintaining competitive flight efficiency in multi-scale environments. Real-world outdoor flight tests further provide qualitative evidence that CaMeRL can be deployed for obstacle avoidance and goal-reaching with onboard sensing and computation. Future work will extend the framework to dynamic obstacles and more complex real-world environments.

REFERENCES

- [1] J. Xiao, R. Zhang, Y. Zhang, and M. Feroskhan, "Vision-based learning for drones: A survey," *IEEE Transactions on Neural Networks and Learning Systems*, 2025.
- [2] Y. Wang, B. Wang, S. Zhang, H. W. Sia, and L. Zhao, "Learning agile flight maneuvers: Deep se(3) motion planning and control for quadrotors," in *2023 IEEE International Conference on Robotics and Automation (ICRA)*, 2023, pp. 1680–1686.
- [3] X. Zhou, Z. Wang, H. Ye, C. Xu, and F. Gao, "Ego-planner: An esdf-free gradient-based local planner for quadrotors," *IEEE Robotics and Automation Letters*, vol. 6, no. 2, pp. 478–485, 2020.
- [4] A. Loquercio, E. Kaufmann, R. Ranftl, M. Müller, V. Koltun, and D. Scaramuzza, "Learning high-speed flight in the wild," *Science Robotics*, vol. 6, no. 59, p. eabg5810, 2021.
- [5] H. Nguyen, S. H. Fyhn, P. De Petris, and K. Alexis, "Motion primitives-based navigation planning using deep collision prediction," in *2022 International Conference on Robotics and Automation (ICRA)*. IEEE, 2022, pp. 9660–9667.
- [6] Y. Song, A. Romero, M. Müller, V. Koltun, and D. Scaramuzza, "Reaching the limit in autonomous racing: Optimal control versus reinforcement learning," *Science Robotics*, vol. 8, no. 82, p. eadg1462, 2023.
- [7] E. Kaufmann, L. Bauersfeld, A. Loquercio, M. Müller, V. Koltun, and D. Scaramuzza, "Champion-level drone racing using deep reinforcement learning," *Nature*, vol. 620, no. 7976, pp. 982–987, 2023.
- [8] A. Bhattacharya, N. Rao, D. Parikh, P. Kunapuli, Y. Wu, Y. Tao, N. Matni, and V. Kumar, "Vision transformers for end-to-end vision-based quadrotor obstacle avoidance," in *2025 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2025, pp. 1–8.
- [9] G. Zhao, T. Wu, Y. Chen, and F. Gao, "Learning speed adaptation for flight in clutter," *IEEE Robotics and Automation Letters*, vol. 9, no. 8, pp. 7222–7229, 2024.
- [10] J. Lee, A. Rathod, K. Goel, J. Stecklein, and W. Tabib, "Quadrotor navigation using reinforcement learning with privileged information," *arXiv preprint arXiv:2509.08177*, 2025.
- [11] G. Xu, T. Wu, Z. Wang, Q. Wang, and F. Gao, "Flying on point clouds with reinforcement learning," *arXiv preprint arXiv:2503.00496*, 2025.
- [12] J. Chen, X. Liu, G. Sheng, Q. Shao, and B. Zhao, "A general path planning algorithm with soft constraints for uavs in high-density and large-sized obstacle scenarios," *Drones*, vol. 9, no. 11, p. 793, 2025.
- [13] M. Kulkarni, H. Nguyen, and K. Alexis, "Semantically-enhanced deep collision prediction for autonomous navigation using aerial robots," in *2023 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 2023, pp. 3056–3063.
- [14] H. Yu, C. De Wagter, and G. C. E. de Croon, "Mavrl: Learn to fly in cluttered environments with varying speed," *IEEE Robotics and Automation Letters*, 2024.
- [15] D. Hoeller, L. Wellhausen, F. Farshidian, and M. Hutter, "Learning a state representation and navigation in cluttered and dynamic environments," *IEEE Robotics and Automation Letters*, vol. 6, no. 3, pp. 5081–5088, 2021.
- [16] M. Kulkarni and K. Alexis, "Reinforcement learning for collision-free flight exploiting deep collision encoding," in *2024 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2024, pp. 15 781–15 788.
- [17] H. Yu, C. De Wagter, and G. C. E. de Croon, "Depth transfer: Learning to see like a simulator for real-world drone navigation," *IEEE Robotics and Automation Letters*, 2025.
- [18] Y. Zhang, J. Xiao, and M. Feroskhan, "Learning cross-modal visuomotor policies for autonomous drone navigation," *IEEE Robotics and Automation Letters*, 2025.
- [19] Y. Ren, F. Zhu, G. Lu, Y. Cai, L. Yin, F. Kong, J. Lin, N. Chen, and F. Zhang, "Safety-assured high-speed navigation for mavs," *Science Robotics*, vol. 10, no. 98, p. ead06187, 2025.
- [20] Y. Zhai, R. Reiter, and D. Scaramuzza, "Pa-mppi: Perception-aware model predictive path integral control for quadrotor navigation in unknown environments," *arXiv preprint arXiv:2509.14978*, 2025.
- [21] Y. Song, S. Naji, E. Kaufmann, A. Loquercio, and D. Scaramuzza, "Flightmare: A flexible quadrotor simulator," in *Conference on Robot Learning*. PMLR, 2021, pp. 1147–1157.
- [22] H. Yu, G. C. H. E. de Croon, and C. De Wagter, "Avoidbench: A high-fidelity vision-based obstacle avoidance benchmarking suite for multi-rotors," in *2023 IEEE International Conference on Robotics and Automation (ICRA)*, 2023, pp. 9183–9189.
- [23] P. Foehn, E. Kaufmann, A. Romero, R. Penicka, S. Sun, L. Bauersfeld, T. Laengle, G. Cioffi, Y. Song, A. Loquercio, *et al.*, "Agilicious: Open-source and open-hardware agile quadrotor for vision-based flight," *Science robotics*, vol. 7, no. 67, p. eabl6259, 2022.
- [24] R. R. Selvaraju, M. Cogswell, A. Das, R. Vedantam, D. Parikh, and D. Batra, "Grad-cam: Visual explanations from deep networks via gradient-based localization," in *Proceedings of the IEEE international conference on computer vision*, 2017, pp. 618–626.