

GAUGE: A Measurement-Grounded Benchmark for Physical Fidelity in Simulation Engines and Video World Models

Shuai Wang^{*,1} Yaxin Feng^{*,1,2} Xuekun Jiang^{*,1} Shihan Tian^{*,1} Ningyu Yan^{*,1,2}

Xing Shen¹ Chaoyang Lyu¹ Hui Wang^{1,3} Yunsong Zhou¹ Hanqing Wang¹

Jiangmiao Pang¹ Yang Xiang² Xing Gao¹  Chunhua Shen^{1,4} Weinan Zhang^{1,3}

¹Shanghai Artificial Intelligence Laboratory ²Hong Kong University of Science and Technology

³Shanghai Jiao Tong University ⁴Zhejiang University

Physics engines facilitate large-scale training and evaluation for embodied intelligence, while generative video world models are emerging as implicit simulators of future states and interactions. However, existing evaluations of physical fidelity are often conducted in isolation and rely heavily on perceptual similarity or human judgments, providing limited insight into which physical principles or parameters are violated. We introduce GAUGE, a real-world-grounded diagnostic benchmark for jointly evaluating how numerical simulators and generative video world models reproduce or deviate from real-world physics. It comprises 22 controlled task families covering rigid bodies, flexible cables, textiles, and volumetric deformable objects. Grounded in real-world trajectories and paired with calibrated physical metadata, uncertainty annotations, and task-specific observables, these tasks cover fundamental physical processes including collision, friction, momentum transfer, oscillation, self-contact, and deformation across diverse materials and conditions. We benchmark Isaac Sim, Genesis, and Newton on 14 task families using generalized trajectory errors, and evaluate 6 image-to-video models on 5 rigid-body tasks by testing physical-law consistency and the temporal stability of inferred parameters. Our results reveal no uniformly faithful physics engine, with the largest discrepancies arising in impulsive contact, rapid textile motion, and volumetric deformation. We further find that video world models can produce trajectories with the expected equation form while recovering incorrect accelerations, momentum transfer, and oscillation timing. GAUGE lays the groundwork for developing more physically faithful simulators and world models for embodied intelligence. Project page: <https://internrobotics.github.io/GAUGE/>.

1. Introduction

Advances in embodied intelligence have benefited substantially from the widespread adoption of real-to-sim-to-real pipelines for robot learning, policy evaluation, and large-scale data generation. Despite the approximations inherent in these pipelines, SIMPLER has demonstrated that carefully aligned simulation experiments can reliably predict the relative real-world performance of robot policies [18, 29, 36]. However, the effectiveness of such approaches depends critically on the physical fidelity of the underlying environment, whether it is instantiated by conventional numerical simulators, such as physics engines, or by generative approaches, such as video world models [4, 30, 39, 40]. In particular, high visual fidelity does not necessarily imply accurate physical dynamics: a simulator may produce realistic-looking observations while misrepresenting motion, contact, or deformation, thereby encouraging policies to exploit simulation artifacts or yielding incorrect rankings of policy performance.

Unlike existing benchmarks that mainly measure visual realism or perceived physical plausibility, we introduce GAUGE, a benchmark based on real-world experimental measurements for evaluating the physical fidelity of both physics engines and generative world models. As illustrated in Fig. 1, GAUGE contains 22 standard experimental task families covering rigid bodies, one-dimensional flexible objects, quasi-two-dimensional textiles, and three-dimensional deformable bodies. These

* Equal contribution.

 Corresponding author: Xing Gao (gaoxing@pjlab.org.cn).

© 2026 Shanghai Artificial Intelligence Laboratory. All rights reserved.

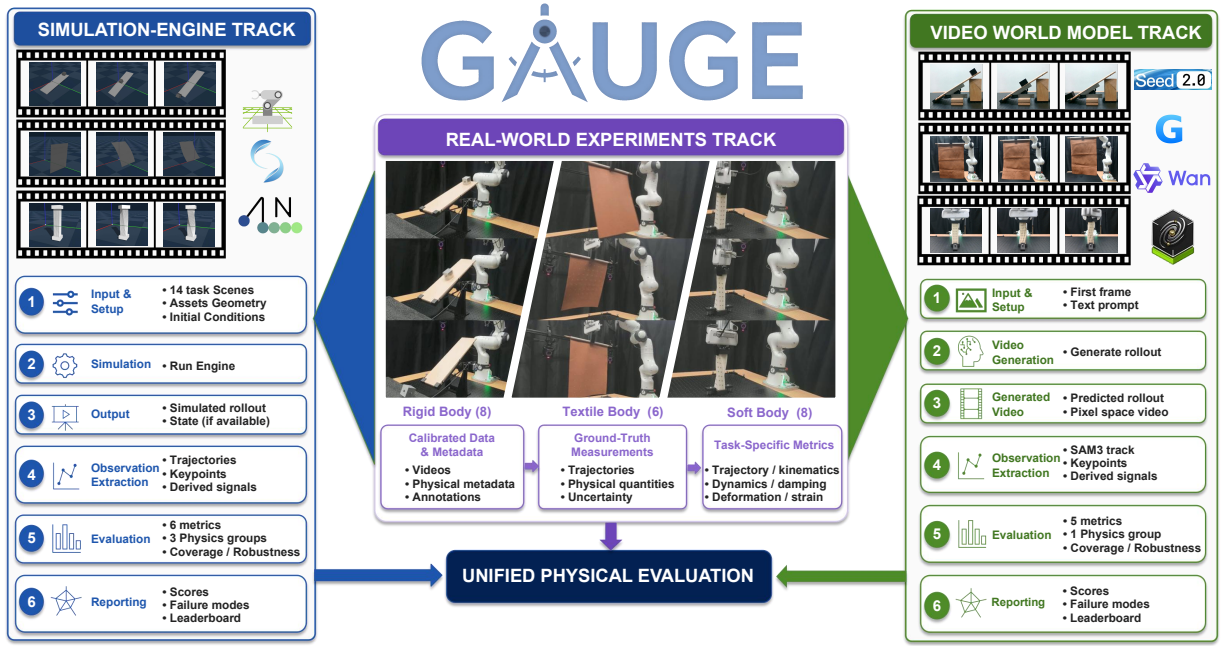


Figure 1. Overview of GAUGE. Controlled real-world experiments provide calibrated physical metadata and motion-capture ground truth for rigid bodies, textiles, and volumetric deformable bodies. The physics-engine track (left) compares trajectories from matched simulated scenes with real measurements. The video world-model track (right) generates future motion from an initial frame and prompt, then evaluates the tracked motion in terms of physical laws and parameters.

tasks evaluate collision, friction, momentum transfer, oscillation, self-contact, curvature, strain, and large deformation. For each task, millimeter-level observations, calibrated physical parameters, and estimates of measurement uncertainty are provided. To evaluate numerical simulators, we reconstruct several representative scenes in Isaac Sim, Genesis, and Newton, and compare their simulated results with real-world measurements. To evaluate generative world models, future videos are predicted by each model from initial scene images and textual prompts upon rigid-body settings. Through the trajectories recovered from video sequences, GAUGE evaluates whether the generated motion conforms to the expected mathematical structure of the underlying physical law, enabling a more diagnostic assessment of both structural consistency and quantitative physical accuracy. Overall, GAUGE serves as a unified diagnostic testbed for identifying not only whether a simulator or world model deviates from real-world physics, but also which physical mechanisms it fails to reproduce.

To summarize, our main contributions are listed below:

- **A unified real-world task suite.** We design 22 controlled task families spanning rigid bodies, flexible cables, textiles, and volumetric deformable objects. The suite contains approximately 1,560 motion-capture trials, together with uncertainty estimates and task-specific physical observables.
- **Cross-regime physical parameter annotations.** To the best of our knowledge, GAUGE is the first real-world benchmark dataset to provide task-associated, experimentally characterized parameters spanning rigid-body contact, cloth constitutive response, and volumetric soft-body mechanics within a single standardized collection.
- **Two complementary evaluation protocols.** Using the same real-world experimental foundation, we separately benchmark numerical physics engines and generative video world models.

The former measures task-specific sim-to-real discrepancies, while the latter distinguishes agreement with physical-law form from parameter accuracy and temporal stability.

2. Related Work

Real-World Validation of Physics Engines. Physical validation has progressed from rigid manipulation and impact studies to domain-specific deformable-object tests. Rigid-body work compares simulated and measured manipulation trajectories or high-speed impacts, showing that fidelity depends strongly on contact geometry, friction, and engine-specific calibration [1, 6]. Other study focuses on calibration procedures rather than direct cross-engine validation [20]. For deformable systems, scaling-law experiments probe rods and plates under bending, twisting, buckling, and frictional contact [31]; DiffCloud [35] uses real point clouds to identify simulator mass and stiffness scalings; and a cloth benchmark compares MuJoCo, Bullet, Flex, and SOFA under dynamic and quasi-static manipulation [3]. PokeFlex [28] supplies synchronized meshes, point clouds, and interaction forces for volumetric objects, RGBench [11] combines garment dynamics with instrument-measured fabric properties, and SORS [21] validates a soft-robot simulator through real experiments. Despite this progress, these efforts remain tied to individual object classes, and several fit effective simulator parameters from the same observations used for evaluation. Their results therefore do not support cross-regime comparison under a shared task and scoring definition.

Physical Consistency of Generative World Models. One line of work evaluates whether generated videos appear physically plausible. VideoPhy-2 [2] combines human judgments with learned evaluators, while PhyGenBench [22], WorldModelBench [17], and PhyWorldBench [9] use human or multimodal-model judgments over law- or scenario-specific criteria. These protocols scale to diverse phenomena, but their scores primarily indicate perceptual or commonsense agreement and do not directly localize errors in trajectories or physical parameters. A complementary line introduces reference-grounded tests. Controlled two-dimensional simulations expose weak out-of-distribution generalization of learned physical laws [13]. Physics-IQ compares generated continuations with repeated real experiments, while Physics-IQ Verified audits its prompts, reference clips, and score aggregation [23, 32]. PISA [16] isolates free-fall behavior using mask- and trajectory-based metrics; WorldBench [37] combines real and synthetic tests of individual concepts and recovers gravity, friction, and viscosity from generated motion; and RIGIDBENCH [12] evaluates rigid-body motion against exact synthetic three-dimensional trajectories. These benchmarks make evaluation more quantitative, yet they typically trade broad coverage for coarse judgments, a narrow law set, or simulator-derived ground truth.

Physical Parameter Supervision. Physical metadata provides a complementary route to diagnosis, although existing annotations differ substantially in meaning. IRIS [14] pairs real videos with governing-equation labels and parameter targets for inverse recovery. Although damping and friction values are fitted from trajectories, its collision coupling is an effective quantity rather than a measured contact parameter. PokeFlex [28] reports object-level effective stiffness rather than material elastic moduli, whereas RGBench [11] measures cloth stretching and bending properties using dedicated instruments. FysicsEval [10] evaluates multimodal models on physical-attribute prediction and reasoning from real images, with instrument-based validation for selected properties, but does not assess generated dynamic rollouts. Thus, prior resources provide valuable physical quantities, but these quantities are generally confined to one mechanical regime, inferred from observed motion, or disconnected from dynamic-fidelity evaluation. In contrast, GAUGE associates experimentally characterized rigid-contact, cloth-constitutive, and volumetric-soft-body parameters with repeated

Benchmark	Grounding		Physical Regime			Evaluated System		Diagnosis	
	Real dyn.	Exp. param.	R	C	S	Engine	Video WM	Eq. form	Param. acc.
Physics-IQ/Verified [23, 32]	✓	–	✓	–	–	–	✓	–	–
IRIS [14]	✓	△	✓	–	–	–	–	✓	✓
WorldBench [37]	△	△	✓	–	–	–	✓	△	✓
RIGIDBENCH [12]	–	–	✓	–	–	–	✓	–	–
Cloth Sim-to-Real [3]	✓	△	–	✓	–	✓	–	–	–
PokeFlex [28]	✓	△	–	–	✓	–	–	–	–
RGBench [11]	✓	✓	–	✓	–	✓	–	–	–
FysicsEval [10]	–	△	✓	–	△	–	–	△	✓
GAUGE (Ours)	✓	✓	✓	✓	✓	✓	✓	✓	✓

Table 1. Comparison with representative datasets and benchmarks for physical grounding and physics-fidelity evaluation. ‘✓’ denotes explicit support, ‘△’ limited or indirect support, and ‘–’ absence. “Real dyn.” denotes task-paired real dynamic references. “Exp. param.” denotes task-associated experimental characterization; fitted, effective, simulator-tuned, or restricted-subset quantities are marked partial. R, C, and S denote rigid bodies, cloth, and volumetric soft bodies, respectively. Fluids are omitted because they are outside the current scope of GAUGE.

real state trajectories. To the best of our knowledge, it is the first standardized real-world benchmark to combine this cross-regime grounding with dedicated protocols for both physics engines and generative video world models. These parameters serve as task-matched metadata for scene reconstruction and failure diagnosis rather than as a separate parameter-estimation track. Tab. 1 provides a comprehensive comparison between GAUGE and existing related benchmarks from multiple perspectives.

3. GAUGE

In this subsection, we present GAUGE, our benchmark designed to provide a unified and standardized set of tasks for evaluating both numerical and generative simulators. The primary goal of GAUGE is to enable fair and systematic assessment of a simulator’s ability to model diverse physical properties under consistent evaluation settings. The design principles and data collection pipeline of the benchmark are described in detail in Section 3.1. Building upon this benchmark, we further evaluate both traditional physics engines and world models. As shown in Fig. 1, the corresponding pipelines are presented in Section 3.2 and Section 3.3.

3.1. Dataset Pipeline

3.1.1. Dataset Design

Unlike benchmarks designed for specific manipulation tasks, GAUGE is constructed to evaluate simulators from a more fundamental physical perspective. To this end, we design 22 tasks that cover the distinct characteristics of rigid and deformable objects (Section A.1). Specifically, the benchmark includes 8 rigid-body tasks, which evaluate physical behaviors such as collision, friction, and the conservation of momentum and energy. For deformable objects, it contains 1 quasi-one-dimensional task (rope), 6 quasi-two-dimensional tasks (textile), and 7 three-dimensional tasks, covering key properties including stiffness, elastic modulus, rigid–deformable interaction, and friction. A complete list of tasks with their corresponding evaluation dimensions is provided in Tab. 2.

Task	Description	Evaluation	Subtask	Material
slope contact	the fall of a trirectangular tetrahedron	slope collisions	1	wood, plastic
nonsmooth contact	the fall of wedges and pyramids	codimensional collisions	3	wood, plastic
slope slider	the slide of a cube on a slope	static and kinetic friction	3	wood, plastic, metal
turntable	the slide of a cube on a turntable	static and kinetic friction in a non-inertial frame.	3	wood, plastic, metal
bouncing ball	the fall and bouncing of a ball	rapid impact	1	rubber
newton's cradle	the collision of closely fitted balls	momentum transfer	1	metal
wall breaking	the collision of a wrecking ball with a wall	large-scale dense collisions	1	wood
pendulum	the oscillation of a ball.	periodic motion	1	metal
rope winding	the winding of a rope	self-collision and stretch modulus	1	rubber
textile stretching	the tensile deformation of a textile	stretch modulus	1	R, S, U, O, L, N
textile bending	the natural sagging of a textile	bending modulus	1	R, S, U, O, L, N
textile flinging	the fluttering of a textile	the motion under locally high acceleration	1	R, S, U, O, L, N
funnel	the passage of textiles through a hole	collision, friction	1	R, S, U, O, L, N
rotating ball	the motion of a textile driven by a rotating ball	static and kinetic friction	1	R, S, U
tablecloth pulling	the pulling of a textile from beneath rigid objects	static and kinetic friction	1	wood, plastic, metal
foam stretching	the stretching of an elastic cuboid	stretching modulus	1	soft, hard
foam compressing	the compression of an elastic cuboid	compression modulus	1	soft, hard
foam shearing	the shearing of an elastic cuboid	shear modulus	1	soft, hard
foam twisting	the twisting of an elastic cuboid	twisting modulus	1	soft, hard
foam bending	the bending of an elastic cuboid	bending modulus	1	soft, hard
stick-stack	the sliding of an elastic rod on a plane	static and kinetic friction	1	soft, hard
cantilever beam	the free hanging of an elastic cantilever beam	the coupling with a large stiffness ratio	1	soft, hard

Table 2. The 22 GAUGE task families, including each experiment’s target physical property, number of condition variants, and material instantiations. The suite covers rigid bodies, rope, textiles, and volumetric deformable bodies. Abbreviations: R = rayon, S = satin, U = uniform cloth, O = Oxford fabric, L = synthetic leather, N = nylon taslan.

To further increase the diversity of the benchmark, we introduce multiple material variants for each object category. Specifically, rigid objects are instantiated with three materials: wood, plastic, and metal. Textile objects include six commonly used fabric types: rayon, satin, uniform cloth, Oxford fabric, synthetic leather, and nylon taslan. For three-dimensional deformable objects, we consider both soft and hard variants of foam and rubber.

3.1.2. Data Acquisition

To accurately capture object states throughout the experiments, we use a millimeter-precision motion capture system to track object trajectories. For rigid objects, attached markers define a body-fixed frame at the object’s geometric center, allowing us to recover its 6-DoF pose over time. For deformable objects, supported by the skeletal tracking functionality, adjacent markers are connected to form a triangulated surface mesh, and their 3D positions are recorded throughout each trial, as shown in Fig. 2(b) and (c).

In addition to capturing the trajectories, GAUGE provides detailed calibration of the physical properties of all assets involved in each task, including object dimensions, mass, and density. Specifically, we measure friction and restitution for rigid bodies using inclined-plane and collision tests. For textiles, tensile, shear, and bending stiffness are obtained from fabric tests conducted by Style3D. And for three-dimensional deformable objects, Young’s modulus and Poisson’s ratio are calibrated using tensile tests and Digital Image Correlation (DIC) (see Section A.2 for more details). Based on the precise trajectory acquisition and comprehensive physical parameter calibration, we establish 22 standardized evaluation scenarios and evaluate the physical fidelity of both physics engines and video world models.

3.2. Physics Engines Pipeline

3.2.1. Simulation and Track

In GAUGE, We evaluate Isaac Sim (v6.0.0), Genesis (v1.12.0), and Newton (v1.3.0) on 14 representative tasks. Each scene is reconstructed from the corresponding digital assets and motion-capture initial states before a rollout is generated. The solver depends on the object class. Rigid bodies use PhysX in Isaac Sim, the native solver in Genesis, and MuJoCo in Newton. Textiles use Surface FEM, PBD, and VBD, respectively, whereas volumetric deformable bodies use FEM, explicit and implicit MPM. Because we aim to measure out-of-the-box performance, physical parameters are set from the GAUGE calibrations, while all other settings remain at their defaults without task-specific fine-tuning.

During simulation data collection, the 6-DoF poses of rigid bodies can be directly exported from the simulation engine. However, Deformable tracking requires an additional step because simulated vertices or particles do not correspond to the motion-capture markers. We therefore use the Hungarian algorithm to assign each initial marker to a unique nearby vertex or particle, with a matching error below 1 cm [15]. The assigned elements are then tracked as marker proxies throughout the rollout.

3.2.2. Evaluation Metrics

To compare different object classes within a common framework and preserve their physical features (details of the calculation method are deferred to Section B.1), we represent each rollout by a generalized trajectory:

$$g(t) = \begin{cases} \mathbf{P}(t) \in \mathbb{R}^3, & \text{rigid bodies,} \\ \mathbf{K}(t) \in \mathbb{R}^{N_m}, & \text{textiles,} \\ \mathbf{A}(t) \in \mathbb{R}^{N_f}, & \text{deformable bodies.} \end{cases} \quad (1)$$

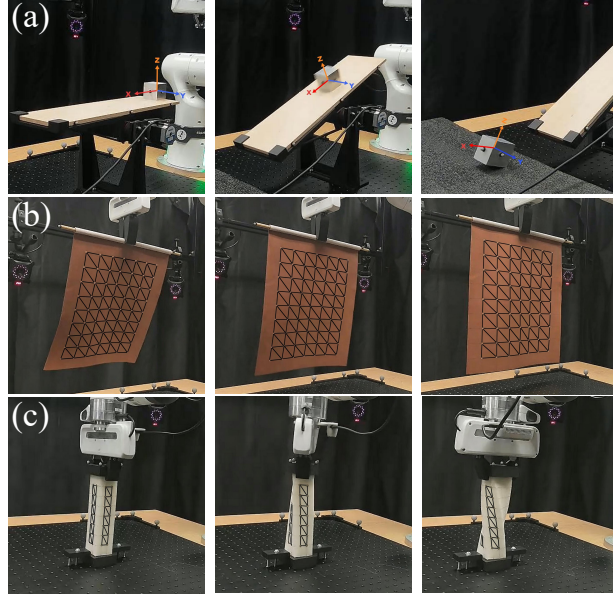


Figure 2. Generalized trajectories used for physics-engine evaluation. (a) Rigid-body motion is represented by object position $\mathbf{P}$; the example compares the real mean and uncertainty band with three simulated trajectories in the X - Z plane. (b) Textile deformation is represented by marker-wise Gaussian curvature $\mathbf{K}$ on the tracked surface mesh. (c) Volumetric deformable body deformation is represented by the areas $\mathbf{A}$ of triangular faces formed by neighboring markers.

Here, $\mathbf{P}$ is the rigid-body position, while $\mathbf{K}$ and $\mathbf{A}$ collect the Gaussian curvatures at textile markers and the areas of deformable-body mesh faces. N_m and N_f denote the corresponding numbers of markers and faces. These representations are illustrated in Fig. 2.

Given a simulated trajectory g_{sim} and the mean trajectory $\bar{g}_{\text{real}}$ over repeated real trials, we compute

$$E_{\text{RMSE}} = \sqrt{\frac{1}{T} \sum_{t=1}^T \|g_{\text{sim}}(t) - \bar{g}_{\text{real}}(t)\|_2^2}, \quad (2)$$

$$E_{\text{DTW}} = \frac{1}{|\pi^*|} \sum_{(i,j) \in \pi^*} \|g_{\text{sim}}(i) - \bar{g}_{\text{real}}(j)\|_2,$$

where π^* is the optimal dynamic time warping (DTW) alignment path. Root mean square error (RMSE) measures frame-aligned error, whereas DTW allows monotonic temporal alignment. In Tab. 3, the baseline reports the within-trial RMSE and per-trial RMSE standard deviation calculated from the real-world experimental data. Specifically, the within-trial RMSE is defined as $\text{mean}_i [E_{\text{RMSE}}(g_{\text{real},i}, \bar{g}_{\text{real}})]$, which measures the typical deviation of an individual real trajectory from the mean trajectory. The per-trial RMSE standard deviation, defined as $\text{std}_i [E_{\text{RMSE}}(g_{\text{real},i}, \bar{g}_{\text{real}})]$, characterizes the consistency of trajectory variations across different real-world trials.

For behaviors not fully captured by trajectory error, we introduce additional physical metrics for pendulum-related tasks. For Newton’s cradle task:

- **Longest Stationary Duration (LSD):** The maximum duration among all time intervals that satisfies the stationary condition, measuring whether the cradle exhibits the expected impulse-like motion.
- **Momentum Transfer Efficiency (MTE):** The ratio between the momentum of the outgoing

ball and that of the incoming ball, evaluating whether momentum is fully transmitted during the collision process.

For the simple pendulum task:

- **Period Duration (PD):** The time required for the pendulum to complete one full oscillation, and measures whether the simulated oscillation period is consistent with the expected physical behavior.
- **Energy Loss (EL):** The ratio of the final mechanical energy loss to the initial mechanical energy, evaluating whether the pendulum approximately conserves mechanical energy under the undamped setting.

3.3. World Models Pipeline

3.3.1. Generation and Track

Because current world models still struggle with 3D consistency and deformable-object dynamics, we focus on rigid-body scenarios to evaluate six models: five image-to-video models—Cosmos3-Nano[26], Cosmos3-Super-Image2Video (Cosmos3-Super-I2V)[26], Wan-2.2[38], Wan-2.7, and Seedance 2.0[33]—and the interactive world model Genie 3. For each task, every model receives the same frontal initial frame and a standardized text prompt describing the scene, object properties, and expected motion, and then generates a future video. It is worth noting that, for the Cosmos3 and Wan model families, we further conduct a controlled ablation by introducing a negative prompt shared across all models to constrain physically implausible behaviors and evaluate its impact on model inference. (Section C.1.1).

To recover the motion from generated video sequences, we leverage SAM3[5] to segment and track the target object. In general, we adopt text prompts to identify the target; when the segmentation is ambiguous, we add negative point prompts to exclude background regions. With reliable segmentation masks acquired, the object’s 2D pixel coordinates are approximated from the centroid of each frame’s binary segment mask. Benefiting from its nearly constant depth relative to the camera, the object with known dimensions can provide an image-to-world scale. By utilizing this scale, we can thereby convert the centroid sequence into a two-dimensional trajectory in the experimental coordinate system (see Section C.2.1 for more details).

3.3.2. Evaluation Metrics

Unlike previous evaluations of the physical consistency of world models, GAUGE assesses whether a model has learned physical laws from two complementary perspectives: the structural form of the governing equations and their underlying physical parameters. This evaluation enables us to determine whether a model has truly captured the principles governing object motion, rather than merely generating visually plausible videos. To this end, we introduce the following metrics.

- **Dynamic Error (DE).** Generally, for tasks with known external forces, DE measures consistency with Newton’s second law:

$$DE = \frac{1}{T} \sum_{t=1}^T |m\ddot{x}_t - f_t|. \quad (3)$$

Here, T is the number of frames, while m , x_t , and f_t denote object mass, position, and net external force at frame t . A lower DE indicates better force–motion consistency.

- **Coefficient of Determination (R^2).** Whereas DE directly tests force–motion consistency, R^2 measures how well the expected physical model explains the generated trajectory. A higher value indicates closer agreement with the expected equation form.
- **Quadratic Form Improvement (QFI).** QFI complements R^2 by measuring the additional residual reduction obtained after adding a quadratic term to the expected linear relation. For uniformly accelerated motion (the free fall), displacement should be linear in squared time. Therefore, a low QFI indicates that the expected linear form is sufficient, whereas a high QFI reveals additional curvature. The detailed computation of R^2 and QFI is provided in the Section C.3

4. Experiment Setup

4.1. Data Acquisition

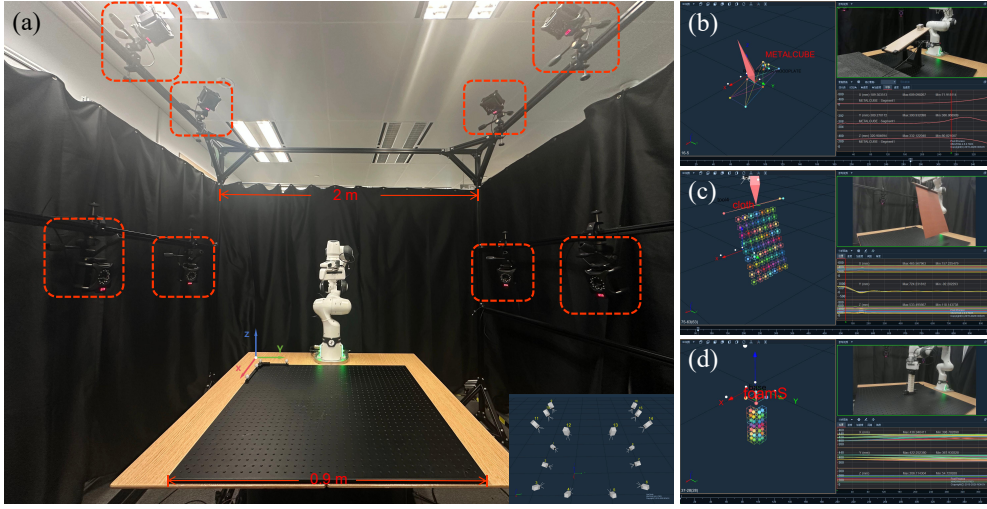


Figure 3. Real-world motion-capture system and representative tracking configurations.

As illustrated in Fig. 3(a), we construct a $2\text{ m} \times 2\text{ m} \times 2\text{ m}$ motion capture volume to accurately measure object trajectories in GAUGE. To fully cover the experimental workspace, we deploy 16 NOKOV Mars9H infrared cameras arranged across three height levels. The cameras operate at 180 Hz and provide sub-millimeter 3D localization accuracy. The experimental platform is built on a $0.9\text{ m} \times 0.9\text{ m}$ black optical breadboard, where the world coordinate system is established using an L-shaped calibration fixture located at the upper-left corner of the workspace. To minimize environmental drift, all cameras are jointly calibrated with a T-shaped calibration fixture before each experiment.

Depending on the object category, different marker configurations and tracking strategies are adopted. As shown in Fig. 3(b), rigid-body objects are instrumented with 6 mm retroreflective spheres (approximately 0.5 g each), while reflective adhesive markers are used for spherical rigid objects. Since rigid bodies preserve their geometric structure, the motion capture system continuously estimates the pose of a rigid-body coordinate frame defined by multiple markers. In contrast, for textiles and deformable objects (Fig. 3(c) and (d)), 6 mm reflective adhesive markers are attached to the object surface, and the system reconstructs local skeletal structures by connecting adjacent markers to track the trajectory of each marker individually. The masses of all markers are negligible and therefore have no measurable influence on the object dynamics.

After data acquisition, each recording is first truncated to the valid experimental interval and

subsequently downsampled to 30 fps. For every evaluation task, we collect 20 independent real-world trials and store the processed trajectories together with the calibrated physical properties in JSON format for subsequent evaluation.

4.2. Physics Engines

During the physics-engine evaluation, we run all three engines on a Windows 11 workstation equipped with a single NVIDIA GeForce RTX 4090 GPU. The simulation frequency is set to 180 Hz for rigid-body and textile tasks, matching the motion capture frequency, and increased to 900 Hz for three-dimensional deformable-body tasks to prevent numerical divergence. Across all tasks, simulation states are recorded at 30 Hz.

4.3. World Models

During world-model inference, all models take the same initial image with a resolution of 832×480 as input (except for Genie3: 1300×750), while the generated videos retain each model’s native output resolution and frame rate. Open-source models, including the Cosmos3 series and Wan-2.2, are deployed on the DLC distributed computing platform. Specifically, Cosmos3-Nano is inferred using a single NVIDIA GeForce RTX 4090 GPU, whereas Cosmos3-Super-I2V and Wan-2.2 each use eight NVIDIA GeForce RTX 4090 GPUs. Closed-source models are accessed through their official inference services: Wan-2.7 and Seedance 2.0 are invoked via remote APIs, while Genie 3 is generated directly through its online interface.

5. Results

5.1. Physics Engines

Rigid-body dynamics. Tab. 3 reports each simulator’s discrepancy relative to the mean value of the baseline. For RMSE and DTW, a normalized value below one indicates that the simulator-to-real discrepancy is smaller than the within-trial RMSE measured across repeated real-world trials. Isaac Sim gives the lowest errors for slope contact, nonsmooth contact, and turntable motion. Its turntable errors are particularly small, with normalized RMSE and DTW of 0.17 and 0.61, respectively. Genesis performs best on the slope-slider task, reaching 0.58 RMSE and 0.69 DTW, while Newton is less accurate in this friction-dominated setting. These results show that standard contact and sliding behaviors can be reproduced reasonably well, but the ranking depends on the contact geometry and reference frame.

More demanding rigid-body events expose a substantially larger gap. Even the best bouncing-ball result is 15.63 times the baseline RMSE and 5.58 times the baseline DTW. For Newton’s cradle, Isaac Sim and Newton produce zero longest stationary duration, and their normalized momentum-transfer efficiencies are only 0.20 and 0.26; Genesis does not produce a valid rollout. The pendulum is easier in terms of frequency: Isaac Sim and Newton obtain normalized periods of 1.10 and 1.09. However, all engines accumulate energy error over the longer rollout, with raw energy-loss values ranging from -0.041 to 0.034 . Thus, matching low-frequency motion does not imply accurate impact resolution or long-horizon energy behavior.

Textile and deformable body dynamics. The textile results vary markedly with the deformation regime. For textile stretching, Isaac Sim and Newton achieve normalized errors close to or below one. For textile bending, however, the best RMSE and DTW increase to 7.94 and 11.78. The largest

Task	Material	Frames	Metric	Baseline	IsaacSim	Genesis	Newton
slope contact	plastic	10	RMSE	12.31 (7.62)	1.26	1.60	1.75
			DTW	5.30 (1.84)	1.83	2.57	3.07
nonsmooth contact	plastic	20	RMSE	17.67 (6.19)	1.53	10.04	6.05
			DTW	8.92 (2.44)	1.90	14.37	8.01
slope slider	metal	60	RMSE	38.01 (28.53)	0.61	0.58	1.95
			DTW	9.54 (8.52)	0.71	0.69	2.93
turntable	metal	95	RMSE	13.26 (7.43)	0.17	0.57	20.04
			DTW	3.33 (0.81)	0.61	2.01	66.72
bouncing ball	rubber	18	RMSE	5.29 (3.60)	15.63	22.50	22.71
			DTW	4.23 (2.87)	5.58	14.58	14.89
newton’s cradle	metal	1027	LSD	0.38 (0.015)	0.00	–	0.00
			MTE	93.02 (2.47)	0.20	–	0.26
pendulum	metal	300	PD	1.14 (0.066)	1.10	2.47	1.09
		3000	EL	0.00	0.034	−0.041	0.022
textile stretching	satin	380	RMSE	0.21 (0.42)	0.73	1.51	0.73
			DTW	0.21 (0.42)	0.76	1.56	0.75
textile bending	satin	335	RMSE	1.92 (0.69)	7.94	11.73	19.90
			DTW	1.20 (0.17)	11.78	17.35	18.82
textile flinging	satin	562	RMSE	0.016 (0.0056)	128.26	8.54	9.25
			DTW	0.012 (0.0014)	167.31	11.27	12.12
foam stretching	soft	30	RMSE	8.72 (6.94)	16.15	10.05	15.46
			DTW	8.19 (6.93)	17.18	10.65	16.45
foam shearing	soft	37	RMSE	5.60 (0.70)	26.13	15.26	26.57
			DTW	5.07 (0.59)	28.85	16.74	29.34
foam twisting	soft	65	RMSE	8.07 (0.53)	17.14	10.86	16.78
			DTW	7.48 (0.39)	18.47	11.67	18.07
foam bending	soft	35	RMSE	7.00 (4.39)	10.71	14.43	10.37
			DTW	3.52 (1.05)	21.28	27.51	20.53

Table 3. Physical fidelity of Isaac Sim, Genesis, and Newton on 14 tasks. Baseline reports the real-world mean and standard deviation. Simulator entries are normalized by the baseline mean: lower is better for RMSE and DTW, while values closer to one are better for normalized LSD, MTE, and PD. Bold marks the best valid result, and a dash denotes an unavailable rollout. The pendulum EL row reports raw values because its baseline is zero; zero is ideal.

solver-specific failure occurs in textile flinging: Genesis obtains the lowest RMSE of 8.54, whereas Isaac Sim reaches 128.26. This contrast indicates that quasi-static agreement does not reliably predict fidelity under rapid, spatially varying deformation. For volumetric deformable bodies, Genesis gives the lowest errors for stretching, shearing, and twisting, while Newton performs best for bending. Nevertheless, even the best-performing deformable body simulations exhibit errors approximately one order of magnitude above the corresponding real-world baselines. Overall, no engine dominates across rigid, textile, and volumetric regimes. The results instead reveal complementary solver strengths and identify dynamic contact, high-acceleration cloth motion, and three-dimensional deformation as the main sources of residual sim-to-real error.

Task	Mat.	Met.	Base.	Cosmos3-N		Cosmos3-S		Wan22		Wan27		Seed2		Genie3	
				w/o	w	w/o	w	w/o	w	w/o	w	w/o	w	w/o	w
slope slider	wood	QFI	0.00	64.89	26.65	13.61	569.36	393.00	15.74	1201.08	558.97	781.51	40.11		
		a	2.58	2.06	0.90	0.13	0.12	0.43	0.091	0.061	0.038	0.23	0.62		
	plastic	QFI	0.00	129.76	276.49	25.60	330.31	14.24	40.12	1164.59	942.08	8.69	67.07		
		a	2.57	0.58	0.22	0.36	0.030	0.75	0.16	0.055	0.063	0.20	0.58		
	metal	QFI	0.00	4.41	184.09	1266.40	924.39	116.64	6.96	60.70	1145.94	730.22	70.37		
		a	2.67	0.36	0.15	0.056	0.068	0.24	0.40	0.046	0.038	0.074	0.43		
turntable	wood	DE	0.00	0.078	0.10	0.092	0.00	0.00	0.00	0.18	0.00037	0.00	0.00		
	plastic	DE	0.00	0.11	0.17	0.0029	0.11	0.00	0.00	0.032	0.050	0.00	0.00		
	metal	DE	0.00	0.0064	0.19	0.040	0.25	0.00048	0.00	0.12	0.78	0.0024	0.00		
bouncing ball	rubber	QFI	0.00	2620.05	1125.36	270.69	12.50	428.39	38.72	59.49	16.08	65.16	88.70		
		a	9.81	0.45	0.33	0.076	0.088	0.051	0.064	0.16	0.15	1.84	-0.052		
newton’s cradle	metal	MTE	~1	—	—	—	—	—	0.76	0.55	0.48	0.24	—		
pendulum	metal	R ²	1.00	0.86	0.66	0.50	0.92	0.98	0.99	0.71	0.72	0.96	0.99		
		PD	1.06	2.36	2.93	17.95	2.34	6.03	1.93	1.83	1.87	3.13	1.90		

Table 4. Physical consistency of video world models on five rigid-body tasks. **w/o** and **w** denote generation without and with the negative prompt. Lower is better for QFI and DE; acceleration a , MTE, and PD are compared with the real baseline; and higher is better for R². Bold marks the best valid result, and dashes denote unavailable generations. Abbreviations: Mat. = material, Met. = metric, Base. = baseline, Cosmos3-N/S = Cosmos3-Nano/Super-I2V, Seed2 = Seedance 2, a in m/s², and PD in seconds.

5.2. World Models

Law form and parameter accuracy. Tab. 4 and Fig. 4 shows that satisfying the structural form of a physical law and recovering its parameters are distinct capabilities. For slope sliding, the lowest QFI is achieved by different models for wood, plastic, and metal: Cosmos3-Super-I2V, Seedance 2, and Cosmos3-Nano, respectively. This change in ranking indicates limited consistency across materials. More importantly, a low QFI does not guarantee a correct acceleration. For wood, the best estimate, 2.06 m/s², is reasonably close to the measured 2.58 m/s². For plastic and metal, however, the closest reported accelerations are only 0.75 and 0.43 m/s², compared with real values of 2.57 and 2.67 m/s². Fig. 4 (a) visualizes this discrepancy: several trajectories are approximately linear in squared time, yet their slopes differ substantially.

The bouncing-ball task provides an even clearer example. Cosmos3-Super-I2V with the negative prompt obtains the lowest QFI of 12.50, but its inferred acceleration is only 0.088 m/s². Seedance 2 gives the closest acceleration among the evaluated models, but its value of 1.84 m/s² remains far below gravitational acceleration. As shown in Fig. 4 (b), the generated motion can resemble a uniformly accelerated trajectory over a short interval while encoding an incorrect physical scale. This result supports evaluating equation structure and parameter accuracy separately.

Interaction and oscillation. Momentum transfer remains difficult. Six of the ten reported model configurations fail to produce a valid Newton’s-cradle sequence, and Wan-2.2 with the negative prompt reaches the highest MTE of 0.76, below the real-world value of approximately one. The pendulum results further illustrate the limits of perceptual plausibility. Wan-2.2 and Genie3 attain an R² of 0.99, indicating a strong oscillatory fit, but their periods are 1.93 s and 1.90 s rather than the measured 1.06 s. The closest period is 1.83 s from Wan-2.7, which is still about 73% longer than the baseline. Fig. 4 (c) further shows substantial variation in fitted damping and amplitude, including different damping signs across models. Consequently, a generated sequence may look periodic and achieve a

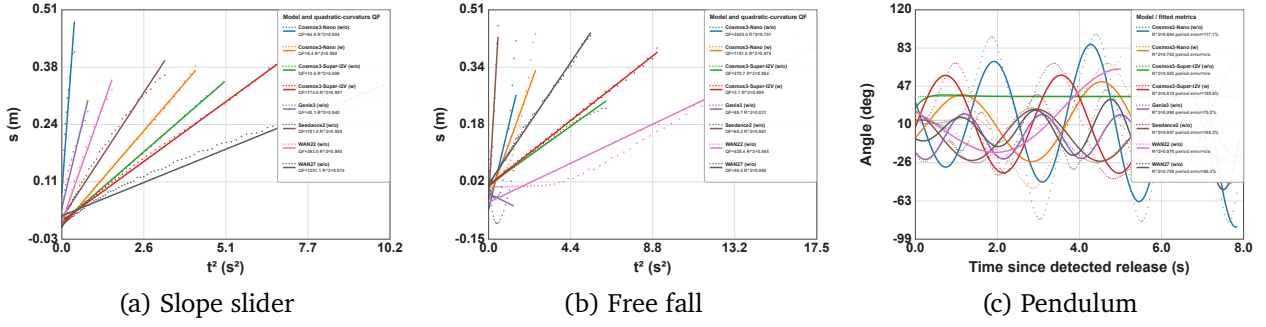


Figure 4. Representative physical-law fits for generated videos. Displacement is plotted against squared time for (a) the wood slope slider and (b) the free-fall segment of the bouncing ball; uniform acceleration should produce a straight line. (c) Tracked pendulum angles and fitted oscillations after release. Dotted curves are recovered trajectories and solid curves are physical-model fits; the legends report QFI or fitted parameters. Differences in slope, curvature, period, and damping reveal errors not captured by visual plausibility alone.

high fitting score while still violating the underlying temporal parameters and energy behavior.

Prompt sensitivity. The paired settings in Tab. 4 show that the negative prompt does not yield a consistent improvement. For example, it reduces the bouncing-ball QFI of Cosmos3-Super-I2V from 270.69 to 12.50 and enables Wan-2.2 to produce a Newton’s-cradle rollout, but it increases the wood slope-slider QFI of Cosmos3-Super-I2V from 13.61 to 569.36. The direction and magnitude of the change depend on both the model and the task. This sensitivity suggests that physics evaluation should use fixed prompt templates and report paired results rather than drawing conclusions from a single favorable generation. More analysis details can be found in Section C.3.

6. Limitations and Outlook

GAUGE has several limitations that also define directions for future work. First, although the current benchmark covers rigid bodies, textiles, and three-dimensional deformable bodies, its materials and calibrated parameter ranges remain limited. Materials within the same nominal category can differ because of surface treatment, internal structure, manufacturing process, temperature, and wear. Future versions should therefore include more materials and broader ranges of friction, stiffness, density, restitution, and damping. The task set should also be extended to fluids and coupled processes, including fluid-rigid and fluid-soft-body interactions, to better represent the physical diversity encountered by embodied agents.

Second, the current world-model track focuses on rigid-body tasks that can be evaluated from two-dimensional image trajectories. This representation is insufficient for textiles and volumetric deformable bodies, whose states involve distributed deformation, depth variation, self-occlusion, and self-contact. When reliable three-dimensional coordinates become available, future metrics should operate on reconstructed point clouds, meshes, or tracked surface elements. Relevant measurements include local strain, area and volume change, Gaussian and mean curvature, bending energy, geodesic distortion, self-contact, oscillation modes, damping, and energy dissipation. Correspondence and reconstruction uncertainty must also be modeled explicitly so that errors in three-dimensional perception are not incorrectly attributed to the world model. Combining these measurements with GAUGE’s law-form and parameter-stability analysis would enable a more accurate evaluation of generated textile and deformable body dynamics.

7. Conclusion

We presented GAUGE, a measurement-grounded benchmark for evaluating the physical fidelity of both physics engines and generative video world models. GAUGE contains 22 controlled task families spanning rigid bodies, flexible cables, textiles, and volumetric deformable objects, together with repeated real-world trajectories, calibrated physical parameters, and task-specific observables. The benchmark supports a common evaluation framework while retaining metrics that are meaningful for different physical regimes.

Our experiments show that current physics engines have strongly domain-dependent accuracy. Isaac Sim performs well on several rigid contact tasks, Genesis is more competitive on dynamic textile and most deformable body tasks, and Newton is strongest in selected deformation cases; none is consistently accurate across all regimes. Current video world models exhibit a related but different limitation. They can generate trajectories that are visually plausible or well fitted by a physical equation while predicting incorrect accelerations, momentum-transfer efficiencies, oscillation periods, or damping behavior. Their performance is also sensitive to prompt formulation. These findings demonstrate that physical fidelity cannot be characterized by visual quality, a single trajectory distance, or parameter estimation alone. By jointly evaluating law form, physical parameters, and temporal behavior against real measurements, GAUGE provides a diagnostic basis for improving simulators and world models intended for embodied intelligence.

References

- [1] Brian Acosta, William Yang, and Michael Posa. Validating robotics simulators on real-world impacts, 2021. doi: 10.48550/ARXIV.2110.00541.
- [2] Hritik Bansal, Clark Peng, Yonatan Bitton, Roman Goldenberg, Aditya Grover, and Kai-Wei Chang. Videophy-2: A challenging action-centric physical commonsense evaluation in video generation, 2025. doi: 10.48550/ARXIV.2503.06800.
- [3] David Blanco-Mulero, Oriol Barbany, Gokhan Alcan, Adrià Colomé, Carme Torras, and Ville Kyrki. Benchmarking the sim-to-real gap in cloth manipulation. *IEEE Robotics and Automation Letters*, 9(3), Mar 2024. doi: 10.1109/lra.2024.3360814.
- [4] Jake Bruce, Michael Dennis, Ashley Edwards, Jack Parker-Holder, Yuge Shi, Edward Hughes, Matthew Lai, Aditi Mavalankar, Richie Steigerwald, Chris Apps, Yusuf Aytar, Sarah Bechtle, Feryal Behbahani, Stephanie Chan, Nicolas Heess, Lucy Gonzalez, Simon Osindero, Sherjil Ozair, Scott Reed, Jingwei Zhang, Konrad Zolna, Jeff Clune, Nando de Freitas, Satinder Singh, and Tim Rocktäschel. Genie: Generative interactive environments, 2024. doi: 10.48550/ARXIV.2402.15391.
- [5] Nicolas Carion, Laura Gustafson, Yuan-Ting Hu, Shoubhik Debnath, Ronghang Hu, Didac Suris, Chaitanya Ryali, Kalyan Vasudev Alwala, Haitham Khedr, Andrew Huang, Jie Lei, Tengyu Ma, Baishan Guo, Arpit Kalla, Markus Marks, Joseph Greer, Meng Wang, Peize Sun, Roman Rädle, Triantafyllos Afouras, Effrosyni Mavroudi, Katherine Xu, Tsung-Han Wu, Yu Zhou, Liliane Momeni, Rishi Hazra, Shuangrui Ding, Sagar Vaze, Francois Porcher, Feng Li, Siyuan Li, Aishwarya Kamath, Ho Kei Cheng, Piotr Dollár, Nikhila Ravi, Kate Saenko, Pengchuan Zhang, and Christoph Feichtenhofer. Sam 3: Segment anything with concepts, 2025. doi: 10.48550/ARXIV.2511.16719.
- [6] Jack Collins, Jessie McVicar, David Wedlock, Ross Brown, David Howard, and Jurgen Leitner.

- Benchmarking simulated robotic manipulation through a real world dataset. *IEEE Robotics and Automation Letters*, 5(1), Jan 2020. doi: 10.1109/lra.2019.2953663.
- [7] Genesis AI Team. Genesis world: Pbd cloth solver, 2026, <https://github.com/Genesis-Embodied-AI/genesis-world>.
 - [8] Eitan Grinspun, Anil N. Hirani, Mathieu Desbrun, and Peter Schröder. Discrete shells, 2003. doi: 10.2312/SCA03/062-067.
 - [9] Jing Gu, Xian Liu, Yu Zeng, Ashwin Nagarajan, Fangrui Zhu, Daniel Hong, Yue Fan, Qianqi Yan, Kaiwen Zhou, Ming-Yu Liu, and Xin Eric Wang. "phyworldbench": A comprehensive evaluation of physical realism in text-to-video models, 2025. doi: 10.48550/ARXIV.2507.13428.
 - [10] Minghao Han, Dingkan Yang, Yue Jiang, Yizhou Liu, and Lihua Zhang. Omnifysics: Towards physical intelligence evolution via omni-modal signal processing and network optimization, 2026. doi: 10.48550/ARXIV.2602.07064.
 - [11] Wenkang Hu, Xincheng Tang, Yanzhi E, Yitong Li, Zhengjie Shu, Wei Li, Huamin Wang, and Ruigang Yang. Real garment benchmark (rgbench): A comprehensive benchmark for robotic garment manipulation featuring a high-fidelity scalable simulator, 2025. doi: 10.48550/ARXIV.2511.06434.
 - [12] Swarnim Jain and Shangzhe Wu. RigidBench: Evaluating Rigid-Body Physics in Video Generation Models. In *Proceedings of the 2nd Workshop on World Models: Understanding, Modelling and Scaling at ICLR 2026*, 2026.
 - [13] Bingyi Kang, Yang Yue, Rui Lu, Zhijie Lin, Yang Zhao, Kaixin Wang, Gao Huang, and Jiashi Feng. How far is video generation from world model: A physical law perspective, 2024. doi: 10.48550/ARXIV.2411.02385.
 - [14] Rasul Khanbayov, Mohamed Rayan Barhdadi, Erchin Serpedin, and Hasan Kurban. Iris: A real-world benchmark for inverse recovery and identification of physical dynamic systems from monocular video, 2026. doi: 10.48550/ARXIV.2603.16432.
 - [15] H. W. Kuhn. The hungarian method for the assignment problem. *Naval Research Logistics Quarterly*, 2(1-2), Mar 1955. doi: 10.1002/nav.3800020109.
 - [16] Chenyu Li, Oscar Michel, Xichen Pan, Sainan Liu, Mike Roberts, and Saining Xie. Pisa experiments: Exploring physics post-training for video diffusion models by watching stuff drop, 2025. doi: 10.48550/ARXIV.2503.09595.
 - [17] Dacheng Li, Yunhao Fang, Yukang Chen, Shuo Yang, Shiyi Cao, Justin Wong, Michael Luo, Xiaolong Wang, Hongxu Yin, Joseph E. Gonzalez, Ion Stoica, Song Han, and Yao Lu. Worldmodelbench: Judging video generation models as world models, 2025. doi: 10.48550/ARXIV.2502.20694.
 - [18] Xuanlin Li, Kyle Hsu, Jiayuan Gu, Karl Pertsch, Oier Mees, Homer Rich Walke, Chuyuan Fu, Ishikaa Lunawat, Isabel Sieh, Sean Kirmani, Sergey Levine, Jiajun Wu, Chelsea Finn, Hao Su, Quan Vuong, and Ted Xiao. Evaluating real-world robot manipulation policies in simulation, 2024. doi: 10.48550/ARXIV.2405.05941.
 - [19] Miles Macklin, Matthias Müller, and Nuttapong Chentanez. Xpbd: position-based simulation of compliant constrained dynamics. In *Proceedings of the 9th International Conference on Motion in Games*, Oct 2016.

- [20] Bhairav Mehta, Ankur Handa, Dieter Fox, and Fabio Ramos. A user’s guide to calibrating robotics simulators, 2020. doi: 10.48550/ARXIV.2011.08985.
- [21] Manuel Mekkattu, Mike Y. Michelis, and Robert K. Katzschmann. Sors: A modular, high-fidelity simulator for soft robots, 2025. doi: 10.48550/ARXIV.2512.15994.
- [22] Fanqing Meng, Jiaqi Liao, Xinyu Tan, Wenqi Shao, Quanfeng Lu, Kaipeng Zhang, Yu Cheng, Dianqi Li, Yu Qiao, and Ping Luo. Towards world simulator: Crafting physical commonsense-based benchmark for video generation, 2024. doi: 10.48550/ARXIV.2410.05363.
- [23] Saman Motamed, Laura Culp, Kevin Swersky, Priyank Jaini, and Robert Geirhos. Do generative video models understand physical principles?, 2025. doi: 10.48550/ARXIV.2501.09038.
- [24] Matthias Müller, Bruno Heidelberger, Marcus Hennix, and John Ratcliff. Position based dynamics. *Journal of Visual Communication and Image Representation*, **18**(2), Apr 2007. doi: 10.1016/j.jvcir.2007.01.005.
- [25] Newton Developers. Newton physics: Vbd cloth implementation, 2026, <https://github.com/newton-physics/newton>.
- [26] NVIDIA, :, Aditi, Niket Agarwal, Arslan Ali, Jon Allen, Martin Antolini, Adeline Aubame, Alisson Azzolini, Junjie Bai, Maciej Bala, Yogesh Balaji, Josh Bapst, Aarti Basant, Mukesh Beladiya, Mohammad Qazim Bhat, Zaid Pervaiz Bhat, Dan Blick, Vanni Brighella, Han Cai, Tiffany Cai, Eric Cameracci, Jiaxin Cao, Yulong Cao, Mark Carlson, Carlos Casanova, Ting-Yun Chang, Yan Chang, Yu-Wei Chao, Prithvijit Chattopadhyay, Roshan Chaudhari, Chieh-Yun Chen, Junyu Chen, Ke Chen, Qizhi Chen, Wenkai Chen, Xiaotong Chen, Yu Chen, An-Chieh Cheng, Click Cheng, Xiu Chia, Jeana Choi, Chaeyeon Chung, Wenyan Cong, Yin Cui, Magdalena Dadela, Nalin Dadhich, Wenliang Dai, Joyjit Daw, Alperen Degirmenci, Rodrigo Vieira Del Monte, Robert Denomme, Sameer Dharur, Marco Di Lucca, Ke Ding, Wenhao Ding, Yifan Ding, Yuzhu Dong, Nicole Drumheller, Yilun Du, Aigul Dzhumamuratova, Aleksandr Efitarov, Hamid Eghbalzadeh, Naomi Eigbe, Imad El Hanafi, Hassan Eslami, Benedikt Falk, Jiaojiao Fan, Jim Fan, Amol Fasale, Sergiy Fefilatyev, Liang Feng, Francesco Ferroni, Sanja Fidler, Xiao Fu, Vikram Fugro, Prashant Gaikwad, TJ Galda, Katelyn Gao, Yihuai Gao, Wenhao Ge, Sreyan Ghosh, Arushi Goel, Vivek Goel, Akash Gokul, Rama Govindaraju, Jinwei Gu, Miguel Guerrero, Elfie Guo, Aryaman Gupta, Siddharth Gururani, Hugo Hadfield, Song Han, Ankur Handa, Zekun Hao, Mohammad Harrim, Ali Hassani, Nathan Hayes-Roth, Yufan He, Chris Helvig, Cyrus Hogg, Madison Huang, Michael Huang, Sophia Huang, Yufan Huang, Jacob Huffman, DeLesley Hutchins, Suneel Indupuru, Boris Ivanovic, Arihant Jain, Joel Jang, Ryan Ji, Yanan Jian, Dongfu Jiang, Jingyi Jin, Atharva Joshi, Nikhilesh Joshi, Pranjali Joshi, Andy Ju, Jaehun Jung, Weiwei Kang, Scott Kassekert, Jan Kautz, Ashna Khetan, Julia Kiczka, Slawek Kierat, Gwanghyun Kim, Kuno Kim, Sunny Kim, Kezhi Kong, Xin Kong, Zhifeng Kong, Tomasz Kornuta, Egor Krivov, Hui Kuang, Saurav Kumar, Chia-Wen Kuo, George Kurian, Wojciech Kutak, JF Lafleche, Himangshu Lahkar, Omar Laymoun, Jayjun Lee, Sanggil Lee, Gabriele Leone, Boyi Li, Freya Li, Jiajun Li, Jinfeng Li, Ling Li, Pengcheng Li, Shangru Li, Tingle Li, Xiaolong Li, Xuan Li, Zhaoshuo Li, Zhiqi Li, Hao Liang, Maosheng Liao, Chen-Hsuan Lin, Tsung-Yi Lin, Ming-Yu Liu, Sifei Liu, Zihan Liu, Hai Loc Lu, Xiangyu Lu, Alice Luo, Ruipu Luo, Wenjie Luo, Jiangran Lyu, Martin Ding Ma, Nic Ma, Qianli Ma, Dawid Majchrowski, Louis Marcoux, Miguel Martin, Qing Miao, Ashkan Mirzaei, Shreyas Misra, Kaichun Mo, Durra Mohsin, Hyejin Moon, Pawel Morkisz, Saeid Motiian, Kirill Motkov, Seungjun Nah, Yashraj Narang, Deepak Narayanan, Thabang Ngazimbi, Julian Ouyang, Shubham Pachori, David Page, Yatian Pang, Sehwi Park, Mahesh Patekar, Mostofa Patwary, Marco Pavone, Trung Pham, Wei Ping, Soha Pouya, Shrimai Prabhunoye, Varun Praveen, Delin Qu, Hesam Rabeti, Morteza Ramezanali, Marilyn Reeb, Xuanchi Ren, Kristen Rumley, Wojciech Rymer, Jun Saito,

- Yeongho Seol, John Shao, Piyush Shekdar, Tianwei Shen, Humphrey Shi, Min Shi, Stella Shi, Kevin Shih, Mohammad Shoeybi, Mateusz Sieniewski, Shuran Song, Alexander Sotelo, Amir Sotoodeh, Sunil Srinivasa, Vignesh Srinivasakumar, Bartosz Stefaniak, Rahul Heinrich Steiger, Shangkun Sun, Jiaxiang Tang, Shitao Tang, Yangyang Tang, Yue Tang, Tolou Tavakkoli, Kayley Ting, Krzysztof Tomala, Wei-Cheng Tseng, Jibin Varghese, Sergei Vasilev, Thomas Volk, Raju Wagwani, Roger Waleffe, Andrew Z. Wang, Boxiang Wang, Haoxiang Wang, Qiao Wang, Shihao Wang, Shijie Wang, Ting-Chun Wang, Yan Wang, Yu Wang, Rohit Watve, David Wehr, Fangyin Wei, Xinshuo Weng, Jay Zhangjie Wu, Kedi Wu, Hongchi Xia, Summer Xiao, Tianjun Xiao, Kevin Xie, Daguang Xu, Jiashu Xu, Mengyao Xu, Ruqing Xu, Xingqian Xu, Yao Xu, Dinghao Yang, Dong Yang, Hans Yang, Xiaodong Yang, Xuning Yang, Yichu Yang, Yurong You, Zhiding Yu, Hao Yuan, Simon Yuen, Xiaohui Zeng, Pengcui Zeren, Cindy Zha, Haotian Zhang, Jenny Zhang, Jing Zhang, Liangkai Zhang, Paris Zhang, Shun Zhang, Xuanmeng Zhang, Zhizheng Zhang, Ann Zhao, Yilin Zhao, Yuliya Zhautouskaya, Charles Zhou, Fengzhe Zhou, Shilin Zhu, Yuke Zhu, Dima Zhylko, and Artur Zolkowski. Cosmos 3: Omnimodal world models for physical ai, 2026. doi: 10.48550/ARXIV.2606.02800.
- [27] NVIDIA. Omni physics: Surface deformable bodies, 2026, https://docs.omniverse.nvidia.com/kit/docs/omni_physics/110.1/dev_guide/deformables/deformable_bodies.html.
- [28] Jan Obrist, Miguel Zamora, Hehui Zheng, Ronan Hinchet, Firat Ozdemir, Juan Zarate, Robert K. Katzschmann, and Stelian Coros. Pokeflex: A real-world dataset of volumetric deformable objects for robotics, 2024. doi: 10.48550/ARXIV.2410.07688.
- [29] Nicholas Pfaff, Evelyn Fu, Jeremy Binaglia, Phillip Isola, and Russ Tedrake. Scalable real2sim: Physics-aware asset generation via robotic pick-and-place setups, 2025. doi: 10.48550/ARXIV.2503.00370.
- [30] Julian Quevedo, Ansh Kumar Sharma, Yixiang Sun, Varad Suryavanshi, Percy Liang, and Sherry Yang. Worldgym: World model as an environment for policy evaluation, 2025. doi: 10.48550/ARXIV.2506.00613.
- [31] Victor Romero, Mickaël Ly, Abdullah Haroon Rasheed, Raphaël Charrondière, Arnaud Lazarus, Sébastien Neukirch, and Florence Bertails-Descoubes. Physical validation of simulators in computer graphics: a new framework dedicated to slender elastic structures and frictional contact. *ACM Transactions on Graphics*, **40**(4), 2021. doi: 10.1145/3450626.3459931.
- [32] Tim Rädtsch, Yuki M Asano, Hilde Kuehne, Stefan Bauer, Priyank Jaini, Robert Geirhos, and Carsten T. Luth. Physics-iq verified, 2026. doi: 10.48550/ARXIV.2606.18943.
- [33] Team Seedance, De Chen, Liyang Chen, Xin Chen, Ying Chen, Zhuo Chen, Zhuowei Chen, Feng Cheng, Tianheng Cheng, Yufeng Cheng, Mojie Chi, Xuyan Chi, Jian Cong, Qinpeng Cui, Fei Ding, Qide Dong, Yujiao Du, Haojie Duanmu, Junliang Fan, Jiarui Fang, Jing Fang, Zetao Fang, Chengjian Feng, Yu Gao, Diandian Gu, Dong Guo, Hanzhong Guo, Qiushan Guo, Boyang Hao, Hongxiang Hao, Haoxun He, Jiaao He, Qian He, Tuyen Hoang, Heng Hu, Ruqing Hu, Yuxiang Hu, Jiancheng Huang, Weilin Huang, Zhaoyang Huang, Zhongyi Huang, Jishuo Jin, Ming Jing, Ashley Kim, Shanshan Lao, Yichong Leng, Bingchuan Li, Gen Li, Haifeng Li, Huixia Li, Jiashi Li, Ming Li, Xiaojie Li, Xingxing Li, Yameng Li, Yiying Li, Yu Li, Yueyan Li, Chao Liang, Han Liang, Jianzhong Liang, Ying Liang, Wang Liao, J. H. Lien, Shanchuan Lin, Xi Lin, Feng Ling, Yue Ling, Fangfang Liu, Jiawei Liu, Jihao Liu, Jingtuo Liu, Shu Liu, Sichao Liu, Wei Liu, Xue Liu, Zuxi Liu, Ruijie Lu, Lecheng Lyu, Jingting Ma, Tianxiang Ma, Xiaonan Nie, Jingzhe Ning, Junjie Pan, Xitong Pan, Ronggui Peng, Xueqiong Qu, Yuxi Ren, Yuchen Shen, Guang Shi, Lei Shi, Yinglong

- Song, Fan Sun, Li Sun, Renfei Sun, Wenjing Tang, Boyang Tao, Zirui Tao, Dongliang Wang, Feng Wang, Hulin Wang, Ke Wang, Qingyi Wang, Rui Wang, Shuai Wang, Shulei Wang, Weichen Wang, Xuanda Wang, Yanhui Wang, Yue Wang, Yuping Wang, Yuxuan Wang, Zijie Wang, Ziyu Wang, Guoqiang Wei, Meng Wei, Di Wu, Guohong Wu, Hanjie Wu, Huachao Wu, Jian Wu, Jie Wu, Ruolan Wu, Shaojin Wu, Xiaohu Wu, Xinglong Wu, Yonghui Wu, Ruiqi Xia, Xin Xia, Xuefeng Xiao, Shuang Xu, Bangbang Yang, Jiaqi Yang, Runkai Yang, Tao Yang, Yihang Yang, Zhixian Yang, Ziyang Yang, Fulong Ye, Bingqian Yi, Xing Yin, Yongbin You, Linxiao Yuan, Weihong Zeng, Xuejiao Zeng, Yan Zeng, Siyu Zhai, Zhonghua Zhai, Bowen Zhang, Chenlin Zhang, Heng Zhang, Jun Zhang, Manlin Zhang, Peiyuan Zhang, Shuo Zhang, Xiaohe Zhang, Xiaoying Zhang, Xinyan Zhang, Xinyi Zhang, Yichi Zhang, Zixiang Zhang, Haiyu Zhao, Huating Zhao, Liming Zhao, Yian Zhao, Guangcong Zheng, Jianbin Zheng, Xiaozheng Zheng, Zerong Zheng, Kuan Zhu, and Feilong Zuo. Seedance 2.0: Advancing video generation for world complexity, 2026. doi: 10.48550/ARXIV.2604.14148.
- [34] Breannan Smith, Fernando De Goes, and Theodore Kim. Stable neo-hookean flesh simulation. *ACM Transactions on Graphics*, **37**(2), Mar 2018. doi: 10.1145/3180491.
- [35] Priya Sundareshan, Rika Antonova, and Jeannette Bohg. Diffcloud: Real-to-sim from point clouds with differentiable simulation and rendering of deformable objects, 2022. doi: 10.48550/ARXIV.2204.03139.
- [36] Marcel Torne, Anthony Simeonov, Zechu Li, April Chan, Tao Chen, Abhishek Gupta, and Pulkit Agrawal. Reconciling reality through simulation: A real-to-sim-to-real approach for robust manipulation, 2024. doi: 10.48550/ARXIV.2403.03949.
- [37] Rishi Upadhyay, Howard Zhang, Jim Solomon, Ayush Agrawal, Pranay Boreddy, Shruti Satya Narayana, Yunhao Ba, Alex Wong, Celso M de Melo, and Achuta Kadambi. Worldbench: Disambiguating physics for diagnostic evaluation of world models, 2026. doi: 10.48550/ARXIV.2601.21282.
- [38] Team Wan, Ang Wang, Baole Ai, Bin Wen, Chaojie Mao, Chen-Wei Xie, Di Chen, Fei Wu Yu, Haiming Zhao, Jianxiao Yang, Jianyuan Zeng, Jiayu Wang, Jingfeng Zhang, Jingren Zhou, Jinkai Wang, Jixuan Chen, Kai Zhu, Kang Zhao, Keyu Yan, Lianghua Huang, Mengyang Feng, Ningyi Zhang, Pandeng Li, Pingyu Wu, Ruihang Chu, Ruili Feng, Shiwei Zhang, Siyang Sun, Tao Fang, Tianxing Wang, Tianyi Gui, Tingyu Weng, Tong Shen, Wei Lin, Wei Wang, Wei Wang, Wenmeng Zhou, Wenten Wang, Wenting Shen, Wenyan Yu, Xianzhong Shi, Xiaoming Huang, Xin Xu, Yan Kou, Yangyu Lv, Yifei Li, Yijing Liu, Yiming Wang, Yingya Zhang, Yitong Huang, Yong Li, You Wu, Yu Liu, Yulin Pan, Yun Zheng, Yuntao Hong, Yupeng Shi, Yutong Feng, Zeyinzi Jiang, Zhen Han, Zhi-Fan Wu, and Ziyu Liu. Wan: Open and advanced large-scale video generative models, 2025. doi: 10.48550/ARXIV.2503.20314.
- [39] Philipp Wu, Alejandro Escontrela, Danijar Hafner, Ken Goldberg, and Pieter Abbeel. Daydreamer: World models for physical robot learning, 2022. doi: 10.48550/ARXIV.2206.14176.
- [40] Seonghyeon Ye, Yunhao Ge, Kaiyuan Zheng, Shenyan Gao, Sihyun Yu, George Kurian, Suneel Indupuru, You Liang Tan, Chuning Zhu, Jiannan Xiang, Ayaan Malik, Kyungmin Lee, William Liang, Nadun Ranawaka, Jiasheng Gu, Yinzhen Xu, Guanzhi Wang, Fengyuan Hu, Avnish Narayan, Johan Bjorck, Jing Wang, Gwanghyun Kim, Dantong Niu, Ruijie Zheng, Yuqi Xie, Jimmy Wu, Qi Wang, Ryan Julian, Danfei Xu, Yilun Du, Yevgen Chebotar, Scott Reed, Jan Kautz, Yuke Zhu, Linxi "Jim" Fan, and Joel Jang. World action models are zero-shot policies, 2026. doi: 10.48550/ARXIV.2602.15922.

Appendix Contents

A	Benchmark dataset	20
A.1	Standard Scenes	20
A.2	Parameter calibration	21
A.2.1	Parameter Measurements	21
A.2.2	Textile parameters mapping	22
B	Physics engines	23
B.1	Metrics	23
C	World model	28
C.1	Model configurations	28
C.1.1	Standard input	28
C.2	Trajectory recording	32
C.2.1	SAM3	32
C.2.2	Results Display	34
C.3	Physical-Consistency Analysis	34
C.3.1	Common Coordinate and Time Processing	34
C.3.2	Slope Slider	34
C.3.3	Turntable	36
C.3.4	Bouncing Ball	37
C.3.5	Newton’s Cradle	38
C.3.6	Pendulum	39

A. Benchmark dataset

A.1. Standard Scenes

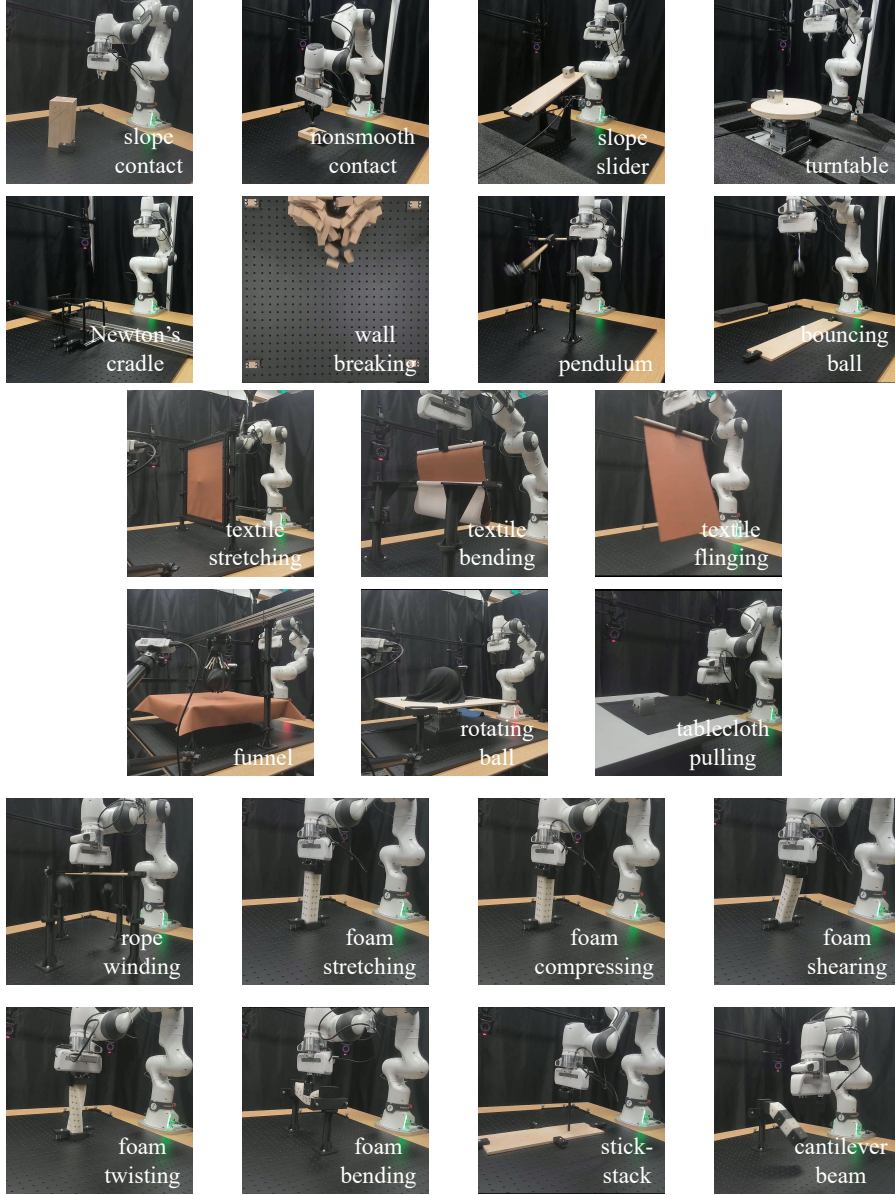


Figure 5. Overview of GAUGE’s 22 standardized real-world task families.

Fig. 5 provides an overview of all 22 standardized scenarios included in GAUGE, consisting of 8 rigid-body tasks, 6 textile tasks, and 8 deformable-body tasks. For rigid-body scenarios, we focus on evaluating fundamental physical interactions, including collision, friction, elasticity, and momentum/energy transfer. For textile and deformable-body scenarios, we primarily investigate self-collision, various stiffness-related properties, and rigid–deformable coupling behaviors.

Notably, three tasks, namely "Nonsmooth Contact", "Slope Slider", and "Turntable", each contain three sub-tasks. The three sub-tasks of "Nonsmooth Contact" correspond to collisions between (1) a quadrangular pyramid and a square-groove base, (2) a quadrangular pyramid and a triangular-groove

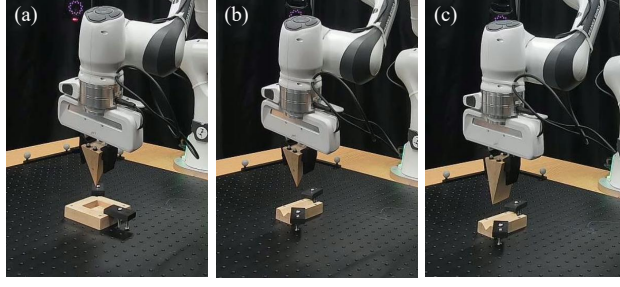


Figure 6. Geometry variants of the nonsmooth contact task.

base, and (3) a wedge and a triangular-groove base, respectively (Fig. 6). The three sub-tasks of "Slope Slider" and "Turntable" are designed with different slope inclinations and rotational velocities, respectively, causing the cube to undergo different friction regimes, including static friction, dynamic friction, and transitions between them.

A.2. Parameter calibration

A.2.1. Parameter Measurements

Beyond providing a comprehensive set of scenarios covering rigid bodies, textiles, and deformable objects, GAUGE further distinguishes itself by providing detailed physical property calibration for each scenario. In addition to basic information such as mass and geometric dimensions, GAUGE measures critical physical parameters, including friction coefficients and restitution coefficients for rigid bodies, stretch and bending stiffness for textiles, and Young's modulus and Poisson's ratio for deformable materials.

For friction coefficient measurement between rigid bodies (as well as between rigid bodies and textiles), we mainly adopt the inclined plane method (Fig. 7(a)). By measuring the sliding velocity $v(t)$ of an object, the friction coefficient is calculated as: $\mu = (g \sin \theta - \dot{v}) / (g \cos \theta)$, where g denotes the gravitational acceleration and θ represents the inclination angle of the slope. Furthermore, we measure the coefficient of restitution using a collision-based method. To eliminate friction and ensure consistent initial collision velocities, we employ an inclined air-bearing rail as illustrated in Fig. 7(b). One object is fixed at one end of the rail, while the other object is released from the same height in each trial. The coefficient of restitution is then obtained from the ratio between the outgoing and incoming velocities: $e = v_{\text{out}} / v_{\text{in}}$.

For cloth materials, we use Style3D stretch and bending measurement instruments to characterize stretch and bending stiffness through stretch tests and cantilever bending tests, respectively. During stretch measurements, we evaluate deformation along both the warp and weft directions of the fabric, as well as the diagonal direction, to characterize shear stiffness. In practical simulation settings, we use the average stretch stiffness along the warp and weft directions as the final parameter configuration. Finally, to validate the accuracy of our measurements, we compare the real-world and simulated results in a hanging test using a $1, \text{m}^2$ piece of cloth, as shown in Fig. 7(c).

For deformable materials, we calibrate Young's modulus and Poisson's ratio using compression tests and Digital Image Correlation (DIC), respectively. Fig. 7(d) shows the measured stress-strain curve during material characterization. Since our experiments mainly operate in the small-deformation regime, we fit the initial linear region of the curve to estimate Young's modulus. Fig. 7(e) presents the DIC visualization during the measurement process, where Poisson's ratio is obtained from the ratio between transverse expansion and longitudinal elongation.

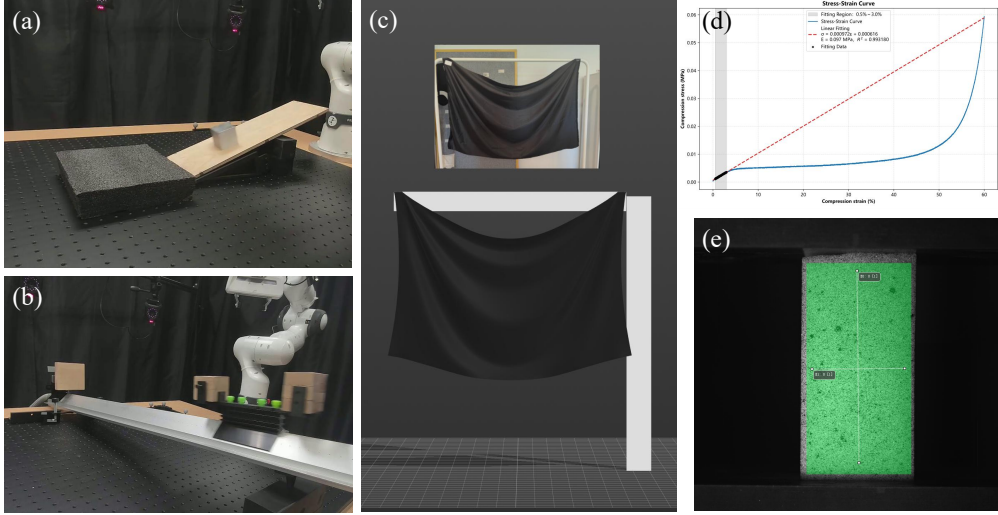


Figure 7. Experimental characterization and validation of task-specific physical parameters.

A.2.2. Textile parameters mapping

We denote the measured stretch and shear stiffnesses per unit width by K_s and K_{sh} (N/m), respectively, the thickness by t , and the torque-per-angle stiffness of a discrete bending hinge by K_θ . Here, K_s is defined as the tangent stiffness of a uniaxial test with traction-free transverse boundaries. Because the evaluated simulators employ different constitutive models and discretizations, the same measurements cannot be transferred as identical numerical coefficients. We therefore derive model-specific initializations by matching the corresponding small-strain response. These values are treated as effective isotropic solver parameters rather than exact representations of the generally anisotropic textile response.

IsaacSim For an isotropic membrane under plane stress, the free-transverse uniaxial and shear stiffnesses satisfy

$$K_s = Et, \quad K_{sh} = \frac{Et}{2(1 + \nu)}, \quad (4)$$

which gives Young’s modulus E and Poisson’s ratio ν :

$$\nu = \frac{K_s}{2K_{sh}} - 1, \quad E = \frac{K_s}{t}. \quad (5)$$

When ν falls outside the non-auxetic range supported in our configuration, we preserve the measured stretch stiffness and use the fixed fallback

$$\nu = \begin{cases} \nu, & 0 \leq \nu < 0.5, \\ 0.30, & \nu < 0, \\ 0.45, & \nu \geq 0.5. \end{cases} \quad (6)$$

PhysX represents bending through the modulus-like parameter `surfaceBendStiffness`, whose resulting edge stiffness is proportional to t^3 [27]. For our fixed, regular square grid with diagonal triangulation, we use the mesh-specific initialization

$$\text{surfaceBendStiffness} \simeq \frac{K_\theta}{4t^3}. \quad (7)$$

The factor 1/4 follows from averaging the two edge classes in this triangulation and is not a mesh-independent identity [8].

Genesis Genesis models textiles using discrete distance and dihedral constraints. Following the nominal XPBD energy convention, we initialize its per-constraint compliance parameters as

$$\begin{aligned}\text{stretch_compliance} &= \frac{1}{K_s}, \\ \text{bending_compliance} &= \frac{1}{K_\theta}.\end{aligned}\tag{8}$$

These reciprocals should not be interpreted as an exact, mesh-independent conversion from macroscopic textile properties. Genesis applies the same coefficients to individual mesh edges and hinges, while the effective response also depends on the mesh, substep size, relaxation factors, and number of projection iterations [7, 19, 24]. We therefore keep these settings fixed and report them with the benchmark. Moreover, the evaluated Genesis textile model provides no independent input channel for K_{sh} .

Newton VBD Newton’s VBD membrane uses stable Neo-Hookean elasticity, with its input coefficients corresponding to the small-strain Lamé parameters μ and λ . Internally, the stable Neo-Hookean parameters are $\mu_{\text{NH}} = \mu$ and $\lambda_{\text{NH}} = \lambda + \mu$ [25, 34]. Matching a free-transverse uniaxial test and an engineering-shear test yields

$$K_{\text{sh}} = \mu, \quad K_s = \frac{4\mu(\lambda + \mu)}{\lambda + 2\mu}.\tag{9}$$

Consequently, the Newton coefficients are initialized by

$$\text{tri_ke} = \tilde{K}_{\text{sh}}, \quad \text{tri_ka} = \frac{2\tilde{K}_{\text{sh}}(K_s - 2\tilde{K}_{\text{sh}})}{4\tilde{K}_{\text{sh}} - K_s},\tag{10}$$

where

$$\tilde{K}_{\text{sh}} = \begin{cases} K_{\text{sh}}, & 2 < K_s/K_{\text{sh}} < 4, \\ K_s/2.7, & \text{otherwise.} \end{cases}\tag{11}$$

The interval above is the positive- λ regime of the intrinsic two-dimensional isotropic model, rather than a universal admissibility condition. The ratio 2.7 is a fixed engineering prior used when the anisotropic measurements cannot be represented by this isotropic model; it is not a theoretical constant of Newton or stable Neo-Hookean elasticity. Finally, because Newton’s bending kernel uses the effective hinge coefficient $k_e = \text{edge_ke} \ell_e$, we set

$$\text{edge_ke} = \frac{K_\theta}{\bar{\ell}_e},\tag{12}$$

where $\bar{\ell}_e$ is the mean rest-edge length of our nearly uniform mesh.

B. Physics engines

B.1. Metrics

Generated trajectory As discussed in the main text, when evaluating the performance of the simulation engines, we define a generalized trajectory $g(t)$, which denotes, respectively, the rigid-body position (P) in Fig. 8(a), the Gaussian curvature of the textile marker points (K) in Fig. 8(b), and the area of the triangular faces formed by the soft-body marker points (A) in Fig. 8(c). For the Gaussian curvature, the computation adopted in this work is based on the discrete form of the Gauss–Bonnet

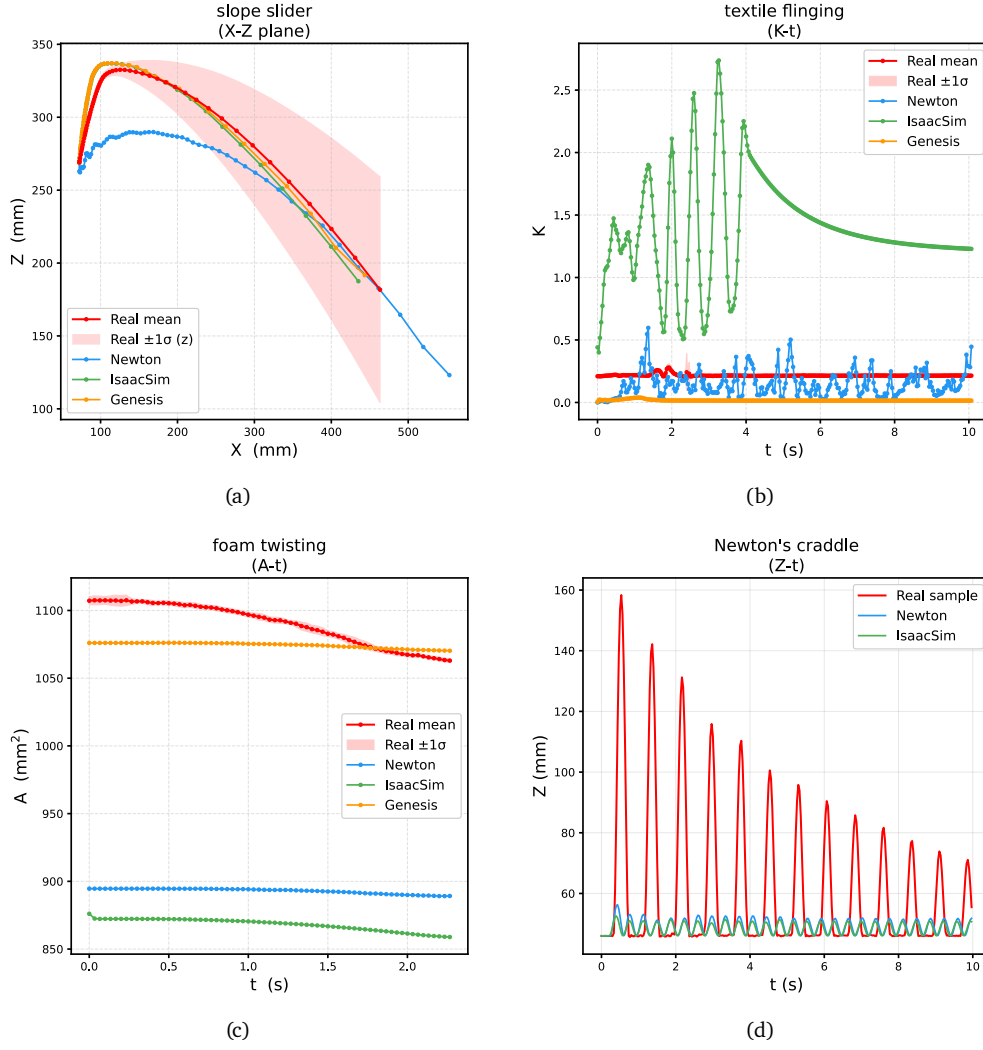


Figure 8. Representative generalized trajectories used for physics-engine evaluation. Red curves and bands in (a)–(c) show the real-world mean and $\pm 1\sigma$ across repeated trials, while the remaining curves show simulator outputs; (d) compares a representative real trial with the available simulations.

theorem, namely the *angle deficit method*. Specifically, at each time instant, for every marker point i that serves as a vertex of the mesh, the interior angle subtended at vertex i by each adjacent triangle is computed. For a given adjacent triangle, let $\mathbf{a}$ and $\mathbf{b}$ denote the edge vectors from vertex i to the other two vertices of that triangle; the corresponding interior angle is

$$\theta = \arccos\left(\frac{\mathbf{a} \cdot \mathbf{b}}{\|\mathbf{a}\| \|\mathbf{b}\|}\right). \quad (13)$$

Summing all interior angles adjacent to vertex i , denoted $\sum \theta_i$, the discrete Gaussian curvature at that vertex is defined as the difference between a reference full angle Θ_i and this angle sum:

$$k_i = \Theta_i - \sum \theta_i. \quad (14)$$

Since the fabric samples studied in this work are open, bounded rectangular surface patches rather than closed surfaces, marker points are pre-classified, according to their topological position within the mesh, into three categories: interior points, edge points (lying on a straight boundary), and

corner points. The reference full angle Θ_i in eq. (14) is set accordingly to 2π , π , and $\pi/2$, respectively, corresponding to the angle subtended when, in the zero-curvature case, an interior point is fully surrounded, an edge point is covered by a half-plane, and a rectangular corner point is covered by a quarter-plane.

This curvature is computed independently, frame by frame, along the entire trajectory. If a marker point lacks three-dimensional coordinates in the current frame due to occlusion or other causes, or if an adjacent triangle degenerates owing to coincident vertices, the corresponding interior angle in eq. (14) is excluded from the summation and does not contribute to the curvature computed for that point at that frame. It should be noted that k_i is, in essence, the angular deficit at the vertex (expressed in radians) and is not normalized by the local area associated with the vertex; it therefore does not, strictly speaking, constitute a Gaussian curvature value with the dimension of length^{-2} . The Gaussian curvature K shown in Fig. 8(b) is precisely the norm of the vector formed by the per-vertex curvature values k_i .

Longest Static Period Fig. 8(d) illustrates a segment of the Newton’s cradle trajectory recorded in both the real world and simulation. It can be observed that, due to the near-perfect momentum transfer efficiency in the real-world setup, the pendulum balls remain stationary for a certain period after momentum transfer, resulting in an impulse-like trajectory pattern with discrete motion intervals. The proposed Longest Static Duration (LSD) metric is specifically designed to identify the stationary periods between consecutive impulses. LSD is defined as:

$$\text{LSD} = \max_S \{|S|/f_s\} \quad \text{s.t.} \quad \begin{cases} \max(z_S) - \min(z_S) \leq \epsilon_z, \\ |v_S| \leq v_{\text{th}} \end{cases} \quad (15)$$

where S denotes the set of consecutive frames satisfying the stationary condition, f_s represents the sampling frequency, and ϵ_z and v_{th} denote the position variation threshold and velocity threshold, respectively. In our evaluation, we set $\epsilon_z = 0.5 \text{ mm}$ and $v_{\text{th}} = 5 \text{ mm/s}$.

Momentum transfer efficiency Different from LSD, the Momentum Transfer Efficiency (MTE) directly evaluates the efficiency of momentum transmission during collisions from a momentum perspective. In our calculation, we only consider the efficiency of the first impact:

$$\text{MTE} = \sqrt{\frac{\Delta H_{\text{out}}}{\Delta H_{\text{in}}}} \quad (16)$$

where ΔH_{in} and ΔH_{out} denote the initial height difference and the maximum swing height difference relative to the equilibrium position of the incoming and outgoing balls, respectively. A larger MTE value indicates that a greater proportion of the incoming ball’s momentum is transferred to the outgoing ball.

Period The period is a commonly used metric for evaluating simple harmonic motion in pendulum systems. However, since the pendulum in GAUGE is released from the horizontal position, its motion does not satisfy the analytical oscillation formula derived under the small-angle assumption. Therefore, instead of directly applying the theoretical period equation, we first perform Fourier spectral analysis on the trajectory to identify the dominant frequency component. The reciprocal of this dominant frequency is then used as the estimated oscillation period of the pendulum.

Energy loss The Energy Loss metric is designed to evaluate whether the numerical integrator used by a simulator satisfies the energy conservation principle. It is defined as:

$$\text{EL} = \frac{E_{\text{start}} - E_{\text{end}}}{E_{\text{start}}} \quad (17)$$

where E_{start} and E_{end} denote the mechanical energy of the system at the initial and final time steps, respectively. In practice, we compute this metric at the peak positions of the pendulum oscillation, where the kinetic energy is completely converted into gravitational potential energy, and thus the total mechanical energy can be approximated by the gravitational potential energy. A value closer to 1 indicates better energy conservation. In contrast, a value below 0 indicates an unphysical increase in system energy caused by the accumulation of numerical integration errors. Tab. 5 provides detailed evaluation results of GAUGE across all sub-tasks and object variants.

Task	Sub. Mat.		Frm. Met.		Base.	Isaacsim	Genesis	Newton	
slope contact		wood	10	RMSE	9.25 (5.17)	3.38	2.98	2.66	
				DTW	6.27 (2.48)	2.94	3.05	2.66	
	plastic	10	RMSE	12.31 (7.62)	1.26	1.6	1.75		
			DTW	5.30 (1.84)	1.83	2.57	3.07		
nonsmooth contact	1	wood	11	RMSE	12.51 (6.77)	3.51	3.42	3.61	
				DTW	6.38 (1.78)	3.59	3.29	3.3	
		plastic	11	RMSE	12.94 (5.91)	3.42	3.43	3.01	
				DTW	6.48 (1.76)	3.75	3.73	2.93	
	2	wood	8	RMSE	14.28 (13.20)	2.72	2.7	2.69	
				DTW	7.90 (4.64)	3.06	2.98	2.96	
		plastic	9	RMSE	20.35 (9.02)	2.16	2.8	2.15	
				DTW	10.54 (2.99)	2.27	2.76	2.11	
	3	wood	13	RMSE	16.98 (10.77)	2.2	5.84	2.23	
				DTW	8.68 (2.25)	2.44	8.21	3.11	
		plastic	20	RMSE	17.67 (6.19)	1.53	10.04	6.05	
				DTW	8.92 (2.44)	1.9	14.37	8.01	
	slope slider	1	wood	9	RMSE	0.59 (0.28)	0.019	0.074	24.68
					DTW	0.59 (0.28)	0.017	0.055	14.12
			plastic	9	RMSE	1.90 (2.17)	0.013	0.016	6.24
					DTW	1.90 (2.17)	0.011	0.014	4.31
		metal	9	RMSE	0.86 (0.69)	0.078	0.062	15.08	
				DTW	0.86 (0.69)	0.067	0.052	10.63	
2		wood	19	RMSE	18.00 (15.89)	1.23	0.53	1.71	
				DTW	7.70 (3.69)	1.11	1.05	1.79	
		plastic	17	RMSE	25.01 (25.45)	0.48	0.82	0.51	
				DTW	9.13 (5.00)	0.87	1	1.06	
		metal	19	RMSE	32.06 (21.93)	1	0.83	1.15	
				DTW	10.87 (4.04)	0.45	0.54	0.9	
		3	wood	46	RMSE	24.27 (16.85)	2.62	2.62	1.35
					DTW	6.73 (2.56)	2.21	2.24	2.16
plastic			46	RMSE	49.96 (20.37)	1.58	1.46	0.67	
				DTW	12.97 (4.94)	2.2	1.83	1.55	
		metal	60	RMSE	38.01 (28.53)	0.61	0.58	1.95	
				DTW	9.54 (8.52)	0.71	0.69	2.93	
turntable		1	wood	95	RMSE	2.01 (1.45)	0.32	0.83	34.37
					DTW	1.40 (0.64)	0.43	1.14	36.33
	plastic		95	RMSE	2.00 (2.48)	1.22	1.12	36.04	

Continued on next page

Table 5 – continued from previous page

Task	Sub. Mat.		Frm. Met.	Base.	Isaacsim	Genesis	Newton	
	2	metal	95	DTW	0.97 (0.61)	2.19	2.22	53.08
				RMSE	3.17 (1.74)	0.42	0.51	17.19
		wood	18	DTW	1.53 (0.50)	0.82	0.99	28.43
				RMSE	6.76 (4.65)	4.82	3.69	2.88
		plastic	17	DTW	4.70 (2.68)	4.64	3.56	3.26
				RMSE	7.86 (5.21)	3.61	1.57	1.92
	3	metal	17	DTW	3.92 (1.58)	4.75	1.96	2.2
				RMSE	5.76 (4.17)	5.7	3.09	1.97
		wood	95	DTW	3.60 (1.66)	6.06	3.16	2.84
				RMSE	27.15 (27.08)	1.55	1.75	9.5
		plastic	95	DTW	14.36 (12.90)	0.85	1.17	15.09
				RMSE	12.50 (6.49)	2.37	2.47	21.76
		metal	95	DTW	3.48 (0.84)	1.78	2.04	66.49
				RMSE	13.26 (7.43)	0.17	0.57	20.04
				DTW	3.33 (0.81)	0.61	2.01	66.72
bouncing ball	rubber	18	RMSE	5.29 (3.60)	15.63	22.5	22.71	
			DTW	4.23 (2.87)	5.58	14.58	14.89	
newton cradle	metal	1027	LSD	0.38 (0.015)	0	—	0	
			MTE	93.02 (2.47)	0.2	—	0.26	
pendulum	metal	300	PD	1.14 (0.066)	1.1	2.47	1.09	
		3000	EL	0.00	0.034	-0.041	0.022	
textile stretching	rayon	432	RMSE	0.024 (0.030)	7.43	12.15	7.34	
				DTW	0.0084 (0.0018)	21.06	34.49	20.8
	satin	380	RMSE	0.21 (0.42)	0.73	1.51	0.73	
				DTW	0.21 (0.42)	0.76	1.56	0.75
	uniform cloth	432	RMSE	0.018 (0.012)	6.12	13.79	—	
				DTW	0.011 (0.0018)	10.16	23.04	—
	nylon taslan	448	RMSE	0.027 (0.0077)	5.9	12.74	5.7	
				DTW	0.024 (0.0055)	6.63	14.46	6.44
	Oxford fabric	423	RMSE	0.0061 (0.0080)	18.05	51.16	15.93	
				DTW	0.0051 (0.0068)	21.1	61.17	18.9
	synthetic leather	441	RMSE	0.017 (0.0072)	6.12	18.21	—	
				DTW	0.0085 (0.0038)	11.97	37.2	—
textile bending	rayon	379	RMSE	1.07 (0.21)	7.69	20.04	37.13	
				DTW	0.63 (0.13)	11.67	31.9	58.97
	satin	335	RMSE	1.92 (0.69)	7.94	11.73	19.9	
				DTW	1.20 (0.17)	11.78	17.35	18.82
	uniform cloth	302	RMSE	1.28 (0.34)	7.63	14.15	36.77	
				DTW	0.48 (0.058)	17.88	35.05	90
	nylon taslan	187	RMSE	1.94 (0.95)	7.98	9.97	20.02	
				DTW	1.37 (0.94)	9.57	12.57	25.19
	Oxford fabric	145	RMSE	2.47 (1.26)	4.78	7.84	12.53	
				DTW	1.96 (0.84)	5.29	8.88	13.6
	synthetic leather	302	RMSE	1.79 (0.45)	12.49	14.63	21.79	
				DTW	1.23 (0.43)	16.98	19.98	21.19
textile flinging	rayon	303	RMSE	0.024 (0.0087)	61.62	9.31	11.09	
				DTW	0.016 (0.0015)	91.62	14.36	16.66
	satin	562	RMSE	0.016 (0.0056)	128.26	8.54	9.25	
				DTW	0.012 (0.0014)	167.31	11.27	12.12

Continued on next page

Table 5 – continued from previous page

Task	Sub. Mat.	Frm. Met.	Base. Isaacsim	Genesis	Newton		
	uniform cloth	444	RMSE	0.016 (0.0067)	78.06	7.11	18.35
			DTW	0.012 (0.0019)	105.17	9.77	22.22
	nylon taslan	204	RMSE	0.021 (0.020)	104.87	3.66	11.13
			DTW	0.0095 (0.0022)	222.9	7.94	20.56
	Oxford fabric	187	RMSE	0.013 (0.0097)	115.3	5.3	15.46
			DTW	0.0095 (0.0014)	148.27	7.22	17.85
	synthetic leather	219	RMSE	0.0072 (0.00051)	77.49	6.91	27.65
			DTW	0.0063 (0.00023)	84.39	7.89	25.72
foam stretching	Soft	30	RMSE	8.72 (6.94)	16.15	10.05	15.46
			DTW	8.19 (6.93)	17.18	10.65	16.45
	hard	30	RMSE	21.28 (12.52)	11.29	1.74	10.75
			DTW	21.07 (12.35)	11.41	1.75	10.86
foam shearing	Soft	37	RMSE	5.60 (0.70)	26.13	15.26	26.57
			DTW	5.07 (0.59)	28.85	16.74	29.34
	hard	38	RMSE	6.25 (3.53)	38.57	6.12	36.67
			DTW	5.08 (2.01)	47.46	7.53	45.12
foam twisting	Soft	65	RMSE	8.07 (0.53)	17.14	10.86	16.78
			DTW	7.48 (0.39)	18.47	11.67	18.07
	hard	69	RMSE	7.08 (2.63)	32.41	4.7	30.12
			DTW	5.64 (1.18)	40.66	5.86	37.76
foam bending	Soft	35	RMSE	7.00 (4.39)	10.71	14.43	10.37
			DTW	3.52 (1.05)	21.28	27.51	20.53
	hard	33	RMSE	2.85 (0.52)	58.39	9.96	55.78
			DTW	2.28 (0.21)	72.88	12.41	69.62

Table 5. Simulation comparison results across rigid-body, textile, and foam tasks. RMSE and DTW report trajectory discrepancies; LSD, MTE, PD, and EL denote the task-specific evaluation metrics. Lower is better unless otherwise specified. Bold marks the best valid simulator result, and dashes denote unavailable results. Abbreviations: Sub. = subtask, Mat. = material, Frm. = frames, Met. = metric, and Base. = baseline.

C. World model

C.1. Model configurations

C.1.1. Standard input

First frame For the five image-to-video models, every source first frame is converted to a common 832×480 -pixel canvas before inference. Let the original image width and height be W and H . The isotropic scale factor is $s = \min(\frac{832}{W}, \frac{480}{H})$. The image is resized to integer dimensions corresponding to sW and sH , preserving the original aspect ratio and full field of view. The resized image is then centered on an 832×480 black canvas with symmetric padding. No content is cropped and no geometric distortion is introduced. Genie 3 is treated as an interface-specific exception because Project Genie requires an input image of at least 1280×704 pixels. Its first frame is therefore prepared at 1300×750 , which has the same aspect ratio as 832×480 and preserves the standardized scene composition while satisfying the larger input requirement. The exported Genie 3 video has a resolution of 1280×704 . Details can be found in the table below Tab. 6.

Negative prompts are passed through model-specific interfaces. For the two Cosmos3 models,

the negative prompt is supplied through the Diffusers `negative_prompt` argument. For Wan-2.2, it is written to `wan_shared_cfg.sample_neg_prompt` in `shared_config`; this variable is set to an empty string in the baseline condition. Wan-2.7 accepts a negative prompt through its API. The Seedance 2.0 and Genie 3 interfaces used in this study do not expose a separate negative-prompt field.

Model	Access method	Generated MP4	Deployment environment
Cosmos3-Nano	Diffusers Cosmos30mniPipeline	832×480 189 frames; 24 fps	1 $\times$ RTX 4090 DSW or DLC
Cosmos3-Super-I2V	Diffusers Cosmos30mniPipeline	832×480 189 frames; 24 fps	8 $\times$ RTX 4090 DLC
Wan-2.2-I2V-A14B	Official inference script <code>generate.py</code>	832×464 81 frames; 16 fps	8 $\times$ RTX 4090 DLC
Wan-2.7	DashScope API	1264×728 240 frames; 30 fps	Remote server
Seedance 2.0	Volcano Engine Ark API	864×496 193 frames; 24 fps	Remote server
Genie 3	Project Genie interface	1280×704 200 frames; 20 fps	Remote server

Table 6. Access methods, generated-video settings, and deployment environments of the evaluated world models.

Text prompts The benchmark covers seven physical task families: slope contact, non-smooth contact, slope slider, turntable, Newton’s cradle, pendulum, and bouncing ball. Material variants are introduced for tasks whose friction, restitution, inertia, or contact behavior depends on the object material. The same task-specific prompts are used consistently across all evaluated world models:

Slope Contact

Prompt. Static fontal camera view: An 84g solid wood trirectangular tetrahedron is placed on a 997g fixed wood base on a black perforated optical table, initially forming a single upright rectangular block with a diagonal contact seam. Governed by gravity, a 0.39 wood-on-wood friction coefficient, and a 0.37 restitution coefficient, the tetrahedron slides down from rest from the slope surface, and bounces on the table until settling. Maintain structural integrity and object consistency throughout: no changing shapes, no blending, and no flashing background.

Non-smooth Contact (plastic)

Prompt. Static frontal camera view: A stationary robot arm holds a 98g black plastic pyramid (apex oriented downward with a slight tilt) above a fixed 115g wooden square base with a square recess on a black optical table. The gripper opens, releasing the wood pyramid into a gravity-driven free fall. Governed by a 0.28 plastic-on-wood friction coefficient and an about 0.36 restitution coefficient, the pyramid descends, collides with the base, and bounces until settling into a stable rest, while the robot arm remains completely fixed. Maintain structural integrity and object consistency throughout: no changing shapes, no blending, and no flashing background.

Non-smooth Contact (wood)

Prompt. Static frontal camera view: A stationary robot arm holds a 43g wooden pyramid (apex oriented downward with a slight tilt) above a fixed 115g wooden square base with a square recess on a black optical table. The gripper opens, releasing the wood pyramid into a gravity-driven free fall. Governed by a 0.27 wood-on-wood friction coefficient and an about 0.33 restitution coefficient, the pyramid descends, collides with the base, and bounces until settling into a stable rest, while the robot arm remains completely fixed. Maintain structural integrity and object consistency throughout: no changing shapes, no blending, and no flashing background.

Slope Slider (plastic)

Prompt. Static frontal camera view: A 147g black plastic cube sits near the upper end of a 477g fixed wooden plank. The steep incline of the plank is 30 degree. A linear ruler and digital protractor are placed beside the assembly, all resting on a black perforated optical table. Coefficient of friction between plastic and wood is 0.28; coefficient of restitution for the cube is 0.38. Upon release, the cube slides down the inclined surface, and finally lands on the table surface. The wooden plank remains fully stationary for the entire duration of the motion. Maintain structural integrity and object consistency throughout: no changing shapes, no blending, and no flashing background.

Slope Slider (wood)

Prompt. Static frontal camera view: A 90g wood cube sits near the upper end of a 477g fixed wooden plank. The steep incline of the plank is 30 degree. A linear ruler and digital protractor are placed beside the assembly, all resting on a black perforated optical table. Coefficient of friction between wood and wood is 0.27; coefficient of restitution for the cube is 0.22. Upon release, the cube slides down the inclined surface, and finally lands on the table surface. The wooden plank remains fully stationary for the entire duration of the motion. Maintain structural integrity and object consistency throughout: no changing shapes, no blending, and no flashing background.

Slope Slider (metal)

Prompt. Static frontal camera view: A 340g silver metal cube sits near the upper end of a 477g fixed wooden plank. The steep incline of the plank is 30 degree. A linear ruler and digital protractor are placed beside the assembly, all resting on a black perforated optical table. Coefficient of friction between plastic and wood is 0.26; coefficient of restitution for the cube is 0.33. Upon release, the cube slides down the inclined surface, and finally lands on the table surface. The wooden plank remains fully stationary for the entire duration of the motion. Maintain structural integrity and object consistency throughout: no changing shapes, no blending, and no flashing background.

Turntable (plastic)

Prompt. Static top camera view: A 147g black plastic cube is positioned off-center atop a 722g wooden circular turntable driven by an electric motor undergoing a counterclockwise rotation with a constant angular velocity; the full assembly rests on an optical table. Coefficient of friction between the cube and turntable is 0.32; coefficient of restitution is approximately 0.32. During rotation, the wood cube slides on the turntable surface. Maintain structural integrity and object consistency throughout: no changing shapes, no blending, and no flashing background.

Turntable (wood)

Prompt. Static top camera view: A 90g wood cube is positioned off-center atop a 722g wooden circular turntable driven by an electric motor undergoing a counterclockwise rotation with a constant angular velocity; the full assembly rests on an optical table. Coefficient of friction between the cube and turntable

is 0.38; coefficient of restitution is 0.29. During rotation, the wood cube slides on the turntable surface. Maintain structural integrity and object consistency throughout: no changing shapes, no blending, and no flashing background.

Turntable (metal)

Prompt. Static top camera view: A 340g silver metal cube is positioned off-center atop a 722g wooden circular turntable driven by an electric motor undergoing a counterclockwise rotation with a constant angular velocity; the full assembly rests on an optical table. Coefficient of friction between the cube and turntable is 0.33; coefficient of restitution is approximately 0.23. During rotation, the wood cube slides on the turntable surface. Maintain structural integrity and object consistency throughout: no changing shapes, no blending, and no flashing background.

Newton's Cradle

Prompt. Static frontal camera view: A Newton's cradle assembly is consist of five identical 33g metal balls, and rests atop a black perforated optical table. Four balls hang in contact forming a stationary aligned row; the leftmost ball is pulled back to a nearly horizontal position on its individual suspension string and held propped against the tip of an independent lever mounted to a sliding rail. Upon release, the ball swings back to collide with the stationary row. Momentum transfers sequentially through the chain of balls, launching the terminal ball outward into a swing. The collisions are moderately inelastic, which visibly suppresses the ideal Newton's cradle behavior across successive oscillation cycles. The coefficient of restitution between balls is 0.20. Maintain structural integrity and object consistency throughout: no changing shapes, no blending, and no flashing background.

Pendulum

Prompt. Static frontal camera view: A 318g black metal ball is fixed to the tip of a lightweight rigid rod, which rotates freely about a stationary horizontal axle mounted between two vertical posts atop a black perforated optical table. Initially, the rod angle is 10 degree, with the ball extending out to one side. Upon release, the ball follows pendulum motion: it accelerates downward past the black vertical posts, ascends on the opposite side, and continues oscillating back and forth over numerous cycles, its amplitude slowly and gradually diminishing due to friction. Maintain structural integrity and object consistency throughout: no changing shapes, no blending, and no flashing background.

Bouncing Ball

Prompt. Static frontal camera view: A 121g black ball is suspended high above a wooden plank, which is fixed on a black perforated optical table. Coefficient of friction is 0.81; coefficient of restitution is 0.58. When released, the ball undergoes free fall, followed by a sequence of successive bounces with diminishing peak heights, before finally coming to rest on the plank. Maintain structural integrity and object consistency throughout: no changing shapes, no blending, and no flashing background.

Negative Prompts Cosmos3-Super provides a structured negative_prompt.json containing separate descriptions for undesirable subjects, spatial relations, backgrounds, lighting, aesthetics, cinematography, temporal consistency, and physical realism. The original physical_realism field is reproduced below. "No adherence to physical laws. Objects defy gravity, pass through solid surfaces, and change mass and momentum without cause. Fluid dynamics, cloth simulation, and rigid body physics are all fundamentally broken. Furthermore, conservation of energy is violated as objects gain or lose kinetic energy spontaneously. Elastic collisions produce inelastic results and vice versa. Surface friction is inconsistent – objects slide on rough surfaces while sticking to smooth ones. Air resistance appears to affect only some objects while others move through the atmosphere unimpeded." To satisfy the

character limit of the Wan interfaces while retaining the principal physical failure modes, this field is compressed to the following 493-character prompt.

Physical Realism Negative Prompt. No adherence to physical laws. Objects defy gravity, pass through solid surfaces, and change mass and momentum without cause. Broken fluid dynamics, cloth simulation, rigid-body physics and conservation of energy; objects gain or lose kinetic energy spontaneously. Elastic collisions produce inelastic results and vice versa. Surface friction is inconsistent: objects slide on rough surfaces or stick to smooth ones. Air resistance affects some objects while others move through air unimpeded.

The same compact negative prompt is applied to Cosmos3-Nano, Cosmos3-Super-I2V, Wan-2.2, and Wan-2.7. It is passed through `shared_config` for Wan-2.2, through the Diffusers pipeline for the two Cosmos3 models, and through the API negative-prompt field for Wan-2.7. Seedance 2.0 and Genie 3 are excluded from this condition because the interfaces used in this study do not provide a separate negative-prompt input. To ensure compatibility with the Wan interfaces and maintain a shared negative prompt, the original entry was condensed to 493 characters while preserving its principal physical failure modes.

C.2. Trajectory recording

C.2.1. SAM3

The videos generated in the first stage are subsequently passed to a second-stage segmentation and tracking pipeline based on Segment Anything with Concepts (SAM3). SAM3 is a promptable image and video segmentation model that accepts both textual descriptions and visual prompts, such as point prompts, and propagates the selected object mask throughout a video sequence.

For each physical task, a reference text prompt and a set of point prompts are initialized on the standardized first frame. Before processing the generated videos, the reference point coordinates, text description, and preprocessing metadata are recorded. Although the image-to-video models receive the same standardized 832×480 first frame, their generated videos do not necessarily preserve the same spatial resolution or reproduce the input geometry exactly at the pixel level. Differences in native output resolution, internal resizing, retained padding, first-frame reconstruction, and API-side preprocessing may shift the target relative to the canonical annotation. Therefore, the point-prompt coordinates are recalibrated separately for the first frame of each generated video.

For outputs that retain the 832×480 format, the recalibrated points typically remain close to the canonical coordinates. For videos generated at other resolutions, the coordinates are first transformed according to the corresponding horizontal and vertical scale factors and are then adjusted using output-specific offsets to account for padding or composition changes. After the target location has been verified, the final text prompt, point prompts, frame count, frames per second (FPS), video resolution, and coordinate-transformation parameters are stored in JSON files.

SAM3 is then applied to every generated video. For each frame t , the model produces a binary segmentation mask for the target object. If a predicted mask contains no foreground pixels, the corresponding frame is retained as a missing tracking observation rather than being assigned an artificial object position.

For a valid mask containing N foreground pixels with coordinates $\{(x_i, y_i)\}_{i=1}^N$, the geometric centroid is defined as

$$c_x(t) = \frac{1}{N} \sum_{i=1}^N x_i, \quad c_y(t) = \frac{1}{N} \sum_{i=1}^N y_i. \quad (18)$$

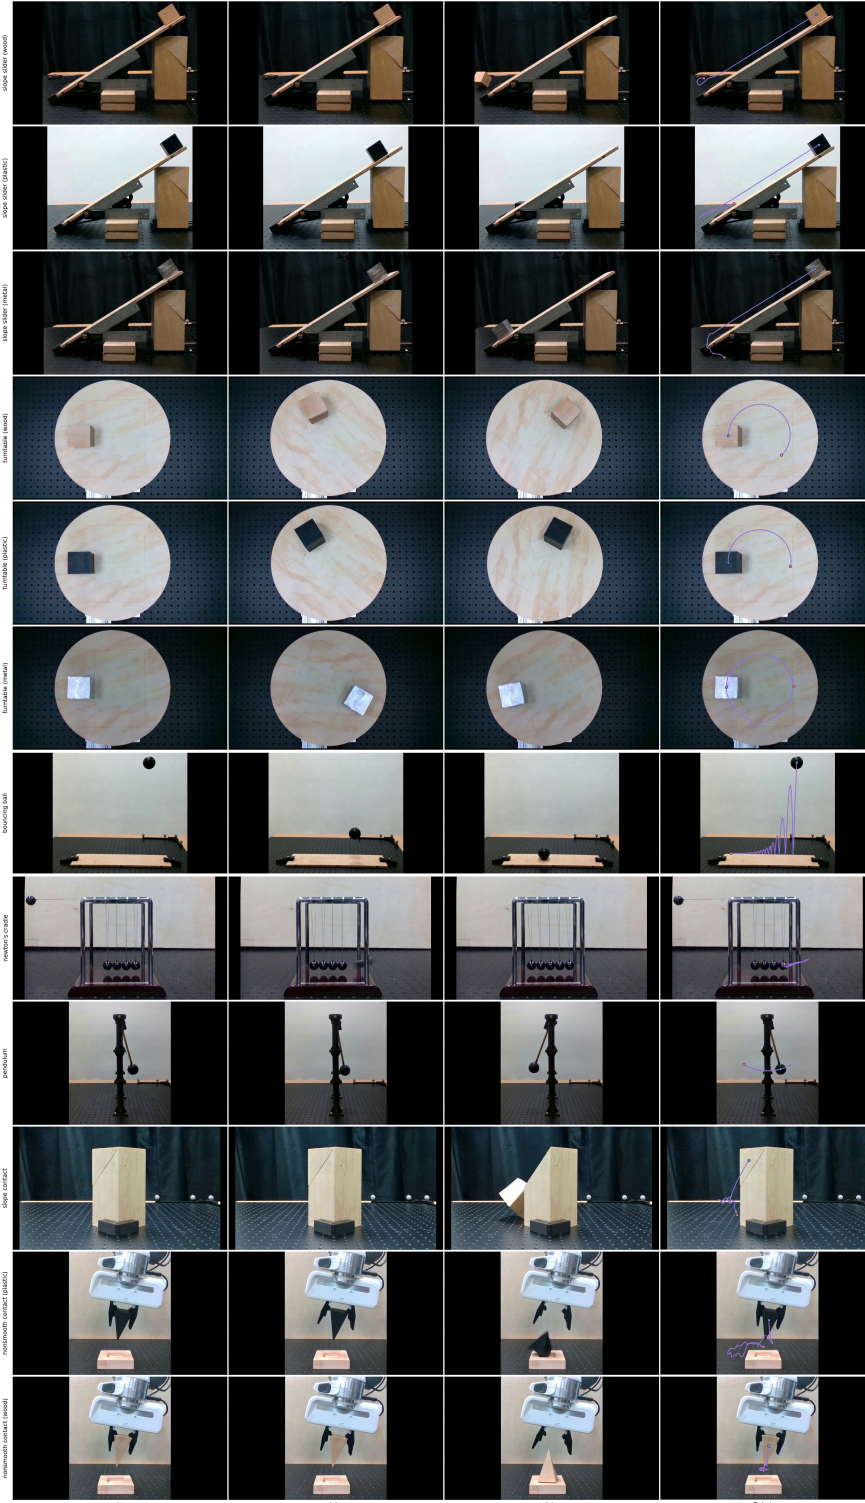


Figure 9. Example of qualitative trajectory visualization for physical realism evaluation. The last three rows of the figure correspond to the inference results of "slope contact" and "non-smooth contact". Since these scenarios exhibit substantial 3D geometric deformations and discontinuous object states, they are excluded from the subsequent quantitative evaluation.

Consistent with the implemented extraction procedure, the mean coordinates are converted to integer pixel positions, and each valid trajectory observation is stored as

$$(t, c_x(t), c_y(t)), \quad (19)$$

where t denotes the frame index. After trajectory extraction, the resulting trajectories are then passed to the downstream physical-consistency analysis.

C.2.2. Results Display

To illustrate the qualitative evaluation protocol, we visualize one representative example generated by Seedance 2.0. For each scenario, frames at 0 s, 2.5 s, and 5.0 s are presented together with the extracted object trajectory. The trajectory is obtained by SAM3-based segmentation and centroid tracking, where the start and end positions indicate the tracked motion range. Results can be found in Fig. 9.

C.3. Physical-Consistency Analysis

This section details how the physical-consistency metrics in the main-paper world-model table are computed. The tasks are presented in the same order as in that table: slope slider, turntable, bouncing ball, Newton’s cradle, and pendulum. The analysis uses object-centroid trajectories recovered by segmentation and tracking. Unless explicitly stated otherwise, the retained coordinates are neither smoothed nor interpolated, so tracking jumps, stalls, reversals, and model-generated geometric drift remain visible in the reported metrics.

C.3.1. Common Coordinate and Time Processing

For a generated video with width W , height H , and frame rate fps , the tracked image coordinate at frame f_i is $\mathbf{p}_i = (x_i, y_i)$. Because the models generate different native resolutions, coordinates are first mapped to the task’s reference image of size $W_{\text{ref}} \times H_{\text{ref}}$:

$$\tilde{x}_i = x_i \frac{W_{\text{ref}}}{W}, \quad \tilde{y}_i = y_i \frac{H_{\text{ref}}}{H}. \quad (20)$$

Horizontal and vertical scaling are performed independently. Each task then uses an object of known size to obtain a metric scale c , in m/pixel, and converts the reference-image coordinates to metric coordinates. Time is computed from the original JSON frame keys rather than from the position of a sample in an array:

$$t_i = \frac{f_i - f_0}{\text{fps}}, \quad (21)$$

where f_0 is the first frame retained for the task-specific fit. Thus, missing frame keys preserve their true temporal gap. Leading stationary frames may be excluded when they precede the physical event, but motion artifacts inside the evaluated interval are retained.

C.3.2. Slope Slider

Trajectory Calibration and Projection This task tests whether a block released from rest follows uniformly accelerated motion along a fixed incline. A visible face of the $L_{\text{block}} = 0.05$ m block is annotated in the reference frame. If $\bar{L}_{\text{px}}$ is the mean pixel length of its four annotated edges, the metric scale is

$$c = \frac{L_{\text{block}}}{\bar{L}_{\text{px}}}. \quad (22)$$

Two annotated incline points define a fixed unit direction $\mathbf{e}$. After applying eq. (20) and the scale c , the signed displacement along the incline is

$$s_i = (\mathbf{p}_i^m - \mathbf{p}_0^m) \cdot \mathbf{e}. \quad (23)$$

The incline direction is not re-estimated from each generated trajectory; otherwise a nonphysical trajectory could redefine the direction against which it is evaluated.

The analysis removes a sustained leading or trailing stationary run using a six-frame displacement window. After forward motion has been established, the first sustained plateau or reversal terminates the fit because it no longer belongs to the first continuous slide. These windows select the frame range only; the selected coordinates themselves remain unfiltered.

Acceleration For release from rest with constant acceleration,

$$s(t) = s_0 + \frac{1}{2}at^2. \quad (24)$$

Let $u_i = t_i^2$. Ordinary least squares is used to fit

$$\widehat{s}_i = b + ku_i, \quad a = 2k. \quad (25)$$

The acceleration a , reported in m/s^2 , measures the physical time scale implied by the generated trajectory. It is a parameter estimate, not a goodness-of-fit score, and is therefore compared with the measured real-world baseline for each material.

Quadratic Form Improvement The main table's Quadratic Form Improvement (QFI) tests whether the expected linear relation between s and $u = t^2$ is sufficient. The linear model in eq. (25) is compared with

$$\widehat{s}_i^Q = b_Q + k_Q u_i + c_Q u_i^2 = b_Q + k_Q t_i^2 + c_Q t_i^4. \quad (26)$$

With

$$\text{SSE}_L = \sum_{i=1}^N (s_i - \widehat{s}_i)^2, \quad \text{SSE}_Q = \sum_{i=1}^N (s_i - \widehat{s}_i^Q)^2, \quad (27)$$

the value reported as QFI is the nested-model F statistic

$$\text{QFI} = \frac{(\text{SSE}_L - \text{SSE}_Q)/1}{\text{SSE}_Q/(N - 3)}. \quad (28)$$

Low QFI means that adding the t^4 term provides little additional explanatory power, as expected for ideal constant acceleration. High QFI indicates systematic curvature in the s -versus- t^2 relation. Because an F statistic also depends on sample count, it is interpreted together with the plotted residual pattern rather than as an absolute trajectory error.

Result Analysis Fig. 10 shows substantial variation in both slope and curvature across models and materials. For wood, Cosmos3-Super-I2V without the negative prompt gives the lowest tabulated QFI of 13.61, whereas the closest acceleration is 2.06 m/s^2 from Cosmos3-Nano without the negative prompt, compared with the real value of 2.58 m/s^2 . The model with the best equation form is therefore not the model with the best physical parameter.

The discrepancy is larger for plastic and metal. Seedance 2.0 gives the lowest plastic QFI of 8.69, but the closest plastic acceleration among all models is only 0.75 m/s^2 , far below the 2.57 m/s^2

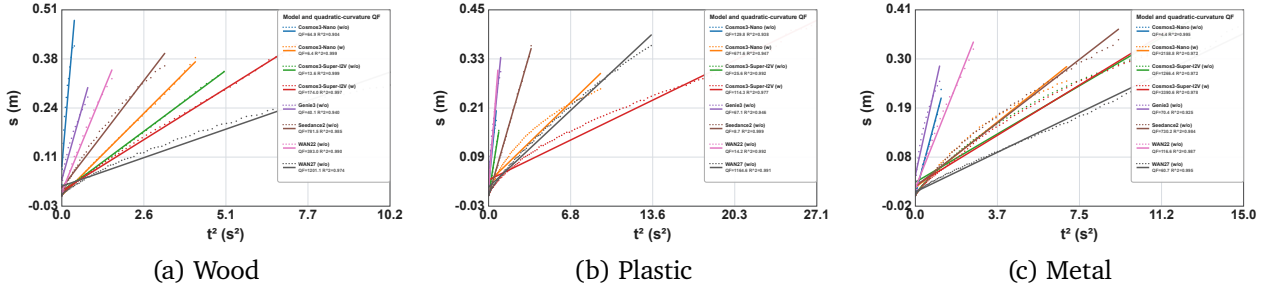


Figure 10. Slope-slider trajectories for the three materials. Points are the retained, unfiltered projected displacements, and solid lines are the linear fits in s versus t^2 . A visually linear trajectory may still have the wrong slope and hence the wrong acceleration.

baseline. For metal, Cosmos3-Nano without the negative prompt achieves the lowest QFI of 4.41, while the closest acceleration is 0.43 m/s^2 from Genie 3, compared with 2.67 m/s^2 in the real experiment. The different slopes in Fig. 10 visualize this parameter mismatch directly. Furthermore, the negative prompt has no consistent effect: for example, the wood QFI of Cosmos3-Super-I2V changes from 13.61 to 569.36, despite improving other model-task pairs.

C.3.3. Turntable

Direct Acceleration Analysis This task tests whether the horizontal force required by a generated block trajectory is compatible with the available friction on the turntable. The known 0.05 m block edge provides the metric scale. After removing only sustained leading stationary frames and terminal frozen frames, the metric trajectory is differentiated directly. For equally spaced samples with $\Delta t = 1/\text{fps}$,

$$\mathbf{a}_i = \frac{\mathbf{p}_{i+1}^m - 2\mathbf{p}_i^m + \mathbf{p}_{i-1}^m}{\Delta t^2}, \quad a_i = \|\mathbf{a}_i\|_2. \quad (29)$$

For unequal time gaps caused by missing frames, the implemented three-point form is

$$\mathbf{a}_i = \frac{2}{t_{i+1} - t_{i-1}} \left[\frac{\mathbf{p}_{i+1}^m - \mathbf{p}_i^m}{t_{i+1} - t_i} - \frac{\mathbf{p}_i^m - \mathbf{p}_{i-1}^m}{t_i - t_{i-1}} \right]. \quad (30)$$

This local calculation is used because a single fixed acceleration-vector fit would allow the continuously changing centripetal direction to cancel over a rotation. No position smoothing is applied before differentiation.

Dynamic Error For block mass m , friction coefficient μ , and $g = 9.80665 \text{ m/s}^2$, the maximum available friction magnitude is

$$F_{\text{fric,max}} = \mu mg. \quad (31)$$

The positive-part operator is denoted by $[z]_+ = \max(0, z)$. The per-frame force exceedance and the Dynamic Error (DE) reported in the main table are

$$e_i = [ma_i - F_{\text{fric,max}}]_+, \quad \text{DE} = \frac{1}{M} \sum_{i=1}^M e_i. \quad (32)$$

Thus DE has units of newtons and is zero whenever the required force does not exceed the friction limit. The implementation also records the median, 95th-percentile, and maximum accelerations, the fraction of frames exceeding the limit, and the maximum force exceedance. The main-table entries

use the mean in eq. (32); for example, this is why small isolated acceleration spikes affect DE without defining it solely by the maximum spike.

As an auxiliary geometric diagnostic, the radial range about the calibrated turntable center is divided by the block edge length. A range above 10% flags possible radial sliding. Pure tangential slip cannot be identified without an independently tracked turntable angle, so the radial flag is not substituted for DE.

Result Analysis The turntable task produces several zero or near-zero DE values. This means that the frame-wise force estimated from the generated motion generally does not exceed the calibrated friction limit; it does not prove that the block co-rotates correctly with the turntable. For example, the wood results include exact zero values for several configurations, while Cosmos3-Nano without the negative prompt has $DE = 0.078$ N and Wan-2.7 without the negative prompt reaches 0.18 N. For metal, Wan-2.7 with the negative prompt gives the largest reported value, 0.78 N, whereas several other configurations remain at or near zero.

These results indicate that abrupt centroid changes and excessive local acceleration are detected by DE, but overly slow, nearly stationary, or incorrectly synchronized motion can still obtain $DE = 0$. The radial-sliding flag and direct trajectory inspection are therefore necessary complements. The paired values also show that the negative prompt is not uniformly beneficial: it may suppress acceleration exceedance for one model and material while increasing it for another.

C.3.4. Bouncing Ball

First Free-Fall Segment This metric evaluates only the first airborne descent before collision or bounce. The common reference frame contains a ball of known diameter $D_{\text{ball}} = 0.06$ m. If its mean annotated pixel diameter is $\bar{d}_{\text{px}}$, the scale is

$$c = \frac{D_{\text{ball}}}{\bar{d}_{\text{px}}}. \quad (33)$$

Image-down is defined as the positive vertical direction. Relative to the retained release point,

$$s_i = c(\tilde{y}_i - \tilde{y}_0), \quad q_i = c(\tilde{x}_i - \tilde{x}_0), \quad (34)$$

where s_i is the vertical displacement used by the main metric and q_i is retained as a horizontal-drift diagnostic.

A sustained-window detector locates release after any initial wait. Once downward motion is established, the first vertical reversal, sustained contact plateau, tracking transfer, or loss of observations ends the ballistic segment. Normal post-impact samples are excluded rather than penalized, because a bounce does not obey the single free-fall model. All samples within the selected airborne interval remain unfiltered.

Acceleration and QFI Static release under constant gravity predicts

$$s(t) = s_0 + \frac{1}{2}at^2, \quad a = g \quad (35)$$

in the ideal case. The same constrained linear fit as in eq. (25) is applied:

$$\hat{s}_i = b + kt_i^2, \quad a = 2k. \quad (36)$$

The reported acceleration is compared with the real baseline $g \approx 9.81 \text{ m/s}^2$. A visually smooth parabola can therefore have low shape error but still encode an incorrect gravity magnitude.

For consistency with Slope slider, QFI is obtained by adding a t^4 term and using exactly eq. (28). Here SSE_L is the residual sum of squares of eq. (36), and SSE_Q is that of $\hat{s} = b_Q + k_Q t^2 + c_Q t^4$. Low QFI indicates that the expected linear s -versus- t^2 form is sufficient; it does not by itself imply that the fitted slope yields the correct gravitational acceleration.

The implementation additionally diagnoses horizontal drift by fitting

$$q(t) = b_x + v_x t + \frac{1}{2} a_x t^2 \quad (37)$$

and recording horizontal range, net displacement, and a_x/g . These diagnostics prevent an accurate-looking vertical component from hiding a strongly non-vertical generated trajectory.

Result Analysis Fig. 4(b) contains both nearly linear segments and conspicuous curvature, plateaus, reversals, and isolated jumps. Cosmos3-Super-I2V with the negative prompt obtains the lowest tabulated QFI of 12.50, improving substantially over its value of 270.69 without the negative prompt. Nevertheless, its fitted acceleration is only 0.088 m/s^2 , which is less than one percent of the 9.81 m/s^2 real baseline. Thus, its trajectory is closer to a straight line in s versus t^2 , but the line has the wrong slope.

Seedance 2.0 provides the closest acceleration, 1.84 m/s^2 , but this remains about 81% below gravity and its QFI is 65.16. Genie 3 produces a negative fitted acceleration of -0.052 m/s^2 , consistent with the reversed trend visible in the curve. Wan-2.2 exhibits a long shallow region followed by stronger motion, which leads to a large QFI of 428.39. Overall, no evaluated model simultaneously recovers both the expected free-fall form and the correct gravitational scale.

C.3.5. Newton's Cradle

Apex-Based Momentum Transfer For equal masses, the ratio of outgoing to incoming momentum can be estimated from the gravitational potential heights at the corresponding pendulum apices. If the incoming left ball is released from height h_L above the resting ball-center level, conservation of mechanical energy gives its pre-impact speed $v_L = \sqrt{2gh_L}$. For the i -th detected post-impact apex of the right ball at height $h_{R,i}$, the corresponding outgoing speed is $v_{R,i} = \sqrt{2gh_{R,i}}$. The event-level Momentum Transfer Efficiency (MTE) is therefore

$$\eta_i = \frac{mv_{R,i}}{mv_L} = \sqrt{\frac{h_{R,i}}{h_L}}, \quad (38)$$

and the main-table value averages all valid right-ball apex events:

$$\text{MTE} = \bar{\eta} = \frac{1}{N} \sum_{i=1}^N \eta_i. \quad (39)$$

The reference ball diameter is 0.02 m , which is used separately for each generated resolution to convert vertical pixel differences into heights. The annotated initial left-ball height is approximately $h_L = 13.294 \text{ cm}$. Right-ball events are local high/right apices identified after independent per-frame detection, with a minimum temporal separation to avoid counting multiple neighboring frames as separate collisions. Summary images are not counted as events.

An ideal lossless equal-mass cradle has $MTE \approx 1$. Values below one indicate incomplete momentum transfer or excessive damping, while a value above one indicates generated amplitude gain. A dash in the main table means that the model did not yield a valid sequence of independently identifiable right-ball apex events, rather than an MTE of zero.

Result Analysis Six of the ten model-prompt configurations do not produce a valid sequence from which MTE can be measured. Among the valid generations, Wan-2.2 with the negative prompt gives the highest mean efficiency, $MTE = 0.76$. Wan-2.7 without and with the negative prompt reaches 0.55 and 0.48, respectively, while Seedance 2.0 reaches only 0.24. All valid averages are below the ideal value of one, indicating incomplete transfer to the outgoing ball. Although the first detected Wan-2.2 event slightly exceeds one, its later events decay strongly, reducing the event-averaged efficiency. The high failure rate and large inter-event variation show that generating a visually recognizable cradle is not sufficient to reproduce repeated collision dynamics.

C.3.6. Pendulum

Angle Extraction and Geometric Constraint This task uses a calibrated fixed pivot $\mathbf{p} = (x_p, y_p)$, a ball diameter of 0.06 m, and the reference pivot-to-ball-center length. After resolution normalization, the signed angle relative to image-vertical-down is

$$\theta_i = \text{atan2}(\tilde{x}_i - x_p, \tilde{y}_i - y_p). \quad (40)$$

The instantaneous radius

$$r_i = \sqrt{(\tilde{x}_i - x_p)^2 + (\tilde{y}_i - y_p)^2} \quad (41)$$

is also retained to diagnose pivot drift and changing pendulum length. Only a sustained leading release wait is removed. Turning points, damping, amplitude growth, temporary stalls, and other behavior after release remain in the fit.

Damped-Oscillation Fit The small-angle damped-pendulum equation is

$$\ddot{\theta} + 2\beta\dot{\theta} + \omega_0^2\theta = 0, \quad \omega_0 = \sqrt{\frac{g}{L}}. \quad (42)$$

For an underdamped trajectory, the fitted model is

$$\hat{\theta}(t) = \theta_{\text{eq}} + e^{-\beta t} [C \cos(\omega_d t) + D \sin(\omega_d t)]. \quad (43)$$

For each candidate pair (β, ω_d) , the coefficients θ_{eq}, C, D are solved by linear least squares; the search then selects the pair with the smallest residual sum of squares. The fit does not force β to be positive, so nonphysical amplitude growth is not hidden.

The coefficient of determination reported in the main table is

$$R^2 = 1 - \frac{\sum_{i=1}^N (\theta_i - \hat{\theta}_i)^2}{\sum_{i=1}^N (\theta_i - \bar{\theta})^2}. \quad (44)$$

High R^2 means that a damped sinusoid explains the generated angular variation, but it does not establish that the period, pivot, or pendulum length is physically correct.

Period Duration The Period Duration (PD) is obtained directly from the fitted damped angular frequency:

$$\text{PD} = T_d = \frac{2\pi}{\omega_d}. \quad (45)$$

It is compared with the measured real-world baseline of 1.06 s in the main table. As a diagnostic, same-side turning points also provide cycle estimates $T_k = t_{k+2} - t_k$, but the tabulated PD is the global fitted value in eq. (45). Consequently, a sequence can obtain a high R^2 by looking periodic while still receiving an incorrect PD because its oscillation time scale is too slow or too fast.

The fitted frequency and damping also imply

$$\omega_0 = \sqrt{\omega_d^2 + \beta^2}, \quad g_{\text{fit}} = L\omega_0^2, \quad (46)$$

which is retained as an auxiliary absolute-scale diagnostic. Fixed-pivot radial error and period stability are likewise recorded separately; neither is absorbed into R^2 .

Result Analysis The trajectories in Fig. 4(c) differ substantially in amplitude, equilibrium offset, damping behavior, and period. Wan-2.2 with the negative prompt and Genie 3 both achieve $R^2 = 0.99$, showing that a damped sinusoid describes their angular variation well. Their fitted periods are 1.93 s and 1.90 s, however, compared with the 1.06 s real baseline. Their high shape scores therefore do not imply a correct physical time scale.

The closest period is 1.83 s, obtained by Wan-2.7 without the negative prompt, but it is still approximately 73% longer than the real period and its R^2 is only 0.71. At the other extreme, Cosmos3-Super-I2V without the negative prompt has a fitted period of 17.95 s and $R^2 = 0.50$, reflecting its nearly stationary angular trajectory. The negative prompt sometimes improves the oscillatory fit or period but does not consistently recover the real dynamics. These results support reporting R^2 and PD separately.