

GeoMFD: Continual Drone-View Geo-Localization with Geometry-Aware Adapter and Margin-Field Distillation

Zhongwei Chen¹, Hai-jun Rong¹, Tao Zhang¹, Xianfeng Nie¹, Xiangbao Zhang¹

Guoqi Li^{2*}, Zhao-Xu Yang^{1*}

¹School of Aerospace Engineering, Xi'an Jiaotong University

²Institute of Automation, Chinese Academy of Sciences

ISChenawei@sut.xjtu.edu.cn, yangzhx@xjtu.edu.cn, guoqi.li@ia.ac.cn

Code: <https://github.com/ISChenawei/GeoMFD>

Abstract

Existing drone-view geo-localization (DVGL) methods are mainly developed under a static training paradigm, where models are optimized for fixed environments with all training data available in advance. However, this paradigm is difficult to extend to real-world deployment, where drones may encounter diverse environments and require multiple environment-specific models, resulting in additional storage and model-selection costs. Directly adapting a single model to new environments also risks distorting previously learned cross-view embedding geometry and causing forgetting. To address these challenges, we formalize the continual drone-view geo-localization (C-DVGL) setting and propose GeoMFD, a geometry-aware continual adaptation method for DVGL. GeoMFD combines a cold-start bootstrapping strategy (CBS), a geometry-aware adapter (Geo-Adapter), and margin-field distillation (MFD) to balance adaptation and cross-view geometry preservation. CBS initializes a stable embedding space, Geo-Adapter enables environment adaptation through controlled residual corrections, and MFD preserves similarity margins between positive pairs and hard negatives to alleviate cross-view geometry forgetting. Extensive experiments demonstrate that GeoMFD effectively mitigates forgetting and achieves competitive performance with environment-specific DVGL methods using a single continuously updated model.

Introduction

Drone-view geo-localization (DVGL) is a promising visual localization task for GNSS-denied environments, where a drone-view query is matched with its corresponding geo-referenced satellite image (Shen et al. 2023). Recent methods have achieved substantial progress through advanced cross-view representation learning (Lv et al. 2024; Wang et al. 2025). However, most are developed under a closed-world assumption, where the model is trained and evaluated within a fixed target environment (Wang et al. 2024a; Song et al. 2026). This setting limits practical deployment, as drones may operate across diverse environments, including urban areas and campuses under diverse daytime and nighttime conditions. Variations in illumination, viewpoint, flight altitude, and scene structure can cause substantial performance degradation when the model encounters unseen environments. Training a separate model for each environment is

a straightforward alternative, but it increases storage costs, complicates onboard deployment, and requires an additional mechanism to select the appropriate model during operation.

Therefore, a more practical solution is to maintain a single DVGL model that can be progressively adapted to new environments, avoiding the storage and selection of multiple environment-specific models. Continual learning provides a natural framework for this goal, yet its direct application to DVGL remains challenging. Existing methods mainly address classification or same-modality retrieval, where forgetting is reflected in degraded category or identity discrimination (Zhao et al. 2026; Wen, Chen, and Zhang 2026). In contrast, DVGL depends on the relative geometry between drone-view and satellite-view embeddings. Sequential adaptation may bias the embedding space toward the current environment, reducing the margins between positive pairs and hard negatives and disrupting previously learned cross-view relationships. Motivated by this observation, we introduce continual drone-view geo-localization (C-DVGL), which extends standard retrieval between drone and satellite imagery to evolving environments. In this setting, a single model is progressively updated across environments while retaining the cross-view matching capability learned from previous ones. The central challenge is therefore to adapt the model to new environments without distorting the previously established cross-view embedding geometry.

To address this challenge, we propose GeoMFD, a geometry-aware continual adaptation method that balances environmental adaptation and cross-view geometry preservation. Specifically, as illustrated in Fig. 1, GeoMFD consists of three complementary components, including a cold-start bootstrapping strategy (CBS), a geometry-aware adapter (Geo-Adapter), and margin-field distillation (MFD). CBS first constructs a stable initial cross-view embedding space, providing a reliable geometric foundation for subsequent continual adaptation. Based on this initialization, Geo-Adapter applies controlled residual corrections in the normalized embedding space, enabling adaptation to new environments while limiting undesirable distortion of the learned cross-view embedding geometry. Meanwhile, MFD preserves the relative similarity margins between positive pairs and hard negatives established in previous stages, thereby reducing geometry forgetting without retaining data from earlier environments. Extensive experiments demonstrate that

*Corresponding author.

GeoMFD effectively mitigates forgetting and achieves competitive performance with environment-specific models using a single continuously updated model. Our contributions are summarized as follows:

- We formalize the continual drone-view geo-localization (C-DVGL) setting, extending DVGL from learning in static environments to sequential environment adaptation.
- We propose GeoMFD, a geometry-aware continual adaptation method consisting of CBS, Geo-Adapter, and MFD. CBS initializes a stable initial cross-view embedding space as the geometric foundation for subsequent adaptation. Geo-Adapter enables environment adaptation through controlled residual corrections and preserves the learned structure, and MFD maintains the relative similarity margins between positive pairs and hard negatives to prevent cross-view geometry degradation and catastrophic forgetting.
- Extensive experiments under various continual task orders demonstrate that GeoMFD effectively mitigates forgetting and achieves competitive performance with environment-specific DVGL models while requiring only a single continuously updated model.

Related Work

Drone-View Geo-Localization

Drone-view geo-localization (DVGL) aims to retrieve the geo-referenced satellite image corresponding to a given drone-view query (Chen et al. 2026). Existing methods primarily focus on cross-view representation learning and fine-grained feature alignment. LPN (Wang et al. 2021) extracts part-level features through local pattern partitioning, and FSRA (Dai et al. 2021) further selects salient regions to enhance region-level discrimination. TransFG (Zhao et al. 2024) captures long-range cross-view dependencies through Transformer-based feature modeling. CAMP (Wu et al. 2024) combines contrastive attribute mining with position-aware partitioning, DAC (Xia et al. 2024) improves cross-view consistency through domain alignment and scene constraints, and MEAN (Chen, Yang, and Rong 2025) strengthens global-to-local associations via multi-level embedding alignment. Recent studies further extend DVGL by incorporating geometric structures and additional modalities. Geometry-aware methods exploit orientation priors, multi-view observations, or 3D structural cues to reduce the geometric discrepancy between oblique drone-views and overhead satellite images (Li et al. 2025; Ji et al. 2025; Liu et al. 2026).

Despite these advances, existing DVGL methods are mainly developed under a static training paradigm, where models are optimized for fixed target environments. Although effective for benchmark evaluation, this assumption limits real-world deployment, as adapting to new environments often requires retraining or maintaining multiple environment-specific models, increasing storage and deployment costs. In contrast, this work introduces continual learning into DVGL and proposes GeoMFD to adapt a single model to sequentially changing environments while preserving cross-view embedding geometry and performance.

Continual Learning

Continual learning aims to update models with sequentially arriving data while mitigating catastrophic forgetting. In classification tasks, existing methods mainly preserve previous task knowledge through parameter regularization, exemplar replay, and knowledge distillation (Kirkpatrick et al. 2017; Buzzega et al. 2020; Li and Hoiem 2017). Beyond classification, continual learning has been extended to retrieval scenarios, particularly lifelong person re-identification, where models need to adapt to new identities and domains while preserving previous retrieval ability. CLUDA-ReID (Huang et al. 2022) balances domain adaptation and forgetting resistance, and KRC (Yu et al. 2023) consolidates historical knowledge for continual retrieval. Recent works further explore embedding-level knowledge preservation in lifelong retrieval. LSTKC and LSTKC++ (Xu, Zou, and Zhou 2024; Xu et al. 2025b) model long- and short-term knowledge evolution, DKP (Xu et al. 2024) preserves distribution-aware prototypes, and DASK (Xu et al. 2025a) rehearses historical feature distributions through adaptive style kernels.

However, existing continual retrieval methods are mainly designed for identity-centric matching, where the objective is to preserve identity discrimination or retrieval consistency. In contrast, C-DVGL requires preserving the cross-view embedding geometry between heterogeneous drone and satellite views, which involves maintaining relative similarity structures rather than identity features. Therefore, directly applying existing retrieval continual learning strategies may not effectively prevent cross-view geometry degradation, motivating geometry-aware continual adaptation for DVGL.

Methodology

Problem Definition. In C-DVGL, training data are observed from a sequence of environments, and only the current stage data are available. Let $\mathcal{D} = \{\mathcal{D}_t\}_{t=1}^T$ denote the training sequence, where each $\mathcal{D}_t = (\mathcal{U}_t, \mathcal{V}_t)$ contains drone-view and satellite-view images annotated with location identities. A cross-view pair is positive if both images correspond to the same location. The final model is evaluated on unseen locations from all observed environments, aiming to adapt to new environments while preserving previous performance.

Notation. At stage t , the drone-view and satellite-view branches share the same backbone Θ_t and geometry-aware adapter Θ_t^A . Given a drone-view image u_i and a satellite-view image v_j , their backbone features are $\mathbf{f}_{t,i}^d = \Theta_t(u_i)$ and $\mathbf{f}_{t,j}^s = \Theta_t(v_j)$, and their adapted features are $\mathbf{f}_{t,i}^{Ad} = \Theta_t^A(\mathbf{f}_{t,i}^d)$ and $\mathbf{f}_{t,j}^{As} = \Theta_t^A(\mathbf{f}_{t,j}^s)$. $\bar{\mathbf{f}}$ denotes an ℓ_2 -normalized feature. For a mini-batch of B matched pairs, we define the cross-view affinity matrix $\mathbf{R}_t \in \mathbb{R}^{B \times B}$ by $(\mathbf{R}_t)_{ij} = \beta_t(\bar{\mathbf{f}}_{t,i}^{Ad})^\top \bar{\mathbf{f}}_{t,j}^{As}$, where β_t is the logit scale.

Backbone and Geometry-Aware Adapter

To enable environment adaptation while preserving the cross-view embedding geometry, GeoMFD combines a shared feature backbone with a lightweight geometry-aware adapter. Specifically, the drone and satellite branches share a ViT-B/16 backbone initialized with DINOv3 weights (Siméoni et al. 2025), and the adapter is attached

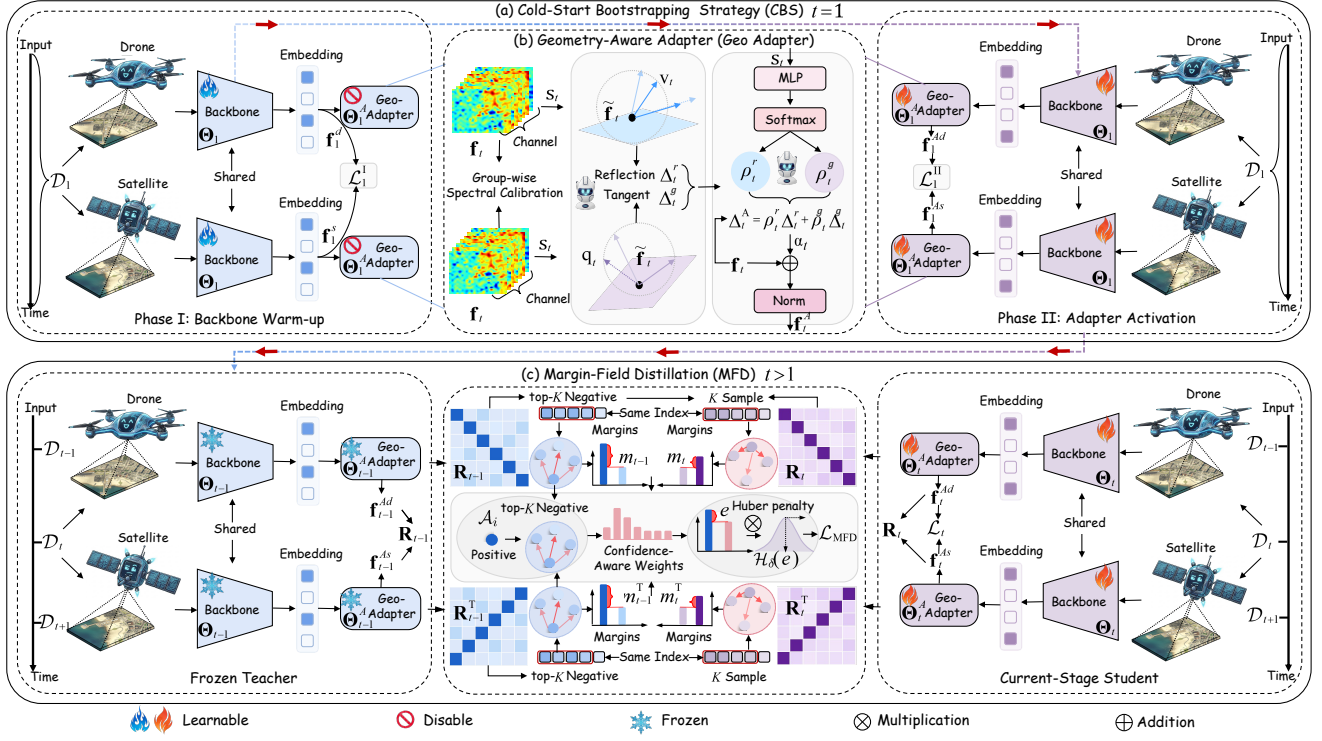


Figure 1: Pipeline Overview. Our method contains three key components. (a) At the initial stage, cold-start bootstrapping warms up the shared backbone with the adapter disabled and then activates the adapter for stable residual learning. (b) The geometry-aware adapter performs view-gap-aware angular correction by combining spectral calibration, reflection residuals, tangent residuals, and adaptive gating. (c) For later stages, margin-field distillation uses the frozen previous-stage model as a teacher to preserve positive-versus-hard-negative margins, mitigating forgetting while retaining plasticity for new environments.

to its output through a gated residual pathway to compensate for feature shifts. Since DVGL relies on cosine similarity between ℓ_2 -normalized features, retrieval is governed by angular geometry on the unit hypersphere. Given a backbone feature $\mathbf{f}_t \in \mathbb{R}^C$, the adapter first applies layer normalization and computes the mean absolute response of each channel group to form the spectral statistics $\mathbf{s}_t$. Then, a lightweight bottleneck maps $\mathbf{s}_t$ to group-wise scaling factors, which rescale the corresponding channels to obtain the calibrated feature $\tilde{\mathbf{f}}_t$. The calibrated feature is then fed into two MLPs, $h_t^r(\cdot)$ and $h_t^g(\cdot)$, to predict a normalized reflection direction $\mathbf{v}_t$ and a local correction vector $\mathbf{q}_t$, respectively:

$$\mathbf{v}_t = h_t^r(\tilde{\mathbf{f}}_t) / \|\mathbf{h}_t^r(\tilde{\mathbf{f}}_t)\|_2, \quad \mathbf{q}_t = h_t^g(\tilde{\mathbf{f}}_t), \quad (1)$$

where $\mathbf{v}_t$ defines a Householder-style reflection direction, while $\mathbf{q}_t$ provides a local correction direction. Based on these two directions, we construct a reflection residual and a tangent residual:

$$\Delta_t^r = (\bar{\mathbf{f}}_t - 2\langle \bar{\mathbf{f}}_t, \mathbf{v}_t \rangle \mathbf{v}_t) - \bar{\mathbf{f}}_t, \quad \Delta_t^g = \mathbf{q}_t - \langle \mathbf{q}_t, \bar{\mathbf{f}}_t \rangle \bar{\mathbf{f}}_t. \quad (2)$$

Here, $\bar{\mathbf{f}}_t = \mathbf{f}_t / \|\mathbf{f}_t\|_2$. Δ_t^r captures an angular correction through reflection, while Δ_t^g removes the radial component of $\mathbf{q}_t$ and performs correction in the tangent space of the unit hypersphere. The two residuals are adaptively fused by the gate:

$$\Delta_t^A(\mathbf{f}_t) = \rho_t^r \Delta_t^r + \rho_t^g \Delta_t^g, \quad (3)$$

where $[\rho_t^r, \rho_t^g] = \text{softmax}(\psi_t(\mathbf{s}_t))$. $\psi_t(\cdot)$ is a lightweight MLP that predicts two logits corresponding to the reflection residual Δ_t^r and the tangent correction residual Δ_t^g . This allows each sample to adaptively balance global reflection and local tangent correction. Finally, the adapted feature is obtained as

$$\mathbf{f}_t^A = \Theta_t^A(\mathbf{f}_t) = \text{Norm}(\bar{\mathbf{f}}_t + \alpha_t \Delta_t^A(\mathbf{f}_t)), \quad (4)$$

where α_t is a learnable scalar initialized to a small value. The final normalization keeps the adapted feature on the unit hypersphere, and the small residual gate makes the adapter start from a near-identity mapping before gradually learning environment-specific angular corrections.

Cold-Start Bootstrapping Strategy

At the first stage, directly activating the adapter may be unstable because the cross-view retrieval space is not yet calibrated. We thus adopt a two-phase cold-start bootstrapping strategy on $\mathcal{D}_1$, applied only at $t = 1$. The backbone is first warmed up to build a basic cross-view embedding space, and the adapter is then activated for geometry-aware residual learning. To formulate the objectives of the two phases, let $\mathcal{B}_1 = \{(\tilde{u}_b, \tilde{v}_b)\}_{b=1}^B$ denote a mini-batch of matched cross-view pairs. For a similarity matrix $\mathbf{S} \in \mathbb{R}^{B \times B}$, with diagonal positives and off-diagonal in-batch negatives, the row-wise

contrastive loss is defined as

$$\mathcal{C}(\mathbf{S}) = -\frac{1}{B} \sum_{b=1}^B \log \frac{\exp(S_{bb})}{\sum_{k=1}^B \exp(S_{bk})}. \quad (5)$$

The symmetric cross-view contrastive objective is written as $\mathcal{J}(\mathbf{S}) = \frac{1}{2}[\mathcal{C}(\mathbf{S}) + \mathcal{C}(\mathbf{S}^\top)]$, which performs contrastive learning in both directions.

Phase I: Backbone warm-up. In the first phase, the adapter is disabled, and only the shared backbone Θ_1 is optimized. For each matched pair $(\tilde{u}_b, \tilde{v}_b)$, the backbone features are denoted as $\mathbf{f}_{1,b}^d = \Theta_1(\tilde{u}_b)$ and $\mathbf{f}_{1,b}^s = \Theta_1(\tilde{v}_b)$. We construct the backbone-level similarity matrix by $S_{bk}^I = \text{sim}(\mathbf{f}_{1,b}^d, \mathbf{f}_{1,k}^s)/\tau_c$, where τ_c is the contrastive temperature. The Phase-I objective is $\mathcal{L}_1^I = \mathcal{J}(\mathbf{S}^I)$. After this phase, the warmed-up backbone is denoted as Θ_1 .

Phase II: Adapter activation. In the second phase, the backbone Θ_1 is initialized from Θ_1 , and the geometry-aware adapter Θ_1^A is activated. Both modules are jointly optimized. For each matched pair $(\tilde{u}_b, \tilde{v}_b)$, the adapted features are written as $\mathbf{f}_{1,b}^{Ad} = \Theta_1^A(\Theta_1(\tilde{u}_b))$ and $\mathbf{f}_{1,b}^{As} = \Theta_1^A(\Theta_1(\tilde{v}_b))$. We construct the adapter-level similarity matrix by $S_{bk}^A = \text{sim}(\mathbf{f}_{1,b}^{Ad}, \mathbf{f}_{1,k}^{As})/\tau_c$, and define the adapter-level contrastive objective as $\mathcal{L}_1^A = \mathcal{J}(\mathbf{S}^A)$. To further guide the adapter toward cross-view compensation, we introduce a view-gap closure loss. Let $\bar{\mathbf{f}}_{1,b}^d$ and $\bar{\mathbf{f}}_{1,b}^s$ denote the normalized backbone features, and let $\bar{\mathbf{f}}_{1,b}^{Ad}$ and $\bar{\mathbf{f}}_{1,b}^{As}$ denote the normalized adapted features. The adapter-induced residual gap and the desired compensation direction are defined as

$$\mathbf{r}_b = (\bar{\mathbf{f}}_{1,b}^{Ad} - \bar{\mathbf{f}}_{1,b}^d) - (\bar{\mathbf{f}}_{1,b}^{As} - \bar{\mathbf{f}}_{1,b}^s), \mathbf{c}_b = -\eta(\bar{\mathbf{f}}_{1,b}^d - \bar{\mathbf{f}}_{1,b}^s). \quad (6)$$

Here, η controls the compensation strength. $\mathbf{r}_b$ measures the relative correction introduced by the adapter between the two views, while $\mathbf{c}_b$ encourages this correction to close the original backbone-level view gap. Let $\mathbf{e}_b = \mathbf{r}_b - \mathbf{c}_b$. The view-gap closure loss is defined as

$$\mathcal{L}_1^{vg} = \frac{1}{B} \sum_{b=1}^B \left[\mathcal{H}_\delta(\mathbf{e}_b) + \frac{1}{4}(1 - \cos(\mathbf{r}_b, \mathbf{c}_b)) \right], \quad (7)$$

where $\mathcal{H}_\delta(\cdot)$ denotes the element-wise averaged Huber penalty for robust compensation matching, and the cosine term is computed with stabilized normalization. The final Phase-II objective is

$$\mathcal{L}_1^{\text{II}} = \mathcal{L}_1^A + \lambda_1 \mathcal{L}_1^{vg}, \quad t = 1 \quad (8)$$

where λ_1 is a weighting coefficient. Through this two-phase design, the backbone first learns a reliable cross-view embedding space, and the adapter then learns view-gap-aware residual corrections on top of this space. This provides a stable initialization for subsequent continual stages.

Margin-Field Distillation

For continual stages $t > 1$, the model should preserve the cross-view geometry learned from previous environments to avoid catastrophic forgetting. We freeze the model from stage $t-1$ as a teacher and distill a compact *margin field* on

samples from $\mathcal{D}_t$. Unlike full affinity distillation, the margin field focuses on the margins between positive pairs and hard negatives, imposing selective geometric constraints around the retrieval boundary while retaining the plasticity needed for new environment adaptation. Specifically, given a mini-batch of B matched cross-view pairs from $\mathcal{D}_t$, we compute the current stage student affinity as

$$(\mathbf{R}_t)_{ij} = \beta_t (\bar{\mathbf{f}}_{t,i}^{Ad})^\top \bar{\mathbf{f}}_{t,j}^{As}. \quad (9)$$

Here, $\bar{\mathbf{f}}_{t,i}^{Ad}$ and $\bar{\mathbf{f}}_{t,j}^{As}$ denote the normalized adapted features of the current stage student. The frozen teacher affinity $(\mathbf{R}_{t-1})_{ij}$ is obtained analogously using the normalized adapted features produced by the stage $(t-1)$ teacher and its logit scale β_{t-1} . For the i -th query, the diagonal entry $(\mathbf{R}_{t-1})_{ii}$ corresponds to its positive match. We select the top- K hard negatives from the off-diagonal entries of the teacher affinity matrix:

$$\mathcal{H}_{t-1,i} = \arg \text{topK}_{j \neq i}(\mathbf{R}_{t-1})_{ij}, \quad |\mathcal{H}_{t-1,i}| = K. \quad (10)$$

For each selected negative $j \in \mathcal{H}_{t-1,i}$, the teacher and student margins are defined as $m_{t-1,i,j} = [(\mathbf{R}_{t-1})_{ii} - (\mathbf{R}_{t-1})_{ij}]/\tau_m$ and $m_{t,i,j} = [(\mathbf{R}_t)_{ii} - (\mathbf{R}_t)_{ij}]/\tau_m$, where τ_m is the margin temperature. Matching these margins preserves how much the positive match is preferred over hard negatives, rather than forcing all pairwise similarities to remain unchanged.

Not all teacher margins are equally reliable under domain shift. We therefore introduce confidence-aware weights. Let $\mathcal{A}_i = \{i\} \cup \mathcal{H}_{t-1,i}$ denote the restricted candidate set. The teacher distribution over this set is computed as $p_{i\ell} = \text{softmax}_{\ell \in \mathcal{A}_i}((\mathbf{R}_{t-1})_{i\ell}/\tau_d)$, and its entropy is $H_i = -\sum_{\ell \in \mathcal{A}_i} p_{i\ell} \log p_{i\ell}$. The row reliability is defined as $\omega_i = \text{clip}(1 - H_i/\log(K+1), \omega_{\min}, 1)$, and the margin confidence is defined as $a_{ij} = \max(\sigma(m_{t-1,i,j}), \omega_{\min})$. We combine them as $w_{ij} = \omega_i a_{ij}$. Let $e_{ij} = m_{t,i,j} - m_{t-1,i,j}$ and $Z = \sum_{i=1}^B \sum_{j \in \mathcal{H}_{t-1,i}} w_{ij} + \epsilon$. The one-directional margin-field distillation loss is written as

$$\mathcal{D}_{\text{MFD}}(\mathbf{R}_t, \mathbf{R}_{t-1}) = \frac{1}{Z} \sum_{i=1}^B \sum_{j \in \mathcal{H}_{t-1,i}} w_{ij} \mathcal{H}_\delta(e_{ij}), \quad (11)$$

where $\mathcal{H}_\delta(\cdot)$ denotes the Huber penalty, and ϵ is a small constant for numerical stability. Since cross-view retrieval is bidirectional, we apply the same constraint to the transposed affinity matrices:

$$\mathcal{L}_{\text{MFD}} = \frac{\mathcal{D}_{\text{MFD}}(\mathbf{R}_t, \mathbf{R}_{t-1}) + \mathcal{D}_{\text{MFD}}(\mathbf{R}_t^\top, \mathbf{R}_{t-1}^\top)}{2}. \quad (12)$$

For $t > 1$, For $t > 1$, the contrastive loss $\mathcal{L}_t^A$ and the view-gap closure loss $\mathcal{L}_t^{vg}$ are computed on the current stage data $\mathcal{D}_t$ using the same definitions as at $t = 1$. We maintain plasticity with these two objectives and mitigate forgetting through margin-field distillation. The final objective is

$$\mathcal{L}_t = \underbrace{\mathcal{L}_t^A + \lambda_1 \mathcal{L}_t^{vg}}_{\text{Plasticity}} + \underbrace{\lambda_2 \mathcal{L}_{\text{MFD}}}_{\text{Anti-forgetting}}, \quad t > 1. \quad (13)$$

where λ_1 and λ_2 are weighting coefficients to control the relative importance of the loss terms.

Protocol	Method	IR-VL328		DenseUAV		SUES-200		C-RGBT		U-1652		Avg		Storage
		R@1	AP	R@1	AP	R@1	AP	R@1	AP	R@1	AP	R@1	AP	
Drone → Satellite														
Individual	Sample4Geo	68.19	73.43	85.54	67.24	92.60	94.00	89.33	91.46	92.65	93.81	85.66	83.99	1752
	MEAN	63.75	70.11	86.61	67.89	95.50	96.46	81.33	85.31	93.55	94.53	84.15	82.86	730.5
	MFRGN	67.81	73.25	93.47	80.12	95.85	96.52	88.00	90.50	94.33	95.24	87.89	<u>87.13</u>	1869.5
	CAMP	67.04	72.60	84.47	66.02	95.40	96.38	85.33	88.03	94.46	95.38	85.34	83.68	1828.5
	DAC	<u>71.15</u>	<u>75.56</u>	85.67	68.03	96.80	97.54	<u>91.32</u>	93.12	94.67	95.50	87.92	85.95	1931
	SURFNet	65.19	70.87	77.52	58.73	93.63	94.84	88.00	90.56	94.57	95.49	83.78	82.10	2124
Continual	DKP	22.42	29.10	20.93	11.41	48.64	56.19	40.74	48.10	58.87	63.72	38.32	41.70	409.0
	LSTKC++	31.25	38.22	17.16	10.99	21.10	27.86	90.00	92.11	12.33	15.93	34.37	37.02	126.1
	DASK	22.45	28.51	14.84	9.11	51.17	57.52	78.66	82.23	44.32	49.34	42.29	45.34	126.1
Continual	GeoMFD	86.76	89.25	73.70	58.85	99.17	99.36	91.33	<u>93.00</u>	96.23	96.93	89.44	87.48	<u>345.9</u>
Satellite → Drone														
Individual	Sample4Geo	75.78	63.92	20.45	18.54	97.50	93.63	88.00	90.65	95.14	91.39	75.37	71.63	1752
	MEAN	68.75	57.36	20.33	18.26	97.50	<u>94.75</u>	86.66	89.45	96.01	92.08	73.85	70.38	730.5
	MFRGN	<u>78.12</u>	59.33	23.35	21.40	<u>98.75</u>	94.42	84.00	87.48	96.15	<u>93.94</u>	76.07	71.31	1869.5
	CAMP	71.87	63.37	19.56	17.71	96.25	93.36	83.33	86.42	96.15	92.72	73.43	70.72	1828.5
	DAC	75.00	<u>65.38</u>	20.25	<u>18.55</u>	97.50	94.06	93.33	94.71	<u>96.43</u>	93.79	<u>76.50</u>	<u>73.30</u>	1931
	SURFNet	71.88	59.01	17.61	16.07	95.00	90.75	89.33	91.13	95.72	93.20	73.91	70.03	2124
Continual	DKP	19.53	16.46	12.05	10.83	61.25	49.92	44.00	51.53	79.03	59.21	43.17	37.59	409.0
	LSTKC++	71.09	22.41	13.94	12.26	36.25	17.53	91.33	92.94	42.36	10.85	50.99	31.20	126.1
	DASK	25.00	10.35	6.58	6.33	52.50	42.39	84.00	87.30	77.31	45.07	49.08	38.29	126.1
Continual	GeoMFD	90.62	81.35	17.68	16.63	100.00	98.28	<u>92.00</u>	<u>93.84</u>	96.71	95.59	79.40	77.14	<u>345.9</u>

Table 1: Comparison of GeoMFD with state-of-the-art DVGL methods independently trained on each dataset and state-of-the-art continual retrieval methods adapted to the C-DVGL setting. For SUES-200, results are reported at 150 m.

Experiments

Experimental Settings

Benchmarks. We construct a continual DVGL evaluation setting from five representative datasets, including IR-VL328 (Liu, Ren, and Chen 2025), DenseUAV (Dai et al. 2024), SUES-200 (Zhu et al. 2023), CVGL-RGBT (C-RGBT) (Zhou, Yang, and Zhang 2025), and University-1652 (U-1652) (Zheng, Wei, and Yang 2020), covering diverse scenes, viewpoints, platforms, and both visible and infrared modalities. For clarity, we denote them as $\mathcal{D}_1$ to $\mathcal{D}_5$ in the above order, and define $\mathcal{O}_0 = [\mathcal{D}_1, \mathcal{D}_2, \mathcal{D}_3, \mathcal{D}_4, \mathcal{D}_5]$ as the default dataset order. Unless otherwise specified, all experiments follow $\mathcal{O}_0$.

Evaluation Metrics. We evaluate retrieval accuracy with Recall@1 (R@1) and Average Precision (AP). Additionally, to summarize performance across continual stages, we report the Average (Avg) R@1 and AP over the five datasets. Knowledge retention on previously learned datasets is further evaluated using Forgetting (Fgt.) and Backward Transfer (BWT), both computed from R@1 following these works (Chaudhry et al. 2018; Lin et al. 2022). Storage is also reported to quantify the model storage cost in MB.

Implementation Details. For CBS, both the backbone warm-up phase and the adapter activation phase are trained for 5 epochs. We set $\lambda_1 = 0.10$ in Eq. (8) and Eq. (13). For the Geo-Adapter, the residual scale α_t is initialized to 0.03, and the adapter learning rate multiplier is set to 5. The compensation ratio in the view-gap closure loss is set to $\eta = 0.75$. For MFD, we select the top- $K = 32$ hard negatives and set $\tau_m = 1.0$, $\tau_d = 4.0$, $\omega_{\min} = 0.1$, and $\lambda_2 = 0.3$. Each continual stage after $t = 1$ is trained for 5 epochs. Further details

are provided in the supplementary material.

Comparison with State-of-the-Art Methods

GeoMFD is compared with state-of-the-art DVGL methods, including Sample4Geo (Deuser, Habel, and Oswald 2023), MEAN (Chen, Yang, and Rong 2025), MFRGN (Wang et al. 2024b), CAMP (Wu et al. 2024), DAC (Xia et al. 2024), and SURFNet (Liu and Zhang 2026), as well as continual retrieval methods, including DKP (Xu et al. 2024), LSTKC++ (Xu et al. 2025b), and DASK (Xu et al. 2025a).

Overall Comparison. As shown in Table 1, GeoMFD achieves the best average performance in both retrieval directions under the single-model continual setting. It obtains R@1/AP scores of 89.44%/87.48% for Drone→Satellite retrieval, exceeding the best individually trained method by 1.52%/0.35%. For Satellite→Drone retrieval, it reaches 79.40%/77.14%, with improvements of 2.90%/3.84%. Compared with the strongest continual retrieval method, GeoMFD improves R@1/AP by 47.15%/42.14% and 28.41%/38.85% in the two retrieval directions, respectively. It also requires only 345.9 MB of storage, substantially less than maintaining separate models for all datasets. These results demonstrate that GeoMFD achieves stronger overall performance than individually trained DVGL methods and existing continual retrieval methods, while maintaining a low storage cost.

Sequential Fine-Tuning of DVGL Methods. As shown in Fig. 2, we compare GeoMFD with existing DVGL methods under the sequential fine-tuning order $\mathcal{O}_0$. Compared with their independently trained results in Table 1, conventional DVGL methods exhibit substantial performance degradation and large variations across datasets, particularly on the earlier environments. In contrast, GeoMFD maintains consistently

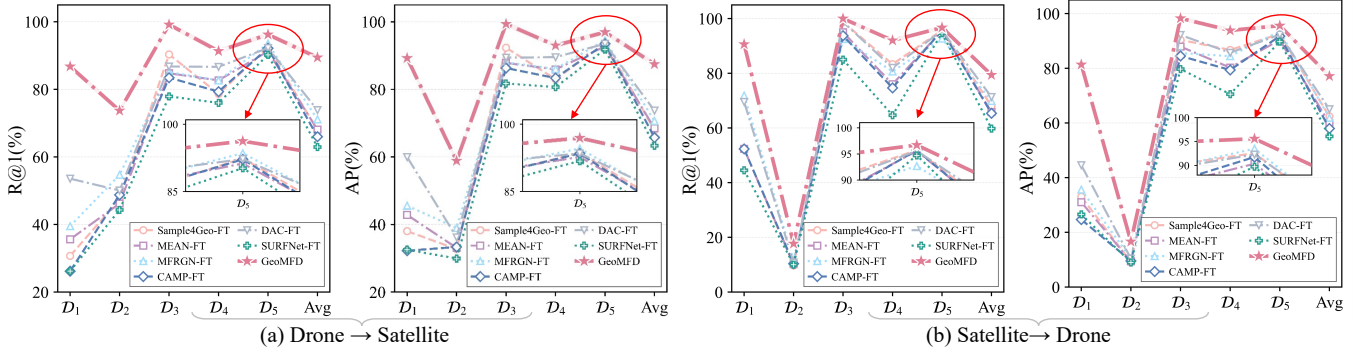


Figure 2: This figure complements Table 1 by comparing GeoMFD with state-of-the-art DVGL methods under sequential fine-tuning, denoted by the suffix “-FT”. For example, DAC-FT refers to the sequentially fine-tuned version of DAC.

Method	Drone → Satellite		Satellite → Drone	
	R@1	AP	R@1	AP
Baseline	81.05	79.91	74.83	70.72
w/o CBS	87.26	85.84	76.38	75.70
w/o Geo-Adapter	88.54	86.73	78.23	76.45
w/o MFD	82.38	81.24	75.50	71.81
GeoMFD	89.44	87.48	79.40	77.14

Table 2: **Ablation study of GeoMFD.** Each component is removed from GeoMFD to evaluate its contribution, with average performance reported over the five datasets.

After Stage t	w/o MFD				GeoMFD			
	R@1	AP	Fgt.↓	BWT↑	R@1	AP	Fgt.↓	BWT↑
Drone → Satellite								
$t=3$	76.79	73.50	13.90	-12.38	84.00	79.40	2.51	-1.08
$t=4$	86.82	83.62	2.51	-1.50	87.77	85.08	0.79	0.52
$t=5$	82.38	81.24	9.75	-8.99	89.44	87.48	0.93	0.36
Satellite → Drone								
$t=3$	64.68	61.66	7.55	-5.60	67.68	65.03	3.92	1.15
$t=4$	75.48	71.36	0.63	0.66	76.58	72.97	0.06	3.32
$t=5$	75.50	71.81	5.93	-4.96	79.40	77.14	1.70	0.98

Table 3: Stage-wise forgetting analysis of MFD. Results are averaged over all datasets seen up to stage t .

strong performance across all five datasets and achieves the highest average R@1 and AP in both retrieval directions. Additionally, the zoomed-in regions on the latest dataset $\mathcal{D}_5$ show that this stability does not compromise adaptation to new environments. These results demonstrate that GeoMFD achieves a favorable balance between stability and plasticity, providing stronger resistance to catastrophic forgetting than direct sequential fine-tuning.

Ablation Analysis

Component Ablation. As shown in Table 2, each component contributes consistently to the overall performance of GeoMFD. Removing MFD causes the most pronounced degradation, reducing the average R@1/AP from 89.44%/87.48% to 82.38%/81.24% for Drone→Satellite retrieval and from 79.40%/77.14% to 75.50%/71.81% for Satellite→Drone re-

Sequence	Drone → Satellite		Satellite → Drone	
	R@1	AP	R@1	AP
$[\mathcal{D}_5, \mathcal{D}_1, \mathcal{D}_2, \mathcal{D}_4, \mathcal{D}_3]$	88.83	86.96	79.80	76.62
$[\mathcal{D}_4, \mathcal{D}_2, \mathcal{D}_3, \mathcal{D}_5, \mathcal{D}_1]$	88.67	86.72	80.12	77.85
$[\mathcal{D}_3, \mathcal{D}_4, \mathcal{D}_2, \mathcal{D}_1, \mathcal{D}_5]$	87.26	85.70	79.66	76.13
$[\mathcal{D}_2, \mathcal{D}_3, \mathcal{D}_1, \mathcal{D}_5, \mathcal{D}_4]$	89.68	88.04	81.33	76.24
$[\mathcal{D}_1, \mathcal{D}_2, \mathcal{D}_3, \mathcal{D}_4, \mathcal{D}_5]$	89.44	87.48	79.40	77.14

Table 4: **Effect of dataset order on C-DVGL.** Average R@1 (%) and AP (%) are reported under different dataset orders.

trieval. This substantial drop highlights the importance of preserving historical similarity margins during sequential adaptation. CBS also provides clear benefits, particularly improving Satellite→Drone R@1 by 3.02%, which indicates that reliable initialization is important for subsequent continual learning. In addition, removing the Geo-Adapter decreases R@1 by 0.90% and 1.17% in the two retrieval directions, respectively, confirming the effectiveness of geometry-aware feature adaptation.

Stage-Wise Forgetting Analysis. As shown in Table 3, MFD consistently improves knowledge retention during sequential adaptation. At $t = 3$, removing MFD results in Fgt./BWT values of 13.90%/−12.38% for Drone→Satellite retrieval and 7.55%/−5.60% for Satellite→Drone retrieval. With MFD, these values improve to 2.51%/−1.08% and 3.92%/1.15%, respectively. After all five stages, MFD further reduces Fgt. from 9.75% to 0.93% and from 5.93% to 1.70% in the two directions, and improves BWT from −8.99% to 0.36% and from −4.96% to 0.98%. These results demonstrate that MFD effectively mitigates catastrophic forgetting and promotes positive backward transfer by preserving historical cross-view similarity margins.

Further Analysis

Robustness to Dataset Order. To evaluate the robustness of GeoMFD to different environment arrival orders, Table 4 reports the results under five dataset permutations. Across these orders, Drone→Satellite R@1/AP ranges from 87.26%/85.70% to 89.68%/88.04%, while Satellite→Drone R@1/AP ranges from 79.40%/76.13% to 81.33%/77.85%. The maximum variation is only 2.42%, which demonstrates

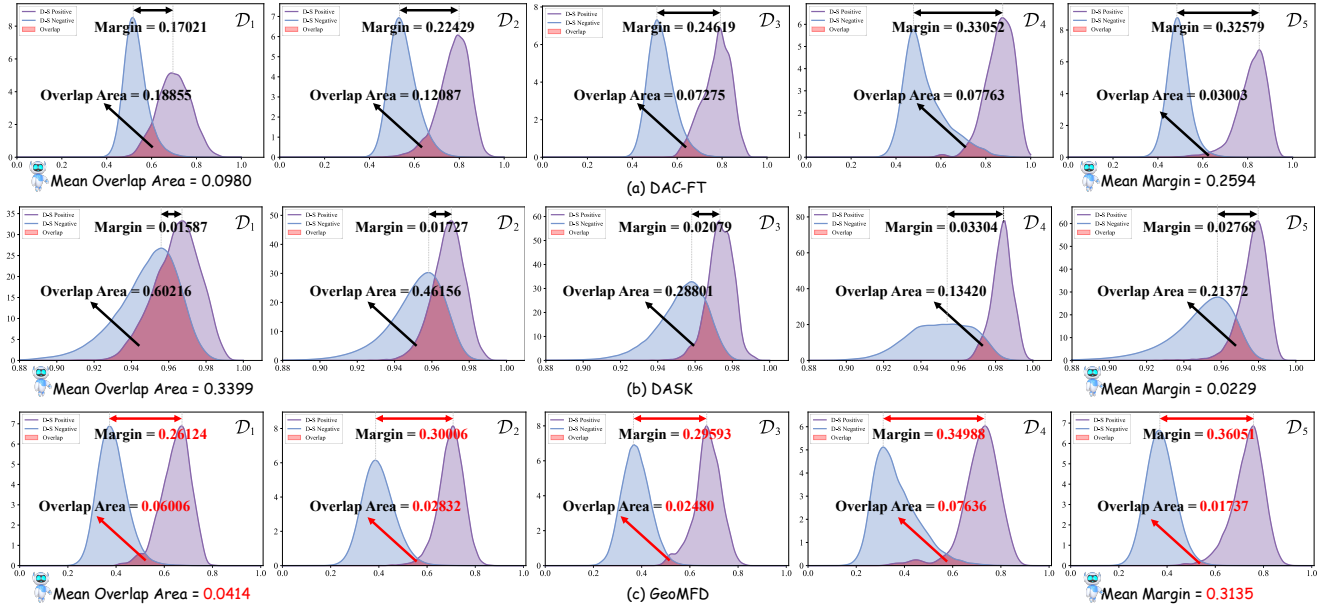


Figure 3: Visualization of cross-view similarity distributions for DAC-FT, DASK, and GeoMFD across $\mathcal{D}_1$ – $\mathcal{D}_5$. The margin measures the separation between positive and negative pairs, and the overlap area indicates matching ambiguity. Larger margins and smaller overlap areas indicate better cross-view discrimination.

Backbone	Method	Drone $\rightarrow$ Satellite		Satellite $\rightarrow$ Drone	
		R@1	AP	R@1	AP
ConvNeXt-S	Baseline	69.80	70.21	66.92	61.88
	GeoMFD	74.61	74.53	72.75	66.12
ConvNeXt-B	Baseline	73.64	73.58	71.95	64.80
	GeoMFD	78.31	77.57	75.01	68.50
ViT-S/16	Baseline	75.60	75.27	71.14	64.52
	GeoMFD	84.06	82.73	76.14	70.97
ViT-B/16	Baseline	81.05	79.91	74.83	70.72
	GeoMFD	89.44	87.48	79.40	77.14
ViT-L/16	Baseline	85.22	84.07	77.76	73.70
	GeoMFD	91.62	89.70	80.85	78.80

Table 5: GeoMFD is evaluated with ConvNeXt backbones and ViT backbones initialized with DINOv3 weights, and compared with the corresponding sequential fine-tuning baselines. Average results over five datasets are reported.

that GeoMFD is robust to changes in dataset order. Moreover, no single order consistently performs best across all metrics. These results confirm that GeoMFD remains robust across different dataset orders without relying on a favorable sequence.

Robustness across Backbones. To assess the robustness of GeoMFD across backbones, we conduct experiments with five backbones. As shown in Table 5, GeoMFD consistently outperforms sequential fine-tuning in both retrieval directions, with improvements of 3.06%–8.46% across all metrics. The results remain consistent for ConvNeXt backbones (Liu et al. 2022) and ViT backbones initialized with DINOv3. These results indicate that GeoMFD remains effective across different backbone families and model scales, rather than re-

lying on a particular encoder capacity.

Cross-View Similarity Distribution. To further examine the preservation of cross-view embedding geometry, Fig. 3 compares GeoMFD with DAC-FT and DASK. DAC-FT is the sequentially fine-tuned version of the DVGL method with the best overall independent-training performance, and DASK achieves the best overall performance among the continual retrieval methods. Across all five datasets, GeoMFD produces more clearly separated positive and negative similarity distributions, achieving the largest mean margin of 0.3135 and the smallest mean overlap area of 0.0414. Compared with DAC-FT, GeoMFD increases the mean margin from 0.2594 to 0.3135 and reduces the overlap area by 57.8%. Compared with DASK, it reduces the overlap area from 0.3399 to 0.0414, corresponding to an 87.8% reduction. These results confirm that GeoMFD more effectively preserves discriminative cross-view geometry and reduces ambiguity.

Conclusion

This paper investigates the practically important problem of continual drone-view geo-localization (C-DVGL), where a single model must adapt to sequentially arriving environments while retaining previously learned cross-view knowledge. We propose GeoMFD, a geometry-aware continual adaptation method that jointly supports environment adaptation and knowledge preservation. Extensive experiments on five DVGL datasets demonstrate that GeoMFD achieves superior overall performance compared with both independently trained DVGL methods and continual retrieval methods, while maintaining a single deployable model. This work provides a practical foundation for adaptive and reliable geo-localization in dynamic real-world environments.

References

- Buzzega, P.; Boschini, M.; Porrello, A.; Abati, D.; and Calderara, S. 2020. Dark experience for general continual learning: a strong, simple baseline. *Advances in Neural Information Processing Systems*, 33: 15920–15930.
- Chaudhry, A.; Dokania, P. K.; Ajanthan, T.; and Torr, P. H. 2018. Riemannian walk for incremental learning: Understanding forgetting and intransigence. In *Proceedings of the European conference on computer vision (ECCV)*, 532–547.
- Chen, N.; Zhang, D.; Jiang, K.; Yu, M.; Zhu, Y.; Lou, T.-S.; and Zhao, L. 2025. SHAA: Spatial Hybrid Attention Network With Adaptive Cross-Entropy Loss Function for UAV-View Geo-Localization. *IEEE Transactions on Circuits and Systems for Video Technology*, 35(9): 9398–9413.
- Chen, Z.; Yang, Z.-X.; and Rong, H.-J. 2025. Multilevel Embedding and Alignment Network With Consistency and Invariance Learning for Cross-View Geo-Localization. *IEEE Transactions on Geoscience and Remote Sensing*, 63: 1–15.
- Chen, Z.; Yang, Z.-X.; Rong, H.-J.; and Li, G. 2026. Without Paired Labeled Data: End-to-End Self-Supervised Learning for Drone-View Geo-Localization. *IEEE Transactions on Neural Networks and Learning Systems*, 1–15.
- Cheng, L.; Liu, D.; Chen, Z.; and Wang, T. 2026. First Learn, Then Review: Human-Like Continual Learning for Cross-View Geo-Localization with Limited Field of View. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, volume 40, 3264–3272.
- Dai, M.; Hu, J.; Zhuang, J.; and Zheng, E. 2021. A transformer-based feature segmentation and region alignment method for UAV-view geo-localization. *IEEE Transactions on Circuits and Systems for Video Technology*, 32(7): 4376–4389.
- Dai, M.; Zheng, E.; Feng, Z.; Qi, L.; Zhuang, J.; and Yang, W. 2024. Vision-Based UAV Self-Positioning in Low-Altitude Urban Environments. *IEEE Transactions on Image Processing*, 33: 493–508.
- Deuser, F.; Habel, K.; and Oswald, N. 2023. Sample4geo: Hard negative sampling for cross-view geo-localisation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 16847–16856.
- Huang, Z.; Zhang, Z.; Lan, C.; Zeng, W.; Chu, P.; You, Q.; Wang, J.; Liu, Z.; and Zha, Z.-j. 2022. Lifelong unsupervised domain adaptive person re-identification with coordinated anti-forgetting and adaptation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 14288–14297.
- Ji, Y.; He, B.; Tan, Z.; and Wu, L. 2025. MMGeo: Multimodal Compositional Geo-Localization for UAVs. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 25165–25175.
- Kirkpatrick, J.; Pascanu, R.; Rabinowitz, N.; Veness, J.; Desjardins, G.; Rusu, A. A.; Milan, K.; Quan, J.; Ramalho, T.; Grabska-Barwinska, A.; et al. 2017. Overcoming catastrophic forgetting in neural networks. *Proceedings of the National Academy of Sciences*, 114(13): 3521–3526.
- Li, H.; Xu, C.; Yang, W.; Mi, L.; Yu, H.; Zhang, H.; and Xia, G.-S. 2025. Unsupervised multi-view uav image geo-localization via iterative rendering. *IEEE Transactions on Geoscience and Remote Sensing*.
- Li, Z.; and Hoiem, D. 2017. Learning without forgetting. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 40(12): 2935–2947.
- Lin, S.; Yang, L.; Fan, D.; and Zhang, J. 2022. Beyond not-forgetting: Continual learning with backward knowledge transfer. *Advances in Neural Information Processing Systems*, 35: 16165–16177.
- Liu, K.; and Zhang, W. 2026. SURFNet: A Surface-Aware UAV-Satellite Geolocation Framework via Feature Aggregation and Dual Positional Encoding. *IEEE Transactions on Geoscience and Remote Sensing*, 64: 1–15.
- Liu, T.; Ren, K.; and Chen, Q. 2025. Object Detection as an Optional Basis: A Graph Matching Network for Cross-View UAV Localization. *arXiv preprint arXiv:2511.02489*.
- Liu, T.; Zhang, Y.; Ren, K.; and Zhao, X. 2026. Satellite-Free Training for Drone-View Geo-Localization. *arXiv:2604.01581*.
- Liu, Z.; Mao, H.; Wu, C.-Y.; Feichtenhofer, C.; Darrell, T.; and Xie, S. 2022. A convNet for the 2020s. In *Proc. IEEE Conf. Comput. Vis. Pattern Recognit.*, 11976–11986.
- Lv, H.; Zhu, H.; Zhu, R.; Wu, F.; Wang, C.; Cai, M.; and Zhang, K. 2024. Direction-guided multi-scale feature fusion network for geo-localization. *IEEE Transactions on Geoscience and Remote Sensing*, 62: 1–13.
- Shao, X.; Yan, Z.; Sun, L.; He, M.; Chen, C.; Zhang, J.; Li, C.; and Meng, Z. 2026. Towards Lifelong Aerial Autonomy: Geometric Memory Management for Continual Visual Place Recognition in Dynamic Environments. *arXiv preprint arXiv:2604.09038*.
- Shen, T.; Wei, Y.; Kang, L.; Wan, S.; and Yang, Y.-H. 2023. MCCG: A convNeXt-based multiple-classifier method for cross-view geo-localization. *IEEE Transactions on Circuits and Systems for Video Technology*, 34(3): 1456–1468.
- Siméoni, O.; Vo, H. V.; Seitzer, M.; Baldassarre, F.; Oquab, M.; Jose, C.; Khalidov, V.; Szafraniec, M.; Yi, S.; Ramamonjisoa, M.; et al. 2025. Dinov3. *arXiv preprint arXiv:2508.10104*.
- Song, Z.; Zhang, J.; Wang, D.; Zhou, Z.; Liu, W.; Guo, H.; Wang, E.; and Du, B. 2026. Geobridge: A semantic-anchored multi-view foundation model bridging images and text for geo-localization. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 27793–27803.
- Wang, T.; Zheng, Z.; Sun, Y.; Yan, C.; Yang, Y.; and Chua, T.-S. 2024a. Multiple-environment self-adaptive network for aerial-view geo-localization. *Pattern Recognit.*, 152: 110363.
- Wang, T.; Zheng, Z.; Yan, C.; Zhang, J.; Sun, Y.; Zheng, B.; and Yang, Y. 2021. Each part matters: Local patterns facilitate cross-view geo-localization. *IEEE Transactions on Circuits and Systems for Video Technology*, 32(2): 867–879.
- Wang, X.; Zhang, L.; Fan, Z.; Liu, Y.; Chen, C.; and Deng, F. 2025. From Coarse to Fine: A Matching and Alignment

- Framework for Unsupervised Cross-View Geo-Localization. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, volume 39, 8024–8032.
- Wang, Y.; Zhang, J.; Wei, R.; Gao, W.; and Wang, Y. 2024b. Mfrgn: Multi-scale feature representation generalization network for ground-to-aerial geo-localization. In *Proceedings of the 32nd ACM International Conference on Multimedia (ACMMM)*, 2574–2583.
- Wen, W.; Chen, H.; and Zhang, S. 2026. Prompt-Anchored Vision-Text Distillation for Lifelong Person Re-identification. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 18503–18512.
- Wu, Q.; Wan, Y.; Zheng, Z.; Zhang, Y.; Wang, G.; and Zhao, Z. 2024. CAMP: Across-view geo-localization method using contrastive attributes mining and position-aware partitioning. *IEEE Transactions on Geoscience and Remote Sensing*, 62: 1–14.
- Xia, P.; Wan, Y.; Zheng, Z.; Zhang, Y.; and Deng, J. 2024. Enhancing cross-view geo-localization with domain alignment and scene consistency. *IEEE Transactions on Circuits and Systems for Video Technology*, 34(12): 1–12.
- Xu, K.; Jiang, C.; Xiong, P.; Peng, Y.; and Zhou, J. 2025a. Dask: Distribution rehearsing via adaptive style kernel learning for exemplar-free lifelong person re-identification. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, volume 39, 8915–8923.
- Xu, K.; Liu, Z.; Zou, X.; Peng, Y.; and Zhou, J. 2025b. Long Short-Term Knowledge Decomposition and Consolidation for Lifelong Person Re-Identification. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 47(9): 7796–7811.
- Xu, K.; Zou, X.; Peng, Y.; and Zhou, J. 2024. Distribution-aware knowledge prototyping for non-exemplar lifelong person re-identification. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 16604–16613.
- Xu, K.; Zou, X.; and Zhou, J. 2024. Lstkc: Long short-term knowledge consolidation for lifelong person re-identification. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, volume 38, 16202–16210.
- Yu, C.; Shi, Y.; Liu, Z.; Gao, S.; and Wang, J. 2023. Lifelong person re-identification via knowledge refreshing and consolidation. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, volume 37, 3295–3303.
- Zhang, X.; Zhao, S.; Zhang, Y.; Ge, F.; Zhao, B.; and Zhang, Y. 2025. APA-BI: Adaptive Partition Aggregation and Bidirectional Integration for UAV-View Geo-Localization. In *2025 IEEE International Conference on Robotics and Automation (ICRA)*, 4175–4181. IEEE.
- Zhao, H.; Ren, K.; Yue, T.; Zhang, C.; and Yuan, S. 2024. TransFG: A cross-view geo-localization of satellite and UAVs imagery pipeline using transformer-based feature aggregation and gradient guidance. *IEEE Transactions on Geoscience and Remote Sensing*, 62: 1–12.
- Zhao, J.; Huang, L.; Li, X.; An, Z.; Yang, C.; Wang, Y.; Diao, B.; and Xu, Y. 2026. Representation-Steered Incremental Adapter-Tuning for Class-Incremental Learning with Pre-Trained Models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 18010–18020.
- Zheng, Z.; Wei, Y.; and Yang, Y. 2020. University-1652: A Multi-view Multi-source Benchmark for Drone-based Geo-localization. In *Proceedings of the 28th ACM International Conference on Multimedia (ACMMM)*, 1395–1403.
- Zhou, X.; Yang, X.; and Zhang, Y. 2025. Cdm-net: A framework for cross-view geo-localization with multimodal data. *IEEE Transactions on Geoscience and Remote Sensing*, 63: 1–16.
- Zhu, R.; Yin, L.; Yang, M.; Wu, F.; Yang, Y.; and Hu, W. 2023. SUES-200: A multi-height multi-scene cross-view image benchmark across drone and satellite. *IEEE Transactions on Circuits and Systems for Video Technology*, 33(9): 4825–4839.

GeoMFD: Continual Drone-View Geo-Localization with Geometry-Aware Adapter and Margin-Field Distillation

Supplementary Material

Motivation and Distinction from Related Continual Localization Settings

As shown in Fig. 4, C-DVGL is motivated by the practical scenario in which a drone successively operates in environments with different scene structures, illumination conditions, and viewing characteristics. A static DVGL model trained for a fixed environment may not remain effective as the operating environment changes. Maintaining a separate model for each environment increases onboard storage requirements and introduces additional model-selection and switching overhead. In contrast, C-DVGL maintains a single model that is sequentially updated across environments while retaining the cross-view matching capability learned from previous ones. This requires the model to preserve the relative relationships between positive pairs and hard negatives during adaptation. The storage and battery symbols in Fig. 4 conceptually illustrate onboard resource constraints rather than measured hardware consumption.

Although continual learning has also been explored in visual geo-localization (Cheng et al. 2026; Shao et al. 2026), the corresponding continual scenarios differ from C-DVGL. HCL-Geo (Cheng et al. 2026) constructs its task sequence according to changes in the field of view, whereas the lifelong aerial VPR setting (Shao et al. 2026) considers sequential localization missions or domains. In contrast, C-DVGL focuses on a DVGL model operating across sequentially changing drone environments. Therefore, these settings differ mainly in how the continual localization sequence is defined and in the deployment scenario being considered.

Additional Method Details

This section provides additional details of GeoMFD that complement the formulation in the main paper. We first describe the group-wise spectral calibration in Geo-Adapter and then analyze the geometric properties of its reflection and tangent branches. We further clarify the motivation behind margin-field distillation (MFD). We follow the notation introduced in the main paper. Specifically, $\mathbf{f}_t \in \mathbb{R}^C$ denotes a backbone feature, $\tilde{\mathbf{f}}_t = \mathbf{f}_t / \|\mathbf{f}_t\|_2$ denotes its normalized representation, and $\mathbf{f}_t^A = \Theta_t^A(\mathbf{f}_t)$ denotes the adapted feature. The same operations are applied to both the drone-view and satellite-view branches.

Backbone Architecture

We adopt ViT-B/16 initialized with DINOv3 weights as the backbone for both the drone-view and satellite-view branches. The input image is divided into non-overlapping 16×16 patches and encoded by the Vision Transformer into a $C = 768$ -dimensional feature representation. The two view branches use the same backbone architecture and share their model parameters, thereby mapping drone and satellite

images into a common embedding space. The resulting backbone feature $\mathbf{f}_t$ is subsequently processed by Geo-Adapter to produce the environment-adapted representation $\mathbf{f}_t^A$.

Group-Wise Spectral Calibration

The spectral calibration extracts a low-dimensional descriptor of the group-wise channel response, which is subsequently used to condition the reflection and tangent residual branches. Given the backbone feature $\mathbf{f}_t \in \mathbb{R}^C$, we first apply layer normalization:

$$z_t = \text{LN}(\mathbf{f}_t) \in \mathbb{R}^C. \quad (14)$$

We then divide the C channels into G non-overlapping groups, each containing $P = C/G$ channels. Let $\mathcal{I}_g = \{(g-1)P+1, \dots, gP\}$ denote the channel indices of the g -th group. Its response magnitude is summarized by the mean absolute activation:

$$(s_t)_g = \frac{1}{P} \sum_{c \in \mathcal{I}_g} |(z_t)_c|, \quad g = 1, \dots, G, \quad (15)$$

where $s_t \in \mathbb{R}^G$ provides a compact description of the group-wise channel-response distribution. In practice, Eq. (15) is efficiently implemented by adaptive average pooling over the absolute channel responses. The resulting descriptor s_t is passed through a lightweight bottleneck to predict a bounded group-wise calibration vector:

$$a_t = \tanh(W_{s,2}\phi(W_{s,1}s_t + b_{s,1}) + b_{s,2}), \quad (16)$$

where $a_t \in [-1, 1]^G$. $\phi(\cdot)$ denotes the SiLU activation. Each entry of $\mathbf{a}_t$ is then broadcast to all channels within the corresponding group through $\mathcal{B}(\cdot)$, yielding the calibrated feature

$$\tilde{\mathbf{f}}_t = z_t \odot (\mathbf{1}_C + \mathcal{B}(\mathbf{a}_t)), \quad (17)$$

where $\mathbf{1}_C$ is an all-one vector of dimension C . Thus, each channel group is adaptively rescaled by a factor in $[0, 2]$.

The use of absolute responses in Eq. (15) allows s_t to capture the activation strength of each group independently of the response sign. Meanwhile, the original signed feature z_t is retained in Eq. (17). The calibration therefore modulates the relative importance of channel groups without discarding their signed response patterns. In all experiments, we use $G = 12$ groups for the $C = 768$ ViT-B/16 embedding, and set the bottleneck width to 256.

The weights and bias of the final linear layer in Eq. (16) are initialized to zero. Consequently, $a_t = \mathbf{0}_G$ and $\tilde{\mathbf{f}}_t = z_t$ at initialization. This identity initialization prevents the calibration module from perturbing the backbone representation at the beginning of training, while allowing it to progressively learn environment-conditioned channel reweighting.

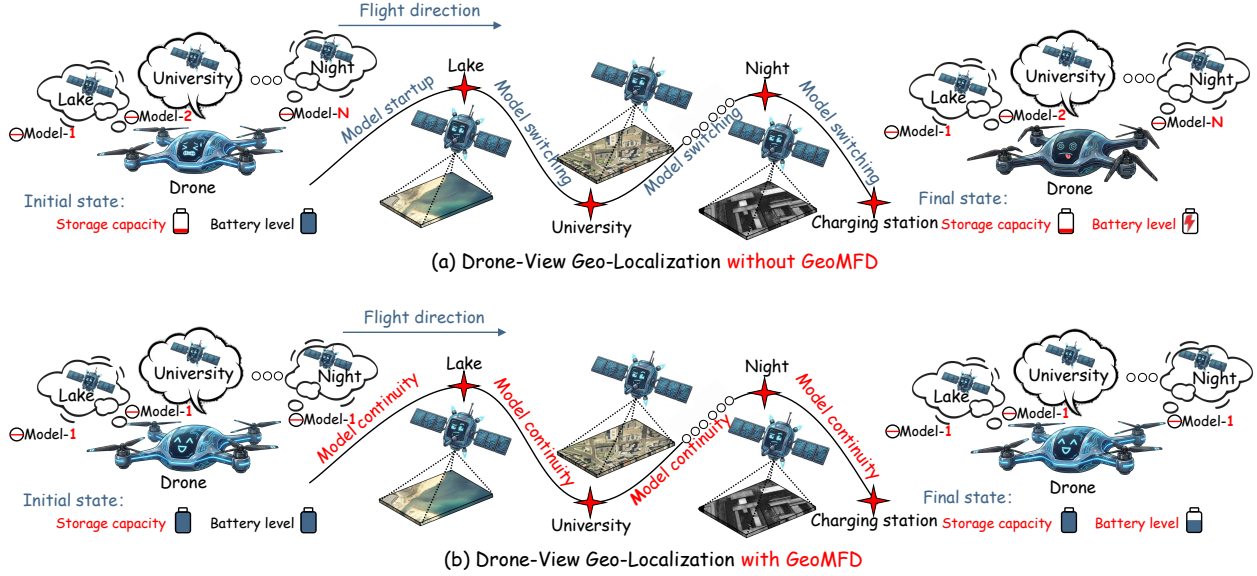


Figure 4: Motivation of GeoMFD. (a) Conventional deployment may require multiple environment-specific models as the operating environment changes. This increases onboard storage, complicates deployment, and introduces additional model-selection overhead. (b) GeoMFD enables a single DVGL model to adapt across sequentially changing environments while maintaining continuity in the learned cross-view embedding geometry.

Geometric Properties of the Reflection and Tangent Residuals

Given the calibrated feature $\tilde{\mathbf{f}}_t$, Geo-Adapter predicts two complementary geometric directions:

$$\mathbf{v}_t = h_t^r(\tilde{\mathbf{f}}_t) / \|h_t^r(\tilde{\mathbf{f}}_t)\|_2, \quad \mathbf{q}_t = h_t^g(\tilde{\mathbf{f}}_t), \quad (18)$$

These definitions correspond to Eq. (1) in the main paper. Here, $\tilde{\mathbf{f}}_t$ is the calibrated representation derived from the original backbone feature $\mathbf{f}_t$ and is used to generate input-dependent geometric directions. In contrast, the normalized feature $\tilde{\mathbf{f}}_t$ provides the geometric reference on the unit hypersphere. The reflection residual is defined as

$$\Delta_t^r = (\tilde{\mathbf{f}}_t - 2\langle \tilde{\mathbf{f}}_t, \mathbf{v}_t \rangle \mathbf{v}_t) - \tilde{\mathbf{f}}_t. \quad (19)$$

The transformed feature before residual subtraction can be written as

$$\mathbf{f}_t^{\text{ref}} = \tilde{\mathbf{f}}_t - 2\langle \tilde{\mathbf{f}}_t, \mathbf{v}_t \rangle \mathbf{v}_t. \quad (20)$$

Since $\|\tilde{\mathbf{f}}_t\|_2 = \|\mathbf{v}_t\|_2 = 1$, the transformation applied to each input feature is a Householder reflection and preserves its individual feature norm:

$$\|\mathbf{f}_t^{\text{ref}}\|_2^2 = \|\tilde{\mathbf{f}}_t\|_2^2 - 4\langle \tilde{\mathbf{f}}_t, \mathbf{v}_t \rangle^2 + 4\langle \tilde{\mathbf{f}}_t, \mathbf{v}_t \rangle^2 \|\mathbf{v}_t\|_2^2 = 1. \quad (21)$$

Therefore, for each input feature, the reflection branch changes its angular position on the unit hypersphere without altering its norm. Moreover, $\|\Delta_t^r\|_2 = 2|\langle \tilde{\mathbf{f}}_t, \mathbf{v}_t \rangle| \leq 2$ shows that the reflection residual provides a bounded reflection residual, whose Euclidean norm corresponds to the chordal displacement between the original and reflected features on the unit hypersphere. Additionally, the tangent residual is defined as

$$\Delta_t^g = \mathbf{q}_t - \langle \mathbf{q}_t, \tilde{\mathbf{f}}_t \rangle \tilde{\mathbf{f}}_t. \quad (22)$$

It removes the radial component of $\mathbf{q}_t$ with respect to $\tilde{\mathbf{f}}_t$. By construction,

$$\langle \Delta_t^g, \tilde{\mathbf{f}}_t \rangle = \langle \mathbf{q}_t, \tilde{\mathbf{f}}_t \rangle - \langle \mathbf{q}_t, \tilde{\mathbf{f}}_t \rangle \|\tilde{\mathbf{f}}_t\|_2^2 = 0. \quad (23)$$

Hence, $\Delta_t^g \in T_{\tilde{\mathbf{f}}_t} \mathbb{S}^{C-1}$, where $T_{\tilde{\mathbf{f}}_t} \mathbb{S}^{C-1}$ denotes the tangent space of the unit hypersphere at $\tilde{\mathbf{f}}_t$. The tangent branch therefore provides a local angular correction without directly moving the feature along its radial direction. Moreover, since the tangent projection is non-expansive, $\|\Delta_t^g\|_2 \leq \|\mathbf{q}_t\|_2$. This property controls the tangent residual relative to its predicted direction, without requiring a sample-independent upper bound on its magnitude.

Following Eq. (3) in the main paper, the two residuals are adaptively fused as

$$\Delta_t^A(\mathbf{f}_t) = \rho_t^r \Delta_t^r + \rho_t^g \Delta_t^g, \quad (24)$$

where the input-dependent mixture weights are predicted by

$$[\rho_t^r, \rho_t^g] = \text{softmax}(\psi_t(\mathbf{s}_t)). \quad (25)$$

Since $\rho_t^r, \rho_t^g \geq 0$ and $\rho_t^r + \rho_t^g = 1$, $\Delta_t^A(\mathbf{f}_t)$ is a convex combination of the reflection-based residual and the local tangent residual. The notation $\Delta_t^A(\mathbf{f}_t)$ emphasizes that the residual correction is conditioned on the original input feature through its calibrated representation and the corresponding channel-response statistics. Meanwhile, the geometric construction of both residual branches is defined with respect to $\tilde{\mathbf{f}}_t$ on the unit hypersphere. The softmax gate therefore adaptively balances the relative contributions of the two geometric corrections according to the channel-response statistics of each input, rather than imposing a uniform bound on the magnitude of the fused residual. The overall correction strength is further

modulated by the learnable residual gate α_t . The adapted feature is finally obtained as

$$\mathbf{f}_t^A = \text{Norm}(\bar{\mathbf{f}}_t + \alpha_t \Delta_t^A(\mathbf{f}_t)). \quad (26)$$

The final normalization maps the residual-updated feature back onto the unit hypersphere, ensuring $\|\mathbf{f}_t^A\|_2 = 1$. When $\alpha_t = 0$ or $\Delta_t^A(\mathbf{f}_t) = \mathbf{0}$, the normalization acts as an identity mapping on the already normalized feature, yielding $\mathbf{f}_t^A = \bar{\mathbf{f}}_t$. For a sufficiently small α_t , a first-order expansion around $\alpha_t = 0$ gives

$$\mathbf{f}_t^A = \bar{\mathbf{f}}_t + \alpha_t (\mathbf{I} - \bar{\mathbf{f}}_t \bar{\mathbf{f}}_t^\top) \Delta_t^A(\mathbf{f}_t) + \mathcal{O}(\alpha_t^2). \quad (27)$$

This expression shows that, to first order, the final normalization removes the radial component of $\Delta_t^A(\mathbf{f}_t)$, and only its component in the tangent space at $\bar{\mathbf{f}}_t$ changes the embedding direction. Since the expansion is performed around the unit-normalized base feature $\bar{\mathbf{f}}_t$, the first-order term does not contain the factor $1/\|\mathbf{f}_t\|_2$. Therefore, α_t directly controls the first-order angular correction without being additionally rescaled by the norm of the original feature.

We initialize α_t to 0.03. The final linear layer of $\psi_t(\cdot)$ is zero-initialized, yielding $\rho_t^r = \rho_t^g = 1/2$ before training. Consequently, Geo-Adapter starts close to the normalized backbone embedding without introducing an arbitrary initial preference for either geometric branch.

Interpretation of View-Gap Closure

For a matched pair, define the normalized backbone-level view gap as $\mathbf{d}_b = \bar{\mathbf{f}}_{1,b}^d - \bar{\mathbf{f}}_{1,b}^s$ and the relative adapter-induced correction as

$$\mathbf{r}_b = (\bar{\mathbf{f}}_{1,b}^{Ad} - \bar{\mathbf{f}}_{1,b}^d) - (\bar{\mathbf{f}}_{1,b}^{As} - \bar{\mathbf{f}}_{1,b}^s). \quad (28)$$

Accordingly, the adapted cross-view gap can be written as

$$\bar{\mathbf{f}}_{1,b}^{Ad} - \bar{\mathbf{f}}_{1,b}^{As} = \mathbf{d}_b + \mathbf{r}_b. \quad (29)$$

The target compensation direction in Eq. (6) of the main paper is $\mathbf{c}_b = -\eta \mathbf{d}_b$. Under the idealized condition $\mathbf{r}_b = \mathbf{c}_b$, the adapted cross-view gap becomes

$$\mathbf{d}_b + \mathbf{r}_b = (1 - \eta) \mathbf{d}_b. \quad (30)$$

Therefore, $0 < \eta < 1$ encourages a partial contraction of the current backbone-level view gap rather than its complete cancellation. In particular, $\eta = 1$ would target a zero gap for each matched pair, whereas a smaller η retains part of the original displacement and avoids imposing an overly restrictive pairwise alignment that may suppress useful discriminative variation with respect to nearby negatives. We use $\eta = 0.75$, corresponding to a target gap of $0.25 \mathbf{d}_b$ when the compensation target is matched exactly.

This interpretation describes the intended behavior of the loss and does not require the equality $\mathbf{r}_b = \mathbf{c}_b$ to be satisfied exactly during optimization. Since the backbone and adapter are jointly updated in Phase II, $\mathbf{d}_b$ denotes the current backbone-level gap at each optimization step, and the view-gap closure loss continuously guides the relative adapter correction toward its corresponding compensation target.

The Huber term penalizes the component-wise discrepancy $\mathbf{r}_b - \mathbf{c}_b$ and therefore provides a robust constraint on

the correction magnitude and structure. The cosine term in Eq. (7) complements it by explicitly encouraging directional consistency between $\mathbf{r}_b$ and $\mathbf{c}_b$ while being insensitive to their absolute scales. Thus, the two terms jointly constrain the magnitude and direction of the adapter-induced compensation. Unlike the adapter-level contrastive objective, which establishes batch-wise discrimination using positive and negative pairs, the view-gap closure loss directly regularizes how the adapter modifies the relative displacement within each matched cross-view pair.

Why Margin-Field Distillation Encourages Retrieval Geometry Preservation

For a query i and a hard negative j selected by the teacher, we define the teacher affinity margin as

$$\delta_{t-1,i,j} = (R_{t-1})_{ii} - (R_{t-1})_{ij}. \quad (31)$$

Its sign determines the local retrieval order: the positive is ranked above the negative j if and only if $\delta_{t-1,i,j} > 0$. Matching the normalized student margin $m_{t,i,j} = \delta_{t,i,j}/\tau_m$ to the corresponding teacher margin $m_{t-1,i,j} = \delta_{t-1,i,j}/\tau_m$ therefore preserves both the ranking decision and its separation from the local decision boundary. In contrast to matching all B^2 affinities, margin matching is invariant to a row-wise additive shift. For any scalar c_i ,

$$[(R_t)_{ii} + c_i] - [(R_t)_{ij} + c_i] = (R_t)_{ii} - (R_t)_{ij}. \quad (32)$$

MFD thus encourages the preservation of the selected local retrieval geometry without requiring the student to reproduce domain-specific row-wise affinity offsets.

In Eq. (10) of the main paper, K denotes the predefined maximum number of hard negatives. Since each affinity row contains at most $B - 1$ off-diagonal candidates, the effective number used in practice is

$$K' = \min(K, B - 1). \quad (33)$$

Accordingly, for each query, the teacher selects $|\mathcal{H}_{t-1,i}| = K'$ hard negatives, where $K = 32$. The restricted candidate set $\mathcal{A}_i = \{i\} \cup \mathcal{H}_{t-1,i}$ therefore contains $K' + 1$ elements. When $B - 1 \geq K$, we have $K' = K$, and the formulation reduces exactly to that presented in the main paper. We use mini-batches with $B \geq 2$, ensuring that at least one in-batch negative is available for each query.

Restricting distillation to these negatives concentrates the constraint near the retrieval boundary and reduces the number of one-directional loss terms from $O(B^2)$ to $O(BK')$. The affinity matrix is still computed in the current implementation for in-batch retrieval and top- K' selection, but no historical image, feature, or affinity matrix is stored.

The confidence terms introduced in the main paper play complementary roles. The normalized-entropy reliability is defined as

$$\omega_i = \text{clip}\left(1 - \frac{H(p_i)}{\log(K' + 1)}, \omega_{\min}, 1\right). \quad (34)$$

The denominator $\log(K' + 1)$ is the maximum entropy of a distribution over the positive and the K' selected negatives. Thus, the normalization remains valid when the available number of in-batch negatives is smaller than the predefined maximum K . The reliability approaches one when the

teacher distribution over the positive and selected negatives is concentrated, and approaches $\omega_{\min}$ when the distribution is ambiguous. The pairwise margin confidence

$$a_{ij} = \max(\sigma(m_{t-1,i,j}), \omega_{\min}) \quad (35)$$

assigns greater weight to comparisons for which the teacher exhibits a clear positive preference. Their product, $w_{ij} = \omega_i a_{ij}$, prevents either an uncertain teacher row or an unreliable pairwise relation from dominating the update, while the floor $\omega_{\min} = 0.1$ avoids discarding such supervision entirely. The Huber penalty further limits the influence of large teacher–student discrepancies caused by domain shift. Finally, MFD is applied in both retrieval directions by performing the same construction on R_t and $R_t^\top$.

Details of the Benchmarks and Evaluation Metrics

We conduct experiments on five drone-view geo-localization benchmarks with distinct scene distributions, acquisition conditions, and cross-view gaps. For all datasets, we evaluate both retrieval directions. In Drone→Satellite retrieval, drone images are used as queries to retrieve their corresponding satellite images from the gallery. Conversely, in Satellite→Drone retrieval, satellite images serve as queries to retrieve the matching drone images.

IR-VL328. IR-VL328 is an infrared–visible cross-modal benchmark designed for UAV geo-localization under nighttime conditions (Liu, Ren, and Chen 2025). It contains 328 geographically independent scenes collected in real environments. The drone-view images are captured at night using an onboard infrared camera, whereas the corresponding reference images are obtained from visible-light satellite imagery. Compared with conventional RGB-based benchmarks, IR-VL328 introduces not only a large viewpoint discrepancy but also a substantial modality and illumination gap between thermal aerial observations and visible satellite references. It therefore provides a challenging environment for evaluating whether a continual model can acquire cross-modal matching knowledge without disrupting the visual correspondence learned from other environments.

DenseUAV. DenseUAV is a real-world benchmark developed for vision-based UAV self-positioning in low-altitude urban environments (Dai et al. 2024). It contains more than 27,000 densely sampled drone-view and satellite-view images collected across 14 university campuses. The UAV images are acquired at flight altitudes of approximately 80, 90, and 100 m, resulting in substantial variations in image scale and ground coverage. Unlike datasets organized around a small number of isolated landmarks, DenseUAV densely samples spatially adjacent locations, producing many visually similar candidates in the gallery. Repetitive building layouts, roads, vegetation, and neighboring urban structures consequently form difficult hard negatives, making the dataset particularly suitable for evaluating fine-grained retrieval geometry and resistance to catastrophic forgetting.

SUES-200. SUES-200 is a multi-height and multi-scene benchmark containing 200 geographical locations and

24,120 drone and satellite images (Zhu et al. 2023). The drone images are captured at four flight altitudes, namely 150, 200, 250, and 300 m, resulting in systematic variations in apparent scale, visible context, and spatial coverage. Its official split contains 120 training locations and 80 test locations. The dataset covers diverse urban scenes and is therefore suitable for evaluating robustness to altitude-induced scale changes and scene-level appearance variations. Among the four altitude settings, 150 m represents the most challenging retrieval condition because the narrower ground coverage provides less contextual information for cross-view matching. Accordingly, we report the 150-m results in the main paper, while the results at the remaining altitudes are provided in the supplementary material.

C-RGBT. C-RGBT is a cross-modal cross-view geo-localization dataset composed of paired visible and thermal images (Zhou, Yang, and Zhang 2025). Its thermal images were captured using a DJI H20T thermal module mounted on a DJI M300 RTK drone. Following Urban-500, the dataset categorizes scenes into building-class and nonbuilding-class scenarios, containing 503 and 395 RGBT image pairs, respectively. The pronounced modality gap between visible and thermal imagery provides a challenging setting for evaluating continual adaptation across heterogeneous sensing conditions.

U-1652. U-1652 is a large-scale multi-view and multi-source benchmark covering 1,652 buildings from 72 universities worldwide (Zheng, Wei, and Yang 2020). It provides images from synthetic drone cameras, satellites, and ground cameras; only the drone and satellite modalities are used in our experiments. Each target is observed from multiple drone viewpoints around the corresponding building, introducing pronounced changes in scale, orientation, and visible facade content. The training set contains 701 buildings from 33 universities, while the evaluation locations are drawn from 39 disjoint universities. The satellite gallery contains 951 buildings, including 250 additional distractor locations, which increases the difficulty of large-scale retrieval. Owing to its broad geographical coverage and diverse architectural styles, U-1652 provides a comprehensive final environment for evaluating both cross-view generalization and accumulated forgetting.

Unless otherwise specified, the default continual sequence is IR-VL328 → DenseUAV → SUES-200 → C-RGBT → U-1652. At stage t , optimization uses only images from the current dataset $\mathcal{D}_t$. The checkpoint obtained at stage $t - 1$ initializes the student model, while a frozen copy of the same checkpoint serves as the teacher throughout stage t . We use neither exemplar replay nor any stored images, features, or affinity matrices from previous datasets. After each stage, the resulting single checkpoint is evaluated on the test sets of all environments observed so far. Dataset identities are not provided to the model during inference.

Protocol	Method	IR-VL328 R@1 AP	DenseUAV R@1 AP	SUES-200 R@1 AP	C-RGBT R@1 AP	U-1652 R@1 AP	Avg. R@1 AP	Storage
Drone → Satellite								
Individual	Sample4Geo	68.19 73.43	85.54 67.24	92.60 94.00	89.33 91.46	92.65 93.81	85.66 83.99	1752
	MEAN	63.75 70.11	86.61 67.89	95.50 96.46	81.33 85.31	93.55 94.53	84.15 82.86	730.5
	MFRGN	67.81 73.25	93.47 80.12	95.85 96.52	88.00 90.50	94.33 95.24	87.89 87.13	1869.5
	CAMP	67.04 72.60	84.47 66.02	95.40 96.38	85.33 88.03	94.46 95.38	85.34 83.68	1828.5
	DAC	71.15 75.56	85.67 68.03	96.80 97.54	91.32 93.12	94.67 95.50	87.92 85.95	1931
	SURFNet	65.19 70.87	77.52 58.73	93.63 94.84	88.00 90.56	94.57 95.49	83.78 82.10	2124
Continual	DKP	22.42 29.10	20.93 11.41	48.64 56.19	40.74 48.10	58.87 63.72	38.32 41.70	409.0
	LSTKC++	31.25 38.22	17.16 10.99	21.10 27.86	90.00 92.11	12.33 15.93	34.37 37.02	126.1
	DASK	22.45 28.51	14.84 9.11	51.17 57.52	78.66 82.23	44.32 49.34	42.29 45.34	126.1
	GeoMFD ($\mathcal{O}_0$)	86.76 89.25	73.70 58.85	99.17 99.36	91.33 93.00	96.23 96.93	89.44 87.48	345.9
	GeoMFD ($\mathcal{O}_1$)	85.23 88.22	71.47 56.64	98.72 98.90	94.00 95.35	94.71 95.69	88.83 86.96	345.9
	GeoMFD ($\mathcal{O}_2$)	88.38 90.62	72.29 56.94	98.30 98.62	89.33 91.52	95.04 95.91	88.67 86.72	345.9
	GeoMFD ($\mathcal{O}_3$)	84.18 87.20	68.21 54.31	99.33 99.46	88.67 90.90	95.93 96.64	87.26 85.70	345.9
	GeoMFD ($\mathcal{O}_4$)	82.88 86.25	78.46 64.40	96.82 97.49	96.00 96.83	94.25 95.21	89.68 88.04	345.9
Satellite → Drone								
Individual	Sample4Geo	75.78 63.92	20.45 18.54	97.50 93.63	88.00 90.65	95.14 91.39	75.37 71.63	1752
	MEAN	68.75 57.36	20.33 18.26	97.50 94.75	86.66 89.45	96.01 92.08	73.85 70.38	730.5
	MFRGN	78.12 59.33	23.35 21.40	98.75 94.42	84.00 87.48	96.15 93.94	76.07 71.31	1869.5
	CAMP	71.87 63.37	19.56 17.71	96.25 93.36	83.33 86.42	96.15 92.72	73.43 70.72	1828.5
	DAC	75.00 65.38	20.25 18.55	97.50 94.06	93.33 94.71	96.43 93.79	76.50 73.30	1931
	SURFNet	71.88 59.01	17.61 16.07	95.00 90.75	89.33 91.13	95.72 93.20	73.91 70.03	2124
Continual	DKP	19.53 16.46	12.05 10.83	61.25 49.92	44.00 51.53	79.03 59.21	43.17 37.59	409.0
	LSTKC++	71.09 22.41	13.94 12.26	36.25 17.53	91.33 92.94	42.36 10.85	50.99 31.20	126.1
	DASK	25.00 10.35	6.58 6.33	52.50 42.39	84.00 87.30	77.31 45.07	49.08 38.29	126.1
	GeoMFD ($\mathcal{O}_0$)	90.62 81.35	17.68 16.63	100.00 98.28	92.00 93.84	96.71 95.59	79.40 77.14	345.9
	GeoMFD ($\mathcal{O}_1$)	92.97 79.30	17.49 16.65	98.75 98.15	92.67 94.50	97.15 94.50	79.80 76.62	345.9
	GeoMFD ($\mathcal{O}_2$)	94.53 85.88	17.13 16.45	98.75 97.40	93.33 95.00	96.86 94.51	80.12 77.85	345.9
	GeoMFD ($\mathcal{O}_3$)	92.19 77.09	16.82 15.90	100.00 98.34	92.00 93.89	97.29 95.43	79.66 76.13	345.9
	GeoMFD ($\mathcal{O}_4$)	98.43 77.86	19.05 18.07	97.50 95.70	94.66 96.00	97.00 93.56	81.33 76.24	345.9

Table 6: Comparison with state-of-the-art methods under different training protocols and continual dataset orders. Individual methods are independently trained on each dataset, whereas continual methods sequentially update a single model. GeoMFD is evaluated under the five dataset orders defined in Eq. (39). For SUES-200, results are reported at 150 m. Storage is measured in MB.

Metrics and Storage Accounting

Let $a_{t,k}$ denote R@1 on dataset D_k after training stage t , where $k \leq t$. The average accuracy after stage t is

$$A_t = \frac{1}{t} \sum_{k=1}^t a_{t,k}. \quad (36)$$

Following the continual-learning convention used in the main paper, forgetting and backward transfer are computed as

$$\text{Fgt}_t = \frac{1}{t-1} \sum_{k=1}^{t-1} \left(\max_{\ell \in \{k, \dots, t-1\}} a_{\ell,k} - a_{t,k} \right), \quad (37)$$

$$\text{BWT}_t = \frac{1}{t-1} \sum_{k=1}^{t-1} (a_{t,k} - a_{k,k}), \quad t > 1. \quad (38)$$

Lower forgetting and higher BWT indicate better retention; negative BWT denotes performance loss on earlier environments. At the final stage, the Avg values in the main tables are

the arithmetic mean of R@1 or AP over all five datasets, computed separately for Drone→Satellite and Satellite→Drone retrieval.

Storage is measured as the total size, in MB, of parameters required for deployment after the full sequence. For an independently trained method, this includes one complete model per environment. For a continual method, it includes only the final deployable model; the frozen teacher is a transient training copy and is not retained for inference. Dataset files and temporary optimizer states are excluded for all methods.

Additional Experiments Details

Experimental Settings

The shared backbone is DINOv3-ViT-B/16 pretrained on its original pretraining corpus. All input images are resized to 384×384 . The embedding dimension is $C = 768$. We use AdamW with a backbone learning rate of 10^{-5} . The adapter learning rate is multiplied by 5, giving 5×10^{-5} , and the

		SUES-200															
Protocol	Method	Drone→Satellite								Satellite→Drone							
		150 m		200 m		250 m		300 m		150 m		200 m		250 m		300 m	
		R@1	AP	R@1	AP	R@1	AP	R@1	AP	R@1	AP	R@1	AP	R@1	AP	R@1	AP
Individual	APA-BI	86.45	88.90	91.85	93.54	95.70	96.62	96.70	97.37	97.50	86.21	98.75	94.03	98.75	96.95	98.75	97.82
	SHAA	90.32	92.09	96.50	97.16	97.30	97.71	97.40	97.93	97.50	91.50	98.75	95.68	98.75	97.45	98.75	97.31
	Sample4Geo	92.60	94.00	97.38	97.81	98.28	98.64	99.18	99.36	97.50	93.63	98.75	96.70	98.75	98.28	98.75	98.05
	DAC	96.80	97.54	97.48	97.97	98.20	98.62	97.58	98.14	97.50	94.06	98.75	96.66	98.75	98.09	98.75	97.87
	CAMP	95.40	96.38	97.63	98.16	98.05	98.45	99.33	99.46	96.25	93.69	97.50	96.76	98.75	98.10	100.00	98.85
	CDM-Net	93.78	95.16	97.62	98.16	98.28	98.69	99.20	99.31	95.25	92.24	98.50	96.40	99.00	97.60	99.00	98.01
	GeoBridge	95.68	97.49	97.88	98.89	97.85	98.84	97.63	98.62	98.99	97.98	98.98	97.98	99.01	97.98	98.75	97.95
	MEAN	95.50	96.46	98.38	98.72	98.95	99.17	99.52	99.63	97.50	94.75	100.00	97.09	100.00	98.28	100.00	99.21
Continual	GeoMFD ($\mathcal{O}_0$)	99.17	99.36	99.70	99.77	99.95	99.96	99.90	99.92	100.00	98.28	100.00	98.89	98.75	98.96	98.75	98.96
	GeoMFD ($\mathcal{O}_1$)	98.72	98.90	99.08	99.21	99.23	99.35	99.35	99.48	98.75	98.15	98.75	98.71	98.75	98.60	98.75	98.86
	GeoMFD ($\mathcal{O}_2$)	98.30	98.62	99.35	99.51	99.60	99.69	99.82	99.87	98.75	97.40	100.00	98.53	100.00	98.95	98.75	98.89
	GeoMFD ($\mathcal{O}_3$)	99.33	99.46	99.80	99.85	99.82	99.87	99.95	99.96	100.00	98.34	100.00	98.27	98.75	98.55	98.75	98.68
	GeoMFD ($\mathcal{O}_4$)	96.82	97.49	98.25	98.57	98.40	98.73	98.83	99.11	97.50	95.70	98.75	97.95	98.75	98.37	98.75	98.77

Table 7: Comparison with state-of-the-art methods at four flight altitudes on SUES-200. Individual methods are trained exclusively on SUES-200, whereas GeoMFD is evaluated after completing each continual sequence. SUES-200 is introduced at the first stage under $\mathcal{O}_3$.

adapter weight decay is set to zero. A cosine learning-rate schedule is restarted at every continual stage, with linear warm-up over the first 10% of the stage iterations. Gradients are value-clipped to 100. Training uses automatic mixed precision. For CBS, the backbone warm-up and adapter-activation phases are trained for five epochs each, resulting in a total of ten epochs at the initial stage. To ensure a fair comparison, all corresponding ablation variants are allocated the same total optimization budget at this stage, regardless of whether the two-phase schedule is used. Every subsequent continual stage is trained for five epochs. All experiments are conducted on the Pytorch deep learning framework with the experimental platform running on Ubuntu 22.04 equipped with four NVIDIA RTX 4090 GPUs.

Additional Results under Different Dataset Orders

To examine whether GeoMFD depends on a particular sequence of environments, we further evaluate it under five continual dataset orders. We denote IR-VL328, DenseUAV, SUES-200, C-RGBT, and U-1652 as $\mathcal{D}_1$, $\mathcal{D}_2$, $\mathcal{D}_3$, $\mathcal{D}_4$, and $\mathcal{D}_5$, respectively. The evaluated orders are defined as

$$\begin{aligned}
\mathcal{O}_0 &= [\mathcal{D}_1, \mathcal{D}_2, \mathcal{D}_3, \mathcal{D}_4, \mathcal{D}_5], \\
\mathcal{O}_1 &= [\mathcal{D}_5, \mathcal{D}_1, \mathcal{D}_2, \mathcal{D}_4, \mathcal{D}_3], \\
\mathcal{O}_2 &= [\mathcal{D}_4, \mathcal{D}_2, \mathcal{D}_3, \mathcal{D}_5, \mathcal{D}_1], \\
\mathcal{O}_3 &= [\mathcal{D}_3, \mathcal{D}_4, \mathcal{D}_2, \mathcal{D}_1, \mathcal{D}_5], \\
\mathcal{O}_4 &= [\mathcal{D}_2, \mathcal{D}_3, \mathcal{D}_1, \mathcal{D}_5, \mathcal{D}_4].
\end{aligned} \tag{39}$$

The detailed results under different continual dataset orders are reported in Table 6. GeoMFD maintains consistently strong performance in both retrieval directions. For Drone→Satellite retrieval, the average R@1 and AP vary within 87.26%–89.68% and 85.70%–88.04%, respectively. For Satellite→Drone retrieval, the corresponding ranges are 79.40%–81.33% and 76.13%–77.85%. The limited variation across the five orders indicates that the overall retrieval

performance is robust to changes in the continual dataset sequence.

The results on individual datasets also show that no single order consistently performs best. For Drone→Satellite retrieval, different orders achieve the strongest results on IR-VL328, DenseUAV, SUES-200, C-RGBT, and U-1652. A similar pattern is observed for Satellite→Drone retrieval, where the best R@1 and AP values are distributed across several orders. In terms of average performance, $\mathcal{O}_4$ obtains the highest Drone→Satellite R@1/AP and Satellite→Drone R@1, whereas $\mathcal{O}_2$ achieves the highest Satellite→Drone AP. Thus, the relative advantage of each order varies across datasets, metrics, and retrieval directions.

Notably, the default order $\mathcal{O}_0$ used in the main experiments is not uniformly optimal, yet it remains competitive with the other orders. These observations show that the performance of GeoMFD is not driven by a carefully selected dataset sequence. Instead, it remains stable across different continual orders in both retrieval directions, supporting its robustness to variations in the arrival order of environments.

Performance Retention on Initial Environments

The main comparison includes methods with publicly available implementations, allowing all approaches to be evaluated consistently under the C-DVGL setting. Several recent DVGL methods, including APA-BI (Zhang et al. 2025), SHAA (Chen et al. 2025), CDM-Net (Zhou, Yang, and Zhang 2025), and GeoBridge (Song et al. 2026), have reported results on U-1652 or SUES-200, but their public implementations are unavailable. We therefore include their reported results in the following dataset-specific comparisons to provide a more comprehensive evaluation against recent DVGL methods. These experiments also examine whether GeoMFD can retain knowledge learned from an environment introduced at the beginning of a continual sequence. Specifically, SUES-200 and U-1652 are placed at the first stage under $\mathcal{O}_3$ and $\mathcal{O}_1$, respectively, and are evaluated after the model has

Protocol	Method	Drone→Satellite		Satellite→Drone	
		R@1	AP	R@1	AP
Individual	APA-BI	93.57	94.55	95.86	92.88
	SHAA	93.69	94.68	96.15	93.49
	Sample4Geo	92.65	93.81	95.14	91.39
	MEAN	93.55	94.53	96.01	92.08
	MFRGN	94.33	95.24	96.15	93.94
	CAMP	94.46	95.38	96.15	92.72
	DAC	94.67	95.50	96.43	93.79
	SURFNet	94.57	95.49	95.72	93.20
	CDM-Net	95.13	96.04	96.68	94.05
	GeoBridge	95.82	97.77	97.14	95.05
Continual	GeoMFD ($\mathcal{O}_1$)	94.71	95.69	97.15	94.50

Table 8: Comparison with state-of-the-art methods on U-1652. Individual methods are independently trained on U-1652. The GeoMFD results are evaluated after completing the continual sequence $\mathcal{O}_1 = [\mathcal{D}_5, \mathcal{D}_1, \mathcal{D}_2, \mathcal{D}_4, \mathcal{D}_3]$, where U-1652 ($\mathcal{D}_5$) is introduced at the first stage.

subsequently adapted to the other four environments.

SUES-200 as the Initial Environment. Table 7 complements the main comparison by reporting results at all four flight altitudes. Under $\mathcal{O}_3 = [\mathcal{D}_3, \mathcal{D}_4, \mathcal{D}_2, \mathcal{D}_1, \mathcal{D}_5]$, SUES-200 is introduced at the first stage. After adaptation to the remaining four environments, GeoMFD achieves Drone→Satellite R@1/AP scores of 99.33%/99.46%, 99.80%/99.85%, 99.82%/99.87%, and 99.95%/99.96% at 150 m, 200 m, 250 m, and 300 m, respectively, outperforming the individually trained methods at all four altitudes. For Satellite→Drone retrieval, its R@1 remains between 98.75% and 100.00%, while AP ranges from 98.27% to 98.68%, remaining competitive with the strongest individually trained methods. These results indicate that GeoMFD effectively retains the knowledge learned from SUES-200 across different flight altitudes after adapting to four subsequent environments.

U-1652 as the Initial Environment. Under $\mathcal{O}_1 = [\mathcal{D}_5, \mathcal{D}_1, \mathcal{D}_2, \mathcal{D}_4, \mathcal{D}_3]$, U-1652 is introduced at the first stage. As shown in Table 8, GeoMFD achieves 94.71%/95.69% R@1/AP for Drone→Satellite retrieval and 97.15%/94.50% for Satellite→Drone retrieval after completing the entire sequence. These results remain competitive with methods trained exclusively on U-1652. In particular, GeoMFD achieves the highest Satellite→Drone R@1 and the second-highest AP, despite subsequently adapting to four additional environments. This demonstrates that the cross-view matching capability learned from U-1652 is effectively retained during later adaptation.

The results on SUES-200 and U-1652 demonstrate that GeoMFD consistently retains knowledge acquired from the initial environment across different datasets, continual orders, flight altitudes, and retrieval directions.

Hyperparameter Analysis

We analyze the sensitivity of GeoMFD to three key hyperparameters, including the number of top- K hard negatives, the weight λ_1 of the view-gap closure loss, and the weight

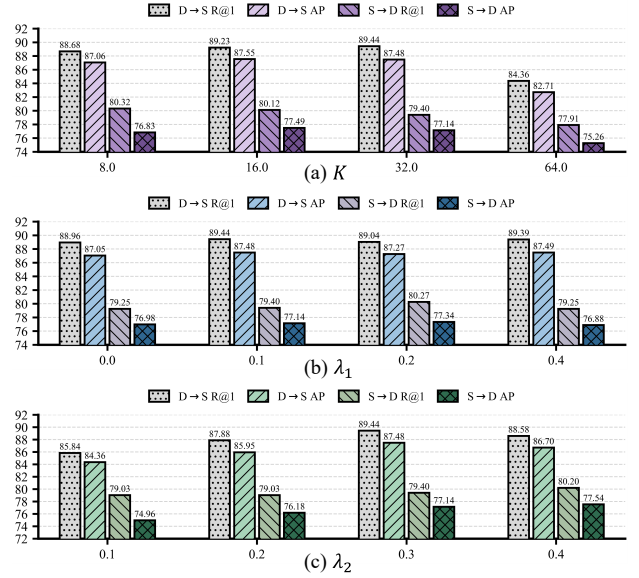


Figure 5: Hyperparameter sensitivity of GeoMFD under the default continual order $\mathcal{O}_0$. We report the average R@1 and AP over the five datasets for both retrieval directions. (a) Number of top- K hard negatives K . (b) Weight λ_1 of the view-gap closure loss. (c) Weight λ_2 of margin-field distillation.

λ_2 of margin-field distillation. All results are obtained under the default continual order $\mathcal{O}_0$ and are averaged over the five datasets.

Effect of the number of hard negatives K . Figure 5(a) studies the effect of the number of top- K hard negatives. GeoMFD remains relatively stable when K varies from 8 to 32. Increasing K from 8 to 32 improves Drone→Satellite R@1 from 88.68% to 89.44%, indicating that a moderately larger hard-negative set provides more informative constraints around the retrieval boundary. The best AP values for the two retrieval directions are obtained at $K = 16$, reaching 87.55% and 77.49%, respectively, while $K = 32$ achieves the highest Drone→Satellite R@1. In contrast, increasing K to 64 causes a clear performance degradation. In particular, Drone→Satellite R@1/AP decreases to 84.36%/82.71%. This suggests that including too many negatives introduces less informative or potentially unreliable teacher relations, thereby weakening the boundary-focused property of MFD. We use $K = 32$ because it provides strong performance in both directions while covering a sufficiently broad set of hard negative relations.

Weight of the view-gap closure loss. Figure 5(b) evaluates λ_1 . Without view-gap closure ($\lambda_1 = 0$), GeoMFD obtains R@1/AP values of 88.96%/87.05% and 79.25%/76.98% in the two retrieval directions. Setting $\lambda_1 = 0.1$ improves all four metrics to 89.44%/87.48% and 79.40%/77.14%, confirming that explicitly encouraging the adapter to compensate for the cross-view discrepancy is beneficial. A larger weight of 0.2 further improves Satellite→Drone retrieval but slightly reduces the Drone→Satellite retrieval performance.

When the weight is increased to 0.4, the Satellite→Drone metrics decrease to 79.25%/76.88%. These results show that view-gap closure acts as a useful auxiliary constraint but should not dominate the retrieval objective. We therefore set $\lambda_1 = 0.1$ to obtain a balanced improvement across both directions.

Weight of margin-field distillation. Figure 5(c) examines λ_2 . Increasing the weight from 0.1 to 0.3 consistently improves Drone→Satellite R@1/AP from 85.84%/84.36% to 89.44%/87.48%. Over the same range, Satellite→Drone AP increases from 74.96% to 77.14%. These improvements demonstrate that an adequate distillation strength is necessary to preserve historical positive-versus-hard-negative relations. Further increasing the weight to 0.4 improves Satellite→Drone R@1/AP to 80.20%/77.54%, but decreases Drone→Satellite R@1/AP to 88.58%/86.70%. This trade-off indicates that overly strong distillation restricts the model’s plasticity during adaptation to the current environment. We consequently choose $\lambda_2 = 0.3$, which provides the best Drone→Satellite performance while maintaining competitive Satellite→Drone accuracy.