

On-Device Robotic Planning: Eliminating Inference Redundancy for Efficient Decision-Making

Joonhee Lee¹ Hyunseung Shin¹ Hyunmi Kim² Pei Zhang³
Jeonggil Ko¹

¹School of Integrated Technology, College of Computing, Yonsei University

²Department of Hyperscale AI SoC Research Section, ETRI

³EECS - Electrical and Computer Engineering, University of Michigan
{neo81389, jay040730, jeonggil.ko}@yonsei.ac.kr
chaos0218@etri.re.kr, peizhang@umich.edu

Abstract: Reasoning-based robotic policies using large language and vision-language models achieve strong semantic planning capabilities but mostly suffer from a high inference latency that limits practical real-time deployment. In this work, we observe that robotic reasoning workloads contain substantial temporal redundancy, where consecutive observations frequently produce identical actions and subgoals. Based on this insight, we present *REIS*, a human cognition inspired robotic decision-making framework that minimizes unnecessary reasoning while preserving semantic adaptability. *REIS* combines lightweight scene gating, KV-steered affordance routing, and deliberative reasoning to accelerate robotic control under embodied constraints. Experiments on ALFRED, and real-world robotic tasks demonstrate that *REIS* significantly suppresses reasoning overhead while maintaining competitive task performance.

Keywords: On-Device, Embodied AI, Decision-Making, Planning, Navigation, Manipulation

1 Introduction

Recent large-scale foundation models have enabled a new “**reason-and-act**” paradigm for robotic decision-making, where intermediate reasoning improves task planning and semantic understanding. Systems such as CoT-VLA [1] and DiffusionVLA [2] demonstrate that explicit reasoning can improve generalization and manipulation performance by leveraging richer contextual and task-level information. These approaches suggest that reasoning is becoming a core component of modern robotic policies rather than a purely auxiliary capability.

However, reasoning introduces substantial computational overhead that conflicts with the real-time constraints of robotic control. Robotic systems typically require inference at 10–100 ms timescales [3, 4, 5, 6], yet reasoning-heavy policies often incur significantly slower execution due to autoregressive generation or iterative denoising [7, 8, 9, 10, 11]. In dynamic environments, this latency becomes particularly problematic as observations rapidly become stale, causing reasoning outputs and planned trajectories to lose validity before execution. As a result, richer reasoning can paradoxically reduce reactivity and robustness during real-world interaction.

Prior work addresses this challenge through hierarchical or dual-process architectures that separate slow semantic reasoning from fast low-level action generation. Systems such as HiRT [12], RoboDual [13], and DP-VLA [14] pair a large reasoning model with lightweight action specialists to improve control frequency. While effective, these approaches fundamentally treat reasoning latency as unavoidable, isolating it rather than fixing it. Consequently, they introduce a fragile trade-off between semantic freshness and control responsiveness: infrequent reasoning updates lead to stale

contextual understanding when the environment shifts, while frequent updates negate the latency benefits of the fast controller entirely [15, 16, 17, 18].

In this work, we argue that the primary bottleneck is not action generation, but rather in the redundant reasoning itself. Robotic reasoning pipelines repeatedly perform similar inference across temporally adjacent observations despite minimal semantic change in the environment [19, 20, 21, 22], causing increased latency. This observation motivates a new design direction. Instead of decoupling reasoning from acting, robotic systems should directly minimize unnecessary reasoning and accelerate the remaining inference process. By treating temporal continuity as an asset rather than a computational burden, we can maintain an active reasoning loop without sacrificing real-time reactivity.

To this end, we present *REIS* (Redundancy Elimination for Inference-efficient Systems), a lightweight framework for efficient LM-based robotic decision-making systems. *REIS* reduces redundant frame-level reasoning while preserving semantic consistency across sequential observations. Specifically, the framework combines lightweight visual feature selection with a priming-effect-inspired inference mechanism that reuses prior reasoning context to accelerate future decisions. By evaluating with benchmarks and real-world robotic experiment data, our experiments show that *REIS* significantly reduces reasoning latency and redundant action generation while maintaining competitive task performance.

The contributions of this work are summarized as follows:

- (1) We design a lightweight vision-encoder head selection method that prunes redundant visual tokens for efficient robotic perception.
- (2) We develop a priming-effect-inspired inference mechanism that leverages historical context to bypass redundant reasoning steps and accelerate LM-based robotic control.
- (3) We validate our framework across diverse foundation model architectures and robotic decision-making pipelines, demonstrating substantial latency reductions with minimal impact on task success in both simulation and real-world environments.

2 Background and Relative Works

Embodied AI Robot Deployment Challenges While generalist robot policies achieve strong long-horizon performance, their computational requirements hinder edge deployment. For example, OpenVLA requires 15GB VRAM and merely generates six action tokens per second on an RTX 4090 [23, 24], creating a major mismatch with resource-constrained robotic platforms such as Jetson Orin NX [25]. This gap motivates the need for lightweight and efficient robotic decision-making pipelines suitable for real-world deployment.

LM as Decision Maker Vision-Language Models (VLMs) enable robots to leverage semantic world knowledge for contextual reasoning and action selection [26, 27, 28], unlike conventional MLP-based policies that depend primarily on spatial subgoals [29, 30, 31]. Hybrid frameworks such as LLM Planner combine LM-based high-level planning with low-level execution policies [32, 33, 34, 35]. However, repeated sequential LM inference introduces substantial latency and computational overhead, limiting real-time robotic deployment [7, 15, 3, 17].

Navigation and Manipulation Tasks Navigation and arm manipulation represent two fundamental forms of robotic physical interaction. Navigation requires scene-level reasoning for long-range movement [26, 36, 37], while manipulation focuses on fine-grained object interaction [38, 39] (e.g., ALFRED [40]). By evaluating both domains, *REIS* targets a broad spectrum of robotic decision-making, from high-level environmental understanding to precise physical control [41, 42, 43].

3 Motivation

Addressing VLM Reasoning Redundancy Robotic reasoning workloads exhibit substantial temporal redundancy [7, 21, 20, 19]. We analyze action and subgoal persistence across consecutive

Table 1: Action and subgoal redundancy rates across ALFRED and real-world environments under different levels of prior environmental knowledge.

Dataset	Env. Knowledge	Metric Type	Sample Size	Redundancy Rate
ALFRED	Full Prior	Subgoal	320,696 pairs	87.10%
		Action	(6,574 episodes)	46.89%
Real World	Incomplete	Action	4,262 pairs	83.04%

observations in ALFRED and self-collected real-world navigation trajectories. As Table 1 shows, ALFRED exhibits an 87.1% subgoal redundancy rate across 320K observation pairs and a 46.9% action redundancy rate across 6,574 episodes. In real-world environments without prior environmental knowledge, action redundancy remains high at 83% over 4,262 observation pairs. This indicates that VLMs repeatedly generate identical reasoning outputs under minimal semantic context changes, with meaningful reasoning updates occurring primarily near structural transitions such as corners or intersections. This suggests that continuous per-frame reasoning is unnecessarily and that lightweight controllers can handle redundant states while reserving VLM inference for semantically complex situations.

Priming Effect on LM Inference Motivated by this redundancy, we investigate whether previous reasoning states can be reused as latent decision priors through KV-cache steering [44]. Rather than repeatedly regenerating similar reasoning outputs, prior reasoning context is reintroduced during inference to bias future decisions. As Table 2 shows, naive KV steering alone improves action accuracy from 21.1% to 67.6%, while producing highly deterministic outputs (low entropy). However, combining

Table 2: Ablation of KV-based priming on ALFRED action selection. B-Dir, B-Reas, KV-Dir, and KV-Reas denote direct baseline, reasoning baseline, KV-steered direct, and KV-steered reasoning, respectively.

Metric	B-D	B-R	KV-D	KV-R
Acc. $\uparrow$	21.1%	34.5%	67.6%	85.2%
Corr. Ent. $\downarrow$	0.251	0.602	0.070	0.334
Incorr. Ent. $\downarrow$	0.351	0.374	0.171	0.871

KV steering with reasoning-based inference improves accuracy to 85.2%, suggesting that cached reasoning priors can accelerate robotic decision-making while preserving contextual adaptability.

4 Method

REIS is a real-time, dual-process robotic decision-making framework designed to minimize redundant inference while preserving semantic planning capability. The architecture separates lightweight intuitive decision making (System One) from deliberate semantic reasoning (System Two). It is motivated by three key principles: the high computational expense of edge foundation models [23, 45, 3, 46, 47], the massive temporal redundancy between consecutive observations [19, 48, 49], and the disparate timescales at which high-level semantic plans and low-level control actions evolve [12, 50]. To optimize for different operational dynamics, the system modulates its pipeline based on the task modality. Specifically, for navigation, it actively deploys an Exponential Moving Average of Head-Selective Visual Similarity (EMA-HSVS) module to filter macro visual noise; and for manipulation, EMA-HSVS is deactivated to maintain sensitivity to local object-level state changes, routing all transitions to the Affordance Router for verification.

4.1 System One: Fast Intuitive Decision Making

System One performs lightweight monitoring and affordance verification to avoid unnecessary LM reasoning via two components: (i) a fast perception module that detects meaningful scene changes, and (ii) a KV-steered affordance router that validates subgoal progression and action consistency.

Fast Perception via EMA-HSVS. *REIS* introduces *Ego-Motion Aware Head Selective Vision Similarity* (EMA-HSVS), a lightweight scene gating mechanism that triggers System Two only when

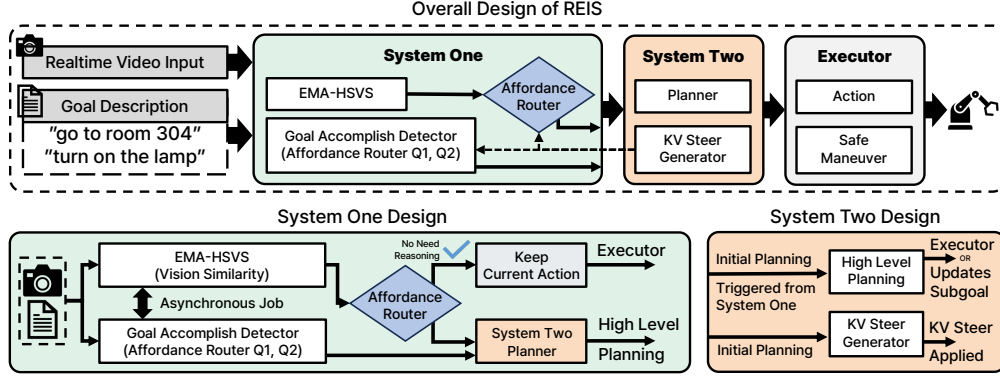


Figure 1: Overview of *REIS*, illustrating the interaction between System One and System Two. Detailed illustration of System One and Two on the bottom row

substantial structural scene changes are detected. Rather than using all visual features, EMA-HSVS selects transformer heads sensitive to geometric variation through a greedy calibration process on datasets such as ALFRED and LIBERO. For incoming frames, EMA-HSVS first trims out pixel difference caused by the robot arm itself (Self-Mask) and a cosine similarity is computed over the selected head features, with System Two being invoked only when similarity falls below a pre-defined threshold. This allows the robot to skip redundant reasoning during visually stable trajectories while remaining reactive to meaningful environmental changes.

KV-Steered Affordance Router. To verify subgoal progress and action validity, *REIS* employs a KV-steered Affordance Router. Instead of autoregressively generating semantic reasoning at every frame, the router injects steering vectors into cached KV states to bias the model toward deterministic affordance decisions [44]. The router continuously tracks subgoal completion while evaluating transition validity and planner consistency. Based on these checks, the system either maintains the current action, switches low-level primitives, advances to the next subgoal, or falls back to System Two for semantic verification.

Boundary Safety Invariant. System One never directly finalizes semantic task progression. Instead, candidate subgoal completions and execution-boundary events are always escalated to System Two for final confirmation. This prevents premature planner transitions while preserving real-time responsiveness in repetitive environments.

4.2 System Two: Deliberative Planning

System Two executes high-level semantic reasoning and multi-step replanning only when escalated by System One under ambiguous or failure-prone states (Fig. 1). It comprises two core mechanisms: (i) online deliberative reasoning for high-level subgoal and low-level action generation, and (ii) offline anticipatory logic synthesis for constructing the KV steering tensors used by System One.

To enable fast, zero-shot gating in System One, the offline component synthesizes task-specific KV steering tensors using simulated positive and negative reasoning trajectory pairs. For each transformer layer l , steering vectors are computed as the mean element-wise difference between reasoning-rich (+) and label-only (−) KV states:

$$S_l^k = \frac{1}{N} \sum_{j=1}^N (K_{l,j}^+ - K_{l,j}^-), \quad S_l^v = \frac{1}{N} \sum_{j=1}^N (V_{l,j}^+ - V_{l,j}^-) \quad (1)$$

Threshold optimization is subsequently executed over downstream affordance-query confidence scores. This maximizes System One classification accuracy while ensuring that execution anomalies or high-uncertainty states are reliably escalated to System Two for full deliberative replanning.

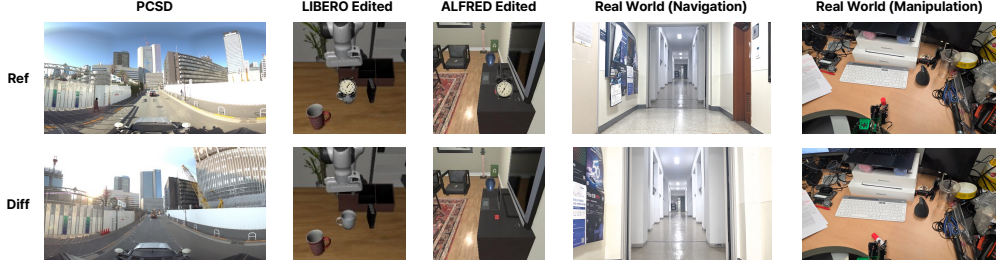


Figure 2: Example of Datasets used for Optimization and Evaluation

Execution Module. The execution module converts high-level intents into physical robot actions. Navigation tasks use symbolic function calls combined with lightweight visual tracking, while manipulation tasks employ continuous reactive control for fine-grained interaction. This design enables efficient long-horizon planning while preserving low-latency physical responsiveness.

5 Evaluation

We evaluate *REIS* on two complementary embodied domains: navigation (scene-level planning under ego-motion) and tabletop manipulation (object-level tracking during local interactions). Our core objective is to assess high-level planner decisions under temporally redundant observations via a four-way classification: determining if the current subgoal is *complete*, whether to *advance* to the next subgoal, if the current plan state can be safely *reused*, or if full deliberative *replanning* is required. To validate the robustness of our EMA-HSVS module, we assess its change detection performance across the PCSD [51], LIBERO [52], and ALFRED [40] datasets, alongside custom RealWorld footage collected across action transitions (Figure 2). This verifies that the module captures structural semantic transformations rather than superficial pixel noise.

For power-constrained edge deployment, all evaluations are conducted on an NVIDIA Jetson Orin NX (16GB) embedded module. System overhead within its shared-memory architecture restricts the practical deployment footprint to 10–12 GB. To satisfy this constraint while maintaining robust high-level reasoning, we evaluate our framework using two compact baselines—Qwen-3-VL (4B) [53] and DeepThink (3B) [54, 55]—deployed via the Hugging Face Transformers engine [56]. End-to-end performance is benchmarked using the long-horizon, language-grounded ALFRED environment. Finally, we validate the complete sim-to-real pipeline via physical deployment on mobile navigation robots and a single-arm manipulation platform to evaluate system robustness, latency reduction, and task success under real-world visual noise.

5.1 Overall Decision-Making Performance

We first evaluate the end-to-end capacity of *REIS* in preserving high-level planning quality while suppressing redundant deliberative reasoning calls. All configurations are deployed under a controlled interface utilizing an identical VLM backbone, which, for the ALFRED benchmark, was fine-tuned via Supervised Fine-Tuning (SFT) for 10 epochs on the full training dataset and evaluated on the validation-seen split. Across all methods, the observation stream, task instructions, and planner-state output schema remain identical; comparison methods differ strictly in their reasoning scheduling strategies, including the frequency of deliberative planning, the structural triggers used to invoke additional checks, and the downstream mechanisms for caching or invalidating previous reasoning.

The real-world evaluation spans two modalities: (i) *Navigation* across five visually diverse environments, and (ii) *Manipulation* featuring sequential “Pick-and-Place” tasks across two tabletop scenes. As Table 3 summarizes, *REIS* achieves a compelling trade-off between execution efficiency and accuracy. Compared to the oracle Naive baseline, our framework incurs a minor macro-averaged

Table 3: Overall Performance Comparison on Each dataset on Each Method

Dataset	Method	Episode Acc	Speed (per second)
Realworld (Navigation)	Naive (Infer Every 1 Second)	0.680	0.28 cm/s
	Only EMA-HSVS	0.678	4.0 cm/s
	Only Affordance Router (Infer Every 1 Second)	0.643	7.14 cm/s
	REIS	0.641	7.66 cm/s
Realworld (Manipulation) «Pick and Place»	Naive (Infer Every Subgoal)	0.760	0.714 cm/s
	REIS	0.729	1.67 cm/s
ALFRED	Naive (Infer Every 10 Frame)	0.554	0.408 frames/second
	Only EMA-HSVS	0.532	5.612 frames/second
	Only Affordance Router (Infer Every 10 Steps)	0.551	5.135 frames/second
	REIS	0.512	6.357 frames/second

degradation of only **3.73%** in episode accuracy across all three tasks; 3.90% in Realworld Navigation, 3.10% in Realworld Manipulation, and 4.20% in ALFRED. Concurrently, *REIS* delivers an average speedup of **15.09 $\times$** in execution velocity. The efficiency gain varies across domains with the framework achieving its highest acceleration of **27.35 $\times$** in the Navigation task, where suppressing severe visual and temporal redundancy during long-horizon macro-movements serves as the primary catalyst for reducing computational overhead. The ALFRED benchmark, which inherently combines both navigation and manipulation characteristics, falls in the middle with a **15.58 $\times$** speedup, while the localized Manipulation task shows a more modest **2.34 $\times$** increase due to its deactivated scene gating. This implies that structural scene-level gating acts as a dominant factor in maximizing redundancy elimination. For physical manipulation tasks, mechanical hardware anomalies (e.g., gripper slippage) are excluded to isolate algorithmic decision-making fidelity.

Ablation analysis shows that operating solely with the EMA-HSVS module yields an average speedup of $\sim 14\times$ (14.28 $\times$ in navigation, 13.75 $\times$ in ALFRED), empirically validating our hypothesis that continuous robotic inference pipelines contain severe temporal and visual redundancy. Concurrently, the *Only Affordance Router* configuration yields comparable latency reductions. This indicates that beyond pure visual redundancy, the underlying action space contains a high proportion of straightforward state-maintenance decisions, such as continuing a primitive or maintaining subgoals, that can be resolved via our lightweight policy instead of triggering heavy deliberative reasoning.

Navigation Qualitative Analysis: To visually inspect how *REIS* mitigates redundancy, we analyze a representative navigation trajectory under realistic edge constraints on the Jetson Orin NX. As illustrated in Figure 3, the robot’s physical trajectory explicitly highlights the hierarchical partitioning of our framework where macro-movements entirely bypass inference via EMA-HSVS gating, nominal state verifications are resolved instantly by the System One router, and heavy System Two deliberative replanning is invoked only at critical environmental junctions.

This structural gating allows *REIS* to successfully navigate to the destination in 7min 38secs. In contrast, conventional architectures that mandate inference every N frames suffer from severe compounding latency; the environment changes faster than the model can generate text, causing observations to become stale and leading to outright task failure. Even when isolating EMA-HSVS without downstream routing, the execution time remains within a feasible operational range of 18min 17secs, implying its real-world deployability on resource-constrained hardware.

Manipulation Failure Detection Analysis: For localized tabletop manipulation tasks where macro scene changes are absent, EMA-HSVS is deactivated to prevent over-gating from self-masking artifacts. Instead, we validate system resilience by explicitly evaluating the failure detection latency of the robotic arm during anomalous events (Fig. 4). Conventional periodic architectures exhibit severe tracking delays (2.068 ± 2.550 s) since they are bottlenecked by fixed frame boundaries, occasionally stretching to 10–12 s if a critical failure window is missed due to the blocking nature of autoregressive generation.

Conversely, the non-autoregressive Affordance Router in *REIS* operates asynchronously at frame-rate, lowering the average failure detection latency to **0.933 $\pm$ 0.874 s**, which represents a **2.21 $\times$**

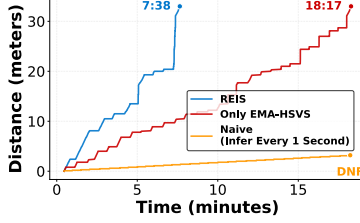


Figure 3: A Sample of Navigation Task (DNF: Did Not Finish)





Figure 4: Fail Detect Latency

		Patch Mean Cosine		CLS Cosine		CLS L2		EMA-HSVS (ours)		EMA-HSVS w/ Self Mask (ours)	
Object Level	True: Diff	80.50%		69.00%		69.00%		82.67%		97.17%	
	Pred: Diff	19.50%		31.00%		31.00%		17.33%		2.83%	
	True: Same	60.33%		12.93%		12.93%		15.01%		0.89%	
	Pred: Same	39.67%		87.07%		87.07%		84.99%		99.11%	
		Patch Mean Cosine		CLS Cosine		CLS L2		EMA-HSVS (ours)		EMA-HSVS w/ Self Mask (ours)	
Scene Level	True: Diff	89.19%		88.51%		88.51%		97.97%		98.65%	
	Pred: Diff	10.81%		11.49%		11.49%		2.03%		1.35%	
	True: Same	45.28%		30.19%		30.19%		26.42%		32.08%	
	Pred: Same	54.72%		69.81%		69.81%		73.58%		67.92%	

Figure 5: Confusion Matrix of Vision Similarity Measure Methods

faster anomaly detection speed. Crucially, these substantial efficiency and safety gains are achieved entirely zero-shot using an off-the-shelf foundation model, demonstrating the robust utility of our dual-process architecture for real-time, edge-deployed robotic systems.

5.2 EMA-HSVS for Lightweight Router Triggering

Operating continuously at frame-rate, the EMA-HSVS module serves as a first-stage gating mechanism that determines whether an incoming observation exhibits sufficient structural variance to warrant downstream Affordance Router queries. Specifically, EMA-HSVS regulates planner-state transition evaluations by leveraging continuously monitored subgoal-completion signals.

To identify specific attention heads within Transformer-based vision encoders sensitive to structural transformations, we curate a balanced dataset capturing both macro scene-level layouts and localized object-level variations. Scene-level data includes real-world indoor navigation footage and ALFRED sequences [40]; object-level data integrates an augmented LIBERO dataset [52] with randomized object insertions, real-world tabletop interaction videos, and ALFRED manipulation tasks. Each data instance pairs a reference observation with a structurally modified variant reflecting distinct action outcomes or novel object states. Sub-datasets are sampled uniformly, yielding 5K pairs for head selection and 1K pairs for evaluation. Deployed on the NVIDIA Jetson Orin NX (16GB), the EMA-HSVS module introduces a minimal average computational overhead of only **181.42 ms (± 24.3 ms) per frame**, validating its suitability for real-time robotic control loops.

Trigger Precision and Recall: We evaluate the capacity of EMA-HSVS to selectively trigger the downstream planner during state mutations while suppressing redundant invocations. As shown in Figure 5, targeted head selection enhances object-level accuracy by isolating task-relevant semantic entities, while an arm kinematic mask filters out spurious ego-motion noise to improve scene-level tracking stability. Quantitatively, *REIS* achieves a recall of over 97% (97.17% for object-level and 98.65% for scene-level) for true state transitions, ensuring critical subgoal updates are captured, and a precision of **94.6%** in filtering out redundant frames, effectively mitigating reasoning overhead without degrading task success.

5.3 Affordance Router for Fast Planner-State Verification

The Affordance Router evaluates four Yes/No queries (Q_1 - Q_3) to assess the current state in terms of (i) maintaining the recent action, (ii) validating the current subgoal, (iii) confirming subgoal completion, and (iv) detecting severe deviations requiring new planning. Responses determine execution state, where C_1 maintains the current action (bypassing System Two), whereas C_2 (action update), C_3 (subgoal and action update), and C_4 (high-level re-planning) all necessitate escalation to the deliberative System Two. To evaluate the accuracy in separating direct execution (C_1) from System Two escalation (C_2 - C_4) on long-horizon semantic tasks, we compare three system variants using Qwen3-VL-4B-Instruct as follows. (1) **Base+Direct**: decodes yes/no token probabilities directly from a joint image and base-prompt prefill. (2) **Base+Reasoning**: allows autoregressive chain-of-thought generation prior to token selection. (3) **Affordance Routing (*REIS*)**: injects a task-specific KV steering vector into the terminal cache slot of the base prefill, appends the query-specific question (Q_1 - Q_3), and evaluates token probabilities directly with zero token generation overhead.

Table 4: Performance Comparison of System Two Routing (C1 vs. C2-C4)

Method	Accuracy	Precision	Recall	F1	Latency	Tokens	1 frame Acc	2 frame Acc	3 frames Acc
Base + Direct	0.762	0.3330	0.1390	0.1960	327.56 ms	0	-	-	-
Base + Reasoning	0.751	0.1000	0.2330	0.1400	43.59 sec	290.8	-	-	-
Affordance Routing (<i>REIS</i>)	0.913	0.8870	0.8240	0.8544	406.21 ms	0	0.913	0.942	0.959

As Table 7 shows, *REIS* significantly improves inference efficiency and classification accuracy over the baselines. While *Base+Reasoning* incurs an impractical edge latency of **43.59 s**, our framework leverages hidden-state steering to slash this down to **406.21 ms** with no output tokens.

Affordance Routing significantly outperforms baselines with a 0.913 accuracy (0.751 and 0.762 for *Base+Reasoning* and *Base+Direct*, respectively). We observed that the reason of *Base+Reasoning* performing worse than *Base+Direct* is due to token length limits. Note that Jetson Orin NX hosts 16GB shared-RAM, mostly used for the model itself, with a small budget for input and output tokens. A Full-HD input leaves ~ 500 token budget for the output. While sufficient in most cases, we noticed cases exceeding this limit; causing performance degradation.

We point out that *REIS*'s low latency secures enough time to further enhance its accuracy by validating System Two escalation decisions in a repetitive manner over consecutive frames. To evaluate this, we constructed 150 image sequences capturing the transition from a C_1 state (System Two bypass) to System Two escalation states (C_2 - C_4). Each sequence consists of a reference image and four subsequent frames at 0.4 s intervals. By repeatedly operating Affordance Routing, we can achieve 0.942 accuracy when evaluating two consecutive frames and 0.959 when evaluating three; demonstrating highly reliable and responsive System Two triggers.

6 Limitations, Future Directions and Conclusion

We presented *REIS*, a dual-process framework that minimizes inference latency in reasoning-based robotic policies by partitioning decision-making into an asynchronous EMA-HSVS visual gating mechanism and a fast, KV-steered Affordance Router.

While our approach substantially reduces computational workload on resource-constrained edge hardware, we see three primary limitations. First, our evaluation heavily leverages benchmarks due to the lack of large-scale real-world data, exploiting physical deployments primarily as feasibility checks. Second, while the VLM backbone was fine-tuned for the ALFRED benchmark, we were unable to apply fine-tuning to the real-world deployments; inherently limiting its performance within existing semantic boundaries. Finally, our current framework is restricted to the high-level function-calling paradigm rather than full end-to-end continuous control [43, 8]. Future work will extend *REIS* to broader embodied architectures, integrating affordance routing into diffusion-based policies to adaptively minimize iterative denoising steps [8, 9, 57] and scaling to VLA pipelines for low-level continuous trajectory generation.

References

- [1] Q. Zhao, Y. Lu, M. J. Kim, Z. Fu, Z. Zhang, Y. Wu, Z. Li, Q. Ma, S. Han, C. Finn, A. Handa, M.-Y. Liu, D. Xiang, G. Wetzstein, and T.-Y. Lin. Cot-vla: Visual chain-of-thought reasoning for vision-language-action models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025. URL https://openaccess.thecvf.com/content/CVPR2025/html/Zhao_CoT-VLA_Visual_Chain-of-Thought_Reasoning_for_Vision-Language-Action_Models_CVPR_2025_paper.html.
- [2] J. Wen, Y. Zhu, M. Zhu, Z. Tang, J. Li, Z. Zhou, X. Liu, C. Shen, Y. Peng, and F. Feng. DiffusionVLA: Scaling robot foundation models via unified diffusion and autoregression. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 66558–66574. PMLR, 2025. URL <https://proceedings.mlr.press/v267/wen25g.html>.
- [3] W. Jiang, J. Clemons, K. Sankaralingam, and C. Kozyrakis. How fast can i run my vla? demystifying vla inference performance with vla-perf, 2026. URL <https://arxiv.org/abs/2602.18397>.
- [4] Y. Dai, H. Gu, T. Wang, Q. Cheng, Y. Zheng, Z. Qiu, L. Gong, W. Lou, and X. Zhou. Actionflow: A pipelined action acceleration for vision language models on edge. *arXiv preprint arXiv:2512.20276*, 2025. URL <https://arxiv.org/abs/2512.20276>.
- [5] L. Scarciglia, A. Paolillo, and D. Palossi. A map-free deep learning-based framework for gate-to-gate monocular visual navigation aboard miniaturized aerial vehicles. In *2025 IEEE International Conference on Robotics and Automation (ICRA)*, 2025. URL <https://arxiv.org/abs/2503.05251>.
- [6] Y. Qian, Y. Zhu, J. Luo, L. Liu, Y. Yuan, G. Ning, and H. Liao. Breaking the latency barrier: Synergistic perception and control for high-frequency 3D ultrasound servoing. In *2026 IEEE International Conference on Robotics and Automation (ICRA)*, 2026. URL https://ras.papercept.net/conferences/conferences/ICRA26/program/ICRA26_ContentListWeb_4.html.
- [7] Z. Duan, Y. Zhang, S. Geng, G. Liu, J. Boedecker, and C. X. Lu. Fast ecot: Efficient embodied chain-of-thought via thoughts reuse. In *2026 IEEE International Conference on Robotics and Automation (ICRA)*, 2026. URL <https://arxiv.org/abs/2506.07639>.
- [8] C. Chi, Z. Xu, S. Feng, E. Cousineau, Y. Du, B. Burchfiel, R. Tedrake, and S. Song. Diffusion policy: Visuomotor policy learning via action diffusion. *The International Journal of Robotics Research*, 2024. doi:10.1177/02783649241273668. URL <https://doi.org/10.1177/02783649241273668>.
- [9] Z. Wang, Z. Li, A. Mandlekar, Z. Xu, J. Fan, Y. Narang, L. Fan, Y. Zhu, Y. Balaji, M. Zhou, M.-Y. Liu, and Y. Zeng. One-step diffusion policy: Fast visuomotor policies via diffusion distillation. In *International Conference on Machine Learning*, 2025. URL <https://openreview.net/forum?id=E2VsqqKNlr>.
- [10] Z. Zhong, J. Li, J. He, H. Yan, X. Gong, G. Zhao, Y. Cai, J. Gao, X. Yan, B. Liu, Y. Chen, L. Yang, and H. Li. Dualcot-vla: Visual-linguistic chain of thought via parallel reasoning for vision-language-action models. *arXiv preprint arXiv:2603.22280*, 2026. URL <https://arxiv.org/abs/2603.22280>.
- [11] Y. Duan, H. Yin, and D. Kragic. Real-time iteration scheme for diffusion policy. In *2025 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2025. URL <https://arxiv.org/abs/2508.05396>.

- [12] J. Zhang, Y. Guo, X. Chen, Y.-J. Wang, Y. Hu, C. Shi, and J. Chen. Hirt: Enhancing robotic control with hierarchical robot transformers. In P. Agrawal, O. Kroemer, and W. Burgard, editors, *Proceedings of The 8th Conference on Robot Learning*, volume 270 of *Proceedings of Machine Learning Research*, pages 933–946. PMLR, 06–09 Nov 2025. URL <https://proceedings.mlr.press/v270/zhang25b.html>.
- [13] Q. Bu, H. Li, L. Chen, J. Cai, J. Zeng, H. Cui, M. Yao, and Y. Qiao. Towards synergistic, generalized and efficient dual-system for robotic manipulation, 2024. URL <https://arxiv.org/abs/2410.08001>.
- [14] B. Han, J. Kim, and J. Jang. A dual process vla: Efficient robotic manipulation leveraging vlm. In *Conference on Robot Learning Workshop on Language and Robot Learning*, pages 1–10, 2024. URL <https://arxiv.org/abs/2410.15549>.
- [15] J. Liu, P. Zhao, Z. Kong, X. Shen, P. Dong, F. Yang, L. Cui, H. Tang, G. Yuan, W. Niu, W. Zhang, X. Lin, G. Liu, Y. Wang, and D. Huang. When should a robot think? resource-aware reasoning via reinforcement learning for embodied robotic decision-making. *arXiv preprint arXiv:2603.16673*, 2026. URL <https://arxiv.org/abs/2603.16673>.
- [16] Y. Hu, J.-N. Zaeche, N. Nikolov, Y. Yao, S. Dey, G. Albanese, R. Detry, L. Van Gool, and D. Paudel. AR-VLA: True autoregressive action expert for vision-language-action models. In *Robotics: Science and Systems*, 2026. URL <https://arxiv.org/abs/2603.10126>.
- [17] J. Tang, Y. Sun, Y. Zhao, S. Yang, Y. Lin, Z. Zhang, J. Hou, Y. Lu, Z. Liu, and S. Han. VLASH: Real-time VLAs via future-state-aware asynchronous inference. *arXiv preprint arXiv:2512.01031*, 2025. URL <https://arxiv.org/abs/2512.01031>.
- [18] Z. Huang, Y. Zhang, J. Liu, R. Song, C. Tang, and J. Ma. TIC-VLA: A think-in-control vision-language-action model for robot navigation in dynamic environments. In *International Conference on Machine Learning*, 2026. URL <https://arxiv.org/abs/2602.02459>.
- [19] Q. Wang, Y. Liang, M. Li, T. Zhou, and C. Rasmussen. History-conditioned spatio-temporal visual token pruning for efficient vision-language navigation. *arXiv preprint arXiv:2603.06480*, 2026. URL <https://arxiv.org/abs/2603.06480>.
- [20] H. Xu, Z. Liu, Y. Luomei, and F. Xu. Aerial vision-language navigation with a unified framework for spatial, temporal and embodied reasoning. *arXiv preprint arXiv:2512.08639*, 2025. URL <https://arxiv.org/abs/2512.08639>.
- [21] S. Wang, Y. Luo, X. Chen, A. Luo, D. Li, C. Liu, S. Chen, Y. Zhang, and J. Yu. VLingNav: Embodied navigation with adaptive reasoning and visual-assisted linguistic memory. *arXiv preprint arXiv:2601.08665*, 2026. URL <https://arxiv.org/abs/2601.08665>.
- [22] K. Luo and X. Ma. EmergeNav: Structured embodied inference for zero-shot vision-and-language navigation in continuous environments. *arXiv preprint arXiv:2603.16947*, 2026. URL <https://arxiv.org/abs/2603.16947>.
- [23] M. J. Kim, K. Pertsch, S. Karamcheti, T. Xiao, A. Balakrishna, S. Nair, R. Rafailov, E. P. Foster, P. R. Sanketi, Q. Vuong, T. Kollar, B. Burchfiel, R. Tedrake, D. Sadigh, S. Levine, P. Liang, and C. Finn. OpenVLA: An open-source vision-language-action model. In P. Agrawal, O. Kroemer, and W. Burgard, editors, *Proceedings of The 8th Conference on Robot Learning*, volume 270 of *Proceedings of Machine Learning Research*, pages 2679–2713. PMLR, 2025. URL <https://proceedings.mlr.press/v270/kim25c.html>.
- [24] NVIDIA. GeForce RTX 4090 graphics cards for gaming. <https://www.nvidia.com/en-us/geforce/graphics-cards/40-series/rtx-4090/>, 2026. Accessed: 2026-05-15.

- [25] NVIDIA. Jetson AGX Orin for next-gen robotics. <https://www.nvidia.com/en-us/autonomous-machines/embedded-systems/jetson-orin/>, 2026. Accessed: 2026-05-15.
- [26] D. Shah, B. Osinski, B. Ichter, and S. Levine. LM-nav: Robotic navigation with large pre-trained models of language, vision, and action. In *6th Annual Conference on Robot Learning*, 2022. URL <https://openreview.net/forum?id=UW5A3SweAH>.
- [27] N. Yokoyama, S. Qian, M. Chang, T.-Y. Yang, and W. Wang. Vlfm: Vision-language frontier maps for zero-shot semantic navigation. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pages 111–117. IEEE, 2024. doi:10.1109/ICRA57147.2024.10610287. URL <https://ieeexplore.ieee.org/document/10610287>.
- [28] Z. Yin, C. Cheng, Y. Guo, and Z. Li. Navigation with vlm framework: Towards going to any language, 2025. URL <https://arxiv.org/abs/2410.02787>.
- [29] V. Blukis, C. Paxton, D. Fox, A. Garg, and Y. Artzi. A persistent spatial semantic representation for high-level natural language instruction execution. In *Proceedings of The 5th Conference on Robot Learning*, volume 164 of *Proceedings of Machine Learning Research*, pages 706–717. PMLR, 2022. URL <https://proceedings.mlr.press/v164/blukis22a.html>.
- [30] J. de Heuvel, W. Shi, X. Zeng, and M. Bennewitz. Subgoal-driven navigation in dynamic environments using attention-based deep reinforcement learning. *Field Robotics*, 4:182–210, 2024. URL https://fieldrobotics.net/Field_Robotics/Volume_4_files/Vol4_07.pdf.
- [31] W. Hu, Y. Zhou, and H. W. Ho. Hierarchical deep deterministic policy gradient for autonomous maze navigation of mobile robots. *arXiv preprint arXiv:2508.04994*, 2025. URL <https://arxiv.org/abs/2508.04994>.
- [32] C. H. Song, J. Wu, C. Washington, B. M. Sadler, W.-L. Chao, and Y. Su. LLM-Planner: Few-shot grounded planning for embodied agents with large language models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 2998–3009, 2023. URL https://openaccess.thecvf.com/content/ICCV2023/html/Song_LLM-Planner_Few-Shot_Grounded_Planning_for_Embodied_Agents_with_Large_Language_ICCV_2023_paper.html.
- [33] M. Ahn, A. Brohan, N. Brown, Y. Chebotar, O. Cortes, B. David, C. Finn, C. Fu, K. Gopalakrishnan, K. Hausman, et al. Do as i can, not as i say: Grounding language in robotic affordances. In *Conference on Robot Learning (CoRL)*, 2022.
- [34] I. Singh, V. Blukis, A. Mousavian, A. Goyal, D. Xu, J. Tremblay, D. Fox, J. Thomason, and A. Garg. Progprompt: Generating situated robot task plans using large language models. In *2023 IEEE International Conference on Robotics and Automation (ICRA)*, 2023. doi:10.1109/ICRA48891.2023.10161317. URL <https://doi.org/10.1109/ICRA48891.2023.10161317>.
- [35] M. Dalal, T. Chiruvolu, D. S. Chaplot, and R. Salakhutdinov. Plan-seq-learn: Language model guided reinforcement learning for solving long horizon robotics tasks. *arXiv preprint arXiv:2405.01534*, 2024. URL <https://arxiv.org/abs/2405.01534>.
- [36] M. F. Ginting, S.-K. Kim, D. D. Fan, M. Palieri, M. J. Kochenderfer, and A.-a. Agha-Mohammadi. Seek: Semantic reasoning for object goal navigation in real world inspection tasks. In *Robotics: Science and Systems*, 2024. URL <https://arxiv.org/abs/2405.09822>.
- [37] X. Zhou, T. Xiao, L. Liu, Y. Wang, M. Chen, X. Meng, X. Wang, W. Feng, W. Sui, and Z. Su. FSR-VLN: Fast and slow reasoning for vision-language navigation with hierarchical multi-modal scene graph. *arXiv preprint arXiv:2509.13733*, 2025. URL <https://arxiv.org/abs/2509.13733>.

- [38] G. Li, N. Tsagkas, J. Song, R. Mon-Williams, S. Vijayakumar, K. Shao, and L. Sevilla-Lara. Learning precise affordances from egocentric videos for robotic manipulation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2025. URL https://openaccess.thecvf.com/content/ICCV2025/html/Li_Learning_Precise_Affordances_from_Egocentric_Videos_for_Robotic_Manipulation_ICCV_2025_paper.html.
- [39] M. Pan, J. Zhang, T. Wu, Y. Zhao, W. Gao, and H. Dong. Omnimanip: Towards general robotic manipulation via object-centric interaction primitives as spatial constraints. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025. URL https://openaccess.thecvf.com/content/CVPR2025/html/Pan_OmniManip_Towards_General_Robotic_Manipulation_via_Object-Centric_Interaction_Primitives_as_CVPR_2025_paper.html.
- [40] M. Shridhar, J. Thomason, D. Gordon, Y. Bisk, W. Han, R. Mottaghi, L. Zettlemoyer, and D. Fox. Alfred: A benchmark for interpreting grounded instructions for everyday tasks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 10740–10749, 2020.
- [41] C. Li, R. Zhang, J. Wong, C. Gokmen, S. Srivastava, R. Martín-Martín, C. Wang, G. Levine, W. Ai, B. Martinez, H. Yin, M. Lingelbach, M. Hwang, A. Hiranaka, S. Garlanka, A. Aydin, S. Lee, J. Sun, M. Anvari, M. Sharma, D. Bansal, S. Hunter, K.-Y. Kim, A. Lou, C. R. Matthews, I. Villa-Renteria, J. H. Tang, C. Tang, F. Xia, Y. Li, S. Savarese, H. Gweon, C. K. Liu, J. Wu, and L. Fei-Fei. BEHAVIOR-1k: A human-centered, embodied ai benchmark with 1,000 everyday activities and realistic simulation. In *Proceedings of The 6th Conference on Robot Learning*, volume 205 of *Proceedings of Machine Learning Research*, pages 80–93. PMLR, 2023. URL <https://proceedings.mlr.press/v205/li23a.html>.
- [42] A. Brohan, N. Brown, J. Carbajal, Y. Chebotar, X. Chen, K. Choromanski, T. Ding, D. Driess, A. Fu, S. Guadarrama, et al. Rt-2: Vision-language-action models transfer knowledge to robotics. *Conference on Robot Learning (CoRL)*, 2023.
- [43] K. Black, N. Brown, D. Driess, A. Esmail, M. Equi, C. Finn, N. Fusai, L. Groom, K. Hausman, B. Ichter, S. Jakubczak, T. Jones, L. Ke, S. Levine, A. Li-Bell, M. Mothukuri, S. Nair, K. Pertsch, L. X. Shi, J. Tanner, Q. Vuong, A. Walling, H. Wang, and U. Zhilinsky. π_0 : A vision-language-action flow model for general robot control. *arXiv preprint arXiv:2410.24164*, 2024. URL <https://arxiv.org/abs/2410.24164>.
- [44] M. Belitsky, D. J. Kopiczko, M. Dorkenwald, M. J. Mirza, J. R. Glass, C. G. M. Snoek, and Y. M. Asano. Kv cache steering for controlling frozen llms. *arXiv preprint arXiv:2507.08799*, 2025. doi:10.48550/arXiv.2507.08799.
- [45] P. Budzianowski, W. Maa, M. Freed, J. Mo, W. Hsiao, A. Xie, T. Mloduchowski, V. Tipnis, and B. Bolte. Edgevla: Efficient vision-language-action models. In *IROS 2024 Workshop on Mobile Manipulation and Embodied Intelligence*, 2024. URL <https://mobile-manipulation.net/events/moma-iros24/>.
- [46] M. Xu, D. Niyato, H. Zhang, J. Kang, Z. Xiong, S. Mao, and Z. Han. Joint foundation model caching and inference of generative AI services for edge intelligence. In *2023 IEEE Global Communications Conference (GLOBECOM)*, pages 3548–3553, 2023. doi:10.1109/GLOBECOM54140.2023.10436771. URL <https://doi.org/10.1109/GLOBECOM54140.2023.10436771>.
- [47] H. Huang, I. Fedorov, A. Gromov, B. Beckerman, N. Suda, D. Eriksson, M. Balandat, R. Conway, P. Huber, C. Sankar, A. Dalmia, Z. Liu, L. Wu, T. Elgamal, A. Sagar, V. Chandra, and R. Krishnamoorthi. MobileLLM-flash: Latency-guided on-device LLM design for industry scale. In *Proceedings of the Annual Meeting of the Association for Computational Linguistics: Industry Track*, 2026. URL <https://arxiv.org/abs/2603.15954>.

- [48] N. Bagrov, E. Khvedchenia, B. Tymchenko, S. Aharon, L. Kadoch, T. Keren, O. Masad, Y. Geifman, R. Zilberstein, T. Rintamaki, M. Le, and A. Tao. Efficient video sampling: Pruning temporally redundant tokens for faster VLM inference. *arXiv preprint arXiv:2510.14624*, 2025. URL <https://arxiv.org/abs/2510.14624>.
- [49] J. Li, M. Wu, J. Cao, A. Tiulpin, and M. B. Blaschko. EchoPrune: Interpreting redundancy as temporal echoes for efficient VideoLLMs. *arXiv preprint arXiv:2605.10050*, 2026. URL <https://arxiv.org/abs/2605.10050>.
- [50] H. Chen, J. Liu, C. Gu, Z. Liu, R. Zhang, X. Li, X. He, Y. Guo, C.-W. Fu, S. Zhang, and P.-A. Heng. Fast-in-slow: A dual-system vla model unifying fast manipulation within slow reasoning. In *Advances in Neural Information Processing Systems*, 2025. URL <https://openreview.net/forum?id=4asFznbzJg>.
- [51] K. Sakurada, M. Shibuya, and W. Wang. Weakly Supervised Silhouette-based Semantic Scene Change Detection. In *IEEE International Conference on Robotics and Automation (ICRA)*, pages 6861–6867. IEEE, 2020. doi:10.1109/ICRA40945.2020.9196985.
- [52] B. Liu, Y. Liu, Z. Cui, S. Huang, and Y. Zhu. Libero: Benchmarking knowledge transfer in lifelong robot learning. In *Thirty-seventh Conference on Neural Information Processing Systems (NeurIPS)*, 2023.
- [53] S. Bai, Y. Cai, R. Chen, K. Chen, X. Chen, Z. Cheng, L. Deng, W. Ding, C. Gao, C. Ge, et al. Qwen3-vl technical report. *arXiv preprint arXiv:2511.21631*, 2025. doi:10.48550/arXiv.2511.21631. URL <https://arxiv.org/abs/2511.21631>.
- [54] prithivMLmods. Codepy-Deepthink-3B. <https://huggingface.co/prithivMLmods/Codepy-Deepthink-3B>, 2024. Hugging Face model card, accessed 2026-05-26.
- [55] Meta. Llama-3.2-3B-Instruct. <https://huggingface.co/meta-llama/Llama-3.2-3B-Instruct>, 2024. Hugging Face model card, accessed 2026-05-26.
- [56] T. Wolf, L. Debut, V. Sanh, J. Chaumond, C. Delangue, A. Moi, P. Cistac, T. Rault, R. Louf, M. Funtowicz, J. Davison, S. Shleifer, P. von Platen, C. Ma, Y. Jernite, J. Plu, C. Xu, T. Le Scao, S. Gugger, M. Drame, Q. Lhoest, and A. Rush. Transformers: State-of-the-art natural language processing. In Q. Liu and D. Schlangen, editors, *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45, Online, Oct. 2020. Association for Computational Linguistics. doi:10.18653/v1/2020.emnlp-demos.6. URL <https://aclanthology.org/2020.emnlp-demos.6/>.
- [57] S.-A. Yu, F. Gao, Y. Wu, C. Yu, and Y. Wang. D3P: Dynamic denoising diffusion policy via reinforcement learning. *arXiv preprint arXiv:2508.06804*, 2025. URL <https://arxiv.org/abs/2508.06804>.

A Appendix

A.1 Affordance Router Details: Prompts and Conditions

This section provides the comprehensive prompt templates and the complete mapping matrix utilized by the KV-Steered Affordance Router in System One. Table 5 defines how the binary outputs of the core affordance questions (Q_1, Q_2, Q_3) map onto the four discrete execution conditions ($C_1 \sim C_4$) for rapid, low-level routing or safe System Two fallback.

Table 5: Mapping of question combinations to affordance conditions.

Condition	Description	Combination (Q_1, Q_2, Q_3)
C1	Subgoal incomplete, transition invalid, and current action continues.	(No, No, Yes)
C2	Subgoal incomplete, transition invalid, and current action changes.	(No, No, No)
C3	Subgoal complete and transition to next subgoal is valid.	(Yes, Yes, Any)
C4	Inconsistent state or completed subgoal with invalid transition.	Otherwise

A.2 EMA-HSVS Gating Pipeline Detail

This section details the explicit structural feature workflows executed by the Fast Perception mechanism. Figure 6 maps the step-by-step tensor processing pipelines used during target site calibration.

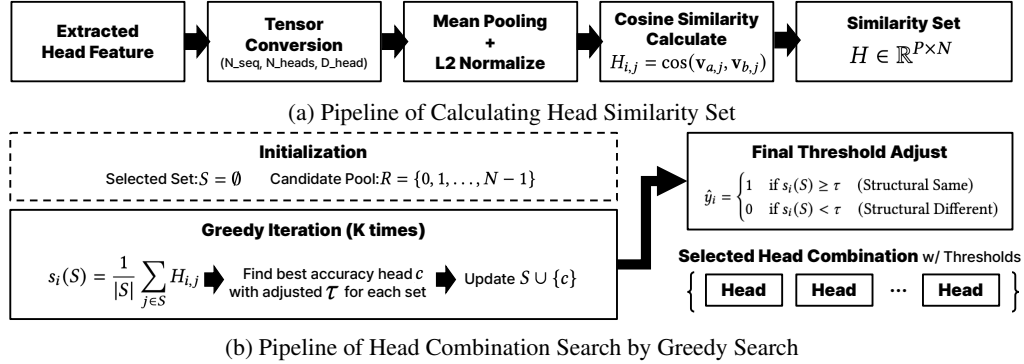


Figure 6: Pipeline of Head Selection (Figure 3 from Main Text)

A.3 Contrastive Pair Generation and KV Steer Details

The architectural flow for generating the training-free optimization pairs and synthesizing downstream steering hidden states is shown below. Figure 7a traces prompt-level token paths, while Figure 7b demonstrates tensor compilation routines.

A.4 Generated Prompt as Positive and Negative for KV Steering

Figure 8 illustrates the exact prompt structures used to generate the contrastive pairs for KV steering. The positive prompt guides the model to produce a detailed chain-of-thought reasoning before outputting the final affordance decision (e.g., subgoal status and action continuation) in a structured JSON format. Conversely, the negative prompt forces the model to bypass the reasoning phase and directly output the JSON decision. The hidden state differences between these two distinct generation paths are extracted to synthesize the task-specific KV steering vectors.

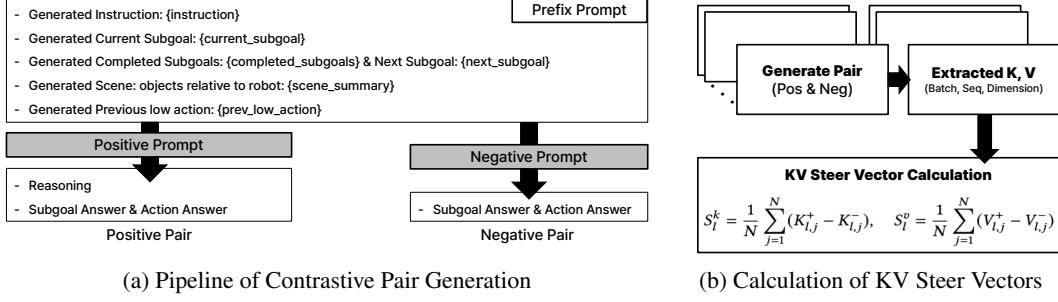


Figure 7: Visual pipelines for (Left) Contrastive Pair Generation (Figure 4) and (Right) Calculation of KV Steer Vectors (Figure 5).

Positive Prompt	Negative Prompt
System: You are an embodied affordance evaluator. User: {"Instruction": "..."} Assistant: {"subgoal_completed": "No", "next_subgoal_logical": "No", "keep_current_action": "Yes", "conclusion": "C1", "reasoning": "..."} User: ...	System: You are an embodied affordance evaluator. User: {"Instruction": "..."} Assistant: {"subgoal_completed": "No", "next_subgoal_logical": "No", "keep_current_action": "Yes", "conclusion": "C1"} User: ...

Figure 8: Positive and Negative Prompt for KV Steering Pair Generation

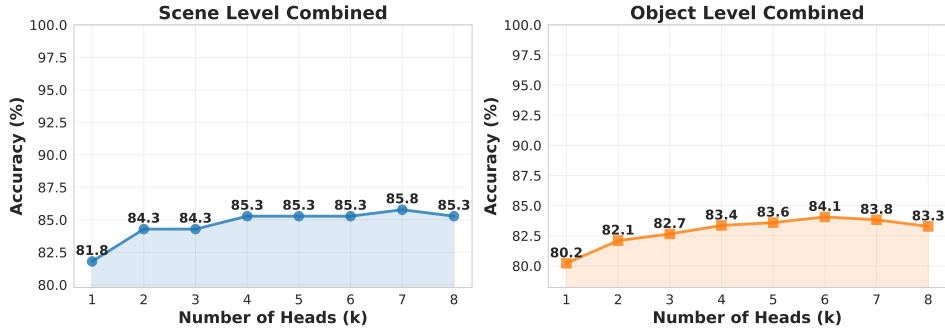


Figure 9: Sweep Result of EMA-HSVS Greedy Search

A.5 Vision Encoder Head & Threshold Configuration

Our data-driven EMA-HSVS calibration pipeline yields a lightweight configuration that exhibits robust generalization across heterogeneous tracking environments. The optimized presets remain stable under varying lighting configurations without demanding localized task tuning.

Head Activation Search and Optimal Combination: Figure 9 illustrates the performance trajectory of the greedy search algorithm used to identify the optimal subset of attention heads. For scene-level structural changes, detection accuracy steadily improves as more heads are aggregated, peaking at 85.8% with $k = 7$ heads before exhibiting a slight degradation. A similar trend is observed at the object level, where optimal accuracy (84.1%) is achieved at $k = 6$ heads. These results indicate that a compact ensemble of 6 to 7 highly sensitive attention heads is optimal for capturing critical structural variations while effectively filtering out redundant visual noise.

A.6 Comparison b/w RAG, TAG, Structured CoT Prefilling, KV Cache Steering for Affordance Routing

The evaluation on the ALFRED benchmark, as shown in Table 5, demonstrates that our proposed KV caching method achieves an optimal balance between accuracy and real-time efficiency. While maintaining comparable accuracy and F1 scores to the context-augmented baselines (CAG and RAG), our

Table 6: Performance Comparison of Different Methods on ALFRED Benchmark

Method	Q	Acc	Precision	Recall	F1	Avg Latency	Avg Output Tokens
Base + Direct	Q1	0.397	0.3955	0.3900	0.3927	327.56 ms	0
	Q2	0.884	0.0000	0.0000	N/A		0
	Q3	0.501	0.7930	0.1220	0.2110		0
Base + Reasoning	Q1	0.328	1.0000	0.3280	0.4930	43.59 sec	219.8
	Q2	0.884	0.0000	0.0000	N/A		216.8
	Q3	0.467	0.6320	0.0630	0.1150		230.8
CAG + Direct	Q1	0.925	0.9242	0.9260	0.9251	1027.44 ms	0
	Q2	0.894	0.8400	0.1890	0.3086		0
	Q3	0.544	0.7469	0.3173	0.4453		0
RAG + Direct	Q1	0.924	0.9173	0.9320	0.9246	1017.83 ms	0
	Q2	0.895	0.8570	0.1860	0.3057		0
	Q3	0.546	0.7510	0.3191	0.4479		0
Affordance Routing (REIS)	Q1	0.925	0.9208	0.9300	0.9254	406.21 ms	0
	Q2	0.894	0.8520	0.1850	0.3040		0
	Q3	0.548	0.7540	0.3210	0.4503		0

approach drastically reduces the average latency. For clarity in explaining the context augmentation, we borrow the terms CAG (Cache-Augmented Generation) and RAG (Retrieval-Augmented Generation) from an architectural perspective, where CAG injects the text prefill *before* the main input (image and prompt) and RAG inserts it *after* the input. Notably, because our system relies on four fixed questions to acquire environmental affordances, there is no actual dynamic retrieval step; we merely adopt these terms to simplify the explanation of our text data augmentation approach.

Efficiency of KV Caching via Bypassing Prefill: Our proposed KV (Ours) method delivers performance comparable to the standard CAG and RAG methods across all accuracy metrics. Crucially, it operates at a fraction of their latency, reducing the processing time by approximately 60% (406.21 ms vs. ~ 1027 ms). This significant acceleration is achieved because our method completely bypasses the online text prefill process by utilizing pre-computed KV caches. In contrast, while Base + Reasoning improves accuracy over Base + Direct, it incurs an impractical latency of 43.59 seconds due to excessive output token generation.

Edge Memory Constraints and Context Length: In typical RAG and CAG setups, text prefilling inevitably leads to prefill latency, increased KV cache memory overhead, and potential long-context degradation. To mitigate this, we restrict our augmented context to approximately 500 tokens. Although providing the model with more in-context examples generally improves performance, 500 tokens is the maximum optimal length that can comfortably fit into the remaining memory of a Jetson Orin NX when deploying a 4B parameter model while reserving a space for 500 tokens for generation.

A.7 Vision Encoder Representation Scaling

Visual Representation Resolution: Reducing visual encoder token inputs reveals an interesting behavioral paradigm shifts; as target resolutions contract, the foundational language model transitions from spatial geometric interpretation to localized object classification. For example, high-aspect ratio, sparse items such as office chairs begin to suffer complete semantic dropping at higher resolution floors compared to visually broad surfaces like entrance doors.

A.8 EMA-HSVS Qualitative Analysis

The extended experiment rigorously evaluates how effectively EMA-HSVS detects dynamically changing environments, triggers inference at appropriate moments, and measures the freshness of visual information similarity from the most recent inference to induce the model to continuously re-explore the environment.

Table 7: Affordance Routing Accuracy and Latency Comparison by Resolution

Method	Q	Acc	Precision	Recall	F1	Avg Latency
Affordance Routing (1920x1080)	Q1	0.968	0.9631	0.9728	0.9679	4392.50 ms
	Q2	0.935	0.8912	0.1935	0.3180	
	Q3	0.573	0.7887	0.3358	0.4710	
Affordance Routing (224x224)	Q1	0.925	0.9208	0.9300	0.9254	406.21 ms
	Q2	0.894	0.8520	0.1850	0.3040	
	Q3	0.548	0.7540	0.3210	0.4503	
Affordance Routing (112x112)	Q1	0.904	0.8996	0.9086	0.9041	362.73 ms
	Q2	0.873	0.8324	0.1807	0.2970	
	Q3	0.535	0.7367	0.3136	0.4399	
Affordance Routing (32x32)	Q1	0.893	0.8890	0.8979	0.8935	339.71 ms
	Q2	0.863	0.8226	0.1786	0.2935	
	Q3	0.529	0.7280	0.3099	0.4348	

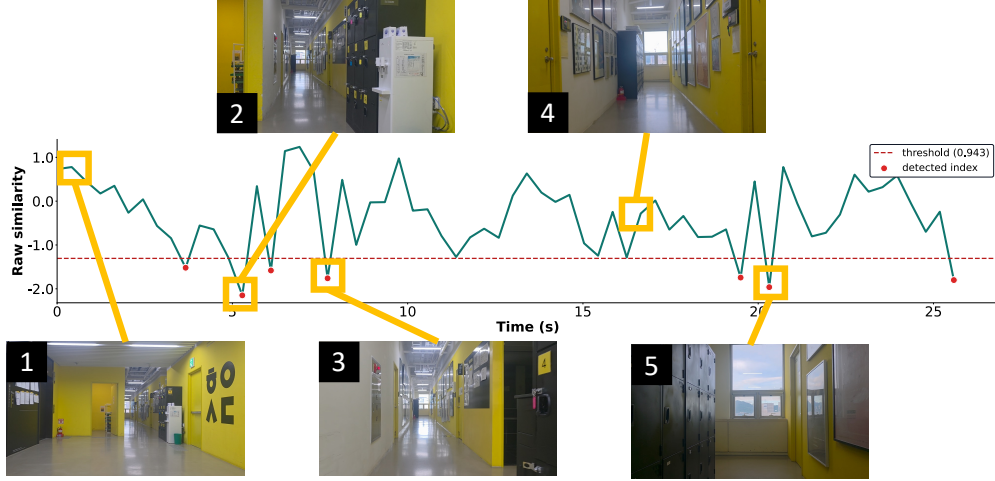


Figure 10: Hallway with Bright Color and Complex Objects on The Wall

Figure 10 demonstrates the triggering mechanism across different spatial transitions. (1) From the initial position to the space slightly to the right of the center, the similarity remains high without significant degradation. However, a trigger is successfully activated starting from point (2), where the global structure of the environment begins to transform. In total, System One is triggered three times sequentially. (3) At this point, a slight turn leading into a restroom appears on the right side of the hallway. This structural variation induces another trigger; considering the robot’s moving speed (3 km/h) and the width of the space, a single trigger at this juncture provides a compelling justification. Image (4) illustrates a scenario where the robot continuously traverses the hallway without any structural changes. Although subtle fluctuations in similarity occur, no trigger is activated as long as the values remain above the threshold, demonstrating robustness against static environments. Finally, as shown in image (5), as the robot approaches the end of the hallway, the path narrows due to a cabinet on the left, and a front wall comes into view, which effectively initiates subsequent triggers.

Figure 11 further illustrates the system’s responsiveness to open spaces and clutter. In (1), the robot initiates navigation in a wide open area, where objects like chairs and vending machines disappear from the current scene, which the system correctly recognizes as a structural transition. In (2), as the robot re-enters a hallway section, two triggers occur consecutively (including the moment just before the captured frame) due to the structural shift. Subsequently, in scene (3), a wide open space opens up to the left of the hallway, causing a total of six triggers, including the one at snapshot (3). This is analyzed as a result of the large variance in similarity caused by the presence of more diverse structural elements compared to a standard wall layout. In (4), the left-side open space disappears, leading to an additional trigger. Lastly, a sequence of three triggers culminating in image (5) is

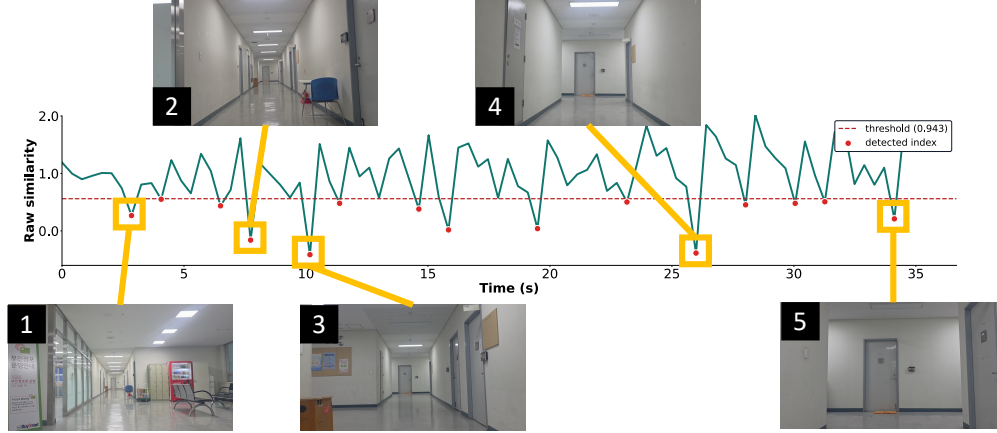


Figure 11: Hallway with Monotone Color and Dynamic Pathway Appearing

		EMA-HSVS w/ Self Mask (Qwen3 VL 4B) (ours)		EMA-HSVS w/ Self Mask (CLIP)		EMA-HSVS w/ Self Mask (SigLIP)		EMA-HSVS w/ Self Mask (BLIP)	
Object Level	True: Diff	97.17%	2.83%	96.50%	3.50%	97.00%	3.00%	95.10%	4.90%
	True: Same	0.89%	99.11%	1.20%	98.80%	1.00%	99.00%	2.80%	97.20%
	Pred: Diff								
	Pred: Same								
Scene Level	True: Diff	98.65%	1.35%	97.80%	2.20%	98.00%	2.00%	96.60%	3.40%
	True: Same	32.08%	67.92%	33.50%	66.50%	31.50%	68.50%	34.00%	66.00%
	Pred: Diff								
	Pred: Same								

Figure 12: Comparison of Other Transformer Based Vision Encoder Performance

attributed to the detection of a novel structural layout, where the end of the hallway is reached and the floor area expands to both the left and right sides.

Cross-Encoder Generalization: To evaluate the architectural versatility of our framework, we applied the EMA-HSVS mechanism across several prominent transformer-based vision encoders, including CLIP, SigLIP, and BLIP. As shown in Figure 12, the self-masking gating approach generalizes robustly without requiring architecture-specific fine-tuning. At the object level, all evaluated models exhibit exceptional True Different ($> 95\%$) and True Same ($> 97\%$) classification rates. Furthermore, at the scene level, SigLIP demonstrates performance nearly identical to our primary Qwen3-VL backbone (98.00% True Different, 68.50% True Same), confirming that the structural sensitivity leveraged by our gating pipeline is a universal trait among modern vision transformers rather than an artifact of a specific model.

A.9 System Consistency by the Model

The framework operates seamlessly across diverse downstream configurations, demonstrating model-agnostic optimization traits regardless of whether the reasoning core leverages large language networks or vision-language-action (VLA) multi-modal nodes.

As detailed in Table 8, the performance patterns vary distinctively across individual tasks depending on model capacity and spatial priors:

Realworld (Navigation): Spatial understanding heavily dictated the results. Compared to the peak accuracy of Qwen 3 VL 4B (0.641), the 3B models showed a sharp decline: Qwen 2.5 VL dropped to 0.513 (-12.8%), and Llama-3.2 plummeted to 0.412 (-22.9%). Gemma-3 4B also underperformed at 0.496 (-14.5%), proving that parameter scale alone cannot offset Qwen 3 VL’s specialized spatial pre-training.

Realworld (Manipulation): The performance gap significantly narrowed to a tight range of 0.035–0.065. While Qwen 3 VL 4B led at 0.729, Gemma-3 4B (0.694) and Qwen 2.5 VL 3B (0.689) followed closely, with Llama-3.2 3B at 0.664. This indicates that short-horizon manipulation planning is highly robust across different architectures.

ALFRED: In long-horizon tasks, Qwen 3 VL 4B maintained the top tier (0.512). The 3B models experienced a correlated performance drop, with Qwen 2.5 VL (0.397) and Llama-3.2 (0.406) decreasing by around 11%. Gemma-3 4B partially closed the gap at 0.475, showing stronger sequential reasoning despite lacking Qwen’s specific vision-language co-design.

In summary, these results confirm that while downstream execution is bound to each model’s foundational limits, our framework consistently extracts stable navigation and manipulation capabilities without architecture-dependent failures.

Table 8: Dataset Evaluation for 3 Different Known Models in 3-4B

Dataset	Method	Episode Acc
Realworld (Navigation)	Qwen 3 VL 4B	0.641
	Qwen 2.5 VL 3B	0.513
	Llama-3.2 3B	0.412
	Gemma-3 4B	0.496
Realworld (Manipulation) «Pick and Place»	Qwen 3 VL 4B	0.729
	Qwen 2.5 VL 3B	0.689
	Llama-3.2 3B	0.664
	Gemma-3 4B	0.694
ALFRED	Qwen 3 VL 4B	0.512
	Qwen 2.5 VL 3B	0.397
	Llama-3.2 3B	0.406
	Gemma-3 4B	0.475