

Accurate Trajectory Tracking with MPCC for Flapping-Wing MAVs

Charbel Toumieh, Jack Zeng, Niel Mistry, Dario Floreano, *Fellow, IEEE*

Abstract—Flapping-wing micro aerial vehicles offer quieter and safer operation than rotary-wing drones, yet achieving precise autonomous control of bird-scale ornithopters remains challenging: lift, airspeed, and turning authority are tightly coupled and governed by only a few control inputs. Conventional cascaded controllers treat altitude, speed, and heading independently, producing persistent tracking errors during complex maneuvers, while time-parameterized trajectory tracking requires predefined speed profiles that existing methods cannot robustly produce for these coupled dynamics. We address both limitations simultaneously with a Model Predictive Contouring Control (MPCC) approach that tracks arc-length-parameterized trajectories while optimizing progress online, eliminating the need for predefined timing. However, MPCC requires a dynamical model that captures the coupled aerodynamics without exceeding the computational budget of real-time nonlinear optimization. Here, we propose a compact, continuously differentiable model that captures the dominant couplings of bird-scale ornithopters, enabling real-time predictive control. We validated the method with the XFly ornithopter flying along circular and three-dimensional racing trajectories and achieved a mean deviation from the reference trajectory between 6.5 and 9 cm at speeds up to 3 m/s, which represents an almost 10-fold improvement over prior ornithopter control methods.

Keywords: Flapping-wing micro aerial vehicle, model predictive contouring control, modeling

I. INTRODUCTION

In contrast to conventional rotary-wing drones, flapping-wing micro aerial vehicles offer quieter operation and safer physical interaction due to the absence of exposed propellers [1]. Remarkable control autonomy has been achieved at the insect scale [2]–[6], but controlling bird-scale ornithopters presents a fundamentally different challenge. Unlike insect-scale ornithopters that can generate lift independently of forward motion, bird-scale ornithopters generate lift during forward flight and are affected by airspeed. Recent work has advanced their mechanical design and onboard sensing [7]–[11], yet precise trajectory control remains an open problem.

Governed by a small number of control inputs—typically flap intensity and rudder deflection—these vehicles exhibit strong coupling: increasing flapping effort simultaneously accelerates the vehicle and induces climb, while increasing airspeed enhances turning authority. Existing flight control methods do not adequately address this intrinsic coupling. At the control level, cascaded PID loops process altitude, speed, and heading independently [12]–[15]. These reactive loops



Fig. 1. Time-lapse of the ornithopter passing through a gate during trajectory tracking.

cannot anticipate how correcting one variable (e.g., turning) perturbs another (e.g., inducing altitude loss) and therefore yield persistent tracking errors during complex maneuvers. A related challenge arises at the planning level. Most controllers treat flight as time-parameterized trajectory tracking [16], which assumes that a feasible speed profile is known in advance. For ornithopters, feasible speed is dictated by coupled climb and turn-radius constraints, making pre-specified time-parameterized trajectories fragile: any deviation from the planned speed — caused by battery depletion, aerodynamic disturbances, or modeling error — produces large along-track errors that cascade into altitude and heading tracking through the couplings. Model Predictive Contouring Control (MPCC) [17]–[19] addresses both issues: it removes the need for pre-specified timing by tracking an arc-length-parameterized trajectory while optimizing progress online, and it resolves the couplings in real time by re-solving the control problem at every cycle.

However, the application of predictive control requires a dynamical model that captures the coupled dynamics without exceeding the computational limits of real-time optimization. Unsteady CFD and vortex-particle models that resolve the flapping wake run orders of magnitude slower than real-time [20], while simplified models neglect the couplings that the predictive framework is designed to handle [12], [13]. Here we bridge this gap with a nine-state dynamical model that captures the dominant aerodynamic couplings of ornithopter flight while using only continuously differentiable functions—a re-

The authors are with the Laboratory of Intelligent Systems, Ecole Polytechnique Fédérale de Lausanne (EPFL), CH1015 Lausanne, Switzerland.

This work was supported by the Swiss National Science Foundation (SNSF) with grant number 200020_212077, and Armasuisse grant number 591797.

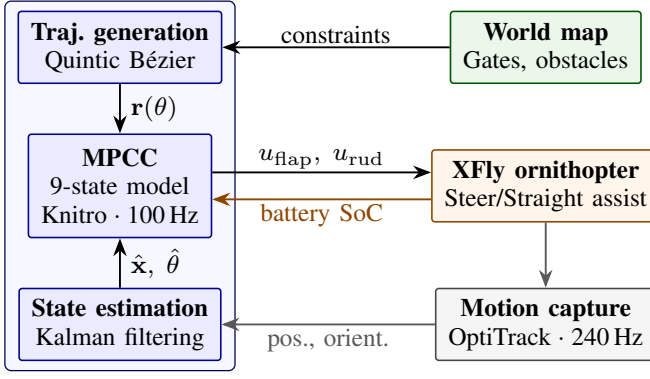


Fig. 2. Control architecture. A world map defines gate positions and obstacles that constrain the offline trajectory generator, which produces the reference trajectory $\mathbf{r}(\theta)$ as quintic Bézier curves. Kalman filters estimate position, velocity, heading, and heading rate from OptiTrack measurements at 240 Hz. The MPCC controller solves (19) over the nine-state model at 100 Hz, producing flapping and rudder commands. The battery state of charge adapts u_{level} throughout flight. The blue blocks are executed offboard on a ground station.

quirement for gradient-based nonlinear programming solvers that make real-time MPCC tractable—and keeping the number of decision variables per time step low enough to solve within a 10 ms control period. We embed this model within an MPCC formulation, creating a predictive framework that directly addresses the platform’s coupled aerodynamic constraints without requiring a pre-specified time-parameterized speed profile. Finally, we experimentally validate the control method on the XFly ornithopter (by Bionic Bird), a commercially available drone with flapping wings and a tail equipped with a vertical rudder. We show precise, real-time trajectory following on circular and three-dimensional racing trajectories that achieve a mean deviation from the reference trajectory (cross-track error) between 6.5 and 9 cm ($8.5\times$ smaller than the state of the art [13]) at speeds up to 3 m/s.

II. METHODS

A. Platform and Onboard Stabilization

Experiments are conducted on the XFly ornithopter [21], a commercially available bird-scale flapping-wing aerial vehicle with a wingspan of approximately 38 cm, a mass of roughly 12 g, and maximum wingbeat frequency of 20 Hz. The platform is actuated through two control inputs:

$$\mathbf{u} = \begin{bmatrix} u_{\text{flap}} \\ u_{\text{rud}} \end{bmatrix}, \quad (1)$$

where $u_{\text{flap}} \in [0, 1]$ denotes the normalized flapping intensity, which regulates wingbeat frequency, and $u_{\text{rud}} \in [-1, 1]$ denotes the normalized rudder deflection, which provides heading authority.

Unlike multirotor platforms, the ornithopter does not provide independent pitch or roll control. The rudder mechanism simultaneously tensions the wings, producing a coupled roll–heading response. The onboard firmware therefore includes an IMU-based stabilization loop that regulates roll angle and roll rate towards zero, providing onboard roll stabilization while exposing flapping frequency and rudder commands to the

external controller. The firmware also exposes configuration parameters controlling steering assist and straight-flight assist. In all experiments the steering assist level was set to medium and the straight-flight assist level to 50%. Under these settings, turns at small radii induce banking and altitude loss that the onboard stabilization alone does not fully reject.

B. Nine-State Ornithopter Dynamics

Predictive control requires a dynamical model that captures the dominant aerodynamic couplings of flapping flight while remaining continuously differentiable and low-dimensional for real-time nonlinear optimization. We derive a cycle-averaged representation based on first-principles considerations of forward flight rather than modeling the detailed wing aerodynamics, which involve complex fluid-structure interactions.

The state vector is defined as

$$\mathbf{x} = [p_x, p_y, p_z, \psi, v, v_z, a_z, \dot{\psi}, \ddot{\psi}]^T, \quad (2)$$

where p_x, p_y, p_z denote position, v represents horizontal airspeed, v_z the vertical speed, a_z the vertical acceleration, and ψ the direction of the horizontal velocity vector. We represent ψ as the direction of the horizontal velocity vector rather than the body heading angle, as the velocity direction is the kinematically relevant quantity for trajectory tracking: it directly governs the evolution of position and is consistent with the horizontal dynamics below.

1) *Horizontal and Forward-Speed Dynamics:* Horizontal motion follows

$$\dot{p}_x = v \cos \psi, \quad (3)$$

$$\dot{p}_y = v \sin \psi, \quad (4)$$

and forward speed evolves according to

$$\dot{v} = k_T u_{\text{flap}} \max\left(0, 1 - \frac{v}{v_{\text{max}}}\right) - k_D v, \quad (5)$$

where k_T is the thrust gain, k_D is the drag coefficient, and v_{max} is the terminal speed.

2) *Vertical Dynamics:* Vertical motion is governed by

$$\dot{p}_z = v_z, \quad (6)$$

$$\dot{v}_z = a_z - k_{\psi z} \dot{\psi}^2, \quad (7)$$

where the term $k_{\psi z} \dot{\psi}^2$ captures turn-induced altitude loss. The flapping intensity determines a target vertical velocity

$$v_{z,\text{target}} = k_z (u_{\text{flap}} - u_{\text{level}}), \quad (8)$$

which is tracked through a second-order response

$$\ddot{a}_z = \omega_n^2 (v_{z,\text{target}} - v_z) - 2\zeta\omega_n a_z. \quad (9)$$

The motor produces less torque for a given command as the battery depletes, requiring a progressively higher flapping input to maintain level flight. Accordingly, u_{level} is not a fixed constant but is updated online via a linear calibration of the form

$$u_{\text{level}} = a_{\text{batt}} b + c_{\text{batt}}, \quad (10)$$

where b is the battery state of charge in percent and $a_{\text{batt}}, c_{\text{batt}}$ are identified from flight data. This adaptation ensures that the vertical dynamics model remains accurate throughout the flight envelope.

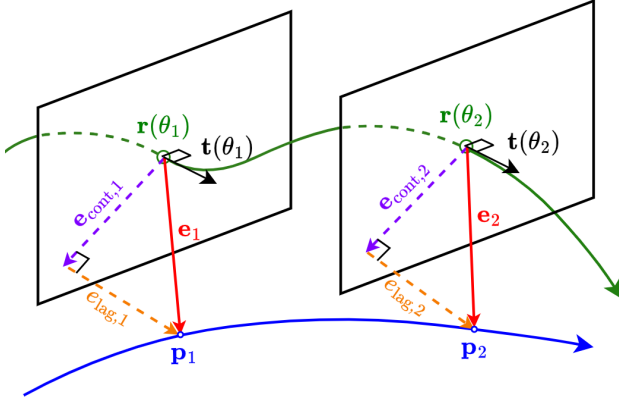


Fig. 3. MPCC error decomposition at two prediction steps. The position error $\mathbf{e}_k = \mathbf{p}_k - \mathbf{r}(\theta_k)$ is projected onto the trajectory tangent $\mathbf{t}(\theta_k)$ to yield the lag (along-track) component e_{lag} and the contouring (cross-track) component e_{cont} . The optimizer penalizes contouring error to keep the vehicle near the trajectory while minimizing lag error and maximizing progress along θ .

3) *Heading Dynamics*: The heading dynamics are modeled as a third-order chain to capture the inertial lag observed during turning maneuvers:

$$\frac{d\psi}{dt} = \dot{\psi}, \quad (11)$$

$$\frac{d\dot{\psi}}{dt} = \ddot{\psi}, \quad (12)$$

$$\frac{d\ddot{\psi}}{dt} = \frac{1}{\tau_{\ddot{\psi}}}(\ddot{\psi}_{\text{cmd}} - \ddot{\psi}), \quad (13)$$

with commanded heading acceleration

$$\ddot{\psi}_{\text{cmd}} = k_{\text{hdg}}(u_{\text{rud}} + u_{\text{rud,trim}})v. \quad (14)$$

The rudder trim $u_{\text{rud,trim}}$ compensates for an inherent heading bias arising from mechanical asymmetries in the wing and rudder linkage, ensuring that a zero rudder command produces straight flight.

C. Model Predictive Contouring Control

MPCC tracks an arc-length-parameterized trajectory $\mathbf{r}(\theta)$ rather than a time-parameterized one, treating progress along the curve as an optimization variable. This removes the need for a precomputed speed profile and allows the optimizer to negotiate tradeoffs between trajectory accuracy and forward progress in real time.

1) Error Decomposition: Let

$$\mathbf{e}_k = \mathbf{p}_k - \mathbf{r}(\theta_k) \quad (15)$$

denote the position error at prediction step k , and let $\mathbf{t}(\theta_k)$ be the unit tangent to the trajectory. The error is decomposed into a lag (along-track) component and a contouring (cross-track) component (Fig. 3):

$$e_{\text{lag},k} = \mathbf{e}_k \cdot \mathbf{t}(\theta_k), \quad (16)$$

$$\mathbf{e}_{\text{cont},k} = \mathbf{e}_k - e_{\text{lag},k} \mathbf{t}(\theta_k). \quad (17)$$

A feedforward flapping target anticipates the effort required by the local climb angle $\gamma(\theta_k)$ of the reference trajectory:

$$u_{\text{flap},k}^* = u_{\text{level}} + k_{\gamma} \gamma(\theta_k). \quad (18)$$

2) *Optimization Problem*: At each control cycle the following nonlinear program is solved over the state trajectory $\mathbf{X} = \{\mathbf{x}_k\}_{k=0}^N$, control sequence $\mathbf{U} = \{\mathbf{u}_k\}_{k=0}^{N-1}$, progress parameter $\Theta = \{\theta_k\}_{k=0}^N$, and progress speed $\mathbf{V}_{\theta} = \{v_{\theta,k}\}_{k=0}^{N-1}$:

$$\begin{aligned} \min_{\mathbf{x}, \mathbf{U}, \Theta, \mathbf{v}_{\theta}} \quad & \sum_{k=0}^{N-1} \left(q_c \|\mathbf{e}_{\text{cont},k}\|^2 + q_l e_{\text{lag},k}^2 \right. \\ & \left. - q_p v_{\theta,k} + q_r u_{\text{rud},k}^2 \right. \\ & \left. + q_f (u_{\text{flap},k} - u_{\text{flap},k}^*)^2 \right) \end{aligned} \quad (19a)$$

$$\text{s.t. } \mathbf{x}_0 = \hat{\mathbf{x}}, \quad \theta_0 = \hat{\theta}, \quad (19b)$$

$$\mathbf{x}_{k+1} = \mathbf{x}_k + \Delta t f(\mathbf{x}_k, \mathbf{u}_k), \quad (19c)$$

$$\theta_{k+1} = \theta_k + \Delta t v_{\theta,k}, \quad (19d)$$

$$u_{\text{flap},k} \in [0, 1], \quad (19e)$$

$$u_{\text{rud},k} \in [-1, 1], \quad (19f)$$

$$v_k \geq v_{\min}, \quad (19g)$$

$$v_{\theta,k} \in [0, v_{\theta}^{\max}], \quad (19h)$$

for $k = 0, \dots, N-1$, where $\hat{\mathbf{x}}$ and $\hat{\theta}$ are the current state estimate and progress parameter, and $f(\cdot)$ denotes the nine-state dynamics of Section II-B.

The cost (19a) combines five terms. The contouring term $q_c \|\mathbf{e}_{\text{cont},k}\|^2$ penalizes cross-track deviation in all three dimensions, while $q_l e_{\text{lag},k}^2$ penalizes along-track error. The negative progress term $-q_p v_{\theta,k}$ incentivizes the vehicle to advance along the trajectory rather than slow down to reduce tracking error. The final two terms regularize control effort: rudder activity and deviation of flapping from the climb-angle-dependent feedforward target (18).

The constraints enforce the dynamics (19c) via Euler integration, advance the progress parameter (19d), and impose actuator limits on the flapping and rudder commands. The progress speed is bounded below by zero to prevent the progress parameter from regressing and above by $v_{\theta}^{\max}$.

The first control input of the optimized sequence is applied to the vehicle, and the problem is warm-started at the next cycle using the shifted previous solution. The nonlinear program is formulated in CasADi [22] and solved using the Knitro solver [23], which resulted in $2\times$ lower computation time than the default IPOPT solver [24] on this problem, enabling real-time operation at 100 Hz.

3) *Trajectory Representation*: The MPCC formulation requires a reference trajectory $\mathbf{r}(\theta)$ that is at least C^2 in the arc-length parameter θ . Given a sequence of three-dimensional waypoints $\{\mathbf{w}_i\}_{i=0}^M$, we first compute the cumulative chord-length stations $s_i = s_{i-1} + \|\mathbf{w}_i - \mathbf{w}_{i-1}\|$ and resample at uniform arc-length spacing. A cubic B-spline [25] is then fitted independently per coordinate axis to these uniformly spaced samples, yielding three scalar interpolants $r_x(s)$, $r_y(s)$, $r_z(s)$ that are each C^2 by construction. The unit tangent $\mathbf{t}(\theta) = \mathbf{r}'(\theta)/\|\mathbf{r}'(\theta)\|$ and climb angle $\gamma(\theta) = \arcsin(t_z)$ are obtained by symbolic differentiation of the spline basis functions.

TABLE I
IDENTIFIED DYNAMICAL MODEL PARAMETERS.

Symbol	Description	Value	Unit
<i>Forward-speed dynamics</i>			
k_T	Thrust gain	4.07	m/s ²
k_D	Drag coefficient	0.227	1/s
$v_{\max}$	Terminal speed	2.96	m/s
<i>Vertical dynamics</i>			
k_z	Climb-rate gain	1.6	m/s
$k_{\psi z}$	Turn-altitude coupling	0.075	m·s/rad ²
ω_n	Vertical natural frequency	4.5	rad/s
ζ	Vertical damping ratio	0.25	—
u_{level}	Level-flight flap (nominal)	0.70	—
a_{batt}	Battery-flap slope	-5.49×10^{-3}	1/%
c_{batt}	Battery-flap intercept	1.021	—
<i>Heading dynamics</i>			
k_{hdg}	Rudder-heading gain	-17.0	rad/(s ² ·m)
$\tau_{\ddot{\psi}}$	Heading-acceleration time constant	0.15	s
$u_{\text{rud,trim}}$	Rudder trim	0.075	—

D. State Estimation

The nine model states are reconstructed from motion-capture position and orientation measurements. A six-state constant-velocity Kalman filter [26] on $[p_x, p_y, p_z, v_x, v_y, v_z]$ estimates position and velocity, from which horizontal airspeed is obtained as $v = \sqrt{v_x^2 + v_y^2}$.

Heading is derived from the velocity direction, $\psi = \text{atan2}(v_y, v_x)$, rather than from the motion-capture quaternion. A two-state constant-heading-rate Kalman filter on $[\psi, \dot{\psi}]$ smooths this measurement. The velocity direction becomes unreliable when forward speed falls below 0.3 m/s, and the filter then switches to quaternion heading measurements.

The remaining two states are obtained by numerical differentiation. Vertical acceleration a_z is computed as the finite difference of the Kalman-filtered vertical velocity v_z and smoothed with a first-order low-pass filter. Heading acceleration $\ddot{\psi}$ is similarly obtained by differentiating the filtered heading rate $\dot{\psi}$ and low-pass filtering the result.

III. EXPERIMENTS

The proposed controller is evaluated on the XFly ornithopter across multiple trajectories designed to test the controller under varying curvature and altitude changes.

A. Experimental Setup

Experiments were conducted indoors using an OptiTrack motion capture system operating at 240 Hz. The MPCC controller ran at 100 Hz with a prediction horizon of $N = 15$ steps and timestep $\Delta t = 0.1$ s, corresponding to a 1.5 s lookahead. All dynamical model parameters were identified from flight data collected on the XFly platform (Appendix A) and are listed in Table I. The MPCC cost weights and constraint bounds, listed in Table II, remained fixed across all experiments.

TABLE II
MPCC CONTROLLER PARAMETERS.

Symbol	Description	Value
<i>Cost weights</i>		
q_c	Contouring (cross-track)	250
q_l	Lag (along-track)	50
q_p	Progress	0.1
q_r	Rudder effort	50
q_f	Flap feedforward deviation	30
<i>Feedforward and horizon</i>		
k_γ	Climb-angle feedforward gain	2.0
N	Prediction horizon	15
Δt	Prediction timestep	0.1 s
<i>Bounds</i>		
$v_{\min}$	Min. airspeed	0.0 m/s
$v_{\theta}^{\max}$	Max. progress speed	5.0 m/s

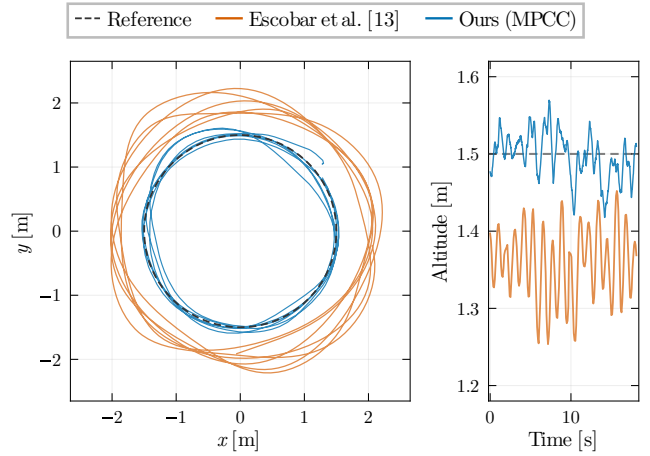


Fig. 4. Circle tracking comparison with Escobar et al. [13] on the XFly ornithopter ($r = 1.5$ m, $z_d = 1.5$ m). *Left*: XY trajectory. *Right*: altitude tracking.

TABLE III
CIRCLE TRACKING ERROR COMPARISON ($r = 1.5$ M, $z_d = 1.5$ M).

	XY [cm]		Alt. [cm]		3D [cm]	
	$\mu \pm \sigma$	max	$\mu \pm \sigma$	max	$\mu \pm \sigma$	max
Ours	5.7 ± 4.8	22	2.3 ± 1.8	8.2	6.5 ± 4.7	23
[13]	53 ± 14	85	14 ± 4.6	25	55 ± 14	89

B. Circular Trajectory

The first experiment evaluates tracking performance on a circular trajectory of radius 1.5 m and of constant altitude (1.5 m). The controller achieved a mean cross-track error of 6.5 cm while maintaining airspeeds between 2.0 and 3 m/s, an $8.5\times$ improvement over the previous state of the art on the platform [13] (Fig. 4, Tab. III). The results reported for [13] are taken from the original publication, which used the same XFly platform with the same onboard stabilization firmware. Both setups use OptiTrack motion capture with sub-centimeter accuracy, ensuring that the reported improvement reflects the outer-loop control strategy rather than sensing or platform differences.

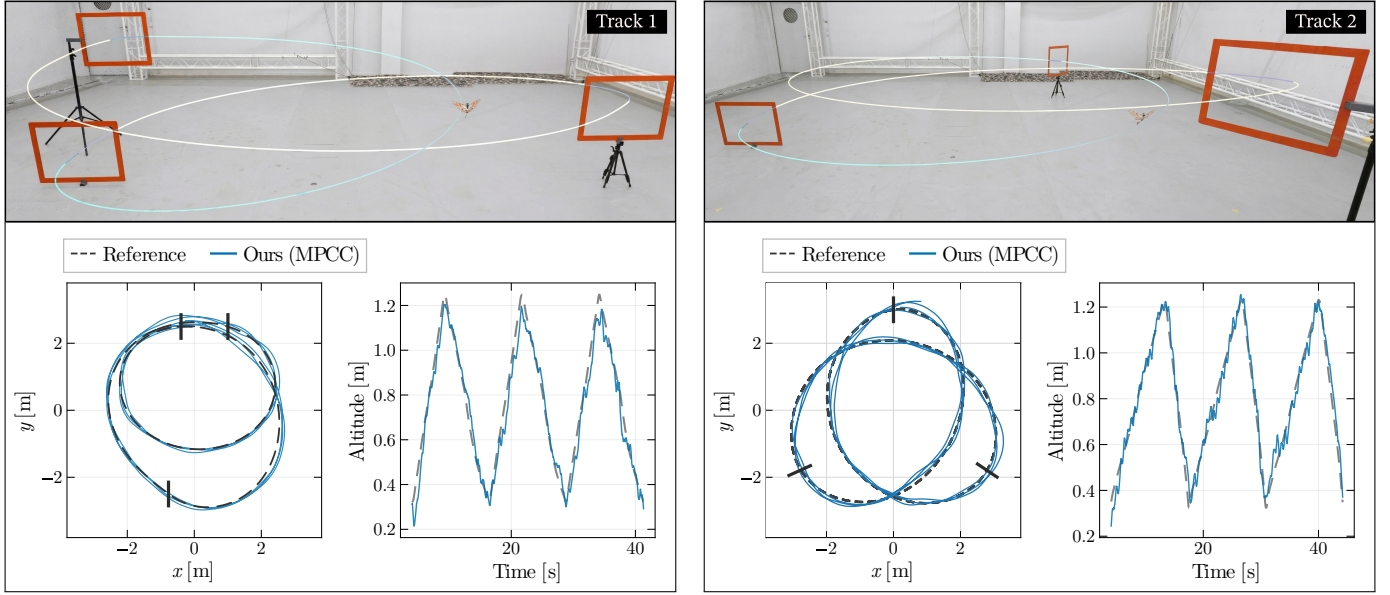


Fig. 5. Experimental flight results on two three-dimensional racing trajectories over 3 laps. *Top*: time-lapse photographs of the ornithopter tracking the reference trajectory through gate obstacles. *Bottom*: top-down XY view (left) and altitude over time (right) for each track, comparing the MPCC-tracked trajectory (solid blue) against the reference trajectory (dashed black). Gate positions are indicated by black markers.

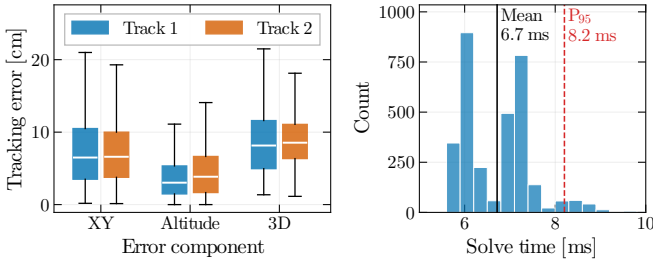


Fig. 6. Quantitative performance analysis over 3 laps on 2 tracks. Left: box plots of XY, altitude, and 3D tracking errors for both tracks, with median errors below 8 cm in XY and 4 cm in altitude. Right: distribution of MPC solve times for Track 1 (KNITRO solver) with a mean of 6.7 ms and 95th percentile of 8.2 ms, comfortably within the 10 ms control period.

C. Racing Trajectories

Two racing trajectories consisting of three-gate closed loops were evaluated over 3 laps (Fig. 5). These trajectories introduce altitude variations between 0.3 m and 1.25 m, and thus the turning radius was limited to 1.8 m to ensure feasibility and adhere to the physical limits of the platform. The reference trajectories were generated offline by optimizing smooth quintic Bézier curves through the gate sequence; full details are provided in Appendix B.

The mean contouring error was 8.5 cm for track 1 and 8.8 cm for track 2, while computation time never exceeded the control time step of 10 ms (Fig. 6).

D. Ablation Study

Four ablated configurations are evaluated on all three trajectories to isolate the contribution of each design choice. Each modifies exactly one component; all other settings remain identical. (i) Replacing the speed-dependent heading command (14) with a fixed nominal airspeed $\bar{v}$, (ii) removing the turn-induced altitude coupling $k_{\psi z}\dot{\psi}^2$ from (7), (iii)

collapsing the vertical dynamics to second order by removing the a_z state from (7)–(9), so that the flapping input directly commands vertical acceleration, and (iv) collapsing the third-order heading chain to second order by removing the $\dot{\psi}$ state so that the rudder maps directly to $\dot{\psi}$.

Ablations (iii) and (iv), which reduce the vertical and heading dynamics to second order respectively, produced large control oscillations that led to flight instability and crashes. Without the a_z state the optimizer commands aggressive flapping inputs that the vertical inertia cannot follow, destabilizing altitude. Similarly, removing the $\dot{\psi}$ lag state causes abrupt rudder reversals that trigger divergent heading oscillations. These two configurations are therefore excluded from the quantitative comparison. Ablations (i) and (ii) were evaluated over 40 laps on the circular trajectory; the results are summarized in Table IV. Both ablations significantly degrade tracking accuracy ($p < 10^{-3}$, Welch’s t -test), confirming that the speed-dependent turning model and turn-altitude coupling are each essential to the controller’s performance.

TABLE IV
ABLATION STUDY: MEAN CROSS-TRACK ERROR (CM) ON THE CIRCULAR TRAJECTORY OVER 40 LAPS. p -VALUES ARE FROM A WELCH’S t -TEST AGAINST THE FULL MODEL.

Configuration	Mean [cm]	Std [cm]	p -value
Full model	7.0	1.8	—
(i) Speed-indep. turning	10.1	4.1	5.6×10^{-5}
(ii) No turn-alt. coupling	12.3	7.9	1.6×10^{-4}

IV. CONCLUSION

This paper presented a Model Predictive Contouring Control (MPCC) framework for bird-scale ornithopters that combines a compact nine-state dynamical model with a trajectory-parameterized optimization that eliminates the need for pre-

computed speed profiles while managing the aerodynamic couplings that cascaded controllers neglect. Experimental validation on the XFly ornithopter demonstrated a mean cross-track error of 6.5 cm on circular trajectories (an $8.5\times$ improvement over the prior state of the art [13]) and below 9 cm on three-dimensional racing trajectories with altitude variations, all at speeds up to 3 m/s with solve times comfortably within the 10 ms control period. Furthermore, we conducted an ablation study to quantify the contribution of each modeling choice to tracking accuracy. A natural next step is to extend the framework to online motion planning for single and multiple flapping-wing vehicles, by adapting the quadrotor planners in [27]–[29] to the presented model.

More broadly, these results establish the trajectory-tracking precision that higher-level autonomy — obstacle avoidance, multi-vehicle coordination, perception-guided flight — requires, bringing bird-scale flapping-wing drones within reach of the autonomous behaviors long demonstrated on rotary-wing platforms.

APPENDIX A PARAMETER IDENTIFICATION

The model parameters (Table I) are identified sequentially from dedicated flight maneuvers, each stage using previously identified parameters. First, a continuous level flight from full charge to depletion identifies a_{batt} and c_{batt} by linear regression of the flapping command required to maintain $v_z \approx 0$ against battery state of charge, establishing the time-varying baseline $u_{\text{level}}(b)$ used in all subsequent stages. Straight-flight segments at varying flapping levels then identify k_T , k_D , and v_{max} via least-squares on (5), including transient phases. The rudder trim $u_{\text{rud,trim}}$ is extracted from straight segments as the command producing zero mean heading rate. Rudder step responses then identify k_{hdg} and $\tau_{\dot{\psi}}$ by fitting (13)–(14), using Kalman-filtered airspeed in (14). Flapping steps during straight flight ($\dot{\psi} \approx 0$) identify k_z , ω_n , ζ from the vertical response (7)–(9), with the concurrent speed transient predicted by the forward-speed model. Turning maneuvers isolate $k_{\psi z}$ from residual altitude loss. All parameters were jointly refined through iterative flight testing to optimize closed-loop performance.

APPENDIX B RACING TRAJECTORY GENERATION

The racing trajectories are generated offline by optimizing smooth, dynamically feasible closed-loop trajectories through a sequence of n gates. Each gate G_i is defined by a position $\mathbf{g}_i \in \mathbb{R}^3$ and a unit normal $\hat{\mathbf{n}}_i$ specifying the traversal direction.

A. Quintic Bézier Parameterization

Each segment connecting gate G_i to $G_{i+1 \bmod n}$ is a quintic Bézier curve [30]

$$\mathbf{C}_i(t) = \sum_{j=0}^5 \binom{5}{j} (1-t)^{5-j} t^j \mathbf{P}_j^{(i)}, \quad t \in [0, 1], \quad (20)$$

with endpoints $\mathbf{P}_0^{(i)} = \mathbf{g}_i$ and $\mathbf{P}_5^{(i)} = \mathbf{g}_{i+1}$ fixed at the gate positions, leaving the four interior control points $\mathbf{P}_1^{(i)}, \dots, \mathbf{P}_4^{(i)} \in \mathbb{R}^3$ as free variables. The full decision vector is the concatenation of all interior control points, giving $12n$ scalar unknowns.

B. Optimization Problem

The trajectory is obtained by solving

$$\min_{\{\mathbf{P}_j^{(i)}\}} \sum_{i=1}^n \int_0^1 \kappa_i(t)^2 \|\mathbf{C}'_i(t)\| dt + \lambda \Phi_{\text{pen}}, \quad (21)$$

where $\kappa_i(t) = \|\mathbf{C}'_i \times \mathbf{C}''_i\| / \|\mathbf{C}'_i\|^3$ is the curvature. The penalty term Φ_{pen} enforces C^1 and C^2 continuity at segment junctions by penalizing $\|\mathbf{C}'_i(1) - \mathbf{C}'_{i+1}(0)\|^2$ and $\|\mathbf{C}''_i(1) - \mathbf{C}''_{i+1}(0)\|^2$, together with gate-alignment terms $(1 - \hat{\mathbf{n}}_i \cdot \mathbf{C}'_i(0) / \|\mathbf{C}'_i(0)\|)^2$ that encourage traversal along each gate normal. Additional penalties enforce a minimum turning radius ($1/\kappa \geq 1.8$ m), a maximum climb angle ($|\dot{z}/\|\mathbf{C}'\|| \leq \tan 20^\circ$) and bounding-box constraints matching the flight volume.

C. Initialization and Solution Procedure

The optimizer is seeded with a heuristic initial guess that places the interior control points using the gate normals as departure and arrival directions. For each segment from gate G_i (position $\mathbf{g}_i$, normal $\hat{\mathbf{n}}_i$) to gate G_{i+1} (position $\mathbf{g}_{i+1}$, normal $\hat{\mathbf{n}}_{i+1}$), a characteristic distance $d = \max(0.3 \|\mathbf{g}_{i+1} - \mathbf{g}_i\|, 1.0 \text{ m})$ is computed. The four interior control points are then placed as

$$\begin{aligned} \mathbf{P}_1 &= \mathbf{g}_i + d \hat{\mathbf{n}}_i, \\ \mathbf{P}_2 &= \mathbf{g}_i + 1.8 d \hat{\mathbf{n}}_i + 0.3 (\mathbf{g}_{i+1} - \mathbf{g}_i), \\ \mathbf{P}_3 &= \mathbf{g}_{i+1} - 1.8 d \hat{\mathbf{n}}_{i+1} + 0.3 (\mathbf{g}_i - \mathbf{g}_{i+1}), \\ \mathbf{P}_4 &= \mathbf{g}_{i+1} - d \hat{\mathbf{n}}_{i+1}. \end{aligned} \quad (22)$$

The first and last points ($\mathbf{P}_1, \mathbf{P}_4$) lie along the respective gate normals and control the departure and arrival tangent directions, while the middle points ($\mathbf{P}_2, \mathbf{P}_3$) are offset further along the normals with an additional 30% bias toward the opposite gate, producing a smooth S-shaped horizontal profile. The z -coordinates are linearly interpolated between gate heights using $z_k = (1 - \alpha_k) z_i + \alpha_k z_{i+1}$ with $\alpha_k \in \{0.2, 0.4, 0.6, 0.8\}$, and all coordinates are clamped to the flight volume bounds.

The cost landscape is multimodal—different control-point arrangements produce distinct trajectory topologies through the gates—so the problem is solved in two stages. First, differential evolution (DE) [31], a gradient-free population-based optimizer, explores the space globally. DE maintains a population of $N_p = 15 \times 12n$ candidate solutions initialized by uniform sampling within the box bounds, seeded with the heuristic guess above. At each generation, a trial vector $\mathbf{v}_i$ is constructed for every candidate $\mathbf{x}_i$ via mutation

$$\mathbf{v}_i = \mathbf{x}_a + F(\mathbf{x}_b - \mathbf{x}_c), \quad (23)$$

where $\mathbf{x}_a, \mathbf{x}_b, \mathbf{x}_c$ are distinct randomly selected candidates and the scale factor F is drawn uniformly from $[0.5, 1.5]$ each

generation. A trial vector is then assembled coordinate-by-coordinate via binomial crossover with probability $CR = 0.8$, and greedy selection retains whichever of the trial or parent has lower cost. The algorithm runs for 60 generations, after which L-BFGS-B [32] refines the best candidate using approximate second-order information for up to 800 iterations. The resulting dense waypoint sequence is converted into the C^2 B-spline trajectory representation of Section II-C.

REFERENCES

- [1] D. Floreano and R. J. Wood, "Science, technology and the future of small autonomous drones," *nature*, vol. 521, no. 7553, pp. 460–466, 2015.
- [2] K. Y. Ma, P. Chirarattananon, S. B. Fuller, and R. J. Wood, "Controlled flight of a biologically inspired, insect-scale robot," *Science*, vol. 340, no. 6132, pp. 603–607, 2013.
- [3] N. T. Jafferis, E. F. Helbling, M. Karpelson, and R. J. Wood, "Untethered flight of an insect-sized flapping-wing microscale aerial vehicle," *Nature*, vol. 570, no. 7762, pp. 491–495, 2019.
- [4] Y. Chen, S. Xu, Z. Ren, and P. Chirarattananon, "Collision resilient insect-scale soft-actuated aerial robots with high agility," *IEEE Transactions on Robotics*, vol. 37, no. 5, pp. 1752–1764, 2021.
- [5] Y.-H. Hsiao, A. Tagliabue, O. Matteson, S. Kim, T. Zhao, J. P. How, and Y. Chen, "Aerobatic maneuvers in insect-scale flapping-wing aerial robots via deep-learned robust tube model predictive control," *Science Advances*, vol. 11, no. 49, p. eaea8716, 2025.
- [6] Y.-H. Hsiao, Q. P. Kieu, Z. Guan, S. Kim, J. Cai, O. Matteson, J. P. How, E. F. Helbling, and Y. Chen, "Controlled flight of an insect-scale flapping-wing robot via integrated onboard sensing and computation," *arXiv preprint arXiv:2602.08328*, 2026.
- [7] Y.-W. Chin, J. M. Kok, Y.-Q. Zhu, W.-L. Chan, J. S. Chahl, B. C. Khoo, and G.-K. Lau, "Efficient flapping wing drone arrests high-speed flight using post-stall soaring," *Science Robotics*, vol. 5, no. 44, p. eaba2386, 2020.
- [8] R. Zufferey, J. Tormo-Barbero, M. M. Guzmán, F. J. Maldonado, E. Sanchez-Laulhe, P. Grau, M. Pérez, J. Á. Acosta, and A. Ollero, "Design of the high-payload flapping wing robot e-flap," *IEEE Robotics and Automation Letters*, vol. 6, no. 2, pp. 3097–3104, 2021.
- [9] R. Zufferey, J. Tormo-Barbero, M. M. Guzmán, F. J. Maldonado, E. Sanchez-Laulhe, P. Grau, M. Pérez, J. R. Martínez-de Dios, and A. Ollero, "How ornithopters can perch autonomously on a branch," *Nature Communications*, vol. 13, p. 7713, 2022.
- [10] T. Kim, I. Hong, S. Im, S. Rho, M. Kim, Y. Roh, C. Kim, J. Park, D. Lim, D. Lee, S. Lee, J. Lee, I. Back, J. Cho, M. R. Hong, S. Kang, J. Lee, S. Seo, U. Kim, Y.-M. Choi, J.-s. Koh, S. Han, and D. Kang, "Wing-strain-based flight control of flapping-wing drones through reinforcement learning," *Nature Machine Intelligence*, vol. 6, no. 9, pp. 992–1005, 2024.
- [11] S. Rafee Nekoo, R. Rashad, C. De Wagter, S. B. Fuller, G. d. Croon, S. Stramigioli, and A. Ollero, "A review on flapping-wing robots: Recent progress and challenges," *The International Journal of Robotics Research*, vol. 44, no. 14, pp. 2305–2339, 2025.
- [12] A. Ndoye, J. de Jesus Castillo-Zamora, S. Samorah-Laki, R. Miot, E. Van Ruymbeke, and F. Ruffier, "Vector field aided trajectory tracking by a 10-gram flapping-wing micro aerial vehicle," in *Proc. IEEE International Conference on Robotics and Automation (ICRA)*, London, UK, 2023, pp. 5379–5385.
- [13] J. C. Escobar, L. Le-Guellec, E. Van Ruymbeke, N. Marchand, T. Engels, and F. Ruffier, "Dynamical model and tracking controller for a novel flapping wing drone platform," in *2025 International Conference on Unmanned Aircraft Systems (ICUAS)*. IEEE, 2025, pp. 91–98.
- [14] H. Huang, W. He, J. Wang, L. Zhang, and Q. Fu, "An all servo-driven bird-like flapping-wing aerial robot capable of autonomous flight," *IEEE/ASME Transactions on Mechatronics*, vol. 27, no. 6, pp. 5484–5494, 2022.
- [15] J. Jiang, W. Xu, E. Pan, and Z. Gong, "A compact autonomous flapping-wing aerial vehicle: Design, modeling, and vision-based control for narrow gap traversal," *IEEE Transactions on Industrial Informatics*, vol. 22, no. 2, pp. 1562–1573, 2026.
- [16] D. Mellinger and V. Kumar, "Minimum snap trajectory generation and control for quadrotors," in *Proc. IEEE International Conference on Robotics and Automation (ICRA)*, Shanghai, China, 2011, pp. 2520–2525.
- [17] A. Liniger, A. Domahidi, and M. Morari, "Optimization-based autonomous racing of 1:43 scale RC cars," *Optimal Control Applications and Methods*, vol. 36, no. 5, pp. 628–647, 2015.
- [18] A. Romero, S. Sun, P. Foehn, and D. Scaramuzza, "Model predictive contouring control for time-optimal quadrotor flight," *IEEE Transactions on Robotics*, vol. 38, no. 6, pp. 3340–3356, 2022.
- [19] M. Krinner, A. Romero, L. Bauersfeld, M. Zeilinger, A. Carron, and D. Scaramuzza, "Mpcc++: Model predictive contouring control for time-optimal flight with safety constraints," *arXiv preprint arXiv:2403.17551*, 2024.
- [20] W. Shyy, H. Aono, C.-k. Kang, and H. Liu, *An Introduction to Flapping Wing Aerodynamics*, ser. Cambridge Aerospace Series. Cambridge University Press, 2013.
- [21] Bionic Bird, "X-Fly: The first sensor-assisted ornithopter drone," <https://www.bionibird.com/world/shop/x-fly/>, 2024, accessed: 2025.
- [22] J. A. E. Andersson, J. Gillis, G. Horn, J. B. Rawlings, and M. Diehl, "CasADi – A software framework for nonlinear optimization and optimal control," *Mathematical Programming Computation*, vol. 11, no. 1, pp. 1–36, 2019.
- [23] R. H. Byrd, J. Nocedal, and R. A. Waltz, "KNITRO: An integrated package for nonlinear optimization," in *Large-Scale Nonlinear Optimization*, G. D. Pillo and M. Roma, Eds. Springer, 2006, pp. 35–59.
- [24] A. Wächter and L. T. Biegler, "On the implementation of an interior-point filter line-search algorithm for large-scale nonlinear programming," *Mathematical Programming*, vol. 106, no. 1, pp. 25–57, 2006.
- [25] C. de Boor, *A Practical Guide to Splines*, ser. Applied Mathematical Sciences. New York: Springer-Verlag, 1978, vol. 27.
- [26] R. E. Kalman, "A new approach to linear filtering and prediction problems," *Journal of Basic Engineering*, vol. 82, no. 1, pp. 35–45, 1960.
- [27] C. Toumeh and A. Lambert, "High-speed planning in unknown environments for multirotors considering drag," in *2021 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2021, pp. 7844–7850.
- [28] —, "Decentralized multi-agent planning using model predictive control and time-aware safe corridors," *IEEE Robotics and Automation Letters*, vol. 7, no. 4, pp. 11 110–11 117, 2022.
- [29] C. Toumeh and D. Floreano, "High-speed motion planning for aerial swarms in unknown and cluttered environments," *IEEE Transactions on Robotics*, vol. 40, pp. 3642–3656, 2024.
- [30] G. Farin, *Curves and Surfaces for CAGD: A Practical Guide*, 5th ed. Morgan Kaufmann, 2002.
- [31] R. Storn and K. Price, "Differential evolution – a simple and efficient heuristic for global optimization over continuous spaces," *Journal of Global Optimization*, vol. 11, no. 4, pp. 341–359, 1997.
- [32] C. Zhu, R. H. Byrd, P. Lu, and J. Nocedal, "Algorithm 778: L-BFGS-B: Fortran subroutines for large-scale bound-constrained optimization," *ACM Transactions on Mathematical Software*, vol. 23, no. 4, pp. 550–560, 1997.