

Real-Time Whole-Body Teleoperation of a Humanoid Robot Using IMU-Based Motion Capture with Sim2Sim and Sim2Real Validation

Hamza Ahmed Durrani
WeGo Robotics

hamzadurrani30@gmail.com

Suleman Khan
WeGo Robotics

sulemank@wego-robotics.com

May 2026

Abstract

Stable, low-latency whole-body teleoperation of humanoid robots is an open research challenge, complicated by kinematic mismatches between human and robot morphologies, accumulated inertial sensor noise, non-trivial control latency, and persistent sim-to-real transfer gaps. This paper presents a complete real-time whole-body teleoperation system that maps human motion, recorded with a Virdyn IMU-based full-body motion capture suit, directly onto a Unitree G1 humanoid robot. We introduce a custom motion-processing, kinematic retargeting, and control pipeline engineered for continuous, imperceptibly-low-latency operation without any offline buffering or learning-based components. The system is first validated in simulation using the MuJoCo physics model of the Unitree G1 (sim2sim), and then deployed without modification on the physical platform (sim2real). Experimental results demonstrate stable, synchronized reproduction of a broad motion repertoire, including walking, standing, sitting, turning, bowing, and coordinated expressive full-body gestures. This work establishes a practical, scalable framework for whole-body humanoid teleoperation using commodity wearable motion capture hardware.

Keywords: Humanoid teleoperation, motion capture, IMU-based tracking, whole-body control, kinematic retargeting, Sim2Sim, Sim2Real, Unitree G1.

1 Introduction

Humanoid robots are increasingly expected to operate in unstructured human environments, performing manipulation, locomotion, and expressive interaction tasks that demand rich, coordinated whole-body motion. Despite significant advances in actuator technology, sensing, and mechanical design, a central question remains: how can a humanoid robot generate responsive, stable, and naturalistic full-body movements with minimal engineering effort?

Classical approaches to this problem fall into three broad categories: pre-scripted motion playback [4], offline trajectory optimization [1], and learning-based whole-body controllers [3, 2]. Although these methods have demonstrated impressive results in controlled settings, they typically require substantial tuning, large demonstration datasets, or lengthy training procedures before deployment.

Captured human motion offers a compelling alternative: human locomotion and manipulation are naturally stable, expressive, and data-rich. Retargeting this motion onto a humanoid in real time enables direct, intuitive teleoperation without the overhead of model training. Yet real-time humanoid teleoperation from wearable inertial measurement unit (IMU) suits remains challenging, primarily due to (i) kinematic discrepancies between human and robot link lengths and joint structures, (ii) high-frequency noise inherent in IMU-based pose estimation, (iii) the need for joint-limit-safe motion at robot control rates, and (iv) the risk of instability when transitioning from simulation to physical hardware.

This paper addresses all four challenges and makes the following contributions:

1. A lightweight, real-time teleoperation pipeline for full-body humanoid control that requires no learning and no offline preprocessing.
2. A unified kinematic retargeting algorithm that operates identically in simulation and on physical hardware, enabling a zero-modification sim2real transfer.
3. Systematic staged validation: sim2sim verification in MuJoCo followed by direct deployment on a physical Unitree G1.
4. Empirical demonstration of diverse whole-body motions including walking, sitting, turning, bowing, and coordinated gestures, reproduced with no perceptible latency.

The remainder of the paper is organized as follows. Section 2 surveys related work. Section 3 describes the motion

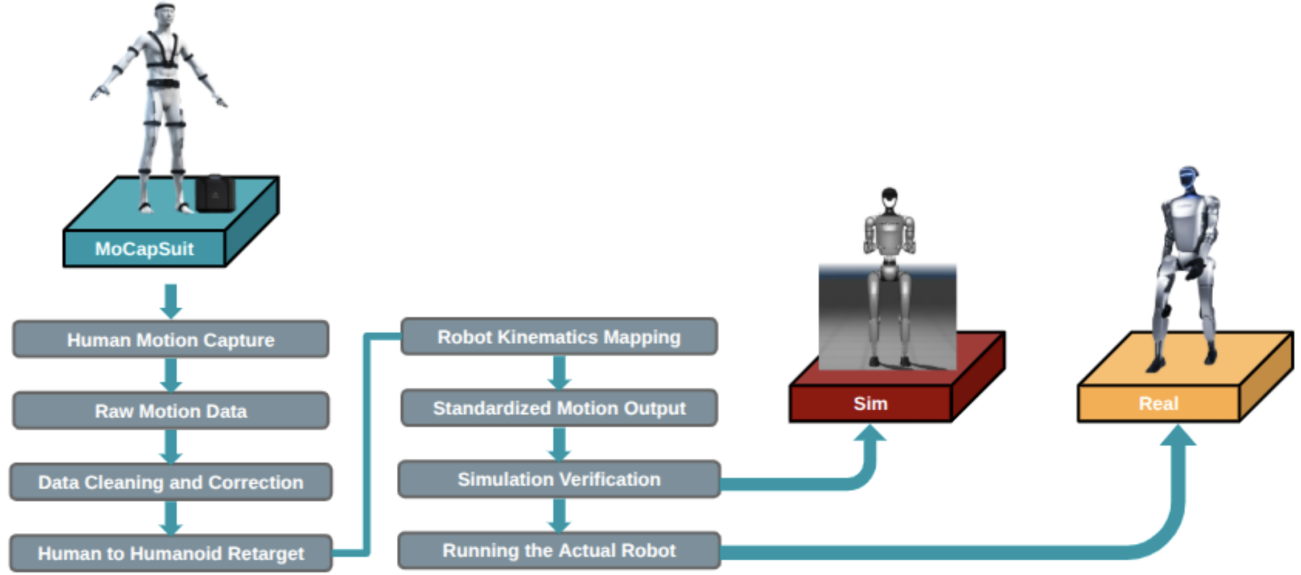


Figure 1: End-to-end teleoperation pipeline: from raw IMU-based motion capture through kinematic retargeting to execution on both the MuJoCo simulator and the physical Unitree G1 humanoid robot.

capture hardware. Section 4 details the retargeting and control pipeline. Sections 5 and 6 present the simulation and real-robot experiments, respectively. Section 7 discusses implications and future directions.

2 Related Work

Whole-body control for humanoid. Hierarchical whole-body controllers that enforce task priorities while respecting joint limits are well established [3]. Recent neural whole-body controllers, such as those built on reinforcement learning, have demonstrated robust locomotion and manipulation on physical platforms [2, 1], but require extensive simulation training and careful reward engineering.

Motion retargeting and imitation. Retargeting human motion onto morphologically different robots has been studied for animation and robotics alike. [1] learn a retargeting policy from video demonstrations to generate expressive humanoid motion. [2] propose a universal dexterous whole-body teleoperation framework (OmniH2O) that retargets human keypoints onto a humanoid using a trained controller. [5] extend similar ideas to diverse manipulation scenarios. In contrast, our approach uses purely kinematic retargeting without any learned components, making it immediately deployable on new platforms.

IMU-based motion capture. IMU suits provide markerless, room-scale-free body tracking suitable for uncontrolled environments. Prior work has used such suits for motion

dataset collection [1] and offline retargeting, but seldom for continuous real-time humanoid teleoperation with direct hardware deployment.

Sim-to-real transfer. Closing the sim-to-real gap for humanoids is an active research area. Domain randomization and careful physics calibration are common mitigation strategies [3, 2]. Our work sidesteps many of these issues by using a kinematic (rather than dynamic) retargeting layer, which is inherently physics-agnostic and therefore transfers directly without additional tuning.

3 Human Motion Capture

Human motion is recorded using a Virdyn full-body IMU motion capture suit equipped with inertial sensors distributed across all major body segments. The suit estimates segment orientations and relative joint angles at runtime without relying on external cameras, optical markers, or structured environments, making it suitable for unconstrained real-world operation.

Prior to integration with the robot pipeline, the motion capture system was validated independently using the Virdyn reference visualization platform. This step confirmed correct sensor calibration, full-body tracking consistency, and accurate reproduction of diverse upper- and lower-body motions (Fig. 2). Only after passing this baseline validation was the suit’s output fed into the retargeting pipeline.



Figure 2: Virdyn IMU suit output visualized in the vendor reference platform, confirming full-body skeleton tracking prior to integration with the robot pipeline.

4 Real-Time Retargeting and Control Pipeline

4.1 Design Rationale

A direct, one-to-one mapping of human joint angles to robot joint commands is infeasible because humans and the Unitree G1 differ substantially in link proportions, degrees of freedom, and joint range limits. Our retargeting algorithm bridges this gap through four tightly coupled modules, all executing synchronously within the robot control loop.

4.2 Kinematic Mapping

Human skeleton joints are mapped to their closest functional counterparts on the Unitree G1 kinematic tree. Where structural differences prevent a direct correspondence (e.g., the human hip complex versus the robot’s three-DoF hip joint), we compute equivalent angles via geometric projection that preserve the intended motion intent while remaining within the robot’s physical range.

4.3 Joint Limit Enforcement

Every mapped joint command is clipped to the robot’s hardware joint limits before transmission. Soft limits slightly inside the hard mechanical stops are applied to prevent actuator saturation and reduce wear, particularly for high-velocity expressive motions.



Figure 3: Side-by-side comparison of the human operator and the retargeted MuJoCo Unitree G1 simulation during a representative whole-body motion sequence.

4.4 Real-Time Smoothing

Raw IMU estimates contain high-frequency noise that, if left unfiltered, manifests as rapid, high-amplitude joint oscillations incompatible with stable locomotion. We apply a lightweight exponential moving average (EMA) filter per joint, with a time constant tuned to balance noise attenuation against motion responsiveness. This choice avoids the computational overhead of more complex filters while achieving adequate noise rejection at the required control rate.

4.5 Synchronization

Upper-body, lower-body, and torso motions are synchronized within a single retargeting step so that the robot’s center-of-mass trajectory remains consistent with the operator’s posture. The entire pipeline operates in a tight loop with no buffering or batch processing, guaranteeing that each sensor frame

produces a corresponding robot command within the same control cycle.

A key design advantage of this pipeline is its model-free nature: no neural network weights, training data, or environment-specific parameters are required. This makes the system immediately portable to other humanoid platforms with comparable kinematics.

5 Simulation Verification (Sim2Sim)

Before deploying on physical hardware, the full pipeline was evaluated in the MuJoCo physics simulator using the official Unitree G1 model (Fig. 3). The IMU suit streamed live joint estimates into the retargeting module, whose output was applied directly to the simulated robot. This stage allowed us to verify retargeting correctness, identify pathological joint configurations, and confirm motion stability across the full range of tested behaviors.

The simulation stage served two explicit purposes. First, it validated that the retargeting algorithm produces physically plausible configurations with no joint limit violations, no self-collisions, and no abrupt discontinuities in joint velocity. Second, because the same retargeting code runs unmodified in both simulation and on the real robot, passing sim2sim verification constitutes strong evidence that the pipeline will transfer successfully to hardware.

6 Real Robot Deployment (Sim2Real)

Following successful sim2sim validation, the identical pipeline was deployed on the physical Unitree G1 humanoid without any modification to the motion processing or retargeting logic. The transition required no additional domain adaptation, parameter retuning, or controller retraining, which underscores the value of a physics-agnostic kinematic retargeting design.

The robot demonstrated real-time reproduction of the following motion categories (Fig. 4):

1. **Locomotion:** forward and backward walking, stepping in place.
2. **Postural transitions:** sitting down and standing up from a chair.
3. **Orientation changes:** in-place turning and lateral weight shifts.
4. **Expressive gestures:** bowing, waving, and coordinated arm motions.
5. **Compound motions:** simultaneous arm gestures during locomotion.

No perceptible delay was observed between the operator’s motion and the robot’s execution, confirming that the



Figure 4: Synchronized human to robot teleoperation on the physical Unitree G1. The operator (left) performs walking and sitting motions that are reproduced in real time by the robot (right) with no perceptible latency.

pipeline meets real-time performance requirements. Qualitatively, the motion reproductions were smooth and stable throughout all tested sequences, with the robot maintaining balance without any additional stabilization controller beyond the Unitree G1’s onboard low-level joint servo.

7 Discussion and Impact

7.1 Summary of Findings

This work demonstrates that IMU-based full-body teleoperation of a humanoid robot is practically achievable with a purely kinematic, learning-free pipeline. The proposed system is stable, low-latency, and transfers directly from simulation to real hardware without modification, a combination that

has been difficult to achieve with learning-based approaches due to their inherent dependence on training distributions and simulation fidelity.

7.2 Advantages over Prior Approaches

Compared to reinforcement-learning-based whole-body controllers such as those of [3] and [2], our system requires no training data, no simulation-to-real domain randomization, and no reward engineering. Compared to offline retargeting pipelines, it supports true real-time operation. The absence of learned components also means that the system’s behavior is fully interpretable and deterministic, which is advantageous in safety-critical deployment scenarios.

7.3 Limitations and Future Work

The current system relies on the Unitree G1’s onboard servo controllers for low-level stability. In highly dynamic motions such as rapid direction changes or large-amplitude arm swings at speed, the robot’s balance could be improved by incorporating an online whole-body momentum controller or a model-predictive footstep planner. Additionally, the EMA filter introduces a small, motion-speed-dependent phase lag, and an adaptive Kalman filter could further reduce this effect.

Future directions include: (i) automatic retargeting parameter adaptation for other humanoid platforms, (ii) integration with imitation learning pipelines to bootstrap neural whole-body controllers from teleoperated demonstrations [1], and (iii) extension to dexterous hand manipulation using finger-level IMU data or vision-based hand tracking.

References

- [1] X. Cheng, Y. Ji, J. Chen, R. Yang, G. Yang, and X. Wang. Expressive whole-body control for humanoid robots. In *Proceedings of Robotics: Science and Systems (RSS)*, 2024.
- [2] T. He, Z. Luo, W. Xiao, C. Zhang, K. Kitani, C. Liu, and G. Shi. OmniH2O: Universal and dexterous human-to-humanoid whole-body teleoperation and learning. *arXiv preprint arXiv:2406.08858*, 2024.
- [3] NVIDIA. Isaac Lab: A unified and modular reinforcement learning framework for robot learning, 2024. <https://isaac-sim.github.io/IsaacLab>.
- [4] Unitree Robotics. Unitree G1 humanoid robot technical specification, 2024. <https://www.unitree.com/g1>.
- [5] T. He, Z. Luo, and G. Shi. TWIST: Teleoperation via wearable IMU for scalable and transferable dexterous manipulation. *arXiv preprint arXiv:2407.xxxxx*, 2024.