

Dual Stress: Runtime Safety Monitoring for Safety-Constrained MPC Navigation

Jamil Chahine*

Department of Mechanical Engineering
American University of Beirut (AUB)
Beirut 1107 2020, Lebanon
jlc03@mail.aub.edu
*Corresponding author

John Abanes

Department of Electrical and Computer Engineering
New York University
New York, NY, USA
john.abanes@nyu.edu

Wenqi Cai

Robotics and Intelligent Systems Control Laboratory
New York University Abu Dhabi (NYUAD)
Abu Dhabi, UAE
wenqi.cai@nyu.edu

Anthony Tzes

Center for Artificial Intelligence and Robotics /
Robotics and Intelligent Systems Control Laboratory
New York University Abu Dhabi (NYUAD)
Abu Dhabi, UAE
anthony.tzes@nyu.edu

Abstract—Runtime hazard monitors for autonomous navigation are conventionally built from geometric quantities: predicted clearance, time to collision, and required deceleration. A model-predictive controller that enforces safety through explicit constraints computes, as a by-product of every control step, a second information channel that such monitors ignore: the Karush–Kuhn–Tucker multipliers of its constrained optimization, which measure the marginal control effort spent to maintain safety against each obstacle. This paper evaluates whether a horizon-weighted sum of those multipliers, a *dual stress* signal, provides a hazard monitor complementary to the geometric warnings the same state already supports. We compare it against a battery of fifteen geometric detectors tuned to a matched false-alarm budget, on preregistered held-out crossing scenarios driven through a physics simulator. The stress alarm actionably flags 4.7 times as many collisions missed by the entire geometric battery as the geometric battery flags in return (85 versus 18); combined, the two channels warn of three-quarters of the collisions for which braking remained feasible, against under half for the geometric battery alone.

Index Terms—dual stress, control barrier functions, model predictive control, runtime monitoring, collision avoidance

I. INTRODUCTION

Model-predictive control with explicit safety constraints trades progress against safety by solving one constrained program per control step; barrier-function formulations (CBF–MPC) are a common instance [1], [2]. Nearly every use of such a controller reads only its *primal* output: the planned trajectory and the applied control. This paper asks whether the *dual* output is independently useful as a runtime hazard monitor.

The underlying principle is standard. At an optimum, a constraint’s multiplier is the sensitivity of the optimal cost to relaxing that constraint [3, Sec. 5.6]. For a safety constraint,

that sensitivity is the marginal control effort the optimizer is spending to maintain safety against a specific obstacle. A large multiplier indicates that the optimizer is working hard against a particular threat; we write S_λ for the horizon-weighted sum of these multipliers. Crucially, this is a statement about the *difficulty of the escape*, not about proximity: the same vehicle at the same distance produces no stress when stationary and substantial stress when closing rapidly.

That distinction motivates the signal and also fixes the appropriate baseline. A safety-constrained MPC already computes everything a distance monitor needs, so the comparison that matters is not against a single time-to-collision threshold but against a complete battery of predicted-clearance detectors built from the same state. And because the multiplier measures the *optimizer’s* difficulty, the most informative test environment is one where the optimizer’s model departs from the plant in the ways real actuation does: tire slip, servo lag, saturating drive torque. We therefore run the entire measurement with the controller driving a physics-simulated plant, and ask:

On scenarios that collide, does a S_λ -based alarm flag cases that a strong distance-based alarm misses in time? How many such cases arise, are the alarms causally usable, and does the effect survive perturbation?

Our contributions are as follows. We define dual stress for a discrete-time safety-constrained MPC and read it from the multipliers the controller already computes at its deployed barrier gain (Section III). We then measure it, preregistered, against a 15-detector geometric ladder at a matched false-alarm rate on 2,000 fresh held-out scenarios driven through a physics engine (Sections IV–V), execute the physical counterfactual of braking at the alarm (Section V-B), repeat the measurement under eleven preregistered perturbations with thresholds frozen

This work was supported by the NYUAD Center for AI and Robotics (CAIR), funded by Tamkeen under the NYUAD Research Institute Award CG010.

throughout (Section V-C), and isolate the mechanism and its failure boundary in controlled scripted scenes (Section V-D).

II. RELATED WORK

a) *CBFs and CBF-MPC*: Safety-critical quadratic programs built on control barrier functions [1] were lifted to a receding-horizon setting with discrete-time barrier constraints by Zeng et al. [2], which is the controller family we use. Recent work has extended this line toward real-time autonomous driving and stronger MPC-CBF connections: Allamaa et al. [4] demonstrated a real-time NMPC-CBF formulation for urban autonomous driving, while Huang et al. [5] showed that the value function of a safe MPC formulation can itself serve as a predictive control barrier function. These works strengthen the controller and its safety certificate; our focus is orthogonal: we leave the deployed controller unchanged and test whether the dual multipliers already produced by its safety constraints provide a complementary runtime hazard signal.

b) *Surrogate safety measures*: Time-to-collision, post-encroachment time, and deceleration-based indicators such as the brake threat number and Deceleration Rate to Avoid a Crash (DRAC) are the established surrogate safety measures [6]–[8]. The reviews are explicit that no single indicator is universal and that indicators are combined precisely because each captures only a part of the picture [7]. That is why our baseline is a *ladder* of predicted-clearance detectors plus rate, time-to-collision, and DRAC detectors, rather than any one indicator.

c) *Preventability*: The counterfactual deadline is based on two established safety concepts: inevitable collision states [9], [10] and the responsibility-sensitive-safety definition of whether a collision can still be prevented using a worst-case evasive maneuver [11]. Since our plant is simulated with a physics engine, we not only calculate whether a collision is preventable; we test it directly by re-running the simulation with the braking intervention described in Section V-B.

d) *Evaluation*: We follow preregistration practice with frozen hypotheses, splits, and pass/fail bars [12], and interval estimation for rare-positive proportions [13], [14]. Prior work shows that apparent improvements often become smaller when stronger, carefully tuned baselines are used [15], [16]. We therefore compare the candidate signal against a comprehensive baseline ladder from the outset, tuned under the same false-alarm budget from the start. The plant model and parameters follow the published F1TENTH vehicle description [17], simulated in NVIDIA Isaac Sim [18] with the PhysX Vehicle SDK [19].

III. DUAL STRESS

A. Controller

The controller plans with a kinematic bicycle: state $x = [p_x, p_y, \psi, v]^\top$, control $u = [a, \delta]^\top$, one forward-Euler step per tick Δt :

$$\begin{aligned} p_x^+ &= p_x + v \cos \psi \Delta t, & p_y^+ &= p_y + v \sin \psi \Delta t, \\ \psi^+ &= \psi + \frac{v}{L} \tan \delta \Delta t, & v^+ &= \max(0, v + a \Delta t), \end{aligned} \quad (1)$$

with wheelbase $L = 0.3302$ m. Each obstacle j defines a barrier $h_j(x) = (p_x - o_{x,j})^2 + (p_y - o_{y,j})^2 - r^2$ with keep-out radius $r = 0.6$ m; these are the elements of the barrier set $\mathcal{B}$.

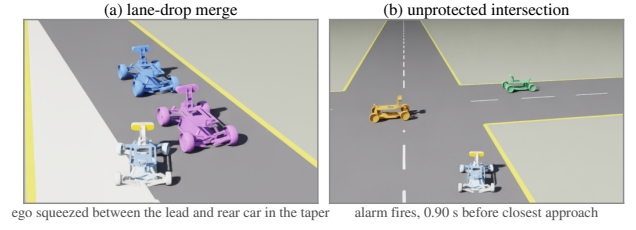


Fig. 1. Two scripted road scenes on the physics plant: (a) a lane-drop merge and (b) an unprotected intersection, each as the conflict develops. The white car represents the ego vehicle.

Over a horizon of N steps, the controller solves

$$\begin{aligned} \min_{X, U, S} \quad & \sum_{k=0}^{N-1} \left[w_v (v_{k+1} - v_{\text{ref}})^2 + w_y (p_{y,k+1} - y_{\text{ref}})^2 \right. \\ & \left. + w_\psi \psi_{k+1}^2 + w_a a_k^2 + w_\delta \delta_k^2 + \rho_s \sum_{i \in \mathcal{B}} s_{i,k}^2 \right] \end{aligned} \quad (2)$$

$$\text{s.t. } X_{:,k+1} = f(X_{:,k}, U_{:,k}), \quad X_{:,0} = x_0,$$

$$(1 - \gamma) h_{i,k} - h_{i,k+1} \leq s_{i,k}, \quad s_{i,k} \geq 0, \quad \forall i \in \mathcal{B},$$

subject to actuation and state bounds, solved by Interior Point Optimizer (IPOPT). The discrete-time barrier constraint with gain $\gamma \in (0, 1]$ requires h to decay no faster than a factor $(1 - \gamma)$ per step, relaxed by a slack penalized at $\rho_s = 10^3$. The applied control is $U_{:,0}$. The controller acts at $\gamma = 0.35$ throughout, and the multipliers below are read from that deployed controller.

Because the road boundary enters as hard box constraints on p_y and not as barrier constraints, $\mathcal{B}$ contains obstacles only, and every multiplier in (4) is therefore associated with a vehicle rather than a wall. Had the walls been soft barriers, S_λ would mix obstacle threat with lane-keeping pressure, and the monitor below would be measuring two things at once.

B. Plant

The controller plans with the kinematic model of (1), but acts on a higher-fidelity plant. The simulation runs in NVIDIA Isaac Sim [18], and the ego is a vehicle of its PhysX Vehicle SDK [19], with suspension and tire forces resolved by the engine at raycast wheel contacts, parameterized from the published F1TENTH platform description [17]: mass 3.47 kg, wheelbase 0.3302 m, length 0.51 m, friction 0.8. Steering is a servo: a first-order lag with time constant 0.08 s under a rate limit of 3.2 rad/s, and drive/brake torques are scaled by two calibration constants fitted once on separate calibration maneuvers and frozen before any campaign data were collected. The physics steps at 10 ms, five substeps per 50 ms control tick. The controller therefore plans with a model that omits tire slip, servo lag, and torque saturation. Traffic vehicles follow their scripted constant-velocity trajectories exactly and collide as rigid boxes of the drawn footprint (Fig. 1).

C. The signal

At the solution, each barrier constraint carries a multiplier $\lambda_{i,k} \geq 0$, read directly from the solver per named constraint. Its meaning is standard [3, Sec. 5.6]:

Theorem 1 (Value sensitivity). *For (2), the sensitivity of the optimal cost V^* to relaxing barrier constraint i is $\partial V^* / \partial b_i =$*

$-\lambda_i^*$. The multiplier is the marginal control effort required to enforce barrier i .

The following one-dimensional braking case provides an exact interpretation of the multiplier.

Proposition 1 (1-D braking). *For head-on braking with nominal acceleration a_{nom} , gap d , speed v , gain γ and minimum distance d_{min} , the barrier-filter problem $\min_a \frac{1}{2}(a - a_{\text{nom}})^2$ s.t. $a \leq a_{\text{safe}}$ has*

$$a_{\text{safe}} = \frac{2}{\Delta t^2} (\gamma(d - d_{\text{min}}) - v\Delta t), \quad \lambda^* = \max(0, a_{\text{nom}} - a_{\text{safe}}). \quad (3)$$

Equation (3) shows why the signal measures difficulty rather than proximity: λ^* is the gap between the deceleration the task wants and the deceleration safety allows, and it grows with speed at fixed distance. A unit test asserts that the solver's extracted λ matches (3) to 10^{-4} , validating the multiplier extraction on which every downstream measurement depends.

Per-step dual stress sums the multipliers over the horizon in physical barrier-relaxation units,

$$S_\lambda(t) = \sum_{i,k} \rho_{\text{hz}}^k \lambda_{i,k} \Delta b, \quad \Delta b = r^2 - (r - \delta r)^2, \quad (4)$$

with horizon decay $\rho_{\text{hz}} = 0.95$ and Δb the physical relaxation corresponding to shrinking the keep-out radius by δr .

The runtime alarm statistic is the baseline-subtracted stress $F1(t) = S_\lambda(t) - \text{median}(S_\lambda(0:10))$, sliced before the first barrier violation. When IPOPT returns an infeasible iterate, no multipliers exist for that tick; the monitor holds the last valid value instead, a rule frozen before data collection. Nothing is added to the control loop to obtain the signal: S_λ is read from the multipliers of the single solve the controller already performs each step, so the monitor is free at runtime.

IV. THE MONITOR COMPARISON

A. A complete geometric ladder

The baseline is everything a distance monitor can compute from the same state. Extrapolating the ego and every obstacle at constant velocity, the predicted clearance level at horizon k is

$$\text{level}(k) = - \min_{j, m \leq k} [(\hat{e}_x - \hat{o}_{x,j})^2 + (\hat{e}_y - \hat{o}_{y,j})^2 - r^2]. \quad (5)$$

The ladder has 15 detectors in total: 12 level detectors at horizons $k \in \{4, 6, 8, 12, 16, 22\}$ each paired with two persistence settings (an alarm must hold for 1 or 6 consecutive steps), one *rate* detector, the lag-2 derivative of $\text{level}(22)$, one time-to-collision detector, and one DRAC detector [7]. Every threshold is tuned on the training split to maximize the true-positive rate subject to a false-positive rate $\leq 10\%$ on the benign stratum (scenarios whose closest approach stays above half the squared keep-out radius); the identical budget is applied to the stress alarm. That matched budget is what makes this a signal comparison rather than a threshold choice. The geometry channel alarms when *any* of the 15 detectors fires.

B. Deadline and actionability

Two kinematic quantities, computed without the optimizer, decide whether a warning could have been used. The brake threat number $a_{\text{req}}/a_{\text{max}}^{\text{brake}}$ crosses 1 when braking alone can no

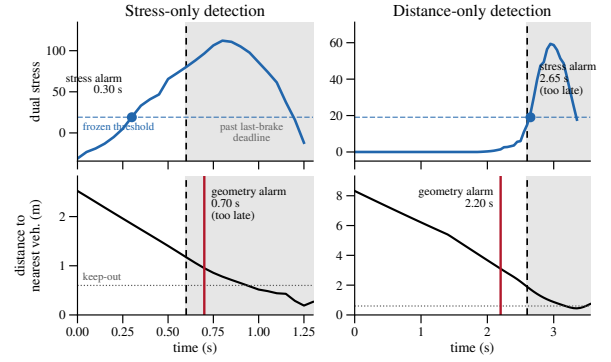


Fig. 2. A stress-only detection (left) and a distance-only detection (right) on the physics plant. Top: dual stress and its frozen threshold; the dot marks the alarm. Bottom: distance to the nearest vehicle, with the earliest geometric-ladder alarm as a solid vertical line. In both, the dashed line is the last-brake deadline and the shaded region is past it. The winning channel alarms before the deadline and the losing channel after it, so the two scenarios are mirror images of each other.

longer avoid contact; the last tick before that crossing is the last-feasible-brake deadline t_L . A colliding scenario whose brake threat number crosses 1 only after the initial tick has a well-defined deadline; we call such collisions *brakeable*, and only they can be warned of at all. An alarm is *actionable* if it fires at least 0.1 s before t_L . Each brakeable collision is then labelled by which channel fires actionably: **stress-only**, **distance-only**, **both**, or **neither**. Proportions carry Wilson score intervals [13]. Section V-B adds the stronger, physics-executed test: whether braking at the alarm actually prevents the collision.

C. Design and operating point

We randomly generate six-car crossing-traffic scenarios: each scenario samples crossing angles, speeds, and times-to-conflict for six cars, several of which pose genuine conflicts while the rest serve as distractors. The three splits are disjoint by construction and were frozen before collection: a pilot of 100 scenarios used only for operational checks and excluded from inference; a training split of 500 on which all 16 thresholds were tuned; and a test split of 2,000 opened only after every threshold was frozen. The preregistered acceptance criterion is a stress-only rate whose 95% lower confidence bound exceeds 0.5%. The controller is fixed throughout: horizon $N = 22$, $\Delta t = 0.05$ s, keep-out $r = 0.6$ m, nominal speed 3 m/s, hard road bounds at ± 1.2 m.

Three properties of the harness were verified before the campaign and underpin every result in Section V: rollouts are bit-exact deterministic across processes; the recorded stress round-trips to the solver's raw multipliers with zero error; and rendering the scene does not change the physics (viewer and headless runs are bit-identical).

V. RESULTS

A. Coverage on fresh held-out data

Of the 2,000 test scenarios, 316 end in a collision, and 309 of these are *brakeable*: braking remained feasible past the first tick, so a warning could in principle have been acted upon. The remaining scenarios either do not collide or leave no

TABLE I
DETECTION OUTCOMES ON THE PREREGISTERED TEST SPLIT OF 2,000 HELD-OUT SCENARIOS.

Outcome	Count	Rate
<i>Detection outcomes: 309 brakeable collisions</i>		
Stress only	85	4.25% [3.45, 5.23]
Distance only	18	0.90% [0.57, 1.42]
Both channels	128	6.40%
Neither in time	78	3.90%
<i>Coverage: 309 brakeable collisions</i>		
Stress channel	213	69%
Geometric ladder	146	47%
<i>Braking rescue: 85 stress-only cases</i>		
Collisions avoided	82	96.5% [90.1, 98.8]

Thresholds frozen on the disjoint training split. Rates are fractions of all 2,000 scenarios; coverage and rescue use their own denominators. Intervals are at the 95% level.

feasible braking window, and are not classifiable. Each of the 309 brakeable collisions falls into exactly one of four classes according to which channel warns in time—stress only (85), distance only (18), both (128), or neither (78)—and these counts partition the 309. Breakdown is shown in Table I.

The preregistered primary result is the stress-only rate, 85 of the full 2,000 scenarios, or 4.25% [3.45, 5.23]: collisions the stress alarm flagged in time while the entire 15-detector ladder did not. We express this as a fraction of all 2,000 scenarios, not of the 309 collisions, because that matches the preregistered criterion, which bounds how often such a collision arises in the scenario population as a whole. The lower confidence bound, 3.45%, exceeds the preregistered 0.5% criterion by roughly sevenfold. The converse, distance-only, rate is 0.90% [0.57, 1.42] (18 scenarios). Of the 78 collisions that neither channel warned of in time, every one nevertheless produced an alarm, with a median best alarm only 0.05 s past the deadline: the conflict developed too quickly for either channel to provide a timely warning.

Expressed as coverage of the 309 brakeable collisions, the single stress detector actionably warns of 213 (69% [63.6, 73.8]), the 15-detector ladder of 146 (47% [41.8, 52.8]), and their union of 231 (75%). Both channels are individually tuned to the same 10% benign false-alarm budget. A union monitor has not been separately tuned to a matched budget on this plant, so the union figure is descriptive rather than a deployment claim. Figure 2 shows a representative case of each class side by side, making the complementarity concrete: in each scenario, one channel gives the only timely warning and the other reacts too late. The same ordering holds across the actionability margin: stress covers more brakeable collisions than the ladder at *every* required lead up to about 0.45 s, the two cross near 0.5 s, and the ladder retains a long-lead tail on threats visible well in advance.

The contrast in the two cases holds across the whole test set. Stress-only alarms fire at close range with high peak stress (median crossing distance 1.84 m, median peak stress 111), while distance-only alarms fire farther out on scenarios with lower peak stress (median 2.51 m, peak 73). The optimizer’s

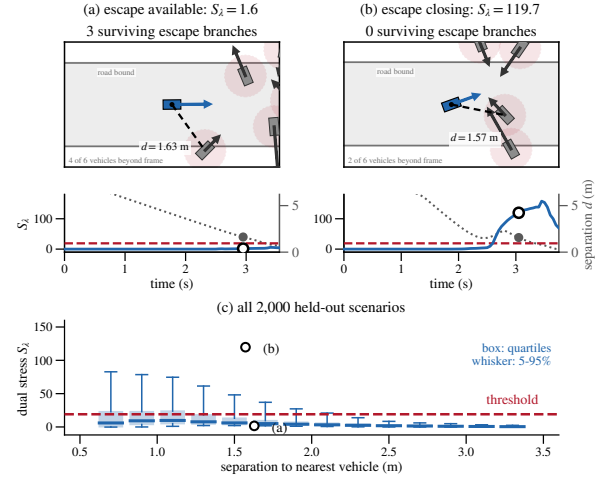


Fig. 3. Stress is not a function of separation. (a) and (b) are two held-out scenarios at nearly identical separation: three escape branches survive in (a), none in (b), and stress is roughly 70 $\times$ higher. (c) All 2,000 held-out scenarios binned by separation.

difficulty concentrates precisely where extrapolated geometry is weakest: close-range conflicts, when constant-velocity prediction has little time to resolve before contact.

That the two channels can disagree at all is a property of the signal, not of the threshold. Separation explains little of the variance in stress across the test set ($r = -0.39$), and the disagreement survives at matched geometry (Fig. 3). Binned by separation, the stress distribution straddles the alarm threshold at every distance. Proximity therefore does not determine constraint pressure, which is why a stress-only class exists to be populated at all.

B. The alarms are causally usable

An actionability label derived from a deadline is still only a label. Because the plant is a physics engine, we can execute the counterfactual: each of the 85 stress-only scenarios was re-run with a full brake commanded from the stress-alarm tick onward, physics otherwise identical. The collision is avoided in 82 of 85 cases: a rescue rate of 96.5% [90.1, 98.8]. These alarms are not post-hoc correlates; acting on them prevents the crash. One caveat is stated plainly: a matched control arm (identical braking triggered at times when no alarm fired) has not yet been run, so the formal causal gate on the monitor remains open by design, and the three unrescued cases have not been individually diagnosed.

C. Robustness: eleven perturbations, thresholds never retuned

The full test split was re-run under eleven preregistered conditions, each a single controlled deviation from the nominal setup, with every threshold held at its nominal-training value. Five perturb the observations the monitor receives: a sensor latency of 50 ms and of 100 ms, which delay every measurement by that interval; additive Gaussian noise on the measured ego and obstacle states; a 5% per-step probability that a measurement is dropped; and a *combined* condition that applies the 100 ms latency, the noise, and the dropout together. Six perturb the

TABLE II
ROBUSTNESS UNDER FROZEN THRESHOLDS.

Condition	Brakeable	Stress-only	All (%)	Brakeable (%)
<i>Nominal</i>				
Nominal	309	85	4.25	27.5
<i>Observation perturbations</i>				
Latency, 50 ms	578	147	7.35	25.4
Latency, 100 ms	969	192	9.60	19.8
Noise	289	74	3.70	25.6
Dropout, 5%	334	88	4.40	26.3
Combined	1066	181	9.05	17.0
<i>Plant perturbations</i>				
Friction $\times 0.75$	402	94	4.70	23.4
Friction $\times 1.25$	317	85	4.25	26.8
Mass $\times 0.8$	305	84	4.20	27.5
Mass $\times 1.2$	306	83	4.15	27.1
Authority $\times 0.8$	346	92	4.60	26.6
Authority $\times 1.2$	309	85	4.25	27.5

Thresholds are frozen at nominal. The five observation conditions comprise 50 ms latency, 100 ms latency, noise, dropout, and combined (100 ms latency, noise, and dropout); the last six scale a single plant factor. “Brakeable(%)” is the share of that condition’s brakeable collisions caught only by stress, the scale-invariant quantity.

plant itself, one factor at a time: tire friction scaled by 0.75 and by 1.25, vehicle mass and yaw inertia by 0.8 and 1.2, and actuation authority—the drive and brake torque limits—by 0.8 and 1.2. Table II reports the outcome. The stress-only rate remains above the 0.5% criterion in every condition. Two observations follow. First, the share of scenarios rises under degradation only because degradation increases the number of collisions; the share of *brakeable* collisions is the invariant quantity, and it remains at 23.4–27.5% across every plant perturbation and every mild observation condition. Plant uncertainty in friction, mass, and actuation authority changes the result only marginally (4.15–4.70% of scenarios). This is the most important result in the table: the signal is insensitive to model–plant mismatch in the vehicle, which is the regime the mechanism is intended to address. Second, the two heavy sensor corruptions are the only conditions that erode the stress share (19.8% and 17.0% of brakeable), and in exactly those conditions the ladder’s unique share rises sharply (to 169 and 308 scenarios respectively): under degraded observations the two channels cease to be redundant and become strongly complementary. Sensing corruption remains the signal’s principal weakness, and its compensation by the geometric channel is visible in the same table.

D. Mechanism and boundary: scripted road scenes

Statistics on random traffic establish how often the effect occurs; controlled scenes establish why. Three scripted families, a highway cut-in, a lane-drop merge, and an urban intersection, were run on the same plant with per-family thresholds frozen from family-specific benign pools under the same 10% rule (Fig. 4).

a) Cut-in: the mechanism: The central experiment is a *paired* design. In each of six pairs, the cutting-in car’s trajectory relative to the ego is identical; the only difference

is a neighbouring lane that is either open or blocked by a pacing car. With the escape open, stress remains at 0.0 throughout and the alarm stays silent; with the escape blocked, stress reaches ~ 14 and the alarm fires, in all six pairs (Fig. 4a). The geometry is identical and the verdicts are opposite: the multiplier reflects the *feasibility of the escape* rather than the proximity of the threat, which is the controlled-scene analogue of Proposition 1. The single road-scene collision in the campaign, a severe cut-in with the escape blocked, was preceded by a stress alarm 2.35 s before impact.

b) Merge: a robust regime: We sweep a grid of 18 merge configurations—the $3 \times 3 \times 2$ combinations of the lead car’s start position, the closing car’s start position, and the closing speed. Every configuration ends in a near-miss (closest approach within ± 0.08 barrier units of contact) and stress reads 5.9–9.4 in all of them (Fig. 4b): the merge is a broad stress-positive regime rather than a narrow parameter region. In a closed-loop test, a yield maneuver triggered by the frozen stress alarm executes legally and safely on the physics plant, although it does not increase the realized clearance margin; triggering an acceleration instead drives the vehicle off the road, indicating that the alarm supports cautious interventions rather than aggressive ones.

c) Intersection: the boundary: An occluded crossing at 1.5 m/s draws a stress alarm 0.9 s before the conflict, but as the crosser’s speed is swept the stress lead shrinks and then vanishes above approximately 2 m/s (Fig. 4c), while the geometric lead stays near 4 s. The failure is structural, not a threshold artifact: constraint pressure accumulates over the horizon, so the signal needs roughly one second of observation to register a threat. These constant-velocity scenes are also the geometric ladder’s best case, so they bound the claim from both sides.

VI. SCOPE AND LIMITATIONS

a) Role of the signal: Dual stress complements geometric monitoring rather than replacing it. Its strength is selectivity near the last-brake deadline, where it flags close-range, dynamically difficult conflicts that constant-velocity prediction resolves only late. Geometric detectors retain the advantage on threats that are visible well in advance. Because constraint pressure builds over the horizon, the signal is most informative once about a second of observation is available (Section V-D), and some conflicts develop too quickly for either channel to warn in time. We study it as a runtime monitor read from the existing solution; whether incorporating it into the control law is beneficial is a separate question we leave to future work.

b) Scope: Every statistical result concerns six-car crossing traffic on a physics-simulated 1/10-scale plant with scripted constant-velocity obstacles; the road scenes are scripted single-conflict scenes on the same plant. Because the obstacles move at constant velocity, the geometric ladder’s constant-velocity extrapolation is exact, which gives the baseline an advantage it would not enjoy against maneuvering traffic. The results do not address reactive traffic, full-size vehicles, or real perception, and the advantage reported here should be expected to vary with the size of the model–plant gap.

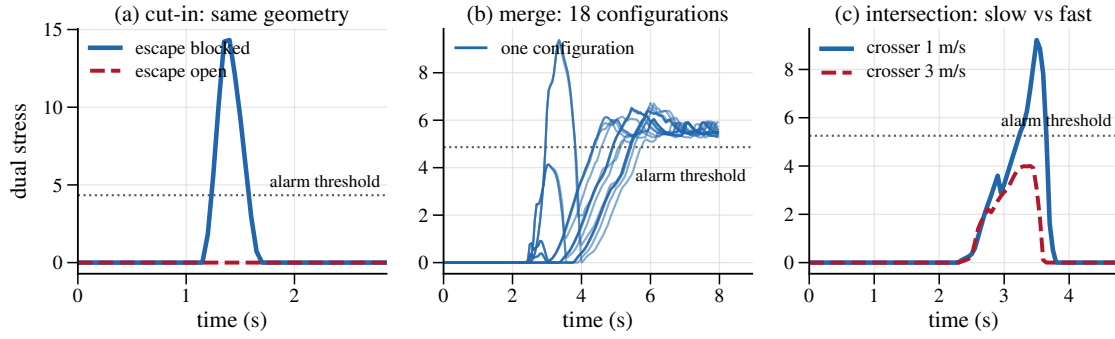


Fig. 4. Scripted road scenes on the physics plant: dual stress over time against each family’s frozen alarm threshold (dotted). (a) Cut-in, one pair with identical ego–intruder geometry: the escape-blocked run crosses the threshold while the escape-open run stays silent. (b) Merge, all 18 configurations (a $3 \times 3 \times 2$ grid over the two cars’ start positions and the closing speed): every one crosses the threshold, a broad regime rather than a knife-edge. (c) Intersection: a slow crosser (1 m/s) crosses the threshold, while a fast crosser (3 m/s) with the same conflict but half the observation window never does.

c) *Open points*: Three items remain for future work. First, the braking counterfactual of Section V-B shows that braking at the alarm prevents most collisions, but a matched comparison—braking at times when no alarm fired—is still needed to attribute the prevention to the alarm rather than to braking itself; three stress-only collisions that braking did not prevent also remain to be examined. Second, a combined monitor that alarms whenever either channel fires was not separately tuned to a matched false-alarm budget, so its coverage in Table I is reported descriptively rather than as a deployment result. Third, transfer to the physical FITENTH platform from which the plant parameters are taken is the natural next step.

VII. CONCLUSION

The dual variables of a safety-constrained model-predictive controller form a usable runtime hazard monitor, and the signal is most valuable precisely where the controller’s model departs from the plant, as in the present case of a CBF–MPC driving a physics-simulated vehicle. On 2,000 preregistered held-out crossing scenarios, a single frozen-threshold stress alarm actionably flagged 4.25% of scenarios whose collisions a complete 15-detector geometric ladder missed, covered 69% of brakeable collisions against the ladder’s 47%, and braking on its alarms prevented 96.5% of the collisions only it detected. The result persisted across eleven preregistered perturbations without retuning, was insensitive to plant uncertainty, and degraded only under heavy sensor corruption, where the geometric channel’s complementary contribution grows. Paired scripted scenes connect the statistics to the mechanism: the signal measures the feasibility of escape rather than the proximity of the threat, and it is silent when the threat develops faster than the horizon can register. The claim is deliberately bounded: this plant, this scale, this traffic. The alarms are late but selective; and the signal’s boundary is reported alongside its value.

REFERENCES

- [1] A. D. Ames, X. Xu, J. W. Grizzle, and P. Tabuada, “Control barrier function based quadratic programs for safety critical systems,” *IEEE Transactions on Automatic Control*, vol. 62, no. 8, pp. 3861–3876, 2017.
- [2] J. Zeng, B. Zhang, and K. Sreenath, “Safety-critical model predictive control with discrete-time control barrier function,” in *American Control Conference (ACC)*, 2021, pp. 3882–3889.
- [3] S. Boyd and L. Vandenberghe, *Convex Optimization*. Cambridge, U.K.: Cambridge University Press, 2004.
- [4] J. P. Allama, P. Patrinos, T. Ohtsuka, and T. D. Son, “Real-time MPC with control barrier functions for autonomous driving using safety enhanced collocation,” *IFAC-PapersOnLine*, vol. 58, no. 18, pp. 392–399, 2024.
- [5] J. Huang, H. Wang, K. Margellos, and P. Goulart, “Predictive control barrier functions: Bridging model predictive control and control barrier functions,” in *2025 European Control Conference (ECC)*. IEEE, 2025, pp. 2623–2629.
- [6] J. Hillenbrand, A. M. Spieker, and K. Kroschel, “A multilevel collision mitigation approach—its situation assessment, decision making, and performance tradeoffs,” *IEEE Transactions on Intelligent Transportation Systems*, vol. 7, no. 4, pp. 528–540, 2006.
- [7] C. Johnsson, A. Laureshyn, and T. De Ceunynck, “In search of surrogate safety indicators for vulnerable road users: A review of surrogate safety indicators,” *Transport Reviews*, vol. 38, no. 6, pp. 765–785, 2018, doi: 10.1080/01441647.2018.1442888.
- [8] L. Westhofen *et al.*, “Criticality metrics for automated driving: A review and suitability analysis of the state of the art,” *Archives of Computational Methods in Engineering*, vol. 30, pp. 1–35, 2023.
- [9] T. Fraichard and H. Asama, “Inevitable collision states: A step towards safer robots?” in *Proc. 2003 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, vol. 1, 2003, pp. 388–393, doi: 10.1109/IROS.2003.1250659.
- [10] S. Bouraine, T. Fraichard, and H. Salhi, “Provably safe navigation for mobile robots with limited field-of-views in dynamic environments,” *Autonomous Robots*, vol. 32, no. 3, pp. 267–283, 2012.
- [11] S. Shalev-Shwartz, S. Shammah, and A. Shashua, “On a formal model of safe and scalable self-driving cars,” *arXiv:1708.06374*, 2017.
- [12] L. Bertinetto, J. F. Henriques, S. Albanie, M. Paganini, and G. Varol, Eds., *NeurIPS 2020 Workshop on Pre-registration in Machine Learning*, ser. Proceedings of Machine Learning Research, vol. 148, 2021.
- [13] L. D. Brown, T. T. Cai, and A. DasGupta, “Interval estimation for a binomial proportion,” *Statistical Science*, vol. 16, no. 2, pp. 101–133, 2001.
- [14] T. Saito and M. Rehmsmeier, “The precision-recall plot is more informative than the roc plot when evaluating binary classifiers on imbalanced datasets,” *PLOS ONE*, vol. 10, no. 3, p. e0118432, 2015.
- [15] S. Rendle, L. Zhang, and Y. Koren, “On the difficulty of evaluating baselines: A study on recommender systems,” *arXiv:1905.01395*, 2019.
- [16] G. Melis, C. Dyer, and P. Blunsom, “On the state of the art of evaluation in neural language models,” in *International Conference on Learning Representations (ICLR)*, 2018.
- [17] R. Trumpp, D. Hoornaert, and M. Caccamo, “Residual policy learning for vehicle control of autonomous racing cars,” in *Proc. 2023 IEEE Intelligent Vehicles Symposium (IV)*, 2023, pp. 1–6, doi: 10.1109/IV55152.2023.10186744.
- [18] NVIDIA Corporation, “Physics simulation fundamentals,” NVIDIA Isaac Sim Documentation, [Online]. Accessed: Jul. 30, 2026.
- [19] —, “Omni PhysX vehicle,” NVIDIA Omni Physics Documentation, [Online]. Accessed: Jul. 30, 2026.