

Bench2Drive-Robust: Benchmarking Closed-Loop Autonomous Driving under Deployment Perturbations

Zhiyuan Zhang^{3*}Zhenghao Jin^{1,2*}Yanlun Peng²Xianda Guo⁴Haoran Liu¹Shaofeng Zhang⁵Xingjun Ma¹Zuxuan Wu¹Junchi Yan^{3✉}Xiaosong Jia^{1✉}Yu-Gang Jiang¹¹ Institute of Trustworthy Embodied AI (TEAI), Fudan University² Great Wall Motor³ Sch. of Computer Science & Sch. of Artificial Intelligence, Shanghai Jiao Tong University⁴ School of Computer Science, Wuhan University⁵ University of Science and Technology of China

* Equal Contributions

✉ Correspondence Author

<https://github.com/Thinklab-SJTU/Bench2Drive-Robust>

Abstract

Robustness is a critical requirement for deploying autonomous driving systems in the real world. Existing robustness benchmarks for autonomous driving have made important progress in studying the effects of image-level corruptions, such as adverse weather or camera degradation, on perception modules and open-loop planning outputs. However, deployment can also involve system-level imperfections, such as inference latency and ego-state estimation errors, which remain less studied in closed-loop E2E-AD evaluation. These imperfections can accumulate through the feedback loop and destabilize control. In this work, we present **Bench2Drive-Robust**, to our knowledge the first device-centric robustness benchmark for closed-loop end-to-end autonomous driving under realistic deployment perturbations. We systematically evaluate deployment-oriented perturbations arising from three major sources: camera-stream failures (frame drop, partial observation), ego-state estimation errors (GPS noise, and speed or odometry errors), and compute-induced control delay (model inference delay). We evaluate representative end-to-end driving methods and analyze their robustness under different perturbation severities. Our results show that these deployment-related perturbations can substantially degrade closed-loop driving performance, revealing robustness challenges that are not fully captured by conventional image-level corruption evaluations. By establishing a closed-loop evaluation protocol and demonstrating the substantial impact of these deployment-oriented perturbations, Bench2Drive-Robust defines practical robustness problems for end-to-end autonomous driving and encourages further research on deployment-aware robust driving systems.

1 Introduction

Autonomous driving systems are expected to operate under diverse and imperfect real-world conditions. Recent end-to-end autonomous driving (E2E-AD) methods have achieved strong performance by mapping sensor observations directly to planning trajectories or control actions [1–6]. How-

*This work was partly done when Zhenghao Jin interns at Great Wall Motor.

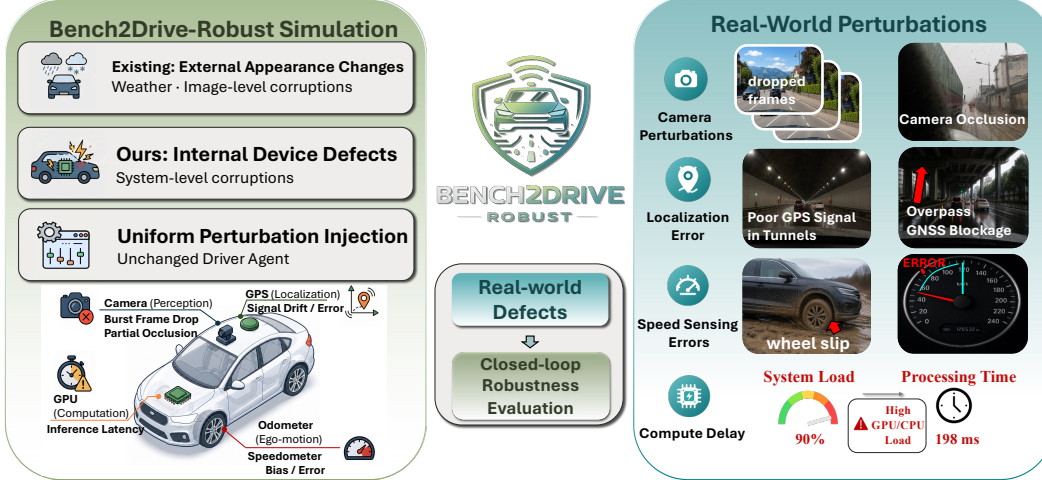


Figure 1: **Overview of Bench2Drive-Robust.** We evaluate three categories of deployment-side failures for E2E-AD—camera-stream failures, ego-state estimation errors, and compute-induced control delay—under closed-loop driving. This differs from existing image- or perception-centric robustness benchmarks that mainly target external appearance changes.

ever, existing closed-loop evaluations typically assess driving capability under diverse scenarios and weather conditions while assuming a reliable simulator-policy interface.

Robustness under deployment conditions is an important step toward practical E2E-AD systems. As illustrated in Fig. 1, real vehicles may encounter camera stream failures, localization errors, speed sensing errors, and compute-control delays caused by onboard hardware, sensing, and software-stack imperfections. Studying such perturbations can provide feedback for onboard system design and encourage E2E-AD algorithms that are more tolerant to realistic software- and device-side variations.

However, these factors affect not only the visual content observed by the model, but also the timing, consistency, and reliability of the perception-control loop. Existing robustness benchmarks have made important progress in studying appearance- and perception-level corruptions, including adverse weather, sensor noise, depth degradation, LiDAR corruptions, and BEV perception failures [7–11]. While these evaluations provide valuable diagnostic signals, they often focus on perception modules or open-loop planning outputs, and therefore may not fully capture how perturbations propagate through vehicle motion and future observations in closed-loop driving [12–15]. This motivates a complementary closed-loop benchmark that evaluates how E2E-AD models respond to deployment-side system perturbations during interactive driving.

In this work, we present **Bench2Drive-Robust**, a device-centric closed-loop robustness benchmark for E2E-AD built on Bench2Drive [15]. Our benchmark translates real-world system imperfections into parameterized simulation perturbations covering three deployment-relevant sources: camera-stream failures, including frame drop and partial observation; ego-state estimation errors, including GPS noise and speed errors; and compute-induced control delay, including inference latency. We evaluate representative E2E-AD models, including TCP [1], UniAD [2], VAD [3], and SimLingo [5], under increasing perturbation severities.

In summary, Bench2Drive-Robust features:

- A closed-loop robustness benchmark for E2E-AD under deployment-side perturbations beyond standard image-level corruptions.
- A device-centric perturbation taxonomy covering camera-stream failures, ego-state estimation errors, and compute-induced control delay.
- A modular perturbation injection framework with parameterized severity settings, enabling structured stress tests across camera-stream, ego-state, and compute-control failures.
- A systematic evaluation of representative E2E-AD models under multiple perturbation severities, showing distinct closed-loop robustness profiles.

Benchmark	Evaluation Level	Closed-Loop	Deployment-Oriented
KITTI-C/nuScenes-C/Waymo-C [7]	3D Object Detection	✗	✗
Robo3D [8]	3D Perception	✗	✗
RoboDepth [9]	Depth Estimation	✗	✗
RoboBEV [10]	BEV Perception	✗	✓ [†]
RobustE2E [12]	E2E Driving	✓ [†]	✗
RoboDriveBench [13]	VLM E2E Driving	✗	✓ [†]
RoboDrive Challenge [54]	Multi-Task Perception	✗	✗
MapBench [11]	HD Map Construction	✗	✗
Fail2Drive [55]	E2E Driving	✓	✓ [†]
Bench2Drive-Robust (Ours)	E2E Driving	✓	✓

Table 1: Comparison with existing AD robustness benchmarks. [†] denotes partial coverage.

RoboBEV includes frame drop and camera crash but remains perception-level. RobustE2E includes limited closed-loop cases. RoboDriveBench covers sensor/communication failures but does not target temporal or ego-state perturbations. Fail2Drive focuses on paired scenario-level distribution shifts.

2 Related Work

2.1 End-to-End Autonomous Driving

End-to-end autonomous driving (E2E-AD) aims to learn driving policies that map onboard observations directly to planning trajectories or low-level control commands. Early neural driving systems studied direct sensorimotor control, conditional imitation learning, privileged distillation, and compact closed-loop policies [1, 4, 16–21]. Recent methods further scale E2E-AD through unified perception–prediction–planning architectures, vectorized and sparse scene representations, BEV/occupancy modeling, and transformer-based policies [2, 3, 6, 22–34]. Planner-centric advances also explore generative trajectory modeling, flow matching, reinforcement learning, trajectory selection, and temporal-consistency mechanisms [35–41]. With the rise of foundation models, language-augmented and vision-language-action driving systems have been developed for instruction following, reasoning, interpretability, and action generation [5, 42–53]. Together, these works have advanced E2E-AD model design and driving capability, while our work focuses on evaluating their robustness under deployment-side closed-loop perturbations.

2.2 Datasets, Benchmarks, and Robustness Evaluation

Large-scale datasets have driven progress in autonomous driving perception, prediction, mapping, and planning [56–64]. Many logged-data evaluations are open-loop, comparing predictions against recorded expert behavior without affecting future observations, which may not fully reflect interactive driving performance [14, 65]. To evaluate planning and control more directly, recent benchmarks introduce closed-loop or simulation-based protocols, including CARLA, nuPlan, NAVSIM, Bench2Drive, Fail2Drive, and DriveArena [15, 55, 66–69]. These benchmarks support assessment of route completion, safety, planning quality, generalization, and multi-ability closed-loop behavior for learning-based planners and E2E-AD systems [34, 38, 39, 41, 70–72].

Robustness benchmarks further evaluate autonomous driving systems under distribution shifts, corruptions, and adverse conditions [73, 74]. Existing protocols mostly focus on perception-side robustness, including image, LiDAR, depth, BEV, 3D perception, and map-construction corruptions [7–11]. Recent studies extend robustness evaluation to vision-language driving systems [12, 13, 54, 55], but still mainly emphasize perception-side corruptions, adversarial or natural corruptions, perception-oriented OoD tracks, and scenario-level distribution shifts [10, 12, 54, 55]. As summarized in Table 1, non-camera interface imperfections such as localization noise, ego-motion sensing errors, and compute-control latency remain underexplored in closed-loop E2E-AD. This motivates a complementary benchmark that evaluates these perturbations under closed-loop E2E-AD.

3 Method

Bench2Drive-Robust is a closed-loop robustness evaluation framework built on Bench2Drive [15]. Given a fixed end-to-end driving model, our framework injects controlled perturbations into the closed-loop evaluation pipeline without changing the agent architecture, checkpoint, or decision logic. We organize deployment-relevant perturbations into three families: camera-stream failures, ego-state estimation errors, and compute-control delays. For each perturbation type, we define a severity

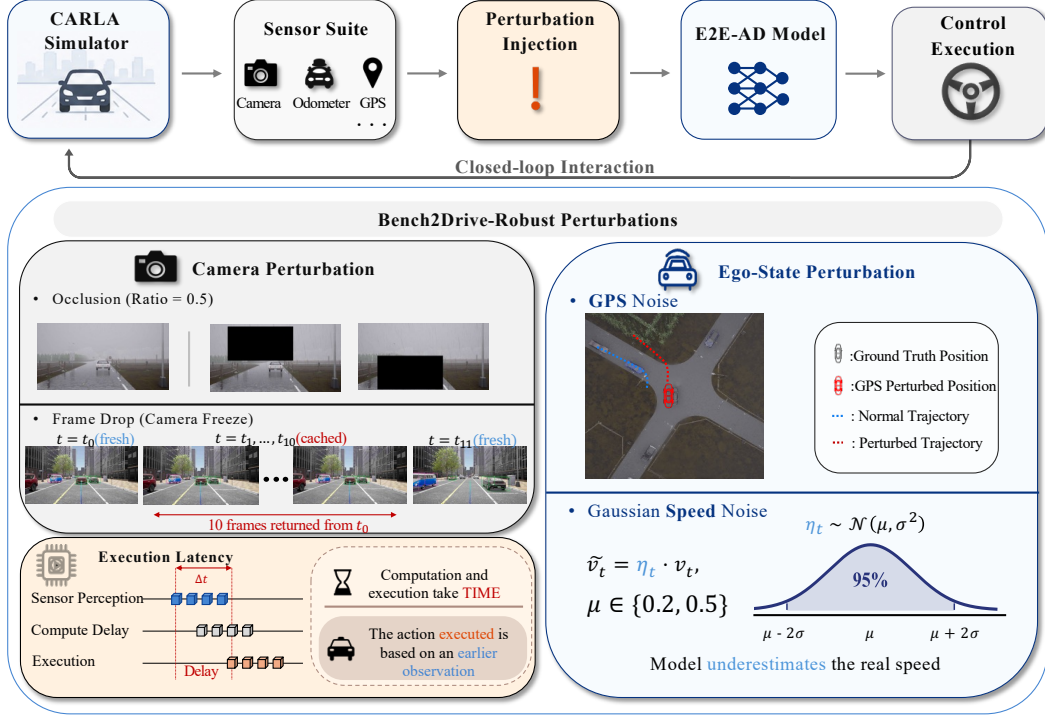


Figure 2: **Overview of Bench2Drive-Robust.** We evaluate end-to-end autonomous driving models in closed-loop simulation by injecting deployment-relevant perturbations into the sensing, ego-state, and action pipelines while keeping the evaluated policy unchanged. The benchmark covers temporal delays, observation integrity perturbations, and ego-state estimation errors, enabling controlled robustness evaluation under consistent driving scenarios.

parameter and apply it consistently across models and routes, enabling model-agnostic comparison under matched closed-loop scenarios.

3.1 Problem Formulation

At each simulator timestep t , an end-to-end driving policy π receives visual observations I_t and ego-state signals s_t , and outputs a control action

$$a_t = \pi(I_t, s_t). \quad (1)$$

To evaluate robustness, we perturb the policy inputs before they are consumed by the model, yielding perturbed observations $\tilde{I}_t$ and perturbed ego-state signals $\tilde{s}_t$. The resulting action is

$$\tilde{a}_t = \pi(\tilde{I}_t, \tilde{s}_t). \quad (2)$$

We focus on deployment-oriented imperfections from system constraints and sensor-interface failures, including stale camera streams, noisy ego-state inputs, and delayed control execution. We do not add separate weather or lighting corruptions, as such appearance-level variations are already covered by the original Bench2Drive scenarios [15]. Our benchmark instead extends Bench2Drive with controlled interface-level perturbations for closed-loop robustness evaluation.

3.2 Design Goals

Bench2Drive-Robust extends Bench2Drive by introducing deployment-oriented robustness as an additional closed-loop evaluation dimension. Instead of changing the evaluated E2E-AD models, we perturb the surrounding driving pipeline, including sensor inputs, ego-state estimates, and action timing. Each perturbation is controlled by an interpretable severity parameter and applied consistently across models and routes, enabling comparable robustness evaluation under matched scenarios. Table 2 summarizes the perturbation types, severity parameters, and evaluated ranges.

Table 2: Summary of deployment-oriented perturbations evaluated in Bench2Drive-Robust.

Category	Perturbation	Severity setting	Modeled failure
Camera stream	Burst frame drop	Burst length $k \in \{1, 3\}$ s	Stream interruption / frozen camera
Camera stream	Partial observation	Mask ratio $r \in \{0.5, 0.8\}$	Partial camera occlusion
Ego-state	GPS noise	Std. $\sigma_{\text{GPS}} \in \{5, 15\}$ m	Noisy localization input
Ego-state	Speed noise	$\eta_t \sim \mathcal{N}(\mu, 0.2^2)$, $\mu \in \{0.2, 0.5\}$	Speed sensing error
Compute-control	Inference latency	Delay $\tau \in \{100, 200, 500\}$ ms	Delayed action execution

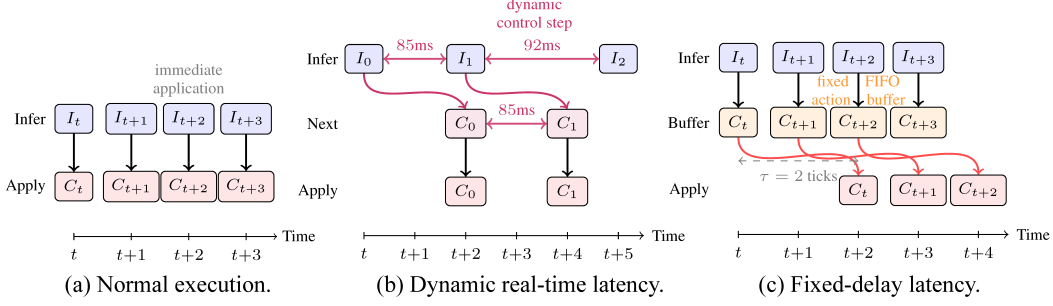


Figure 3: **Latency modes supported in our framework:** immediate execution, dynamic real-time scheduling, and fixed-delay FIFO buffering.

3.3 Robustness Taxonomy

We organize deployment-oriented perturbations by where they enter the closed-loop driving stack: *camera-stream perturbations*, *ego-state perturbations*, and *compute-control perturbations*. This taxonomy separates failures in visual data delivery, vehicle-state sensing, and action execution. Unlike appearance-level corruptions such as fog, rain, or blur, our perturbations mainly target the interface between the simulator and the driving policy: sensory information may be stale, incomplete, noisy, or delayed even when the external scene remains semantically unchanged. Table 2 summarizes the perturbation families and severity settings used in our evaluation.

3.3.1 Inference Latency

Real-time execution is critical for closed-loop autonomous driving, where perception, planning, and control must operate within bounded computation cycles [34, 75, 76]. In practical autonomous driving systems, observation, inference, and actuation take time. The command applied at time t cannot be computed from the observation captured at the same instant, because sensor transmission, neural network inference, planning, control conversion, and actuator communication all introduce non-zero latency. As a result, the vehicle may execute a command derived from an earlier observation. In closed-loop driving, this delay is not merely a computational detail: it changes the state reached by the vehicle, affects future observations, and may amplify errors over long horizons.

We therefore model compute-control delay as a FIFO action buffer, as illustrated in Figure 3. At each simulation tick, the model computes a control command from the latest available observation, but the command is inserted into the buffer instead of being applied immediately. The simulator then applies the command generated τ ticks earlier:

$$\tilde{a}_t = a_{t-\tau}. \quad (3)$$

This buffer-based design gives precise control over the latency level, keeps the policy code unchanged, and isolates the robustness effect of delayed actuation from unrelated runtime variations such as GPU load or simulator speed. Our framework also supports a dynamic real-time latency mode that schedules actions according to measured wall-clock inference time, but fixed-delay latency is used for the main benchmark to ensure comparable severity across models and machines.

3.3.2 Ego-State Noise

Ego-state signals provide auxiliary vehicle-state information to the driving policy, such as GPS readings and ego speed. In real driving environments, GPS localization can be affected by multipath effects, signal blockage, and degraded satellite visibility, and prior studies report meter-level to tens-of-meters localization errors in urban environments [77–80]. Vehicle-state sensing can also

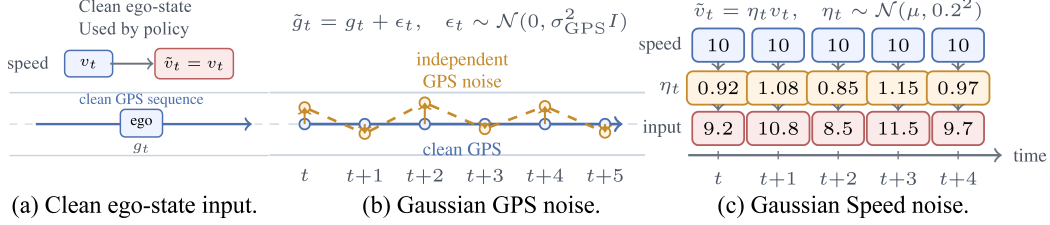


Figure 4: **Illustration of ego-state input perturbations.** (a) The model receives the clean GPS reading g_t . (b) GPS input noise adds Gaussian perturbations to GPS readings. (c) Speed noise independently samples a multiplicative factor η_t at each timestep and feeds $\tilde{v}_t = \eta_t v_t$ to the policy.

be affected by sensor and ego-motion reliability issues [81]. Motivated by these observations, we evaluate whether E2E-AD policies remain stable when ego-state signals are noisy rather than perfectly clean.

For GPS input noise, we add Gaussian perturbations to the clean GPS reading at each timestep:

$$\tilde{g}_t = g_t + \epsilon_t, \quad \epsilon_t \sim \mathcal{N}(0, \sigma_{\text{GPS}}^2 I), \quad (4)$$

where $\sigma_{\text{GPS}} \in \{5, 15\}$ m controls the noise level. This models independent per-timestep GPS input uncertainty rather than a temporally accumulated localization bias.

For speed noise, we perturb the clean ego speed using an independently sampled multiplicative factor:

$$\tilde{v}_t = \eta_t v_t, \quad \eta_t \sim \mathcal{N}(\mu, 0.2^2), \quad (5)$$

where $\mu < 1$ corresponds to systematic speed underestimation. In this benchmark, we focus on underestimation settings with $\mu \in \{0.2, 0.5\}$, which model degraded or biased speed sensing. Figure 4 summarizes these ego-state perturbations.

3.3.3 Camera-Stream Perturbations

Camera-stream perturbations model failures in how visual observations are captured, transmitted, or delivered to the policy. Camera crash, frame loss, and sensor corruption have been studied in recent robustness benchmarks and sensor-failure analyses [10, 13, 54, 81]. We consider two representative camera-stream perturbations: burst frame drop and partial observation.

Burst frame drop. Unlike camera crash or frame-lost settings that replace the current view with an empty, blacked-out image, our burst frame drop is designed to model a frozen but visually plausible camera stream. During a burst interval, the affected camera repeatedly returns the most recent valid frame while the simulation timestamp continues to advance. The delivered image is therefore

$$\tilde{I}_t = \begin{cases} I_t, & \text{if the camera stream is normal at time } t, \\ I_{t^*}, & \text{if the camera is in an active burst interval at time } t, \end{cases} \quad (6)$$

where $t^* < t$ denotes the timestamp of the most recent valid frame before the burst began. This design captures a distinct deployment failure mode: the visual input remains plausible, but becomes temporally stale. Figure 5 illustrates the difference between camera crash and our burst frame drop.

Partial observation. Partial observation simulates incomplete visual input caused by occlusion or camera-view blockage. For each image, we apply a black rectangular mask to a randomly sampled region. The severity is controlled by the mask ratio r . To ensure fair comparison, the mask randomness is generated from deterministic route-level seeds, so different models encounter the same occlusion pattern on the same route.

3.3.4 Severity Parameterization

Following prior robustness benchmarks, we evaluate perturbations at controlled severity levels to compare models under matched stress conditions [7, 10, 15, 73]. Each perturbation type is evaluated at representative severity levels chosen to cover moderate and severe deployment imperfections while keeping the evaluation comparable across models. The same severity protocol is applied to all evaluated methods. The complete settings are summarized in Table 2.

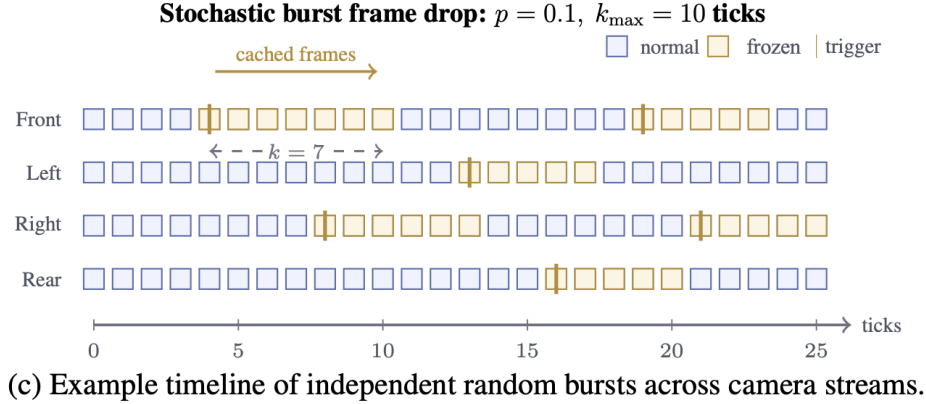
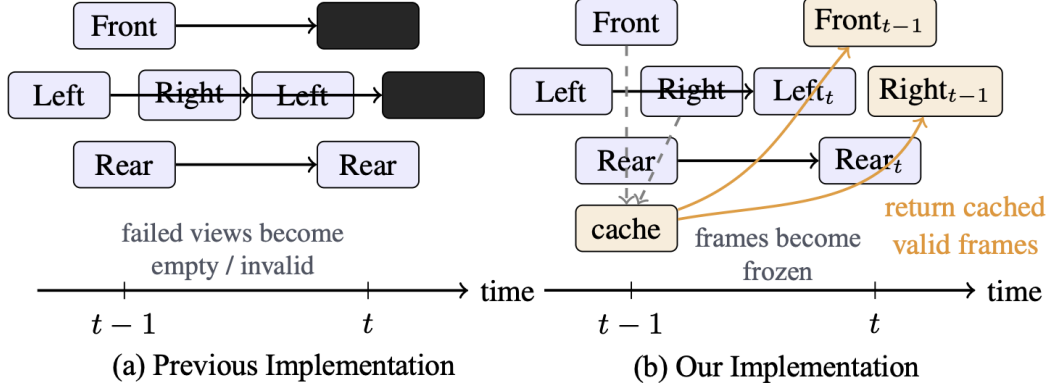


Figure 5: **Illustration of our burst frame drop implementation.** (a) Camera crash or frame-lost perturbations typically replace failed views with empty or invalid images. (b) In our implementation, a failed camera stream returns the most recent valid cached frame, so the simulator timestamp advances while the visual content is temporally frozen. (c) The timeline shows an illustrative example of independently sampled burst events across camera streams with trigger probability $p = 0.1$; in the main experiments, burst severity is controlled by the evaluated burst length settings reported in Table 2.

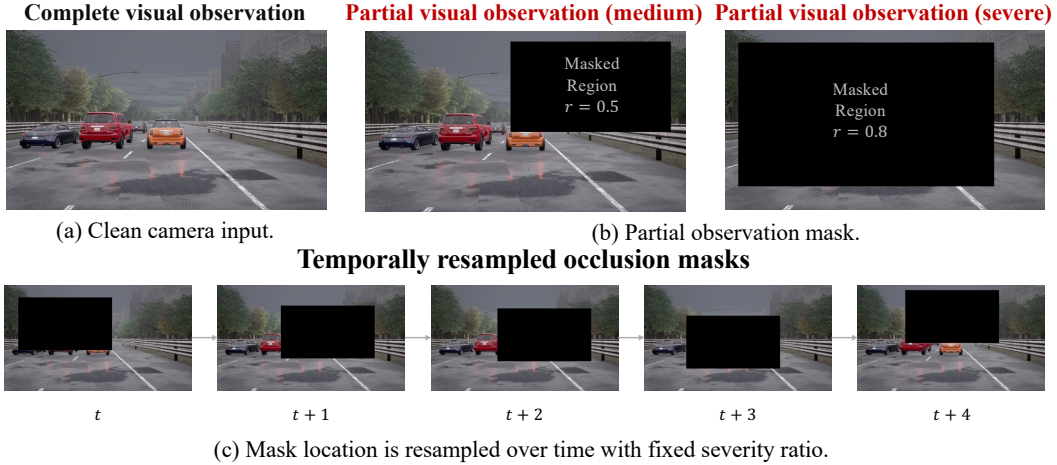


Figure 6: **Illustration of partial observation perturbation.** A gray rectangular mask removes part of the camera observation while leaving the external scene unchanged. The mask location is resampled over time, and the severity is controlled by the mask ratio r .

3.4 Closed-loop Evaluation Protocol

We evaluate each driving model in closed-loop simulation under both clean and perturbed conditions. For each route and scenario, we first measure clean driving performance and then re-evaluate the

same model under different perturbation categories and severity levels. All evaluated models use the same 220 Bench2Drive routes, simulator configuration, and perturbation protocol.

This setting allows us to attribute performance changes directly to robustness differences rather than to route selection or environment randomness. Because the evaluation is performed in closed loop, even small perturbations may accumulate over time and manifest as route deviation, unstable control, traffic violations, or task failure.

3.5 Metrics

We report both standard driving metrics and robustness-oriented degradation statistics.

Standard closed-loop metrics. These include Driving Score (DS), Success Rate (SR), Efficiency (Eff.), and Comfortness (Comf.) inherited from Bench2Drive [15].

Robustness degradation. We quantify robustness degradation (RD) as the relative performance drop compared to the clean baseline:

$$\text{RD}(\pi, \mathcal{P}, s) = 1 - \frac{\text{DS}(\pi, \mathcal{P}, s)}{\text{DS}_{\text{clean}}(\pi)}, \quad (7)$$

where $\mathcal{P}$ denotes the perturbation type, s the severity level, and $\text{DS}_{\text{clean}}(\pi)$ the driving score of policy π under clean conditions. $\text{RD} = 0$ indicates no degradation; $\text{RD} = 1$ indicates complete failure.

4 Experiments

4.1 Experimental Setup

Dataset. We evaluate Bench2Drive-Robust using the official Bench2Drive closed-loop evaluation protocol, which requires E2E-AD models to complete 220 CARLA routes spanning 44 interactive scenarios under different locations and weather conditions [15]. Each model is evaluated in closed loop, where its actions affect future states and observations.

Baselines. We evaluate four E2E-AD models: TCP-traj [1], UniAD [2], VAD [3], and SimLingo [5]. All are tested as fixed policies, without finetuning or robustness adaptation.

Perturbations. We evaluate camera-stream, ego-state, and compute-control perturbations. Camera perturbations include partial observation with $r \in \{0.5, 0.8\}$ and cached burst frame drop with burst lengths of 20 and 60 ticks, corresponding to 1 and 3 seconds at 20 Hz. Ego-state perturbations include GPS localization noise with $\sigma_{\text{GPS}} \in \{5\text{m}, 15\text{m}\}$ and Gaussian multiplicative speed noise $\hat{v}_t = \eta_t v_t$, where $\eta_t \sim \mathcal{N}(\mu, 0.2^2)$. For SimLingo, GPS perturbations affect the released closed-loop wrapper indirectly by perturbing the GNSS signal used to construct target-point navigation tokens, rather than by feeding raw GPS values directly to the core policy. Compute-control perturbation is evaluated using fixed inference latency of 100ms, 200ms, and 500ms with a FIFO action buffer.

4.2 Results

Key findings. Table 3 shows that deployment-side perturbations induce heterogeneous closed-loop failures across perturbation families. Since Bench2Drive evaluates E2E-AD agents in closed-loop over 220 CARLA routes spanning 44 interactive scenarios, these degradations reflect changes in full driving rollouts rather than isolated frame-level errors [15]. The qualitative case studies in Appendix D further illustrate how the aggregate drops translate into concrete route-level failures.

Heterogeneous robustness. Robustness cannot be inferred from a single clean-condition score. For example, SimLingo achieves the strongest clean Driving Score, but degrades sharply under severe occlusion and inference latency. In contrast, several lower-clean-score models are less affected by cached burst frame drop. This suggests that each perturbation family probes a different failure axis of the closed-loop driving stack, rather than a single generic robustness property.

Camera-stream failures. Severe occlusion substantially reduces Driving Score and Success Rate by removing task-relevant visual evidence. The actor-flow case in Fig. 11 shows that occlusion can hide nearby actors, free space, and the intended turning corridor, making the interaction decision unreliable. Cached burst frame drop is generally less harmful for TCP-traj, UniAD, and VAD, suggesting that stale but visually plausible frames can be less destructive than direct spatial information loss. However, burst drops still break temporal consistency between the delivered image and the evolving scene.

Table 3: **Closed-loop robustness evaluation on Bench2Drive-Robust.** We evaluate four E2E-AD models under camera-stream, ego-state, and compute-control perturbations using official Bench2Drive metrics. RD denotes relative Driving Score degradation from each model’s clean baseline. **For cross-model robustness comparison, we emphasize RD over absolute DS.** Speed- $N(\mu)$ denotes multiplicative speed noise with $\eta \sim \mathcal{N}(\mu, 0.2^2)$. Gray rows are clean baselines. Avg. perturb., Avg. latency, and Avg. all perturb. average completed non-latency, latency, and all perturbation settings.

Method	Setting	RD	DS	SR	Eff.	Comf.
TCP-traj [1]	baseline	0.00	59.90	30.00	76.54	18.08
	Occlusion 0.5	0.16	50.16	24.09	75.28	30.24
	Occlusion 0.8	0.24	45.54	18.18	76.10	25.24
	Burst 1s	0.01	59.17	28.64	78.41	23.84
	Burst 3s	0.05	56.80	25.00	78.26	23.67
	GPS 5 m	0.30	41.88	18.18	71.37	20.04
	GPS 15 m	0.65	21.12	0.45	58.37	29.22
	Speed-N(0.5)	0.04	57.49	27.72	91.43	23.82
	Speed-N(0.2)	0.07	55.61	23.64	123.01	23.73
	Avg. perturb.	0.19	48.47	20.74	81.53	24.98
	Latency 100 ms	-0.02	60.91	32.27	77.75	13.49
	Latency 200 ms	0.44	33.43	0.00	77.22	2.35
	Latency 500 ms	0.46	32.22	0.00	80.22	3.03
	Avg. latency	0.30	42.19	10.76	78.40	6.29
	Avg. all perturb.	0.22	46.76	18.02	80.67	19.88
UniAD [2]	baseline	0.00	45.81	16.36	129.21	43.58
	Occlusion 0.5	0.11	40.71	15.45	127.46	42.25
	Occlusion 0.8	0.39	28.03	2.27	133.95	46.66
	Burst 1s	0.03	44.26	14.55	134.70	27.50
	Burst 3s	0.08	42.20	13.64	126.88	43.82
	GPS 5 m	0.15	39.07	11.36	141.52	51.11
	GPS 15 m	0.55	20.50	0.00	117.55	48.91
	Speed-N(0.5)	0.19	37.27	12.72	184.92	51.85
	Speed-N(0.2)	0.37	29.08	4.55	221.40	54.46
	Avg. perturb.	0.23	35.14	9.32	148.55	45.82
	Latency 100 ms	0.19	37.01	14.09	123.44	47.00
	Latency 200 ms	0.26	33.84	10.45	130.93	8.12
	Latency 500 ms	0.30	31.85	7.73	143.88	5.42
	Avg. latency	0.25	34.23	10.76	132.75	20.18
	Avg. all perturb.	0.24	34.89	9.71	144.24	38.83
VAD [3]	baseline	0.00	42.35	15.00	157.94	46.01
	Occlusion 0.5	0.00	42.21	17.73	163.26	41.88
	Occlusion 0.8	0.22	33.15	6.39	167.09	49.50
	Burst 1s	-0.02	43.04	17.73	151.75	47.69
	Burst 3s	0.08	39.09	13.18	149.70	50.76
	GPS 5 m	0.13	37.02	12.27	163.82	32.64
	GPS 15 m	0.62	16.26	0.00	155.12	57.99
	Speed-N(0.5)	0.06	39.64	14.09	213.24	50.31
	Speed-N(0.2)	0.19	34.33	8.64	243.92	54.21
	Avg. perturb.	0.16	35.59	11.25	175.99	48.12
	Latency 100 ms	0.14	36.52	11.36	144.35	53.10
	Latency 200 ms	0.36	27.15	3.64	252.31	11.70
	Latency 500 ms	0.44	23.55	2.27	242.62	9.75
	Avg. latency	0.31	29.07	5.76	213.09	24.85
	Avg. all perturb.	0.20	33.81	9.75	186.11	41.78
SimLingo [5]	baseline	0.00	85.94	66.82	244.18	25.49
	Occlusion 0.5	0.29	60.71	25.00	226.06	37.57
	Occlusion 0.8	0.83	14.79	0.00	199.93	70.22
	Burst 1s	0.01	85.47	66.36	235.40	31.01
	Burst 3s	0.00	85.82	69.09	236.16	31.68
	GPS 5 m	-0.02	87.91	73.64	238.02	33.41
	GPS 15 m	-0.02	87.53	70.91	238.64	32.98
	Speed-N(0.5)	0.28	61.77	29.09	276.62	33.51
	Speed-N(0.2)	0.50	42.73	6.36	282.45	27.15
	Avg. perturb.	0.23	65.84	42.56	241.66	37.19
	Latency 100 ms	0.67	28.45	2.27	218.92	63.66
	Latency 200 ms	0.77	19.47	0.00	189.95	64.52
	Latency 500 ms	0.82	15.70	0.00	177.93	59.78
	Avg. latency	0.75	21.21	0.76	195.60	62.65
	Avg. all perturb.	0.38	53.67	31.16	229.10	44.14

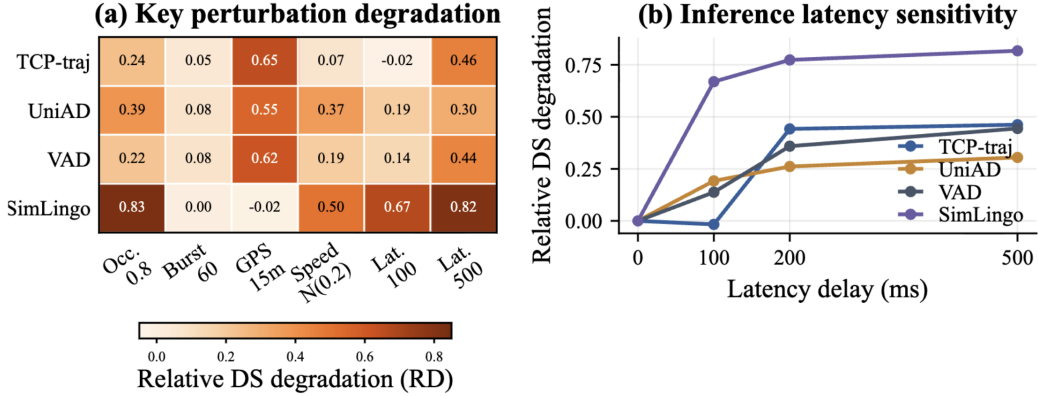


Figure 7: **Main robustness analysis.** Deployment-side perturbations induce heterogeneous degradation patterns across models, and inference latency reveals strong closed-loop synchronization vulnerability.

Ego-state sensitivity. GPS and speed perturbations show that robustness failures are not limited to camera inputs. The GPS case in Fig. 13 shows how localization noise can misalign the route target and predicted waypoints, causing the trajectory-following controller to deviate from the intended turn. The speed case in Fig. 14 shows a complementary longitudinal-control failure: severe speed underestimation leads to insufficient braking at a red light and unstable behavior during the subsequent turn. These results indicate that auxiliary state inputs can become critical failure points even when visual observations remain available.

Latency vulnerability. Inference latency exposes a strong synchronization failure mode. All methods degrade as delay increases, and SimLingo drops sharply despite having the strongest clean baseline. As shown in Fig. 12, predicted waypoints may remain visually plausible, but delayed execution

makes the corresponding action arrive after the scene has evolved. Thus, latency primarily breaks perception–action timing rather than necessarily producing obviously invalid predictions.

Metric interpretation. We treat DS, RD, and SR as the primary robustness indicators because they most directly reflect closed-loop task completion and safety-related degradation. Efficiency and Comfortness are useful complementary diagnostics, but they can be non-monotonic under failed or shortened rollouts. The case studies support this interpretation: failures such as collision, blocking, delayed execution, and insufficient braking are most clearly captured by Driving Score degradation and Success Rate changes.

5 Conclusion

We present **Bench2Drive-Robust**, a closed-loop robustness benchmark for E2E-AD under deployment-oriented perturbations. It injects camera-stream failures, ego-state noise, speed sensing errors, and inference latency into Bench2Drive while keeping the evaluated policy unchanged. Experiments show that these perturbations substantially degrade closed-loop performance and that clean-driving performance does not necessarily imply robustness. Our benchmark provides a diagnostic protocol for future deployment-aware E2E-AD systems.

References

- [1] Penghao Wu, Xiaosong Jia, Li Chen, Junchi Yan, Hongyang Li, and Yu Qiao. Trajectory-guided control prediction for end-to-end autonomous driving: A simple yet strong baseline. *Advances in Neural Information Processing Systems*, 35:6119–6132, 2022. 1, 2, 3, 8, 9
- [2] Yihan Hu, Jiazhi Yang, Li Chen, Keyu Li, Chonghao Sima, Xizhou Zhu, Siqi Chai, Senyao Du, Tianwei Lin, Wenhai Wang, et al. Planning-oriented autonomous driving. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 17853–17862, 2023. 2, 3, 8, 9
- [3] Bo Jiang, Shaoyu Chen, Qing Xu, Bencheng Liao, Jiajie Chen, Helong Zhou, Qian Zhang, Wenyu Liu, Chang Huang, and Xinggang Wang. Vad: Vectorized scene representation for efficient autonomous driving. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 8340–8350, 2023. 2, 3, 8, 9
- [4] Kashyap Chitta, Aditya Prakash, Bernhard Jaeger, Zehao Yu, Katrin Renz, and Andreas Geiger. Transfuser: Imitation with transformer-based sensor fusion for autonomous driving. *IEEE transactions on pattern analysis and machine intelligence*, 45(11):12878–12895, 2022. 3
- [5] Katrin Renz, Long Chen, Elahe Arani, and Oleg Sinavski. Simlingo: Vision-only closed-loop autonomous driving with language-action alignment. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 11993–12003, 2025. 2, 3, 8, 9
- [6] Xiaosong Jia, Junqi You, Zhiyuan Zhang, and Junchi Yan. Drivetransformer: Unified transformer for scalable end-to-end autonomous driving. In *The Thirteenth International Conference on Learning Representations*, 2025. URL <https://openreview.net/forum?id=M42KR4W9P5>. 1, 3
- [7] Yinpeng Dong, Caixin Kang, Jinlai Zhang, Zijian Zhu, Yikai Wang, Xiao Yang, Hang Su, Xingxing Wei, and Jun Zhu. Benchmarking robustness of 3d object detection to common corruptions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1022–1032, 2023. 2, 3, 6
- [8] Lingdong Kong, Youquan Liu, Xin Li, Runnan Chen, Wenwei Zhang, Jiawei Ren, Liang Pan, Kai Chen, and Ziwei Liu. Robo3d: Towards robust and reliable 3d perception against corruptions. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 19994–20006, 2023. 3
- [9] Lingdong Kong, Shaoyuan Xie, Hanjiang Hu, Lai Xing Ng, Benoit Cottureau, and Wei Tsang Ooi. Robodepth: Robust out-of-distribution depth estimation under corruptions. *Advances in Neural Information Processing Systems*, 36:21298–21342, 2023. 3

- [10] Shaoyuan Xie, Lingdong Kong, Wenwei Zhang, Jiawei Ren, Liang Pan, Kai Chen, and Ziwei Liu. Benchmarking and improving bird’s eye view perception robustness in autonomous driving. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 47(5):3878–3894, 2025. 3, 6
- [11] Xiaoshuai Hao, Mengchuan Wei, Yifan Yang, Haimei Zhao, Hui Zhang, Yi Zhou, Qiang Wang, Weiming Li, Lingdong Kong, and Jing Zhang. Is your hd map constructor reliable under sensor corruptions? *Advances in Neural Information Processing Systems*, 37:22441–22482, 2024. 2, 3
- [12] Wei Jiang, Lu Wang, Tianyuan Zhang, Yuwei Chen, Jian Dong, Wei Bao, Zichao Zhang, and Qiang Fu. Robuste2e: Exploring the robustness of end-to-end autonomous driving. *Electronics*, 13(16):3299, 2024. 2, 3
- [13] Dacheng Liao, Mengshi Qi, Peng Shu, Zhining Zhang, Yuxin Lin, Liang Liu, and Huadong Ma. Robodrivevm: A novel benchmark and baseline towards robust vision-language models for autonomous driving. *arXiv preprint arXiv:2512.01300*, 2025. 3, 6
- [14] Jiang-Tian Zhai, Ze Feng, Jinhao Du, Yongqiang Mao, Jiang-Jiang Liu, Zichang Tan, Yifu Zhang, Xiaoqing Ye, and Jingdong Wang. Rethinking the open-loop evaluation of end-to-end autonomous driving in nuscenes. *arXiv preprint arXiv:2305.10430*, 2023. 3
- [15] Xiaosong Jia, Zhenjie Yang, Qifeng Li, Zhiyuan Zhang, and Junchi Yan. Bench2drive: Towards multi-ability benchmarking of closed-loop end-to-end autonomous driving. *Advances in Neural Information Processing Systems*, 37:819–844, 2024. 2, 3, 4, 6, 8, 21, 22
- [16] Mariusz Bojarski, Davide Del Testa, Daniel Dworakowski, Bernhard Firner, Beat Flepp, Praseoon Goyal, Lawrence D Jackel, Mathew Monfort, Urs Muller, Jiakai Zhang, et al. End to end learning for self-driving cars. *arXiv preprint arXiv:1604.07316*, 2016. 3
- [17] Felipe Codevilla, Matthias Müller, Antonio López, Vladlen Koltun, and Alexey Dosovitskiy. End-to-end driving via conditional imitation learning. In *2018 IEEE international conference on robotics and automation (ICRA)*, pages 4693–4700. IEEE, 2018.
- [18] Dian Chen, Brady Zhou, Vladlen Koltun, and Philipp Krähenbühl. Learning by cheating. In *Conference on robot learning*, pages 66–75. PMLR, 2020.
- [19] Aditya Prakash, Kashyap Chitta, and Andreas Geiger. Multi-modal fusion transformer for end-to-end autonomous driving. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 7077–7087, 2021.
- [20] Katrin Renz, Kashyap Chitta, Otniel-Bogdan Mercea, A. Sophia Koepke, Zeynep Akata, and Andreas Geiger. Plant: Explainable planning transformers via object-level representations. In *Conference on Robotic Learning (CoRL)*, 2022.
- [21] Hao Shao, Letian Wang, Ruobing Chen, Hongsheng Li, and Yu Liu. Safety-enhanced autonomous driving using interpretable sensor fusion transformer. In *Conference on Robot Learning*, pages 726–737. PMLR, 2023. 3
- [22] Wenchao Sun, Xuewu Lin, Yining Shi, Chuang Zhang, Haoran Wu, and Sifa Zheng. Sparsedrive: End-to-end autonomous driving via sparse scene representation. In *2025 IEEE International Conference on Robotics and Automation (ICRA)*, pages 8795–8801. IEEE, 2025. 3
- [23] Runwen Zhu, Jianbo Zhao, Diankun Zhang, Guoan Wang, Xiwu Chen, Siyu Zhang, Jiahao Gong, Qibin Zhou, Wenyan Zhang, Ningzi Wang, et al. Sparsead: Sparse query-centric paradigm for efficient end-to-end autonomous driving. *IEEE Transactions on Artificial Intelligence*, 2025.
- [24] Jonah Philion and Sanja Fidler. Lift, splat, shoot: Encoding images from arbitrary camera rigs by implicitly unprojecting to 3d. In *European conference on computer vision*, pages 194–210. Springer, 2020.
- [25] Zhiqi Li, Wenhai Wang, Hongyang Li, Enze Xie, Chonghao Sima, Tong Lu, Qiao Yu, and Jifeng Dai. Bevformer: learning bird’s-eye-view representation from lidar-camera via spatiotemporal transformers. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 47(3):2020–2036, 2024.

- [26] Junjie Huang, Guan Huang, Zheng Zhu, Yun Ye, and Dalong Du. Bevdet: High-performance multi-camera 3d object detection in bird-eye-view. *arXiv preprint arXiv:2112.11790*, 2021.
- [27] Yin hao Li, Zheng Ge, Guanyi Yu, Jinrong Yang, Zengran Wang, Yukang Shi, Jianjian Sun, and Zeming Li. Bevdepth: Acquisition of reliable depth for multi-view 3d object detection. In *Proceedings of the AAAI conference on artificial intelligence*, volume 37, pages 1477–1485, 2023.
- [28] Tingting Liang, Hongwei Xie, Kaicheng Yu, Zhongyu Xia, Zhiwei Lin, Yongtao Wang, Tao Tang, Bing Wang, and Zhi Tang. Bevfusion: A simple and robust lidar-camera fusion framework. *Advances in neural information processing systems*, 35:10421–10434, 2022.
- [29] Yue Wang, Vitor Campagnolo Guizilini, Tianyuan Zhang, Yilun Wang, Hang Zhao, and Justin Solomon. Detr3d: 3d object detection from multi-view images via 3d-to-2d queries. In *Conference on robot learning*, pages 180–191. PMLR, 2022.
- [30] Yingfei Liu, Tiancai Wang, Xiangyu Zhang, and Jian Sun. Petr: Position embedding transformation for multi-view 3d object detection. In *European conference on computer vision*, pages 531–548. Springer, 2022.
- [31] Shihao Wang, Yingfei Liu, Tiancai Wang, Ying Li, and Xiangyu Zhang. Exploring object-centric temporal modeling for efficient multi-view 3d object detection. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 3621–3631, 2023.
- [32] Yunpeng Zhang, Zheng Zhu, and Dalong Du. Occformer: Dual-path transformer for vision-based 3d semantic occupancy prediction. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 9433–9443, 2023.
- [33] Yi Wei, Linqing Zhao, Wenzhao Zheng, Zheng Zhu, Jie Zhou, and Jiwen Lu. Surroundocc: Multi-camera 3d occupancy prediction for autonomous driving. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 21729–21740, 2023.
- [34] Xinshuo Weng, Boris Ivanovic, Yan Wang, Yue Wang, and Marco Pavone. Para-drive: Parallelized architecture for real-time autonomous driving. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15449–15458, 2024. 3, 5
- [35] Bencheng Liao, Shaoyu Chen, Haoran Yin, Bo Jiang, Cheng Wang, Sixu Yan, Xinbang Zhang, Xiangyu Li, Ying Zhang, Qian Zhang, et al. Diffusiondrive: Truncated diffusion model for end-to-end autonomous driving. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 12037–12047, 2025. 3
- [36] Zebin Xing, Xingyu Zhang, Yang Hu, Bo Jiang, Tong He, Qian Zhang, Xiaoxiao Long, and Wei Yin. Goalflow: Goal-driven flow matching for multimodal trajectories generation in end-to-end autonomous driving. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 1602–1611, 2025.
- [37] Lin Liu, Caiyan Jia, Guanyi Yu, Ziyang Song, JunQiao Li, Feiyang Jia, Peiliang Wu, Xiaoshuai Hao, and Yadan Luo. Guideflow: Constraint-guided flow matching for planning in end-to-end autonomous driving. *arXiv preprint arXiv:2511.18729*, 2025.
- [38] Zhenxin Li, Kailin Li, Shihao Wang, Shiyi Lan, Zhiding Yu, Yishen Ji, Zhiqi Li, Ziyue Zhu, Jan Kautz, Zuxuan Wu, et al. Hydra-mdp: End-to-end multimodal planning with multi-target hydra-distillation. *arXiv preprint arXiv:2406.06978*, 2024. 3
- [39] Ziyang Song, Caiyan Jia, Lin Liu, Hongyu Pan, Yongchang Zhang, Junming Wang, Xingyu Zhang, Shaoqing Xu, Lei Yang, and Yadan Luo. Don’t shake the wheel: Momentum-aware planning in end-to-end autonomous driving. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22432–22441, 2025. 3
- [40] Wenhao Yao, Zhenxin Li, Shiyi Lan, Zi Wang, Xinglong Sun, Jose M Alvarez, and Zuxuan Wu. Drivesuprim: Towards precise trajectory selection for end-to-end planning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 11910–11918, 2026.

- [41] Zhenjie Yang, Xiaosong Jia, Qifeng Li, Xue Yang, Maoqing Yao, and Junchi Yan. Raw2drive: Reinforcement learning with aligned world models for end-to-end autonomous driving (in carla v2). *arXiv preprint arXiv:2505.16394*, 2025. 3
- [42] Hao Shao, Yuxuan Hu, Letian Wang, Guanglu Song, Steven L Waslander, Yu Liu, and Hongsheng Li. Lmdrive: Closed-loop end-to-end driving with large language models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 15120–15130, 2024. 3
- [43] Chonghao Sima, Katrin Renz, Kashyap Chitta, Li Chen, Hanxue Zhang, Chengen Xie, Jens Beißwenger, Ping Luo, Andreas Geiger, and Hongyang Li. Drivelm: Driving with graph visual question answering. In *European conference on computer vision*, pages 256–274. Springer, 2024.
- [44] Yingzi Ma, Yulong Cao, Jiachen Sun, Marco Pavone, and Chaowei Xiao. Dolphins: Multimodal language model for driving. In *European Conference on Computer Vision*, pages 403–420. Springer, 2024.
- [45] Zhenhua Xu, Yujia Zhang, Enze Xie, Zhen Zhao, Yong Guo, Kwan-Yee K Wong, Zhenguo Li, and Hengshuang Zhao. Drivegpt4: Interpretable end-to-end autonomous driving via large language model. *IEEE Robotics and Automation Letters*, 9(10):8186–8193, 2024.
- [46] Licheng Wen, Daocheng Fu, Xin Li, Xinyu Cai, Tao Ma, Pinlong Cai, Min Dou, Botian Shi, Liang He, and Yu Qiao. Dilu: A knowledge-driven approach to autonomous driving with large language models. *arXiv preprint arXiv:2309.16292*, 2023.
- [47] Haoyu Fu, Diankun Zhang, Zongchuang Zhao, Jianfeng Cui, Dingkan Liang, Chong Zhang, Dingyuan Zhang, Hongwei Xie, Bing Wang, and Xiang Bai. Orion: A holistic end-to-end autonomous driving framework by vision-language instructed action generation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 24823–24834, 2025.
- [48] Xingcheng Zhou, Xuyuan Han, Feng Yang, Yunpu Ma, Volker Tresp, and Alois Knoll. Open-drivevla: Towards end-to-end autonomous driving with large vision language action model. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 13782–13790, 2026.
- [49] Zewei Zhou, Tianhui Cai, Yun Zhao, Seth Z. and Zhang, Zhiyu Huang, Bolei Zhou, and Jiaqi Ma. Autovla: A vision-language-action model for end-to-end autonomous driving with adaptive reasoning and reinforcement fine-tuning. *Advances in Neural Information Processing Systems*, 2025.
- [50] Zhenjie Yang, Yilin Chai, Xiaosong Jia, Qifeng Li, Yuqian Shao, Xuekai Zhu, Haisheng Su, and Junchi Yan. Drivemoe: Mixture-of-experts for vision-language-action model in end-to-end autonomous driving. *arXiv preprint arXiv:2505.16278*, 2025.
- [51] Sicong Jiang, Zilin Huang, Kangan Qian, Ziang Luo, Tianze Zhu, Yang Zhong, Yihong Tang, Menglin Kong, Yunlong Wang, Siwen Jiao, et al. A survey on vision-language-action models for autonomous driving. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4524–4536, 2025.
- [52] Yupeng Zheng, Pengxuan Yang, Zebin Xing, Qichao Zhang, Yuhang Zheng, Yinfeng Gao, Pengfei Li, Teng Zhang, Zhongpu Xia, Peng Jia, et al. World4drive: End-to-end autonomous driving via intention-aware physical latent world model. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 28632–28642, 2025.
- [53] Yuhang Lu, Jiadong Tu, Yuexin Ma, and Xinge Zhu. Real-ad: Towards human-like reasoning in end-to-end autonomous driving. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 27783–27793, 2025. 3
- [54] Lingdong Kong, Shaoyuan Xie, Hanjiang Hu, Yaru Niu, Wei Tsang Ooi, Benoit R Cottureau, Lai Xing Ng, Yuexin Ma, Wenwei Zhang, Liang Pan, et al. The robodrive challenge: Drive anytime anywhere in any condition. *arXiv preprint arXiv:2405.08816*, 2024. 3, 6

- [55] Simon Gerstenecker, Andreas Geiger, and Katrin Renz. Fail2drive: Benchmarking closed-loop driving generalization. *arXiv preprint arXiv:2604.08535*, 2026. 3
- [56] Andreas Geiger, Philip Lenz, and Raquel Urtasun. Are we ready for autonomous driving? the kitti vision benchmark suite. In *2012 IEEE conference on computer vision and pattern recognition*, pages 3354–3361. IEEE, 2012. 3
- [57] Marius Cordts, Mohamed Omran, Sebastian Ramos, Timo Rehfeld, Markus Enzweiler, Rodrigo Benenson, Uwe Franke, Stefan Roth, and Bernt Schiele. The cityscapes dataset for semantic urban scene understanding. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 3213–3223, 2016.
- [58] Xinyu Huang, Xinjing Cheng, Qichuan Geng, Binbin Cao, Dingfu Zhou, Peng Wang, Yuanqing Lin, and Ruigang Yang. The apolloscape dataset for autonomous driving. In *Proceedings of the IEEE conference on computer vision and pattern recognition workshops*, pages 954–960, 2018.
- [59] Ming-Fang Chang, John Lambert, Patsorn Sangkloy, Jagjeet Singh, Slawomir Bak, Andrew Hartnett, De Wang, Peter Carr, Simon Lucey, Deva Ramanan, et al. Argoverse: 3d tracking and forecasting with rich maps. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 8748–8757, 2019.
- [60] Holger Caesar, Varun Bankiti, Alex H Lang, Sourabh Vora, Venice Erin Liong, Qiang Xu, Anush Krishnan, Yu Pan, Giancarlo Baldan, and Oscar Beijbom. nuscenes: A multimodal dataset for autonomous driving. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 11621–11631, 2020.
- [61] Pei Sun, Henrik Kretzschmar, Xerxes Dotiwalla, Aurelien Chouard, Vijaysai Patnaik, Paul Tsui, James Guo, Yin Zhou, Yuning Chai, Benjamin Caine, et al. Scalability in perception for autonomous driving: Waymo open dataset. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 2446–2454, 2020.
- [62] Fisher Yu, Haofeng Chen, Xin Wang, Wenqi Xian, Yingying Chen, Fangchen Liu, Vashisht Madhavan, and Trevor Darrell. Bdd100k: A diverse driving dataset for heterogeneous multitask learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 2636–2645, 2020.
- [63] Jiageng Mao, Minzhe Niu, Chenhan Jiang, Hanxue Liang, Jingheng Chen, Xiaodan Liang, Yamin Li, Chaoqiang Ye, Wei Zhang, Zhenguo Li, et al. One million scenes for autonomous driving: Once dataset. *arXiv preprint arXiv:2106.11037*, 2021.
- [64] Pengchuan Xiao, Zhenlei Shao, Steven Hao, Zishuo Zhang, Xiaolin Chai, Judy Jiao, Zesong Li, Jian Wu, Kai Sun, Kun Jiang, et al. Pandaset: Advanced sensor suite dataset for autonomous driving. In *2021 IEEE international intelligent transportation systems conference (ITSC)*, pages 3095–3101. IEEE, 2021. 3
- [65] Daniel Dauner, Marcel Hallgarten, Andreas Geiger, and Kashyap Chitta. Parting with misconceptions about learning-based vehicle motion planning. In *Conference on Robot Learning*, pages 1268–1281. PMLR, 2023. 3
- [66] Alexey Dosovitskiy, German Ros, Felipe Codevilla, Antonio Lopez, and Vladlen Koltun. Carla: An open urban driving simulator. In *Conference on robot learning*, pages 1–16. PMLR, 2017. 3
- [67] Holger Caesar, Juraj Kabzan, Kok Seang Tan, Whye Kit Fong, Eric Wolff, Alex Lang, Luke Fletcher, Oscar Beijbom, and Sammy Omari. nuplan: A closed-loop ml-based planning benchmark for autonomous vehicles. *arXiv preprint arXiv:2106.11810*, 2021.
- [68] Daniel Dauner, Marcel Hallgarten, Tianyu Li, Xinshuo Weng, Zhiyu Huang, Zetong Yang, Hongyang Li, Igor Gilitschenski, Boris Ivanovic, Marco Pavone, et al. Navsim: Data-driven non-reactive autonomous vehicle simulation and benchmarking. *Advances in Neural Information Processing Systems*, 37:28706–28719, 2024.

- [69] Xuemeng Yang, Licheng Wen, Tiantian Wei, Yukai Ma, Jianbiao Mei, Xin Li, Wenjie Lei, Daocheng Fu, Pinlong Cai, Min Dou, et al. Drivearena: A closed-loop generative simulation platform for autonomous driving. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 26933–26943, 2025. 3
- [70] Zhiyu Huang, Haochen Liu, and Chen Lv. Gameformer: Game-theoretic modeling and learning of transformer-based interactive prediction and planning for autonomous driving. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3903–3913, 2023. 3
- [71] Yuqian Shao, Xiaosong Jia, Langechuan Liu, and Junchi Yan. Can users specify driving speed? bench2drive-speed: Benchmark and baselines for desired-speed conditioned autonomous driving. *arXiv preprint arXiv:2603.25672*, 2026.
- [72] Zhenxin Li, Shihao Wang, Shiyi Lan, Zhiding Yu, Zuxuan Wu, and Jose M Alvarez. Hydra-next: Robust closed-loop driving with open-loop training. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 27305–27314, 2025. 3
- [73] Dan Hendrycks and Thomas Dietterich. Benchmarking neural network robustness to common corruptions and perturbations. In *International Conference on Learning Representations*, 2019. URL <https://openreview.net/forum?id=HJz6tiCqYm>. 3, 6
- [74] Claudio Michaelis, Benjamin Mitzkus, Robert Geirhos, Evgenia Rusak, Oliver Bringmann, Alexander S Ecker, Matthias Bethge, and Wieland Brendel. Benchmarking robustness in object detection: Autonomous driving when winter is coming. *arXiv preprint arXiv:1907.07484*, 2019. 3
- [75] Edward Fang. Dynamic deadlines in motion planning for autonomous driving systems. *UC Berkeley*, 2020. 5
- [76] Yuhang Zhang, Jiaqi Liu, Chengkai Xu, Peng Hang, and Jian Sun. Lead: The llm enhanced planning system converged with end-to-end autonomous driving. *arXiv preprint arXiv:2507.05754*, 2025. 5
- [77] Youjing Cui and Shuzhi Sam Ge. Autonomous vehicle positioning with gps in urban canyon environments. *IEEE transactions on robotics and automation*, 19(1):15–25, 2003. 5
- [78] Eli Brosh, Matan Friedmann, Ilan Kadar, Lev Yitzhak Lavy, Elad Levi, Shmuel Rippa, Yair Lempert, Bruno Fernandez-Ruiz, Roei Herzig, and Trevor Darrell. Accurate visual localization for automotive applications. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops*, pages 0–0, 2019.
- [79] Karl Rehrl, Stefan Göttlich, Klaus Krainz, and Andreas Graser. Evaluating localization accuracy of automated driving systems. *Sensors*, 21(17):5855, 2021. doi: 10.3390/s21175855.
- [80] Shubh Gupta and Grace Gao. Reliable urban vehicle localization under faulty satellite navigation signals. *EURASIP Journal on Advances in Signal Processing*, 2024(1):32, 2024. doi: 10.1186/s13634-024-01150-2. 5
- [81] Francisco Matos, Jorge Bernardino, João Durães, and João Cunha. A survey on sensor failures in autonomous vehicles: Challenges and solutions. *Sensors*, 24(16):5108, 2024. 6

A Limitations

Bench2Drive-Robust is built on CARLA-based closed-loop simulation, which enables reactive and repeatable evaluation under structured perturbations. However, simulation rendering and traffic behavior may differ from real-world driving distributions. Real-world dataset-based benchmarks provide complementary visual realism, but are typically non-reactive and therefore cannot fully capture closed-loop feedback. Future work may combine reactive simulation with real-world-calibrated perturbation statistics or generative simulation to improve both realism and interactivity.

B Implementation Details

B.1 Perturbation Injection Architecture

Figure 8 shows the two non-invasive injection points used by Bench2Drive-Robust. The first injection point lies on the observation path. CARLA sensor packets are received by `SensorInterface.update_sensor()` through sensor callbacks and stored in a delay buffer. When the model requests observations through `SensorInterface.get_data(frame)`, the interface retrieves buffered measurements, applies the original frame-sampling logic, and then passes the result to the robustness processor. This processor applies camera-stream perturbations, including cached burst frame drop, partial occlusion, as well as ego-state perturbations such as GPS noise and multiplicative speed noise. Since these transformations are applied before policy inference but after sensor retrieval, the original model input interface is preserved.

The second injection point lies on the action path. Each evaluation step invokes `AgentWrapper.__call__()`, where the wrapper either calls the underlying policy normally or returns a delayed/cached control command. For fixed latency, the target delay is converted into simulation ticks as

$$\Delta = \lfloor \tau_{\text{ms}} \cdot \text{SIM_RATE}/1000 \rfloor. \quad (8)$$

For real-time delay, the wrapper uses measured inference time and reuses the last cached command when the policy misses the control cycle. Both modes emulate delayed action execution without changing the policy architecture, checkpoint, or inference code.

This implementation has three practical advantages. First, it is model-agnostic: the same perturbation interface can be applied to TCP-traj, UniAD, VAD, SimLingo, or other Bench2Drive-compatible agents. Second, it is modular and reproducible: each perturbation is implemented as an independent processor and stochastic operations are controlled by seeded random number generators. Third, it separates observation corruption from action delay, enabling camera-stream failures, ego-state errors, and compute-control latency to be evaluated independently or in combination under the same closed-loop protocol.

B.2 Reproducibility and Configuration

Table 4 summarizes the main configuration variables used to control Bench2Drive-Robust. We group the variables by perturbation type to make the implementation protocol explicit: global variables enable robustness evaluation and fix random seeds; camera-stream variables control cached burst frame drop and partial observation; ego-state variables control GPS and speed perturbations; and compute-control variables specify inference-latency injection. All perturbations are configured externally through environment variables rather than by modifying the evaluated model, which keeps the benchmark model-agnostic and makes repeated evaluations reproducible under the same route, seed, and severity setting.

B.3 Model Configuration

All methods are evaluated using their released or Bench2Drive-compatible closed-loop configurations without robustness finetuning. We keep each agent’s architecture, checkpoint, planner logic, and controller unchanged, and apply perturbations only at the simulator–policy interface. Because models differ in camera setup, navigation interface, and ego-state usage, the same perturbation may affect different methods through different input channels. Thus, weak sensitivity to GPS or speed perturbations does not necessarily indicate intrinsic robustness; it may reflect whether the released closed-loop wrapper directly consumes that signal. We therefore interpret the results as deployed-model robustness profiles rather than architecture-normalized comparisons.

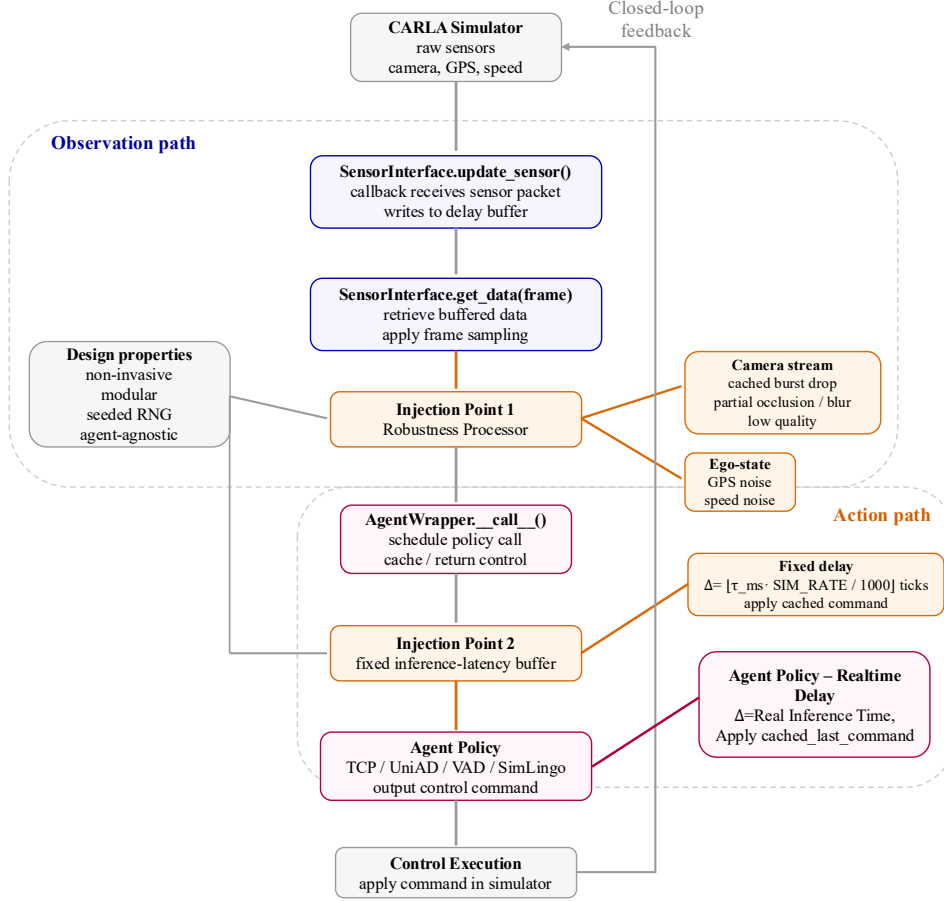


Figure 8: **Perturbation injection architecture.** Bench2Drive-Robust injects observation-side perturbations before policy inference and action-side latency before command execution, while keeping the evaluated model unchanged.


C Further Analysis

Figure 9 provides an overall robustness overview across perturbation types and models. The heatmap in Fig. 9a summarizes relative Driving Score degradation for each method–perturbation pair, while the radar plots in Fig. 9b show the corresponding per-model retention profiles. Together, these visualizations reveal heterogeneous robustness patterns across models and perturbation families. TCP-traj maintains relatively high retention under mild camera-side perturbations and speed noise, but its performance drops substantially under severe GPS localization noise and larger inference latency, indicating sensitivity to localization and delayed control feedback. UniAD and VAD exhibit smoother degradation across most perturbations, but both still suffer clear retention loss under severe GPS localization noise and high-latency settings. SimLingo achieves the strongest clean baseline performance, yet its robustness profile is highly uneven: the heatmap shows sharp degradation under severe occlusion and inference latency, while the radar profile shows that it retains performance under some available ego-state perturbation settings. These patterns suggest that clean closed-loop performance alone is insufficient to characterize deployment robustness, since different models fail under different system components and severity regimes.


Figure 10 provides a detailed view of inference latency robustness. The absolute Driving Score curve shows how each model’s closed-loop performance changes as delay increases, while the relative degradation curve normalizes this effect by each model’s clean baseline. The average latency summary further compares nominal performance against average delayed-control performance. These views show that latency sensitivity differs substantially across models and that strong clean-driving performance does not necessarily imply robustness to delayed control.

Table 4: Main configuration variables used by Bench2Drive-Robust.

Perturbation Type	Variable	Description
Global	ROBUSTNESS_ENABLE	Enable observation-side perturbations
	ROBUSTNESS_SEED	Seed for stochastic perturbations
Camera stream	BURST_MAX_TICKS	Maximum cached burst duration
	BURST_PROBABILITY	Probability of triggering a burst event
	PARTIAL_OBS_RATIO	Occlusion mask ratio for partial observation
Ego-state	GPS_NOISE_STD	Standard deviation of GPS localization noise
	SPEED_BIAS_MEAN	Mean of the Gaussian speed multiplier
	SPEED_BIAS_STD	Standard deviation of the Gaussian speed multiplier
Compute-control	INFERENCE_LATENCY_ENABLE	Enable action-side latency injection
	INFERENCE_LATENCY_MS	Fixed inference latency in milliseconds
	SIM_RATE	Simulation/control rate used to convert milliseconds to ticks

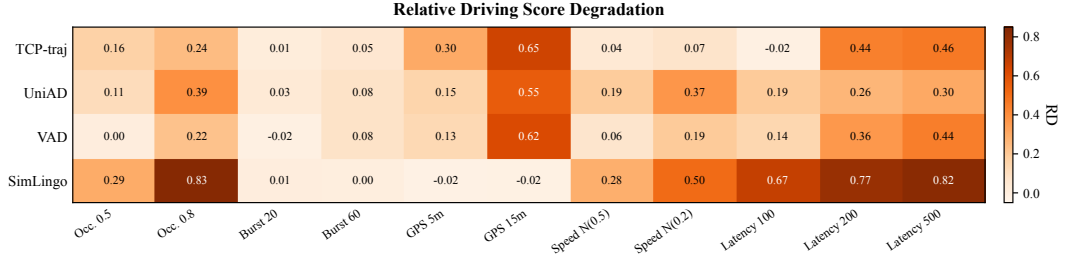


(a) Relative Driving Score degradation across perturbations and models.

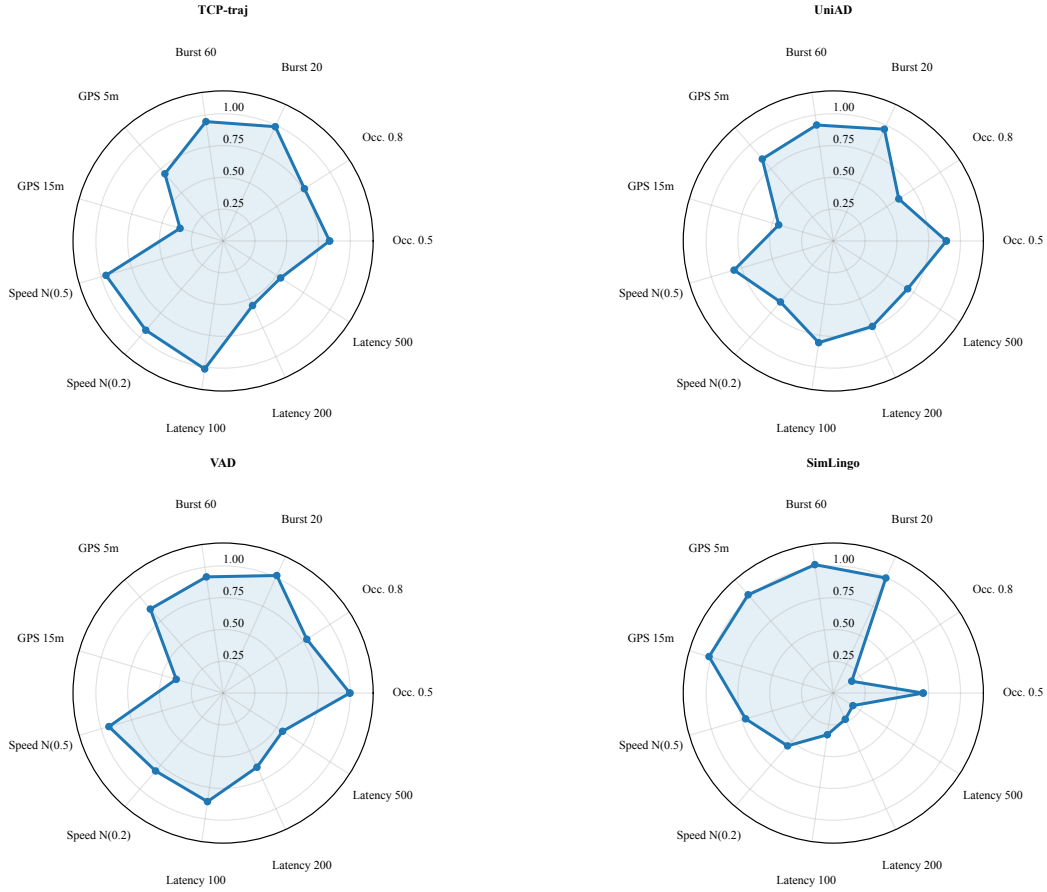


(b) Per-model Driving Score retention profiles across perturbations.


Figure 9: Overall robustness overview across perturbation types and models. The heatmap reports relative Driving Score degradation with respect to each model’s clean baseline, where larger values indicate stronger degradation. The radar plots provide a complementary per-model view by showing Driving Score retention, defined as the ratio between perturbed Driving Score and clean baseline Driving Score. Together, these visualizations show that robustness behavior is highly heterogeneous across models and perturbation families: methods with strong clean-driving performance can still suffer substantial degradation under specific system-level perturbations such as severe occlusion, GPS localization noise, or inference latency. Missing entries are marked as unavailable.

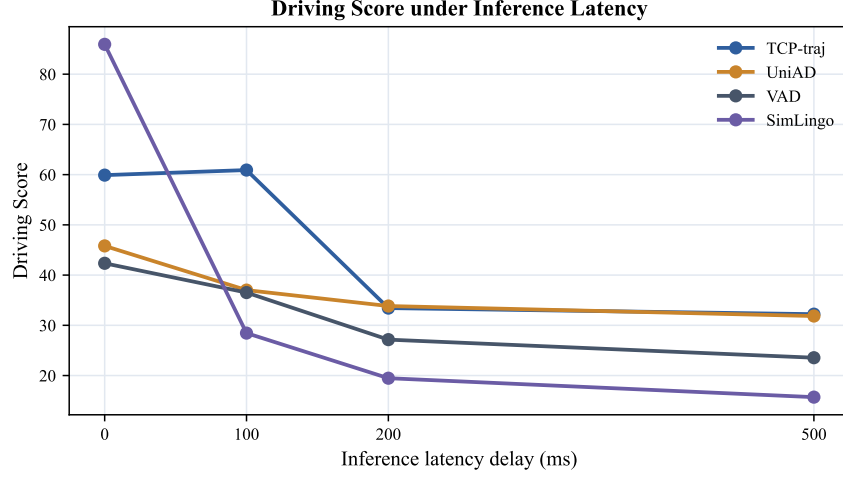

(a) Driving Score under increasing inference latency.

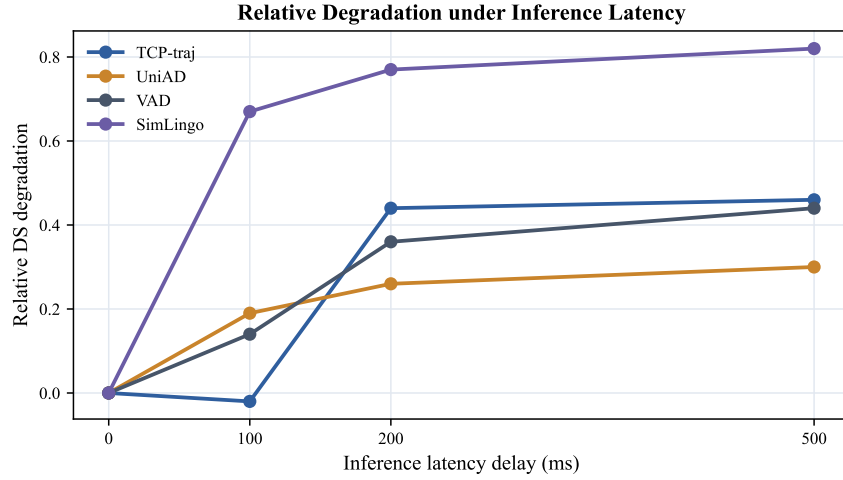

(b) Relative Driving Score degradation under increasing inference latency.

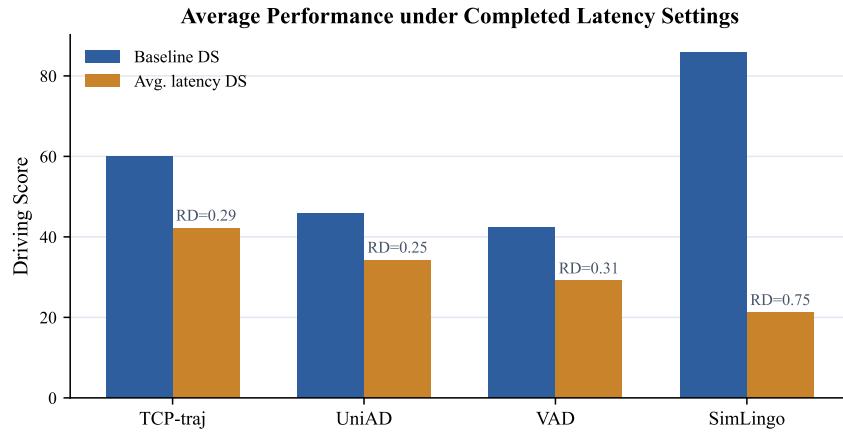

(c) Clean baseline performance versus average performance across latency settings.

Figure 10: Detailed analysis of inference latency robustness under delayed control execution. The first two plots show absolute Driving Score and relative degradation across latency settings of 0ms, 100ms, 200ms, and 500ms. The third plot compares each model’s clean baseline Driving Score with its average Driving Score under completed latency settings, with annotations showing the average relative degradation. Together, these results highlight that latency sensitivity differs substantially across models and that strong clean-driving performance does not necessarily imply robustness to delayed control.

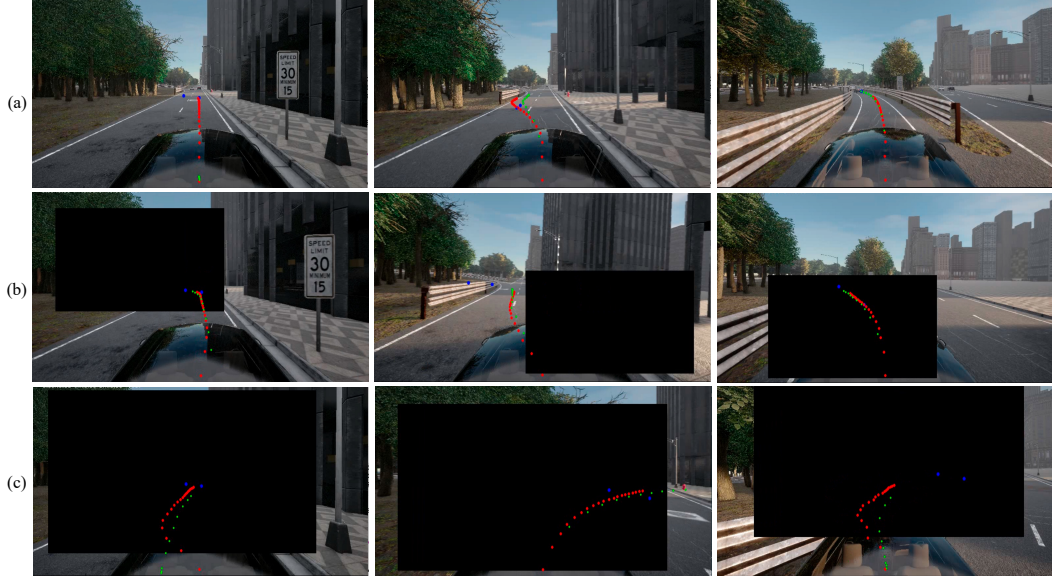


Figure 11: **Qualitative occlusion case study on SimLingo.** We compare the same route under three settings: (a) clean baseline, (b) partial observation with occlusion ratio $r = 0.5$, and (c) severe partial observation with occlusion ratio $r = 0.8$. The overlaid colored points follow the SimLingo visualization convention: **blue points** denote navigation target points, **red points** denote predicted path waypoints, and **green points** denote predicted speed waypoints. The comparison illustrates how progressively stronger visual occlusion removes task-relevant scene evidence and leads to degraded closed-loop behavior.

D Case Study

D.1 Occlusion

Figure 11 shows an occlusion case study for SimLingo on RouteScenario_23910_rep0, which belongs to the InterurbanActorFlow scenario in Bench2Drive. In this scenario, the ego vehicle leaves an interurban road by making a left turn while crossing a fast traffic flow [15]. This route requires several coupled driving abilities: recognizing the road geometry and intended left-turn path, perceiving fast-moving surrounding vehicles, estimating safe temporal gaps, and maintaining controlled progress while crossing the traffic stream. Because the maneuver depends on both global route context and local actor-level evidence, it is particularly sensitive to partial observation.

Under the clean baseline in Fig. 11(a), SimLingo receives complete camera observations and can infer the road layout, nearby vehicles, and available driving corridor. With moderate occlusion in Fig. 11(b), the mask removes part of the visible scene, making local interaction cues less reliable even though some route context remains visible. Under severe occlusion in Fig. 11(c), the visible region is substantially reduced, making it harder to infer nearby actors, free space, and the timing of the crossing maneuver. This example complements the aggregate results in Table 3: although SimLingo achieves strong clean performance, its closed-loop behavior can degrade sharply when task-relevant visual evidence is removed.



Figure 12: **Qualitative inference-latency case study on SimLingo.** We compare the same ParkingExit route under: (a) clean execution, (b) 100ms inference latency, and (c) 500ms inference latency. The route requires the ego vehicle to exit a parallel parking bay and merge into traffic with timely steering and acceleration. **Blue points** denote navigation target points, **red points** denote predicted path waypoints, and **green points** denote predicted speed waypoints. Although the predicted waypoints remain plausible, delayed action execution causes temporally misaligned control and degraded closed-loop behavior.

D.2 Inference Latency

Figure 12 shows a qualitative inference-latency case study for SimLingo on a ParkingExit route. In this scenario, the ego vehicle must exit a parallel parking bay into an active traffic flow, which requires understanding the local road geometry, selecting a feasible exit path, estimating nearby vehicle motion, and executing steering and acceleration *at the correct time*. This makes the route sensitive to action delay: even if the predicted trajectory is reasonable for the observation time, the command may become outdated by the time it is executed. The ParkingExit scenario is designed to test this type of interactive maneuver, where the ego vehicle must leave a parallel parking bay and enter a traffic flow [15].

Figure 12(a) shows that under clean baseline execution, SimLingo predicts a reasonable waypoint sequence and executes the left-then-right parking-exit maneuver at the correct timing. In Figure 12(b), with 100ms latency, the predicted waypoints remain visually plausible, but the delayed execution causes the vehicle to continue along an unstable S-shaped motion and collide with the vehicle from the opposite lane. In Figure 12(c), the 500ms delay further amplifies this temporal mismatch: the S-shaped trajectory becomes more pronounced and the ego vehicle collides with the vehicle on the right. This case highlights that inference latency does not necessarily make the model predict obviously invalid waypoints; instead, it can make otherwise plausible actions arrive too late for the current scene state. It complements the quantitative results in Table 3, where SimLingo shows strong clean performance but suffers severe degradation under delayed control execution.

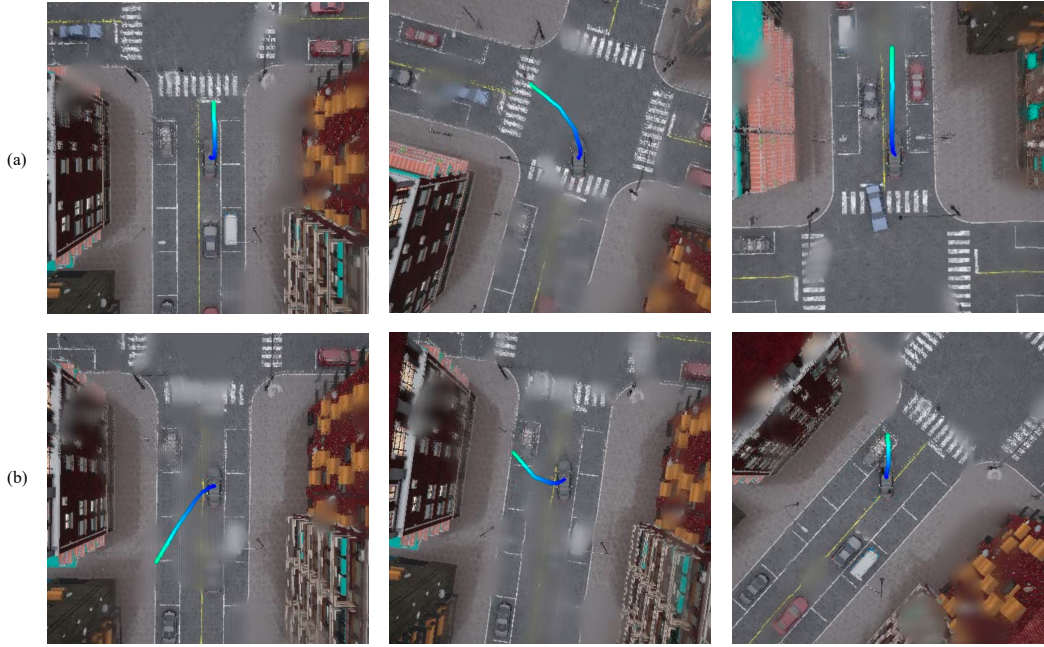


Figure 13: **Qualitative GPS localization-noise case study on TCP-traj.** We compare the same RouteScenario_3869_rep0 VanillaSignalizedTurnEncounterRedLight route under two settings: (a) clean baseline and (b) severe GPS localization noise with $\sigma_{\text{GPS}} = 15\text{m}$. The route requires the ego vehicle to approach a signalized intersection, respect the red-light constraint, and execute the intended turn with accurate route alignment. The overlaid BEV trajectory indicates the TCP-predicted waypoint trajectory used by the controller. Under severe GPS noise, the inferred ego-state and navigation target become less consistent with the true vehicle state, leading to degraded closed-loop behavior.

D.3 GPS Noise

Figure 13 shows a qualitative GPS localization-noise case study for TCP-traj on RouteScenario_3869_rep0, which belongs to the VanillaSignalizedTurnEncounterRedLight scenario in Bench2Drive. In this route, the ego vehicle approaches a signalized intersection and must maintain route alignment while executing the intended turn under the traffic-light constraint. Although the scenario is less visually complex than dense actor-flow cases, it requires accurate ego localization because the route planner and local target point are computed from the GPS-derived ego position. Therefore, perturbing GPS can shift the inferred navigation target and cause the trajectory-following controller to execute a maneuver that is misaligned with the actual vehicle state.

Under the clean setting, TCP-traj receives a consistent ego-state/navigation signal and follows the intended turn. With GPS localization noise, the predicted waypoint trajectory becomes misaligned with the true road geometry and route progress, causing the vehicle to deviate from the intended path and become blocked before completing the intersection maneuver. This case complements Table 3, where severe GPS localization noise causes a large Driving Score and Success Rate drop for TCP-traj, illustrating that ego-state perturbations can induce concrete closed-loop failures even when camera observations remain available.

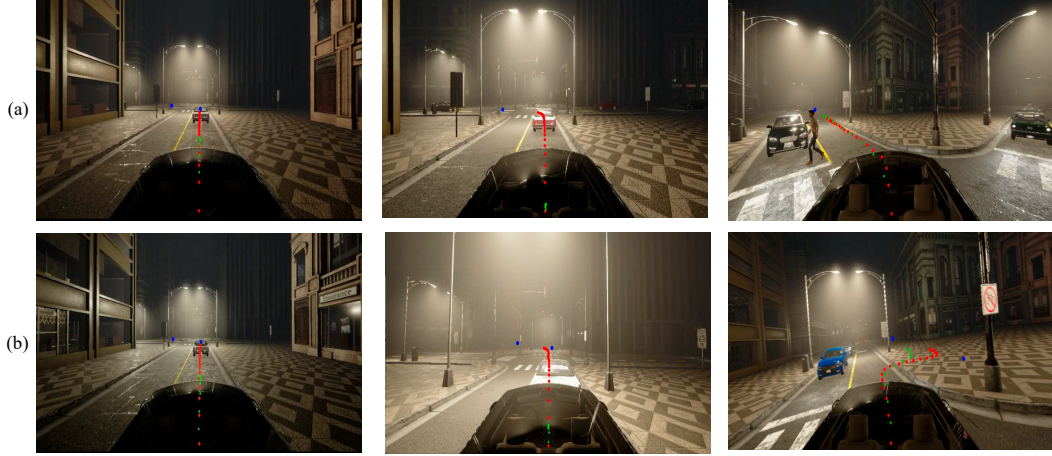


Figure 14: **Qualitative speed-noise case study on SimLingo.** We compare SimLingo on RouteScenario_11381_rep0, a VehicleTurningRoutePedestrian route, under: (a) clean baseline and (b) multiplicative speed noise with $\eta \sim \mathcal{N}(0.2, 0.2^2)$. In the clean setting, the ego vehicle stops behind the leading vehicle at the red light, proceeds after the light turns green, and completes the left turn while yielding to the pedestrian. Under severe speed underestimation, the agent fails to brake sufficiently while waiting at the red light and later shows unstable waypoint predictions and aggressive vehicle body motion during the turning maneuver. **Blue points** denote navigation target points, **red points** denote predicted path waypoints, and **green points** denote predicted speed waypoints.

D.4 Speed Noise

Figure 14 shows a qualitative speed-noise case study for SimLingo on RouteScenario_11381_rep0, which belongs to the VehicleTurningRoutePedestrian scenario. This route requires the ego vehicle to approach a signalized intersection, stop behind the leading vehicle during the red phase, restart when the light turns green, complete a left-turn maneuver, and yield to the pedestrian. It therefore depends on both semantic scene understanding and accurate longitudinal state estimation: the agent must decide not only where to go, but also how strongly to brake or accelerate at each stage.

In the clean baseline shown in Figure 14(a), SimLingo handles the full interaction sequence correctly. The ego vehicle stops behind the front vehicle at the red light, resumes motion after the light changes, and completes the left turn while yielding to the pedestrian. In Figure 14(b), severe multiplicative speed noise with $\eta \sim \mathcal{N}(0.2, 0.2^2)$ causes the speed input to substantially underestimate the true vehicle speed. As a result, the agent fails to judge the required braking strength while waiting at the red light and does not stop reliably behind the leading vehicle. After the turn begins, the predicted waypoints also become less stable, and the rollout exhibits strong body motion during the turning phase. This example complements Table 3 by showing that speed noise can induce concrete longitudinal-control failures even when the visual scene remains available.