

# Telemetry Report Format Specification

**Version 2.0**

The P4.org Applications Working Group

Contributions from *CableLabs, Cisco Systems, Intel, VMware, Xilinx*

**2018-05-18**

## Contents

<b>1. Introduction</b>	2
1.1. Scope . . . . .	3
<b>2. Key Concepts</b>	3
2.1. Telemetry Report Definition . . . . .	3
2.2. Telemetry Report Associations . . . . .	4
2.3. Telemetry Report Events . . . . .	5
2.4. Telemetry Reporting Modes . . . . .	5
2.4.1. Per Hop Reports in INT-XD/MX modes . . . . .	5
2.4.2. Stacked Reports in INT-MD mode . . . . .	6
2.4.3. Using Different Telemetry Modes for Different Telemetry Categories . . . . .	8
2.5. Correlation of Telemetry Reports . . . . .	8
2.6. Flow Identification . . . . .	8
2.7. Coalescing A Group of Telemetry Reports In A Single Packet . . . . .	8
<b>3. Telemetry Report Format</b>	9
3.1. Outer Encapsulation . . . . .	9
3.1.1. UDP header (8 octets) . . . . .	9
3.2. Telemetry Report Group Header (Ver 2.0) (8 octets) . . . . .	9
3.3. Individual Report Header (Ver 2.0) (4+ octets) . . . . .	10
3.3.1. Individual Report Main Contents for <i>RepType</i> 1 ( <i>INT</i> ) (8+ octets) . . . . .	12
3.3.2. Individual Report Inner Contents for <i>InType</i> 1 ( <i>TLV</i> ) (4+ octets) . . . . .	14
3.4. Embedded Telemetry Metadata In Stacked Reports . . . . .	14
<b>4. Examples of Telemetry Reports</b>	15
4.1. Example with Baseline Metadata and Truncated IPv4 . . . . .	15
4.2. Example with Baseline Metadata, Domain Specific Metadata, DS Extension Data and Truncated IPv4 . . . . .	16
4.3. Example with Embedded INT-MD in a TCP Packet . . . . .	16
4.4. Example with Embedded INT-MD over UDP in a VXLAN Packet . . . . .	16
<b>A. Acknowledgements</b>	16
<b>B. Change log</b>	17

## 1. Introduction

Traditional network monitoring has relied on statistics and probe packets such as ICMP echo requests/replies. Recent innovations provide greater insight into network behavior by generating detailed reports of telemetry metadata such as paths, queue occupancy, latency experienced by data packets, and timestamps that can be used to determine hop-by-hop and end-to-end delay. Generation of telemetry reports can be triggered by various events in categories such as flow monitoring, queue congestion, and packet drops. Further information regarding the motivation and usage of detailed telemetry information can be found in the IETF draft for In-situ OAM <sup>1</sup>.

Specifications are being defined for embedding telemetry metadata within data packets, such as INT <sup>2</sup> and IOAM <sup>3</sup>. This allows for telemetry metadata to be collected as packets traverse a

<sup>1</sup>Requirements for In-situ OAM, [draft-brockners-inband-oam-requirements-03](#), March 2017.

<sup>2</sup>[In-band Network Telemetry \(INT\) Dataplane Specification Version 2.1](#), May 2020.

<sup>3</sup>Data Fields for In-situ OAM, [draft-ietf-ippm-ioam-data-05](#), March 2020.

network. When the packets reach the edge of the network, the telemetry metadata is removed and telemetry reports are generated.

This specification defines packet formats for telemetry reports from data plane network devices (e.g. switches, routers, NICs) to a distributed telemetry monitoring system. The packet formats use headers that describe the contents of telemetry reports, along with existing (non-telemetry specific) packet headers that can be used to categorize flows.

## 1.1. Scope

The scope of this specification is interoperability between network devices that generate telemetry reports based on what they see in the data plane, and the initial preprocessors within distributed telemetry monitoring systems that receive the telemetry reports. This specification is applicable when telemetry reports are generated by network devices at the edges of a network, with source and transit network devices embedding telemetry metadata in data packets according to specifications such as IOAM <sup>3</sup> and INT <sup>2</sup>, when using INT-MD mode. This specification is also applicable when each network device directly generates telemetry reports, including transit network devices in the middle of the network, such as in INT-XD (where data packet formats between successive network devices are not affected) and in INT-MX (where only INT instructions are embedded in data packets).

Telemetry report encapsulation formats are defined that allow for the inclusion of additional telemetry metadata, beyond the (optional) telemetry metadata embedded between other packet headers as defined in INT-MD and IOAM. The embedded telemetry metadata is included as is in telemetry reports, so the packet formats defined in INT-MD and IOAM also define some aspects of the telemetry report format. See Section 3.4 for further discussion.

This specification does not address any of the following, which are considered out of scope:

- Configuration of network devices so that they can determine when to generate telemetry reports, and what information to include in those reports, such as SAI DTel <sup>4</sup> and SAI TAM 2.0 <sup>5</sup>.
- Events that trigger generation of telemetry reports.
- Selection of particular destinations within distributed telemetry monitoring systems, to which telemetry reports will be sent.
- Export format for flow statistics or summarized flow records such as IPFIX <sup>6</sup>.

## 2. Key Concepts

### 2.1. Telemetry Report Definition

We define a *telemetry report* as a message that a network device sends to the monitoring system. A *telemetry report* typically carries a snapshot of the original data packet (mostly the inner + outer headers), which triggered the reporting, together with additional telemetry metadata collected from the reporting network device, and possibly from its upstream network devices (in case of an in-band

<sup>3</sup>Data Fields for In-situ OAM, [draft-ietf-ippm-ioam-data-05](#), March 2020.

<sup>2</sup>In-band Network Telemetry (INT) Dataplane Specification Version 2.1, May 2020.

<sup>4</sup>SAI Data Plane Telemetry API Proposal, December 2017.

<sup>5</sup>SAI Telemetry and Monitoring (TAM) 2.0, July 2019.

<sup>6</sup>Specification of the IP Flow Information Export (IPFIX) Protocol for the Exchange of Flow Information, [RFC 7011](#), September 2013.

mechanism like INT-MD or IOAM). The report message is encapsulated by IP+UDP, hence it can be forwarded from the reporting network device through the data network, and to the destination monitoring system.

The network devices that generate telemetry reports are referred to as *nodes* in the rest of this specification. Depending on deployment scenarios, examples of such *nodes* may include network devices such as switches, routers, and NICs.

The following sections will cover the details of report generation, report format and encapsulation.

## 2.2. Telemetry Report Associations

There are many reasons why users may want telemetry reports to be generated. This specification currently considers three categories for telemetry report generation:

### Tracked Flows

Telemetry reports are generated matching certain flow definitions. A telemetry specific access control list (called a *watchlist* in this specification) determines which data packets to monitor by matching packet header fields and optionally identification of the ingress interface. The action in the matched entry in the *watchlist* may specify monitoring of this flow, triggering generation of telemetry reports based on these packets. (Note that the telemetry specific watchlist is not performing any access control. It only makes decisions related to monitoring actions.) The telemetry reports include information about the path that packets traverse as well as other telemetry metadata such as hop latency and queue occupancy.

### Dropped Packets

Telemetry reports are generated for dropped packets matching a telemetry specific access control list (called a *watchlist* in this specification), when the action in the matched entry specifies monitoring of dropped packets. This provides visibility into the impact of packet drops on user traffic.

### Congested Queues

Telemetry reports are generated for traffic entering a specific queue during a period of queue congestion. This provides visibility into the traffic causing and prolonging queue congestion, for example a few large elephant flows that overwhelm a queue, as well as the victim traffic (mice flows) getting hurt by the congestion. This also enables the detection and “re-play” of a short microburst, caused by a large number of mice flows arriving at the queue at the same time.

Each telemetry report may be associated with one or more of these categories. This is indicated in the telemetry report by defining association bits, one for each category, as will be shown in Section 3.3. New categories (and corresponding association bits) may be added to future versions of this specification.

Nodes will need to be configured so that they can determine when to generate telemetry reports, and what information to include in those reports. Such configuration is considered to be beyond the scope of this specification. See SAI DTEl<sup>4</sup> for one API proposal to enable data plane telemetry capabilities in nodes across all three categories.

---

<sup>4</sup>[SAI Data Plane Telemetry API Proposal](#), December 2017.

## 2.3. Telemetry Report Events


Telemetry reports are typically triggered by packet processing at a node. However, even when processed packets match a watchlist for a telemetry report category, it is not necessary for each inspected packet to trigger generation of a telemetry report. Nodes may apply filters to determine when significant events occur that should be reported. This is called event detection in this specification. For example, a node may trigger telemetry report generation whenever a packet matching a tracked application flow is received or transmitted on a different path than previous packets, or if a significant change in latency is experienced at one particular hop.

Determination of which packets trigger reports, in other words the specific conditions and logic to determine the events of interest, is left open for implementations to differentiate themselves, and is considered to be beyond the scope of this specification.

## 2.4. Telemetry Reporting Modes

There are different modes which differ with regard to the locations from which telemetry reports are generated.


### 2.4.1. Per Hop Reports in INT-XD/MX modes

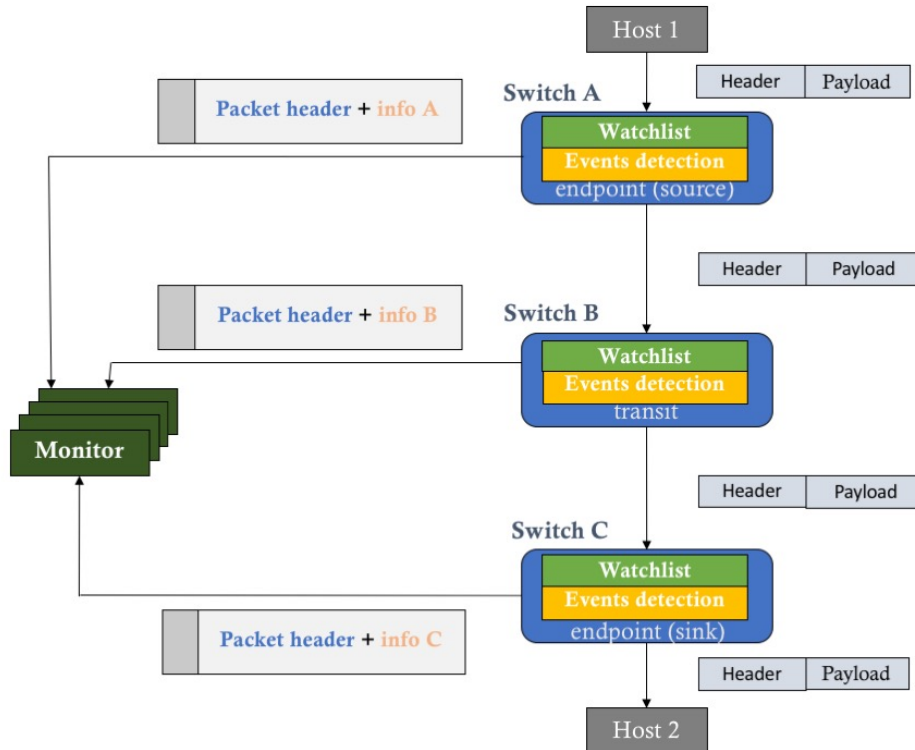

**Figure 1.** INT-XD mode - Telemetry Architecture with per hop reports generated by each node

In the *INT-XD (eXport Data)* mode, as defined in the INT specification <sup>2</sup>, each node generates

<sup>2</sup>In-band Network Telemetry (INT) Dataplane Specification Version 2.1, May 2020.

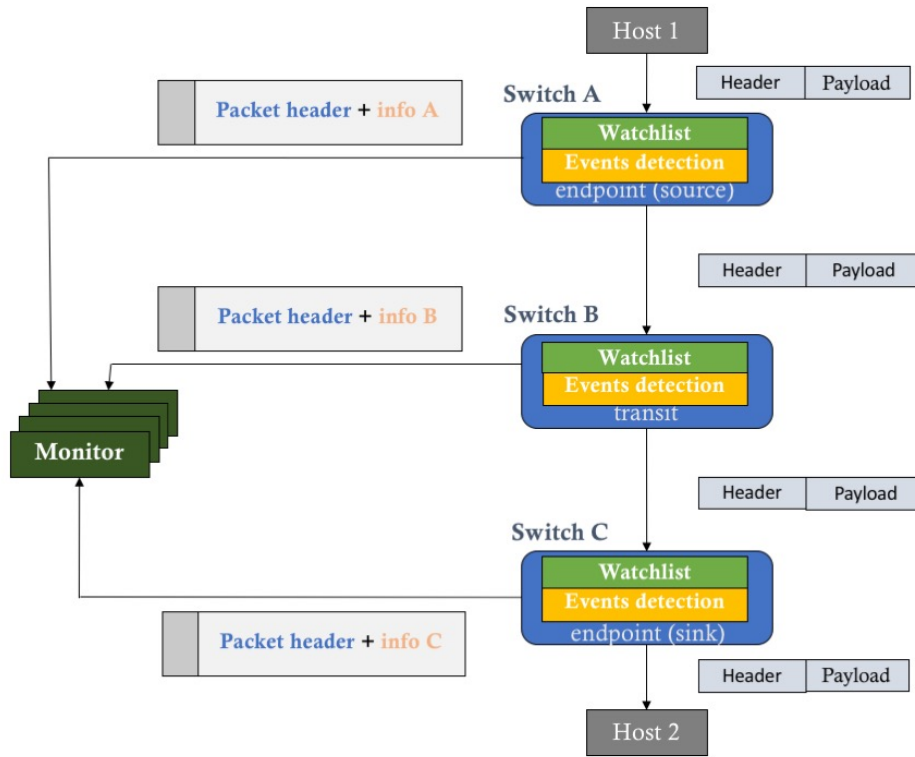

**Figure 2.** INT-MX mode - Telemetry Architecture with per hop reports generated by each node


its own telemetry reports (Figure 1). The distributed telemetry monitoring system will receive reports from different nodes, each describing the telemetry metadata (such as node IDs, interface IDs, latency) for one hop. Within the per hop telemetry reports, the telemetry metadata precedes the details of the original packet header. There is no change to data packets traversing the network. This mode was known as “Postcard” mode in previous versions of this Telemetry Report specification.

In the *INT-MX (eMbed instruct(X)ions)* mode, as defined in the INT specification <sup>2</sup>, the source node embeds instructions in the INT-MX header. Upon receipt of a packet with this INT type, each node in the path generates its own telemetry reports, as shown in Figure 2. The distributed telemetry monitoring system will receive reports from different nodes, each describing the telemetry metadata (such as node IDs, interface IDs, latency) for one hop. The only change to data packets is the source node embedding the INT-MX Header with instructions. The sink node removes the INT-MX Header from such packets. When using INT-MX mode, the telemetry metadata precedes the details of the original packet headers within the telemetry report.

#### 2.4.2. Stacked Reports in INT-MD mode

In the *INT-MD (eMbed Data)* mode, telemetry metadata is embedded in between the original headers of data packets as they traverse the network, as shown in Figure 3. This may be done using any of the telemetry data plane specifications such as INT or IOAM. When a packet enters the

<sup>2</sup>In-band Network Telemetry (INT) Dataplane Specification Version 2.1, May 2020.

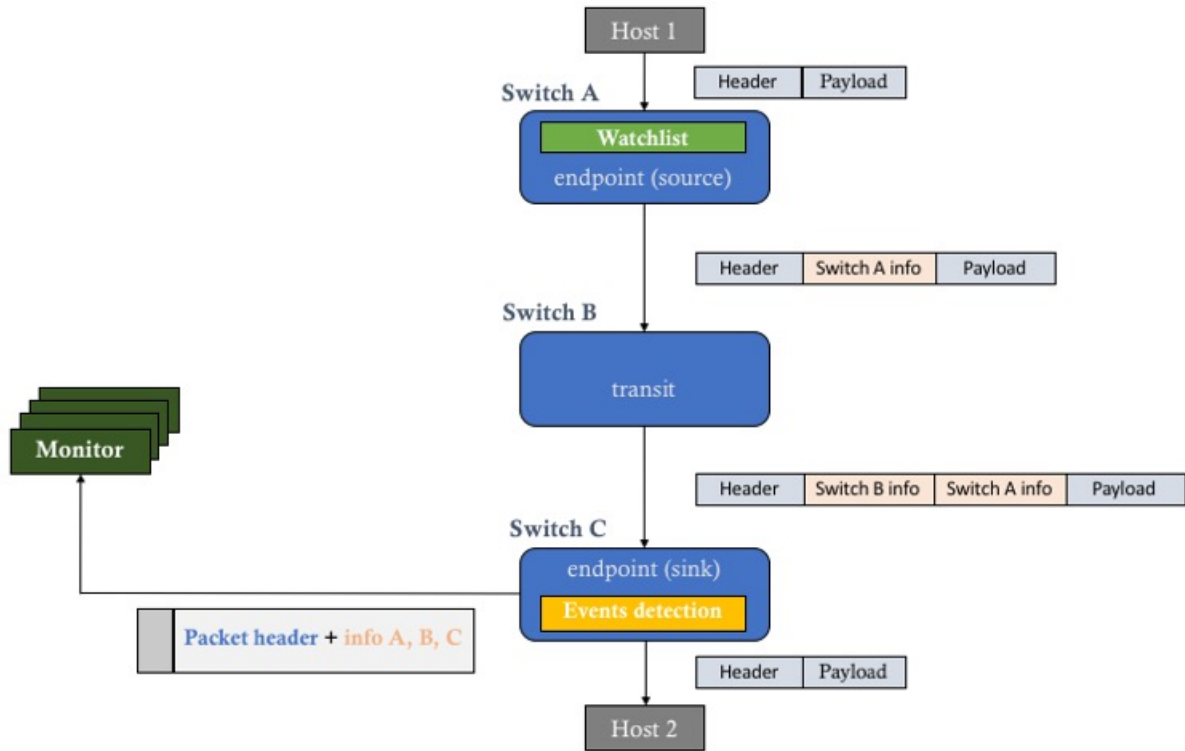

**Figure 3.** INT-MD mode - Telemetry Architecture with stacked reports generated by sink nodes

network, the source node may insert a telemetry instruction header, thereby instructing downstream nodes to add the desired telemetry metadata. At each hop, the transit node inserts its telemetry metadata at the top of the stack. The sink node extracts the telemetry instruction header before progressing the original packet. Depending on the result of event detection, the sink node may generate a telemetry report containing the stacked telemetry metadata from all hops across the network.

In order to reduce complexity at the sink node, some telemetry reports may include embedded telemetry metadata intermingled with the details of original packet headers. This simplifies generation of telemetry reports due to receipt of data packets with embedded telemetry metadata. The telemetry data plane specification such as INT or IOAM specifies the format for this portion of the telemetry metadata. This approach reduces data plane complexity, allowing for all telemetry report processing and generation to be done in the data plane itself without any need to punt to the control plane for further processing.

The sink node has the option to add its local telemetry metadata either in the telemetry report headers defined in this specification, or in the embedded telemetry metadata intermingled with the original packet headers.

### 2.4.3. Using Different Telemetry Modes for Different Telemetry Categories

Even when stacked reports are generated for the category of tracked flows using INT-MD mode, it is possible to generate per hop reports for other categories such as dropped packets and congested queues. The latter categories are often monitored as per node, per port, or per queue local events, suggesting that telemetry reports should be generated directly from the affected node(s).

## 2.5. Correlation of Telemetry Reports

Telemetry reports for a specific application flow matching a watchlist may be received from multiple nodes. In case of INT-XD and INT-MX modes, each hop will generate a separate report. Even when stacked telemetry metadata is embedded in the data plane according to a specification such as INT or IOAM, telemetry reports for one flow may still be generated by multiple nodes in case of path change or in case of dropped packets.

The distributed telemetry monitoring system may want to correlate these telemetry reports on a per flow basis (see Section 2.6 for details on flow identification). The telemetry reports include one association bit for each telemetry report category, providing hints to the distributed telemetry monitoring system that it can use to assist with telemetry report correlation. In particular, the distributed telemetry monitoring system may want to apply certain types of telemetry report correlation only when the corresponding bits are set.

The mechanisms for correlation are left to each implementation, and are considered to be beyond the scope of this specification.

## 2.6. Flow Identification

There is no explicit metadata defined for flow identification. The expectation is that either:

- a truncated packet fragment including the original packet headers will be included in the telemetry report, allowing the distributed telemetry monitoring system to categorize and identify flows in any manner that it desires, or
- domain specific flow identification metadata will be included.

Tunneled packets such as VXLAN packets raise the question whether flow identification should be based on outer or inner headers. The answer may vary depending on the goals of tracked flow monitoring, deployment aspects, operational issues, and the capabilities of the distributed telemetry monitoring system. Note that it is possible to identify flows based on inner packet headers even when using an INT encapsulation based on outer headers such as INT over TCP/UDP.

When using INT-MD and flow identification based on inner headers is desired, the distributed telemetry monitoring system should parse the truncated packet fragment all the way down past any embedded telemetry metadata (if present), even when the Individual Report includes optional metadata such as drop reason. It may also want to process the embedded telemetry metadata, for example to recognize the case where a path change directs traffic to a congested node where packets are being dropped.

## 2.7. Coalescing A Group of Telemetry Reports In A Single Packet

Starting with Version 2.0, the telemetry report format allows for a group of individual reports, each corresponding to one data plane packet, to be coalesced into the same telemetry report packet.



This can help reduce the packet processing overhead associated with telemetry reports. The only restrictions are that all of the individual reports in the group must be generated by the same node (or hardware subsystem within the node), and they are all addressed to the same destination within the distributed telemetry monitoring system. Beyond those restrictions, implementations are free to come up with their own methods for deciding which individual reports to group together.

Support for coalescing a group of telemetry reports in a single packet is optional.

### 3. Telemetry Report Format

This section specifies the packet format for telemetry reports.

#### 3.1. Outer Encapsulation


Telemetry reports are defined using a UDP-based encapsulation. Various outer encapsulations may be used to transport the UDP packets. Typically this would simply be an Ethernet header, followed by an IPv4 or IPv6 header, followed by the UDP header. This specification does not preclude the use of different transport encapsulations.

The source IP address identifies the node that generates the telemetry report.

The Destination IP address identifies a location in the distributed telemetry monitoring system that will receive the telemetry report.

In case of IPv4, as is the case for any other IP packet, either the Don't Fragment (DF) bit must be set, or the IPv4 ID field must be set so that the value does not repeat within the maximum datagram lifetime for a given source address/destination address/protocol tuple.

##### 3.1.1. UDP header (8 octets)

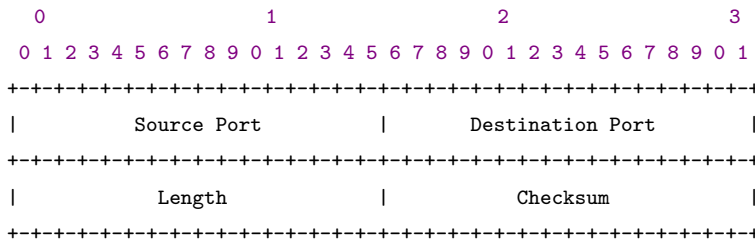

The Source Port may optionally be used to carry flow entropy, for example based on a hash of the inner 5-tuple. Otherwise, it should be user configurable.

The Destination Port is user configurable. The expectation is that the same Destination Port value will be used for all telemetry reports in a particular deployment.

#### 3.2. Telemetry Report Group Header (Ver 2.0) (8 octets)

The Telemetry Report Group Header immediately follows the UDP header whose destination port identifies the contents as a telemetry report. This header contains the common fields in a telemetry report that optionally contains multiple coalesced individual reports, each corresponding to one data plane packet. There is at most one instance of the Telemetry Report Group Header in a packet.



**RepType (4b): Report Type**

Type of the individual report:

- 0: Inner Only
- 1: INT
- 2: IOAM
- 3 – 15: Reserved

**InType (4b): Inner Type**

Type of data embedded after the *Individual Report Main Contents*:

- 0: None
- 1: TLV
- 2: Domain Specific Extension Data
- 3: Ethernet
- 4: IPv4
- 5: IPv6
- 6-15: Reserved.

**Report Length (8b): Report Length**

Indicates the length of the Individual Report Header in a multiple of 4-byte words, including the *Individual Report Main Contents* and *Individual Report Inner Contents*, but excluding the length of the first 4-byte word (*RepType*, *InType*, *Report Length*, *MD Length*, *D*, *Q*, *F*, *I*, *Rsvd*).

For *RepType* codepoint 1 *INT*, this includes the length of *RepMdBits*, *Domain Specific ID*, *DSMdBits*, *DSMdstatus*, *Variable Optional Baseline Metadata*, and *Variable Optional Domain Specific Metadata* (see Section 3.3.1).

**MD Length (8b): Metadata Length**

Indicates the length of metadata included in this report in a multiple of 4-byte words. This may help the telemetry monitoring system determine where the *Individual Report Inner Contents* begins.

For *RepType* codepoint 1 *INT*, this includes the length of the *Variable Optional Baseline Metadata* and *Variable Optional Domain Specific Metadata* in 4-byte words (see Section 3.3.1).

**D (1b): Dropped**

Indicates that at least one packet matching a watchlist was dropped.

**Q (1b): Congested Queue Association**

Indicates the presence of congestion on a monitored queue.

**F (1b): Tracked Flow Association**

Indicates that this telemetry report is for a tracked flow, i.e. the packet matched a watchlist somewhere (in case of INT-MD, INT-MX or IOAM) or locally (in case of INT-XD). The report might include INT-MD or IOAM metadata in the truncated packet. Other telemetry reports are likely to be received for the same tracked flow, from the same node and (in case of drop reports, INT-MX, INT-XD or path changes) from other nodes.

**I (1b): Intermediate Report**

Indicates that a transit node sent this intermediate report for INT-MD.

**Rsvd (4b): Reserved**

Should be set to zero upon transmission, and ignored upon reception

**Individual Report Main Contents**

The metadata that comprises this report, along with associated fields that assist in processing the metadata. The format varies depending on *RepType*.

When the *RepType* value is *Inner Only*, then the Individual Report Main Contents is empty. *MD Length* should be set to zero upon transmission, and ignored upon reception.

The *INT* Individual Report Main Contents format (see Section 3.3.1) was derived with INT 2.0/2.1 in mind, but it may be used with other INT versions as well. It is possible that other *RepType* codepoints and corresponding Individual Report Main Contents formats may be defined for future versions of INT.

The *IOAM* Individual Report Main Contents format will be defined in a future version of this specification.

#### Truncated Packet

L2/L3/ESP/L4 of the packet for flow details. Presence of this field is indicated by *InType* codepoint 3, 4, or 5, which identifies the type of header at the beginning of the truncated packet. The length of the truncated packet can be determined as *Report Length* - ((fixed length of *Individual Report Main Contents*) + *MD Length*).


#### Additional DS Extension Data

Additional Domain Specific Extension Data, whose format can be determined from the *Domain Specific ID* specified in the *Individual Report Main Contents*. For *RepType* codepoint 1 *INT*, this is additional domain specific data that is not associated with *DSMdBits*. Presence of this field is indicated by *InType* codepoint 2.

#### TLV

Type Length Value format. Multiple TLV formatted data (see Section 3.3.2). Presence of this field is indicated by *InType* codepoint 1.

#### 3.3.1. Individual Report Main Contents for *RepType* 1 (*INT*) (8+ octets)

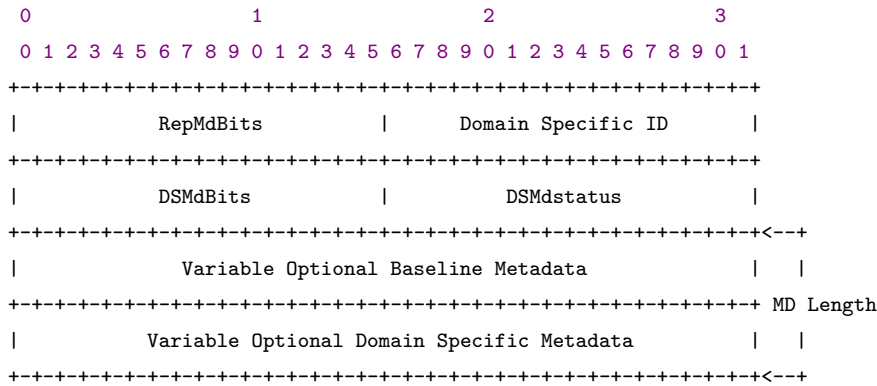

#### RepMdBits (16b): Report Metadata Bits

Bitmap that indicates which optional baseline metadata is present in the telemetry report header. Each bit represents 4 octets of optional metadata, except for bits 4, 5 & 6 which represents 8 octets of optional metadata.

- bit 0 (MSB): Reserved
- bit 1: Level 1 Ingress Interface ID (16 bits) & Egress Interface ID (16 bits)
- bit 2: Hop Latency
- bit 3: Queue ID (8 bits) + Queue Occupancy (24 bits)
- bit 4: Ingress Timestamp (64 bits)
- bit 5: Egress Timestamp (64 bits)

- bit 6: Level 2 Ingress Interface ID (32 bits) + Egress Interface ID (32 bits)
- bit 7: Egress Port TX Utilization
- bit 8: Buffer ID (8 bits) + Buffer Occupancy (24 bits)
- bit 9-14: Reserved.
- bit 15: Queue ID (8 bits) + Drop Reason (8 bits) + Padding (16 bits)

This specification defines the following metadata:

#### Drop reason

An enumeration that indicates the reason why a packet was dropped, for example as defined in [github.com/p4lang/switch](https://github.com/p4lang/switch).

See the INT specification <sup>2</sup> for definitions of the remaining metadata.

#### Domain Specific ID (16b)

The unique ID of the INT Domain.

The *Domain Specific ID* value 0x0000 is the default, known to all nodes. For this value, all *DSMdBits* are treated as reserved. Operators can assign values in the range 0x0001 to 0xFFFF.

#### DSMdBits (16b): Domain Specific Md Bits

Bitmap that indicates which optional domain specific metadata is present in the the telemetry report header. Each bit represents 4 octets or a multiple of 4 octets of domain specific optional metadata.

When using INT-MD or INT-MX, if the *Domain Specific ID* does not match any Domain ID known to this node, then the node may either:

- Set the Telemetry Report *DSMdBits* field to zero and rederive the Telemetry Report *MD Length* from *RepMdBits*, or
- Copy the INT *Hop ML* to the Telemetry Report *MD Length*, subtracting 1 or 2 if INT *Instruction Bitmap* bits 0 and/or 15 is set, copy the INT *DS Instruction* to the Telemetry Report *DSMdBits* field, and pad the Variable Optional Baseline & DS Metadata with the special all-ones reserved value out to *MD Length*.

#### DSMdstatus (16b): Domain Specific Md Status

Indicates the domain specific metadata status.

#### Variable Optional Baseline Metadata

The metadata corresponding to *RepMdBits*, 4 octets for each bit, except 8 octets for bits 4, 5 & 6.

If a node receives an INT-MX or INT-MD packet with an *Instruction Bitmap* that requests one or more metadata values that are not available or reserved, then the node may either:

- Ensure that the corresponding bit(s) in the Telemetry Report *RepMdBits* that specify the unavailable metadata are not set, and rederive the Telemetry Report *MD Length* based on the adjusted *RepMdBits* (and *DSMdBits*) values, or
- Copy the INT *Instruction Bitmap* to the Telemetry Report *RepMdBits* and copy the INT *Hop ML* to the Telemetry Report *MD Length*, clearing bits 0 and 15 if set and subtracting from *MD Length*, and send the all-ones reserved value (4 or 8 bytes of 0xFF depending on the length of metadata) in the Variable Optional Baseline Metadata.


#### Variable Optional Domain Specific Metadata

The metadata corresponding to *DSMdBits*, 4 octets or a multiple of 4 octets for each bit.

<sup>2</sup>In-band Network Telemetry (INT) Dataplane Specification Version 2.1, May 2020.

**3.3.2. Individual Report Inner Contents for *InType* 1 (TLV) (4+ octets)**

One or more TLVs, each following the format defined in this section. The presence of multiple TLVs can be determined by comparing the *TLVLength* in the first TLV with the *Report Length* in the Individual Report Header.

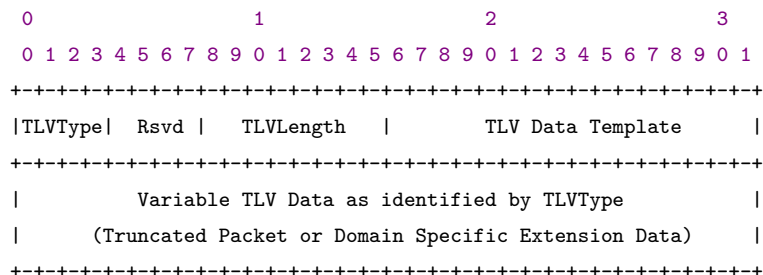**TLVType (4b): TLV data type**

- 0: Domain Specific Extension Data
- 1: Ethernet
- 2: IPv4
- 3: IPv6
- 4-15: Reserved.

**Rsvd (4b) – Reserved**

Should be set to zero upon transmission and ignored upon reception.

**TLVLength (8b)**

Indicates the length, in 4-byte words, of *Variable TLV Data* as identified by *TLVType*.

**TLV Data Template (16b)**

Specifies the format of the *Variable TLV Data*. A non-zero *TLV Data Template* value specifies the template for *TLVType* codepoint of *Domain Specific Extension Data*. For *TLVType* codepoints *Ethernet*, *IPv4*, and *IPv6*, the *TLV Data Template* value should be zero upon transmission and ignored upon reception.

**Variable TLV Data**

Variable length data based upon *TLVType*. The following two fields are defined in this version.

**Truncated Packet**

L2/L3/ESP/L4 of the packet for flow details. Presence of this field is indicated by *TLVType* codepoint 1, 2, or 3, which identifies the type of header at the beginning of the truncated packet.

**Domain Specific Extension Data**

Domain Specific Extension Data, whose format can be determined from the *Domain Specific ID* specified in the *Individual Report Main Contents* and the *TLV Data Template*. Presence of this field is indicated by *TLVType* codepoint 0.

For *RepType* codepoint 1 *INT*, this is additional domain specific data that is not associated with *DSMdBits*.

**3.4. Embedded Telemetry Metadata In Stacked Reports**

There may still be further telemetry metadata embedded within a truncated packet fragment. For example, this is typically the case when there is stacked telemetry metadata from hops prior to the node generating the report. The telemetry metadata will typically be encoded using a defined data plane format such as INT-MD or IOAM.

A node generating a telemetry report with stacked telemetry metadata may include its local telemetry metadata in any of the following:

- the embedded telemetry metadata in a truncated packet fragment,
- the stacked telemetry metadata in domain specific extension data,
- the *Individual Report Main Contents* in the same Individual Report Header that contains the stacked telemetry metadata from previous hops, in either a truncated packet fragment or in domain specific extension data, or
- the *Individual Report Main Contents* in a separate report from the stacked telemetry metadata from previous hops. Note that in this case the ingress timestamp (if present) will be the same in both reports.

If the *Tracked Flow Association (F)* bit is set to 0, then there will not be any embedded telemetry metadata in the report.

If the *Tracked Flow Association (F)* bit is set to 1, there may or may not be any embedded telemetry metadata in the report.

## 4. Examples of Telemetry Reports

This section shows examples of Telemetry Reports. These examples are not intended to be complete or exclusive.

### 4.1. Example with Baseline Metadata and Truncated IPv4

*InType* codepoint of 4 for Truncated IPv4.

```

0           1           2           3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+
|Ver = 2|  hw_id  |      Sequence Number      |
+-----+-----+-----+-----+
|                                     Node ID    |
+-----+-----+-----+-----+
|0 0 0 1|0 1 0 0| Report Length |  MD Length  |D|Q|F|I|  Rsvd |
+-----+-----+-----+-----+
|          RepMdBits          |  Domain Specific ID  |
+-----+-----+-----+-----+
|0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0|
+-----+-----+-----+-----+
|          Variable Optional Baseline Metadata          |
+-----+-----+-----+-----+
|          Truncated IPv4 Packet          |
+-----+-----+-----+-----+

```

## 4.2. Example with Baseline Metadata, Domain Specific Metadata, DS Extension Data and Truncated IPv4

*InType* codepoint of 1 for TLV, *TLVType* of 0 for *Domain Specific Extension Data* and *TLVType* of 2 for Truncated IPv4 Packet.

```

0           1           2           3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+
|Ver = 2|  hw_id  |      Sequence Number      |
+-----+-----+-----+-----+
|      Node ID      |
+-----+-----+-----+-----+
|0 0 0 1|0 0 0 1| Report Length | MD Length |D|Q|F|I| Rsvd |
+-----+-----+-----+-----+
|      RepMdBits      |      Domain Specific ID      |
+-----+-----+-----+-----+
|      DSMdBits      |      DSMdstatus      |
+-----+-----+-----+-----+
|      Variable Optional Baseline Metadata      |
+-----+-----+-----+-----+
|      Variable Optional DS MetaData      |
+-----+-----+-----+-----+
|0 0 0 0| Rsvd | TLVLength |      TLV Data Template      |
+-----+-----+-----+-----+
|      Variable TLV Data (Domain Specific Extension Data)      |
+-----+-----+-----+-----+
|0 0 1 0| Rsvd | TLVLength |      Reserved      |
+-----+-----+-----+-----+
|      Variable TLV Data (Truncated IPv4 Packet)      |
+-----+-----+-----+-----+

```

## 4.3. Example with Embedded INT-MD in a TCP Packet

TBD

## 4.4. Example with Embedded INT-MD over UDP in a VXLAN Packet

TBD

## A. Acknowledgements

We thank the following individuals for their contributions to this specification.

- Gordon Brebner
- Mukesh Hira
- Jeongkeun Lee
- Randy Levensalor



- Ramesh Sivakolundu
- Mickey Spiegel

## B. Change log

- 2017-11-10
  - Initial release
- 2017-11-10
  - **Tag v0.5 spec**
- 2018-2-14
  - Promote *Switch id* to fixed portion of the Telemetry Report Header
    - \* The Switch id is always present.
  - Flexible format allowing for arbitrary combinations of optional telemetry metadata in the Telemetry Report Header
    - \* Replaces previous Telemetry Drop Header and Telemetry Switch Local Report Header
    - \* Adds a 4 bit length field indicating the Telemetry Report Header length in multiples of 4 octets
    - \* Adds a bitmap indicating which optional metadata is present in the Telemetry Report Header
    - \* Rearranges fields in the first 32 bits of the Telemetry Report Header in order to achieve proper alignment, and to place reserved bits between the report metadata bitmap and the association bits so that either one can expand as necessary
- 2018-04-03
  - Editorial changes for v1.0
- 2018-04-20
  - **Tag v1.0 spec**
- 2019-07-19
  - Added INT modes of operation and nomenclature: INT-XD/MX/MD
- 2020-04-06
  - Revised Telemetry Report header 2.0 format supporting:
    - \* coalescing of multiple reports in one packet
    - \* support for domain specific extensions
    - \* some new RepMdBits codepoints
    - \* Increased timestamp size to 8 bytes
  - Changed *Switch id* terminology to *Node ID*

- 2020-05-18
  - Separated the Telemetry Report Header description into separate sections for ‘Telemetry Report Group Header’ (first 8 octets that appear once in a packet, and ‘Individual Report Header’ that may be repeated, one per report in the packet
  - Reworded section on Embedded Telemetry Metadata to match v2.0 format, where truncated packet fragments reside within each Individual Report Header
  - Changed ‘switch’ and ‘device’ to ‘node’ where appropriate
  - Reserved Domain Specific ID value 0x0000 as default well known ID
  - Added RepType codepoint for ‘Inner Only’
  - **Tag v2.0 spec**