

Measured after ADE-25 -3.85 dBm in TX
and LO is 40 db down

RX conversion gain 15 db

RX

RX NF 0.8 dB

File: RX.kicad_sch

RX Current	390 mA
TX Current Bias	560 mA
TX Current 1W Output	890 mA

TV


U19 Standby 40mA, after FL1 +15.5 dBm
U21 Bias Lowered with R40 15K to ...
Power output 1 Watt.

File: TX.kicad_sch

```


ADF settings
-----
Max      ADF4351 set to +5dBm @ 5.6dBm, 1152MHz Imax 120mA
Operation ADF4351 set to -1dBm == 12dBm, 1152MHz @ ADE Imax

```



Id: 1/6



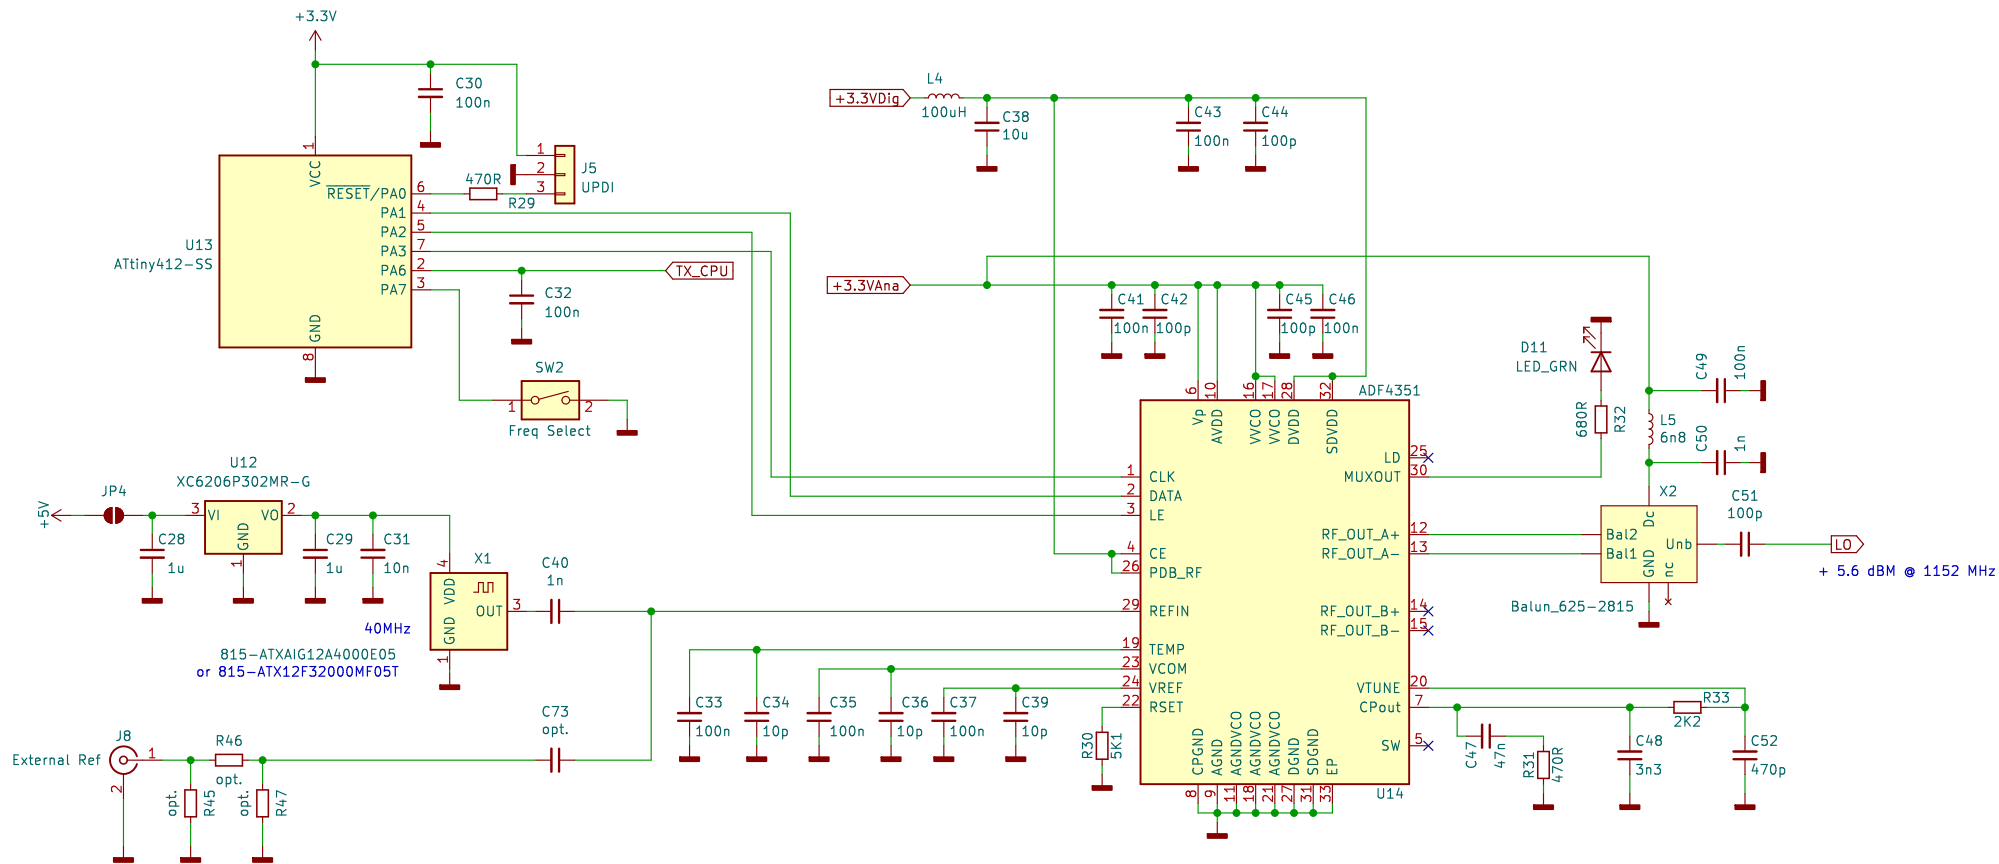

Design PA3AXA
RF Design for FR4 1.0 mm

Sheet: /ADF/
File: ADF.kicad_sch


Title: 1296 Mhz XTVR

Size: A4 Date: 2026-02-02

KiCad E.D.A. kicad (6.0.11-0)

Rev: V 1.0

Id: 4/6

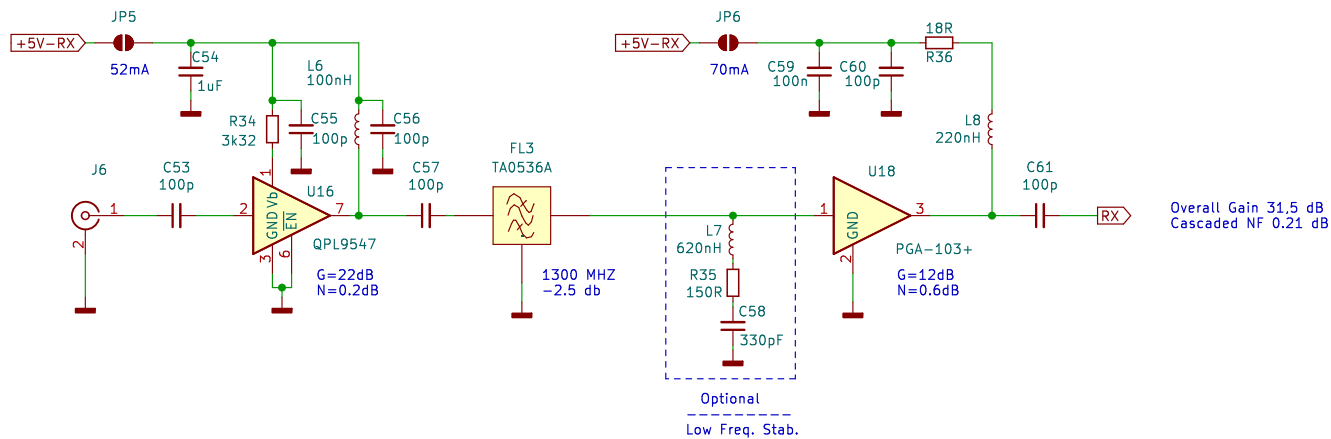


Design PA3AXA
RF Design for FR4 1.0 mm

Sheet: /RX/
File: RX.kicad_sch

Title: 1296 Mhz XTVR

Size: A4 Date: 2026-02-02
KiCad E.D.A. kicad (6.0.11-0)

Rev: V 1.0
Id: 5/6

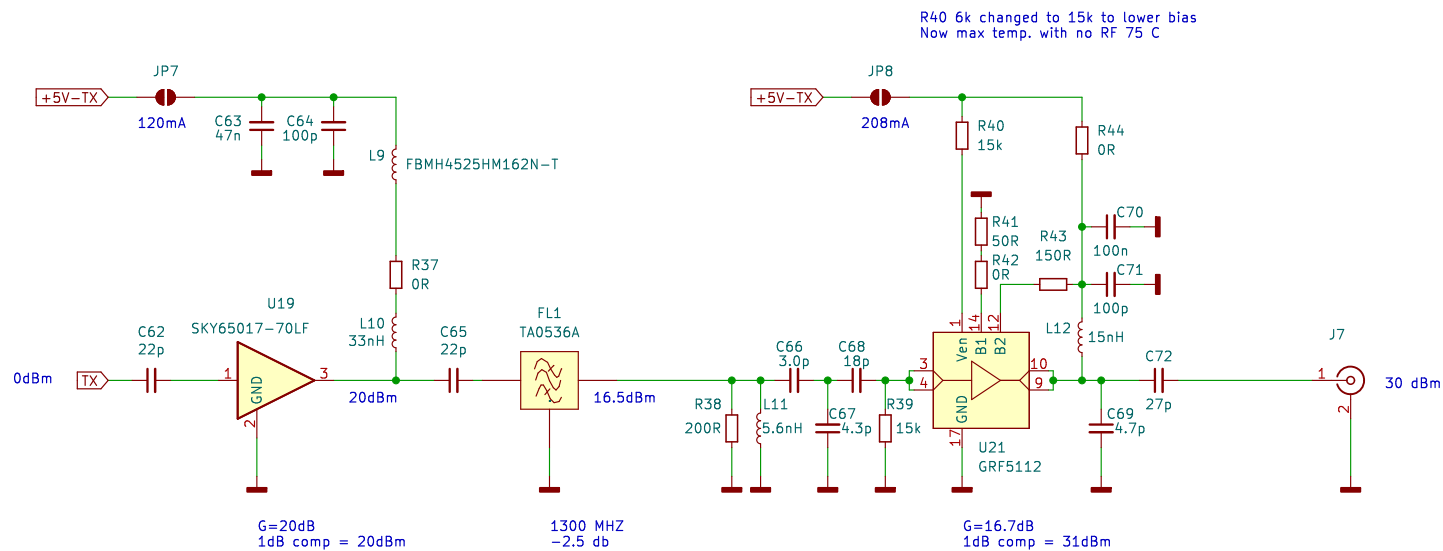

Design PA3AXA
RF Design for FR4 1.0 mm

Sheet: /TX/
File: TX.kicad_sch

Title: 1296 Mhz XTVR

Size: A4 Date: 2026-02-02

KiCad E.D.A. kicad (6.0.11-0)

Rev: V 1.0

Id: 6/6