

Features

- Plug-in module
- Easy to connect and replace in all MiBRX base modules
- Configured via Selpro software
- Spring fit terminals

Technical specification

Input specifications


Analog input

No. of channels	2
Conversion time	100 ms
Analog type	Current
Measurement range	0-20mA
Input impedance in signal range	≥100 Ω
Accuracy	±0.25% of full scale
Resolution	0.002mA
Digital resolution	12bits

General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

Terminal connection

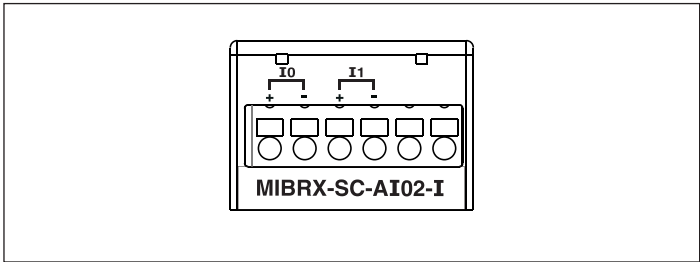

Ordering information

Product code	Description	Certification
MIBRX-SC-AI02-I	MiBRX Slot card - 2 Analog Inputs - Current	CE