**MIBRX** -SC-RO03

# MIBRX IO Card



## Features

- ◆ **Plug-in module**
- ◆ **Easy to connect and replace in all MiBRX base modules**
- ◆ **Configured via Selpro software**
- ◆ **Spring fit terminals**

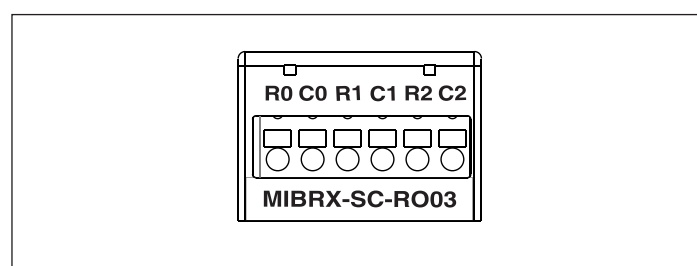## Technical Specification

**Output specifications**
**Relay output**

| | |
|---|---|
| No. of outputs | 3 |
| Output type | PNP |
| Response time | 20 ms (Selectable through software via debounce parameter) |
| Output current | 5A @ 230V AC, 5A @ 30V DC |
| Isolation between outputs | 2.5kV |

**General specifications**

| | |
|---|---|
| Ambient operating temperature | 0°C to 55°C |
| Ambient storage temperature | -20°C to 70°C |
| Humidity | 95% |

**Terminal connection**



## Ordering information

| Product code | Description | Certification |
|---|---|---|
| **MIBRX-SC-RO03** | MiBRX Slot Card - 3 Relay Outputs | CE RoHS compliant |