Features

- **Plug-in module**
- **Easy to connect and replace in all MiBRX base modules**
- **Configured via Selpro software**
- **Spring fit terminals**
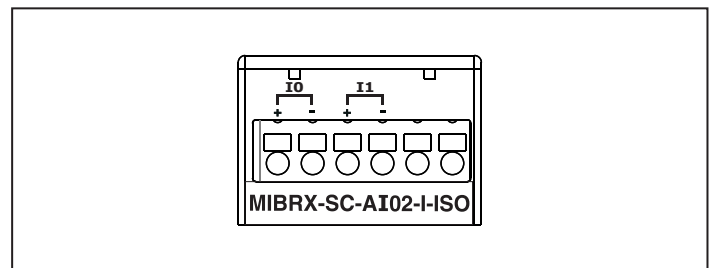
Technical specification

Input specifications
Analog input

No of inputs	2
Conversion time	100 ms
Analog type	Current
Measurement range	0-20mA
Input impedance in signal range	≥100 Ω
Accuracy	±0.25% of full scale
Resolution	0.002mA
Digital resolution	12bits
Isolation between card	1.5kV

General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

Terminal connection

Ordering information

Product code	Description	Certification
MIBRX-SC-AI02-I-ISO	MiBRX slot card - 2 Analog inputs - current (isolated)	CE RoHS compliant