MĪBRX-SC-AI02-V-I

Features

- ◆ **Plug-in module**
- ◆ **Easy to connect and replace in all MiBRX base modules**
- ◆ **Configured via Selpro software**
- ◆ **Spring fit terminals**
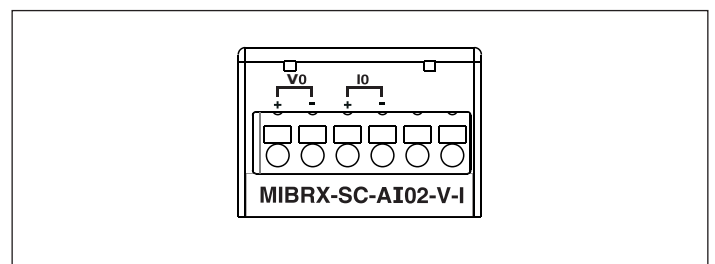
Technical specification

Input specifications

Analog input

No. of channels	2 (1 for Voltage & 1 for Current)
Conversion time	100 ms
Analog type	Voltage / Current
Measurement range	0-20mA (DC) / 0-10V (DC)
Input impedance in signal range	≥330KΩ for voltage / ≥100Ω for current
Accuracy / resolution	0.002mA for Current / 2.44mV for Voltage
Digital resolution	12bits

General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

Terminal connection

Ordering information

Product code	Description	Certification
MIBRX-SC-AI02-V-I	MiBRX Slot card - 2 Analog inputs - 1 Voltage & 1 Current	CE RoHS compliant