Features

- ◆ **Plug-in module**
- ◆ **Easy to connect and replace in all MiBRX base modules**
- ◆ **Configured via Selpro software**
- ◆ **Spring fit terminals**

Technical Specification

Input specifications

Digital input

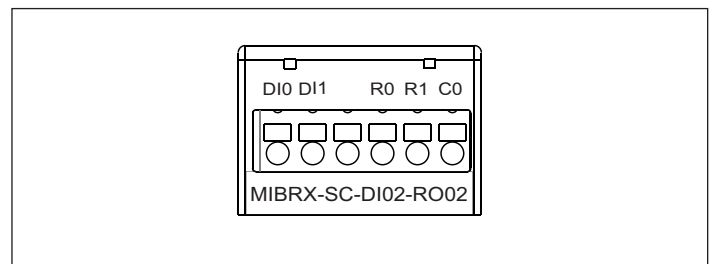| No. of inputs	2
Input type	PNP
Input voltage	7-30V DC
Intput current	5.5mA @ 24V, 7.5mA @ 30V
Response time	20ms (Selectable through software via debounce parameters)
Maximum counting frequency	Standard DI Mode -50Hz

Output specifications

Relay output

No. of outputs	2
Response time	20 ms (Selectable through software via debounce parameters)
Output rating	NO Type : 5A @ 230V AC, 5A @ 30V DC

General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

Terminal connection

DI0 DI1   R0 R1 C0

MIBRX-SC-DI02-RO02

Ordering information

Product code	Description	Certification
MIBRX-SC-DI02-RO02	MiBRX Slot Card - 2 Digital Inputs & 2 Relay Outputs	CE RoHS compliant