

Network awareness for scheduling of containerized applications in an multilevel edge/fog/cloud distributed environment*

Pablo Jaramillo, Agustín C. Caminero, Rocío Muñoz

National Distance University of Spain (UNED)

Madrid, Spain

pjaramill7@alumno.uned.es, accaminero@scc.uned.es, rmunoz@dia.uned.es

Abstract—The use of containers to deploy applications has suffered a huge growth in the last years. Containers allow the easy deployment of applications in such a way they can be isolated from the underlying hardware without the resource consumption and the performance degradation of traditional virtualization technologies (e.g. virtual machines). With this regard, containers can be used in a variety of scenarios, some of them harness distributed multilevel infrastructures (edge, fog and cloud). In these scenarios, the network plays an essential role in the proper execution of the applications, since it is the communication medium for all the agents in such distributed scenario and its poor performance may lead to poor quality of service of the entire system. This paper presents a new technique to perform scheduling of containerized applications on distributed multilevel infrastructures (edge, fog, and cloud). This technique considers the status of the interconnection network as a top-class resource to be considered when performing the scheduling tasks. A performance evaluation using a cluster of microcomputers Raspberry Pi has been conducted as a proof of concept of our work.

Index Terms—scheduling algorithm, network, virtualization, container, distributed system, edge, fog, cloud

I. INTRODUCTION

During the last years, distributed heterogeneous computing resources have arisen. *Cloud computing* can be considered as the application of business models existing in traditional utilities (such as water or power supply) to computing equipment, where users consume virtualized storage or compute resources offered by a provider based on a pay-as-you-go model. The resources providers use are large datacenters with plenty of computing, memory and storage capacity. Along with this, devices at the *edge* of the network can be part of Internet of Things (IoT) deployments. These can be sensors and devices that are part of Smart City infrastructure, lifestyle gadgets like wearables, and smart appliances or smart phones. These devices have been originally designed to sense and generate data streams, and they have spare capacity (computing,

memory, and storage) which could be harnessed to execute applications [1].

The last term to be coined is *fog computing*, which refers to computing resources that are between the edge and cloud in the network hierarchy, with compute, storage and memory capacities that fall between these layers as well [2]. These edge and fog resources provide the opportunity for low latency processing of the generated data, closer to its source, and on the wide-area network [3]. As a result, there is critical need to understand how this diverse ecosystem of edge, fog and cloud resources can be effectively used by large-scale distributed applications [4]. This multilevel scenario can be seen in Figure 1 [5], where the term *cloudlets* refers to the access points devices extended with computing and storage services to create the fog system.

The term *scheduling* refers to the process of allocating computing resources to an application and mapping constituent components of that application onto those resources, in order to meet certain Quality of Service (QoS) and resource conservation goals [6]. The term *application* can be seen as an abstract entity created using different primitives such as processes, threads, or workflows, among others [7], [8]. In the same way, a *computing resource* can be very diverse, including among others bare metal server, a cluster of physical or virtual servers locally or in the cloud, edge or mobile devices in an IoT deployment [9], [10]. Regarding *QoS*, it can be latency, packet loss, throughput, among many other metrics, and *conservation goals* can be among others the energy footprint of the system. So, scheduling applications requires understanding these terms and the way how they coexist.

has taken a key role in the research and development of information technologies. More and more projects are being developed using this paradigm due to the advantages it offers compared to centralized or monolithic computing. This type of paradigm, makes use of container and container orchestration technologies to provide high availability, reliability and resilience for the applications that run on top of them. One of the key advantages of this technologies is the independence of the hardware platform, so they support all type of CPU architectures and configurations, including low-cost computers like the Raspberry Pi. With the use of this paradigm, new

This work has been funded by UNED through the Independent Thinking-Jóvenes Investigadores 2019 project *efficient scheduling of containers* (FILE, 2019-PUNED-0007), by Ministry of Economy and Competitiveness (Ministerio de Economía y Competitividad, MINECO) through the Red Temática Española de Analítica de Aprendizaje, Spanish Network of Learning Analytics (SNOLA, RED2018-102725-T), and by the Region of Madrid through the project e-Madrid-CM (P2018/TCS-4307).

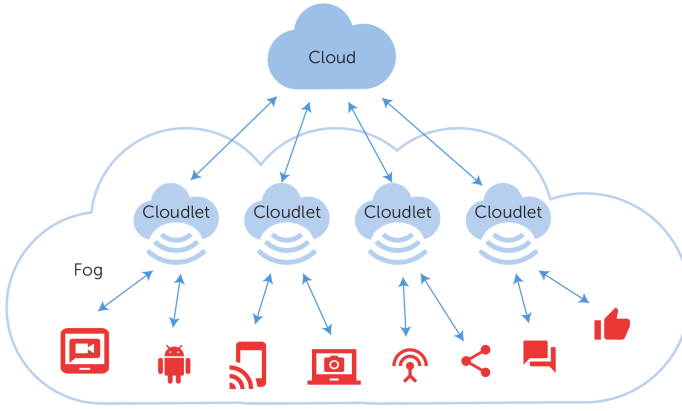


Fig. 1. Multilevel edge/fog/cloud scenario [5].

problems arise; process scheduling inside the cluster is a key factor to assure a good performance of the system and maintain the quality of service. The aim of this study is, combining these ideas, deploy a Kubernetes cluster over low-cost Raspberry Pi computers and perform an evaluation on the influence of the scheduling algorithm on the capabilities of the containers deployed on the cluster.

This paper is organized as follows. Section II presents the related work of this paper. Section III presents the scheduling algorithm which is the main contribution of this work. Section IV details the performance evaluation conducted to illustrate the usefulness of our work. Finally, Section V concludes the paper and suggests guidelines for future work.

II. RELATED WORK

The growth of the use of light virtualization technologies or containers is evident in the vast majority of areas where previously the heavy virtualization was used. Most of the times, the deployment of an application is done in a distributed computing environment, in the cloud or in a local cluster. When deploying applications in distributed environments a container orchestration tool like Kubernetes is needed. Kubernetes manages the deployment of the application introducing the pod concept which is the basic deployment unit in the system. A pod is capable of running one or more containers and every pod has to be deployed in a selected node of the distributed computing environment which will be selected by Kubernetes based on the resources required by the node to run smoothly and in some affinities and taints which has to be configured depending on the type of deployment. Studies have been conducted that address the effects of the deployment configuration in the performance and robustness of the application. In [5] a performance model of Kubernetes application is obtained with the application of benchmarks. It defends that for applications with more than eight containers, the bandwidth and final throughput is higher if every container is deployed in a separate pod. This suggest that deploying more pods with fewer containers in each pod, is better in terms of performance and bandwidth availability. In [6], from the

same authors, the effects of the type of deployment explained above are studied and detailed depending on the nature of the application and its services. The paper makes a distinction between high CPU and I/O demanding services and high bandwidth demand. At the same time, it makes a distinction between service container, that are executing full time, and job containers, which are created and destroyed with each execution. For CPU and I / O intensive applications it is argued that if there is more containers than nodes in the cluster, the best option is to group all the containers, however, it is important to divide the pods among all possible nodes, so it is recommended to divide the number of containers by the number of nodes available in the cluster and deploy a pod on each node. If there is a smaller number of containers than nodes, a container in each pod and a pod in each node. For the second type of application, intensive use of network resources, it is recommended the same policy applied previously in the case of type containers service, while for job-type containers it is always recommended to deploy a single container per pod. This is due to the fact that the network overload in a pod increases significantly when several containers are executed, since they all share the same IP address, unique in each pod.

These studies are very useful when making decisions about the deployment of an application on infrastructures with container orchestration. Despite all this, more precise adjustments may be required in the process of assignment of a node to each pod. If the application is based on a large number of job-type containers that are created and destroyed proportionally with the load of work, it may be the case that the default Kubernetes planner is not enough. This scheduler takes into account resources such as CPU and memory, but it does not take into account the network congestion at the time of assignment or the overhead of the interfaces. During this work, a Kubernetes and Raspberry Pi based testing environment will be deployed and a container planning algorithm based on resource metrics per node and network congestion will be developed.

III. CONTAINER SCHEDULING ALGORITHM DEVELOPMENT

The Kubernetes scheduling algorithm, from now on, scheduler, has the only mission of scheduling the just created pods to a cluster node. It is a process executing with the rest of components in the master node. When a new pod is created, an event is created and the Kubernetes scheduler is triggered to start the assignation of the pod. It has three main execution phases: filtering, node ranking and node selection. During the filtering phase, the scheduler discards the nodes that are not suitable to run the pod due to restrictions and taints. During the second phase, the scheduler populates a list containing all the suitable nodes for the pod execution, applying a collection of priority functions to every node, trying to divide the pods among all the available nodes and giving more importance to the ones with less workload. During the last execution phase, the node with higher priority is selected, and in case of existing more than one, it a random one is chosen. The scheduler is

written in Golang, just like the rest of the Kubernetes project. The scheduler performance is a key part of the system, and in some cases it become the bottleneck of the cluster. For this work, the developed algorithm will only implement the last two phases of the original scheduling algorithm, avoiding the filtering phase as it is out of scope in the work.

Algorithm 1 Custom Scheduler

```

1: function CALCULATEPRIORITIES
2:   Let nodeMetrics[i].cpu be blablabla
3:   Let bestRecPackets be blablabla
4:   for int i = 0; i < 4; i++ do
5:     if nodeMetrics[i].cpu < bestCpu then
6:       bestCpu ← nodeMetrics[i].cpu[i]
7:       bestCpuNode ← nodeMetrics[i].name
8:     if nodeMetrics[i].memory < bestMemory then
9:       bestMemory ← nodeMetrics[i].memory[i]
10:      bestMemoryNode ← nodeMetrics[i].name
11:    if nodeMetrics[i].recPackets <
bestRecPackets then
12:      bestRecPackets ←
nodeMetrics[i].recPackets[i]
13:      bestRecPacketsNode ←
nodeMetrics[i].name
14:    if nodeMetrics[i].sentPackets <
bestSentPackets then
15:      bestSentPackets ←
nodeMetrics[i].sentPackets[i]
16:      bestSentPacketsNode ←
nodeMetrics[i].name
17:    if nodeMetrics[i].bandwidth > bestBandwidth
then
18:      bestBandwidth ←
nodeMetrics[i].bandwidth[i]
19:      bestBandwidthNode ←
nodeMetrics[i].name
20:    if nodeMetrics[i].diskIO < bestDiskIO then
21:      bestDiskIO ← nodeMetrics[i].diskIO[i]
22:      bestDiskIONode ← nodeMetrics[i].name
23:
24:    nodePriorities[bestCpuNode] += 3
25:    nodePriorities[bestMemoryNode] += 2
26:    nodePriorities[bestRecPacketsNode] += 1
27:    nodePriorities[bestSentPacketsNode] += 1
28:    nodePriorities[bestBandwidthNode] += 2
29:    nodePriorities[bestDiskIONode] += 1
30:
31:  return nodePriorities

```

The scheduler that has been developed makes use of the metrics that Prometheus exports on each node through the node exporters. This means that requests to know the status of each node will be made to each of the node exporters since it is desired to know the status at that same moment. If they were made to the Prometheus Server, to obtain the

measurements you would have to make the requests to the exporter node, so they will be made directly from the scheduler saving an extra jump when passing through the server. These metrics obtained from each export node are used to calculate the priority of the candidate nodes to be assigned to the pod in planning. During the planning process, five metrics exported by Prometheus are taken into account: current frequency of each core of the node's CPU, percentage of memory occupied, read and write operations on disk and the number of packets sent and received by the user interface. network in use. The ideal node for the assignment with the pod is the one that uses the least amount of all these resources at the time of selection. After this, the iPerf metrics are collected and stored into the scheduler container, to feed the scheduling algorithm among the Prometheus metrics.

For the node ranking the scheduling algorithm will compare each node metrics, giving, for every metric, a pondered score to the node with best metrics. Each metric score has a different value, being CPU, memory and bandwidth the ones with highest weight. The priority computation function implements this logic, and is executed for every new pod in the cluster. The pseudocode for this logic can be seen in the figure below.

The scheduler code is compiled and packaged in a container and deployed in a pod, and has to be allowed with a role based access account to schedule and allocate new pods.

IV. PERFORMANCE EVALUATION

In order to illustrate the proposed algorithm, a performance evaluation has been conducted. This is detailed in this section, where the experiments setup is explained in the first place, followed by an analysis of the results obtained.

A. Work Environment Preparation

For the testing environment, four Raspberry Pi 3 Model B and one AMD64 Intel Core i7 architecture computer have been used. They have been connected using a five ports ethernet switch. A Kubernetes cluster has been deployed over this hardware infrastructure configuring the AMD computer as the master node and the Raspberries as worker nodes, and tainting the master node to avoid the execution of pods on it. Prometheus Operator[10] has also been installed in the cluster, so we are able to monitor the cluster resources usage, CPU and memory occupation, pods distribution and network metrics. iPerf tool [12] which allows network monitoring between two or more nodes has also been installed and configured in the cluster, to collect information and metrics about the available bandwidth between each node, packet loss and delay. With this two monitoring tools we are able to know the state of the cluster and feed the container scheduling algorithm which will select the best node for a certain pod taking all this data in account.

B. Experiments and results

Performance is really important for an scheduling algorithm.

V. CONCLUSIONS AND FUTURE WORK

REFERENCES

- [1] R. Ghosh, S. P. R. Komma, and Y. Simmhan, "Adaptive energy-aware scheduling of dynamic event analytics across edge and cloud resources," in *18th IEEE/ACM Intl. Symposium on Cluster, Cloud and Grid Computing (CCGRID)*, Washington DC, USA, 2018.
- [2] Y. Simmhan, "Big data and fog computing," in *Encyclopedia of Big Data Technologies*, S. Sakr and A. Y. Zomaya, Eds. Springer, 2019.
- [3] I. Stojmenovic, "Fog computing: A cloud to the ground support for smart things and machine-to-machine networks," *2014 Australasian Telecommunication Networks and Applications Conference (ATNAC)*, pp. 117–122, 2014.
- [4] P. Varshney and Y. Simmhan, "Characterizing application scheduling on edge, fog, and cloud computing resources," *Software: Practice and Experience (in press)*, vol. n/a, no. n/a.
- [5] L. F. Bittencourt, J. D. Montes, R. Buyya, O. F. Rana, and M. Parashar, "Mobility-aware application scheduling in fog computing," *IEEE Cloud Computing*, vol. 4, no. 2, pp. 26–35, 2017.
- [6] M. L. Pinedo, *Scheduling: Theory, Algorithms, and Systems*. Springer, 2008.
- [7] A. Tucker and A. Gupta, "Process control and scheduling issues for multiprogrammed shared-memory multiprocessors," *Operating Systems Review*, vol. 23, no. 5, pp. 159–66, 1989.
- [8] I. J. Taylor, E. Deelman, D. B. Gannon, and M. Shields, Eds., *Workflows for e-Science: Scientific Workflows for Grids*. New York: Springer-Verlag, 2007.
- [9] D. Liu, Z. Yan, W. Ding, and M. Atiquzzaman, "A survey on secure data analytics in edge computing," *IEEE Internet of Things Journal*, vol. 6, no. 3, pp. 4946–4967, 2019.
- [10] Z.-H. Zhan, X.-F. Liu, Y.-J. Gong, J. Zhang, H. S.-H. Chung, and Y. Li, "Cloud computing resource scheduling and a survey of its evolutionary approaches," *ACM Computing Surveys*, vol. 47, no. 4, pp. 63:1–63:33, 2015.