Simple / Reliable / Green / Efficient

PULTRY ROUND-PIPE DRINKING LINE

Provides stable water flow and efficient filtration, offering a long service life.

Technical Description

- The water front parts is equipped with a double-layer filter, witch can effectively filter impurities in water.
- The separate recoil line allows to accurately record how much water the chickens drink.
- The pressure regulator can be adjusted so as to adjust the nipple' s water output, to meet the needs of the chicken's different age, and with a recoil knob (manual/automatic), easy to flush water line.
- The drinking nipples are double sealed structure, and they can flow by both 360 degrees side knocking and by top knocking, which ensure that chickens can drink water at any position. There are two kinds of drinking nipples, the red and the yellow, which are respectively used for breeding chicken and broiler feeding. The red nipples' average water flow is 18mL /min at 20cm water pressure, and the yellow nipples' average water flow is 34 mL /min at 20cm water pressure.
- The drinking pipes with retractable hermaphrodite connectors can relieve stress caused by thermal expansion and contraction, preventing damage to the pipe.
- The tube end is equipped with transparent steel wire hose and centralized drain line for easy observation of water level and flushing water line.

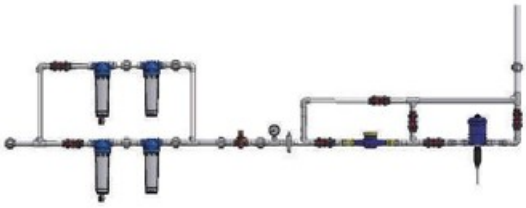

- There are two kinds of drinking nipples (red and yellow) for feeding breeders and broilers respectively. Water can come out from the upper top by laterally tapping in any direction within 360°. Its water flow can be adjusted according to water pressure to meet the drinking demands of the poultry of different ages in days.

Technical parameters

S/N	Category	Feeding capacity
1	Broiler	8- 12 birds/Unit
2	Duck	10 birds/Unit
3	Breeder	10 bird/Unit

QINGDAO BIG HERDSMAN MACHINERY CO.,LTD
Add: Yuehe road, Konggang industrial park, Qingdao city,
Shandong Province, PR China
Tel: +86-532-8493 3988
Website: www.bigherdsman.com

SCAN QR CODE ON WECHAT

Simple / Reliable / Green / Efficient

45 AUGER FEEDING LINE

Uses a spiral auger to move feed through the pipe. A feed sensor at the end of each branch line automatically starts/stops the motor for precise feeding.

WEBSITE
bigherdsman@bigherdsman.com
BIGHERDSMAN
POULTRY PRODUCTION

45 Broiler Auger Feeding System

- A Italian-brand motor is employed for drive. It has an aluminum alloy housing providing fast heat dissipation, no rust and protection grade of IP55;
- The auger is made of imported high-performance material, with stable performance;
- The feed pan includes two types: 14-grill internal adjustable and external adjustable types, and the breeding capacity is about 170 kg/ pan;
- Manual lifting or electric lifting are options for lifting, convenient for adjusting the height of feed line;

Product Parameters

Auger Feedline Specification		45 Weld Pipe	
Feed Pipe Diameter (mm)		Ø 45	
Feed Pipe Thickness (mm)		1.2	
Feed Pipe Material		Hot galvanized pipe	
Motor	Voltage (V)	380	
	Frequency (Hz)	50	
	Protection Class	IP55	
	Power (kw)	0.75	1.1
	Speed Ratio	1:5	
	Output Speed (r/min)	290	
Horizontal Delivery Capacity (kg/h)		450	
Max Delivery Distance (m)		120	140
Feed Pipe Length (mm)		3040	
Auger Outer Diameter (mm)		36.8	
Auger Inner Diameter (mm)		20.8	
Auger Cross - section Width (mm)		8	
Auger Cross - section Thickness (mm)		3.85	
Auger Pitch (mm)		44.45	

Feed Quantity of 14-grill Internal Adjustable Feed Pan

Gear	1	2	3	4	5
Feed quantity (g)	260	275	360	400	520
Gear	6	7	8	9	10

Feed quantity (g)	530	610	640	770	850

Feed Quantity of 14-grill External Adjustable Feed Pan

Gear	1	2	3	4	5
Feed quantity (g)	830	845	1090	1280	1320

45 Auger Feeding System For Males

- A Italian-brand motor is employed for drive. It has an aluminum alloy housing providing fast heat dissipation, no rust and protection grade of IP55;
- The auger is made of imported high-performance. material, with stable performance;
- The feed pan includes nine-grill and five-grill types, and each feed pan is for 8-10 chickens;
- Manual lifting or electric lifting are options for lifting, convenient for adjusting the height of feed line;

Product Parameters

Auger Feedline Specification		45 Weld Pipe	
Feed Pipe Diameter (mm)		Ø 45	
Feed Pipe Thickness (mm)		1.2	
Feed Pipe Material		Hot galvanized pipe	
Motor	Voltage (V)	380	
	Frequency (Hz)	50	
	Protection Class	IP55	
	Power (kw)	0.75	1.1
	Speed Ratio	1:5	
	Output Speed (r/min)	290	
Horizontal Delivery Capacity (kg/h)		450	
Max Delivery Distance (m)		120	140
Feed Pipe Length (mm)		3040	
Auger Outer Diameter (mm)		36.8	
Auger Inner Diameter (mm)		20.8	

Auger Cross - section Width (mm)	8
Auger Cross - section Thickness (mm)	3.85
Auger Pitch (mm)	44.45

Feed Quantity of Nine-grill Feed Pan

Gear	1	2	3	4	5	6	7	8
Feed quantity (g)	465	500	550	590	635	680	725	770
Gear	9	10	11	12	13	14	15	16
Feed quantity (g)	815	875	935	995	1060	1125	1190	1260

Feed Quantity of Five-grill Breeder Feed Pan

Gear	1	2	3	4	5
Feed quantity (g)	750	820	900	990	1080
Gear	6	7	8	9	10
Feed quantity (g)	1170	1270	1380	1490	1600

Simple / Reliable / Green / Efficient

MAIN FEED LINE

Spiral auger or chain-based system that transports feed from silos or bins to each sub-feeding line, achieving automatic feed distribution.

WEBSITE
bigherdsman@bigherdsman.com
BIGHERDSMAN
POULTRY PRODUCTION

Main Feed Line

- Italian-brand motor, aluminum alloy body, IP55-protected.
- Auger imported for stable performance.
- Nylon bends with reinforced inner arcs for wear resistance and sealing.
- Each relay station is angle-adjustable with an inspection port and sight window for easy maintenance.

Product Parameters

Specification of auger feed line	125	90		75
Motor power	1.5	0.75	1.1	0.75
Feeding capacity	5500	2100	3000	1400
Maximum conveying distance	25	40		60

Chain Pain Main Feed Line

The feed line moves in the feeding pipe through the chain, and the nylon chain pan molded on the chain drives the feed to move in the feeding pipe, and the feed is transported from the silo or manual feed box dragged by the chain along the feeding pipe to feed drop ports, so as to achieve the purpose of automatic feed.

•The drive system is provided with overload protection, which can effectively prevent motor stalling and chain damage due to pulling;
•The chain pan is made of modified nylon, with high wear resistance and not easy to be shifted;
•The corner is made of antirust material, firm and durable.

Product Parameters

Feeding pipe diameter (mm)	Ø 101.6		Ø 60
Feeding pipe wall thickness (mm)	2.0		1.5
Feeding pipe material	Hot galvanized pipe		Hot galvanized pipe
Driving power (kw)	4	2.2	1.5
Maximum feeding capacity (kg/h)	5000		1500
Maximum conveying distance (m)	250	120	300

Simple / Reliable / Green / Efficient

SILO

Stores feed, which can be loaded by feed truck or pneumatic feed blowing.

WEBSITE
bigherdsman@bigherdsman.com
BIGHERDSMAN
POULTRY PRODUCTION

Technical Description

- Standard ladder with guardrails for safe operation.
- Ridges for enhanced strength and airtightness.
- Mid panel includes a slope for drainage; mid and lower cones have viewing ports secured with sealant strips for superior sealing, strength, and visibility.
- Standard components undergo a specialized galvanizing process; rubber gaskets remain functional for up to 10 years.

Product Parameters

S/N	Nominal outside diameter (lower cone angle)	Actual diameter	Height H	Volume (m^3)	Number of legs
1	Ø 1.8m 67*	Layer 1	1834	4.4	4
2		Layer 2	1834	6.8	4
3		Layer 3	1834	9.2	4
4	Ø 2.7m 60*	Layer 1	2750	11.7	6
5		Layer 2	2750	16.9	6
6		Layer 3	2750	22.1	6
7		Layer 4	2750	27.3	6
8	Ø 3.6m 60*	Layer 1	3668	24.5	8
9		Layer 2	3668	33.8	8
10		Layer 3	3668	43.1	8
11		Layer 4	3668	52.4	8

The conversion between the volume and tonnage of galvanized sheet silo is calculated according to the density of $0.65t/m^3$: tonnage = volume $*0.65t/m^3$.

Simple / Reliable / Green / Efficient

LIGHTING SYSTEM

The lighting system includes a variety of lighting solutions such as light bulbs, fluorescent tubes and dimmers under both AC and DC voltages, which is suitable for multiple breeding scenarios.
This lighting system is suitable for broiler and duck breeding, and optimizes livestock growth, age of sexual maturity, egg weight and egg production irvarious environments by accurately adiusting the brightness of the lamp.

WEBSITE
bigherdsman@bigherdsman.com
BIGHERDSMAN
POULTRY PRODUCTION

AC Dimmable Light Bulb

- AC220V 10W, 3000K color temperature, no stroboscopic, high luminous efficiency.
- Highly durable, with high heat dissipation materials, IP67. Lifespan >= 50,000 hrs, light decay within 3 years <= 10%.
- Uniform lighting, high light transmittance, broader illumination, no pressure drop at both ends.
- Color temperature and power customizable.

Scheme Design

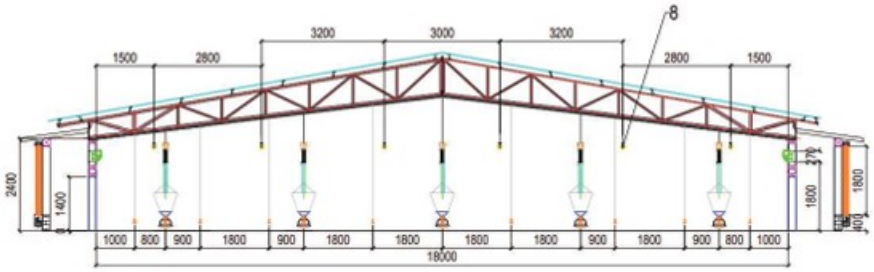

Illuminate simulation

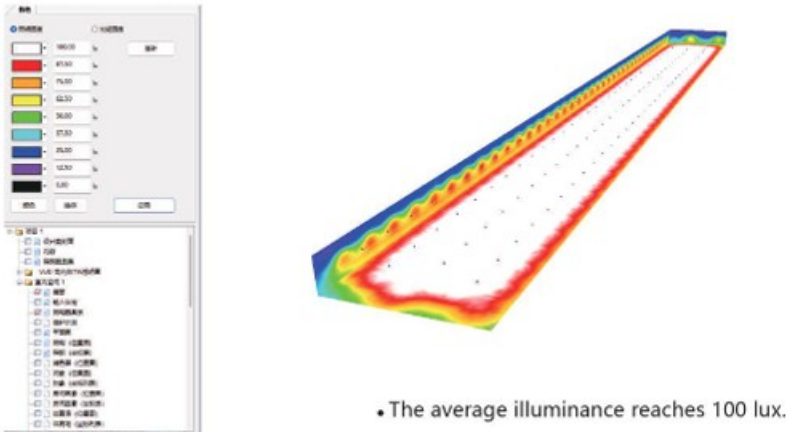

- The average illuminance reaches 100 lux.

Features Of Intelligent Dimmer

- Display screen: 7” capacitive touch screen, which is easy to operate and use, and visible.
- AC 220V, 50Hz/60Hz power supply, and DC 0-50V adjustable and settable output.
- External control, manual control and age-in-day control supported.
- Brightness change delay control (adiustable delay time) supported.
- Chinese-English-Russian language switching supported.
- It has emergency function, can start forced output through emergency switch, and mechanical dimming.
- It supports the switching of two-color lights.

DC Dimmable Fluorescent Tube

- DC 48V 8W, color temperature of 3000K, without stroboscopic effect, safe and reliable.
- High durability, PC material, IP67.Lifespan >= 50,000 hrs, light decay within 3 years <= 10%.
- Uniform lighting, Unique internal circuit design solves voltage drop issue in chicken coops for more even brightness.
- It can achieve the switching between warm and blue colors.

Scheme Design

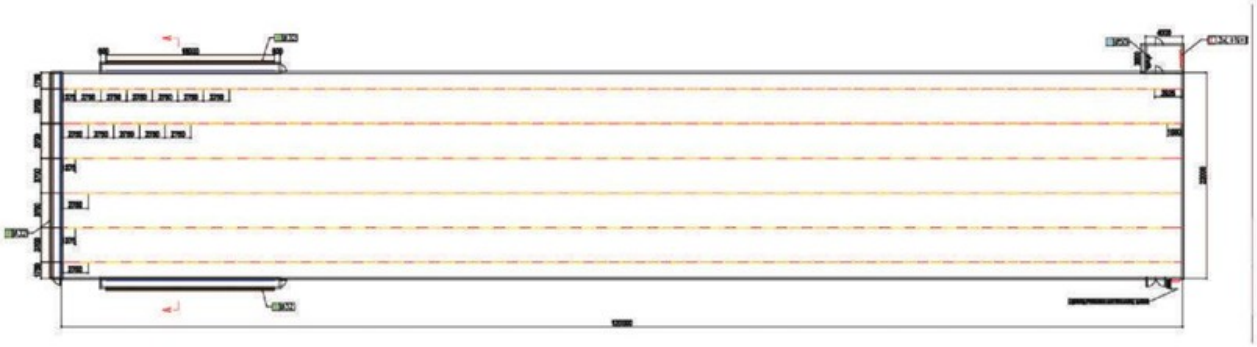

Illuminance simulation

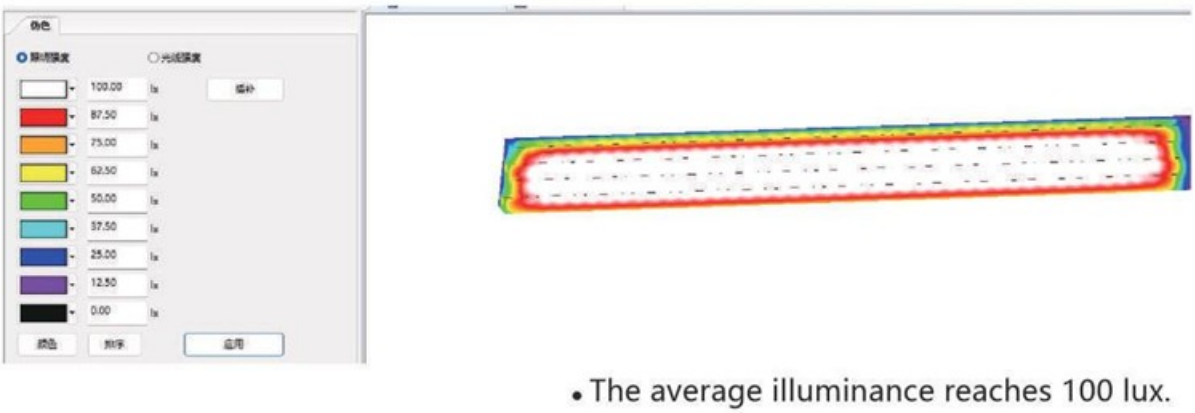

- The average illuminance reaches 100 lux.