

UNIVERSIDADE FEDERAL DO PARANÁ

PEDRO AUGUSTO BORGES DOS SANTOS

THE IMPACT OF BUILT ENVIRONMENT ON SPEEDING BEHAVIOR IN CURITIBA -  
BRAZIL

CURITIBA

2022

PEDRO AUGUSTO BORGES DOS SANTOS

THE IMPACT OF BUILT ENVIRONMENT ON SPEEDING BEHAVIOR IN CURITIBA -  
BRAZIL

Manuscript presented as requirement for the obtaining of a degree in Master of Sciences by the Programa de Pós-Graduação em Planejamento Urbano of Setor de Tecnologia of Universidade Federal do Paraná.

Supervisor: Prof. Dr. Jorge Tiago Bastos  
Co-supervisor: Dr. Oscar Oviedo-Trespalacios

CURITIBA

2022

## **ACKNOWLEDGEMENTS**

The author would like to thank the funding by the National Council for Scientific and Technological Development (CNPq, Brazil)/MCTIC/CNPq N. 28/2018, Universal/-Faixa A, by the Coordination for the Improvement of Higher Education Personnel (CAPES)/Finance Code 001 and by the National Observatory for Road Safety (ONSV) under the Technical Cooperation Agreement with the Federal University of Paraná.

## ABSTRACT

Road traffic crashes cause more than 1.35 million deaths and 50 million injured victims per year, being the eighth leading cause of death in the world. Road traffic deaths involving pedestrians, cyclists, and motorcyclists represent more than half of the total value of global road traffic deaths. Speeding behavior performed by motorized vehicle drivers is one of the main risk factors of road crashes, influencing the severity and the risk of road crashes. Most traffic crashes and conflicts occur in urban areas. City development characteristics, including the built environment, can influence road safety performance in these areas. The main objective of this research is to investigate the influence of the built environment on road safety, using the city of Curitiba, Brazil, as the scenario of the study. The built environment consists of physical features inside the city, including development patterns and roadway designs, and can be split into six categories: density, diversity, design, destination accessibility, distance to transit, and demographics. The speeding rate was used as a road safety performance indicator. The Geographically Weighted Regression (GWR) statistical model was used to explore the correlation between built environment (BE) variables and the occurrence of speeding. Previous works used GWR to explore the correlation between BE and road crashes, due to the model's ability to analyze scenarios that are spatially nonstationary. Speeding data was collected as part of a Naturalistic Driving Study (NDS). NDS consists of monitoring drivers' behavior in their cars, both in normal and safety-critical conditions, with the use of GPS sensors and cameras equipped in the participants' cars. In this work, data contained 32 drivers, 1002 trips, 382.98 hours of driving, and 9,312.82 km of traveled distance in Curitiba and its metropolitan area, in the period between 2019 and 2021. The GWR model was applied using Curitiba's traffic analysis zones (TAZs) as zonal level. Multiple kernel types and bandwidth sizes were tested. The model diagnostics showed that some GWR performed better than the global regression, but none of the models had a desirable performance regarding the spatial heterogeneity associated with the occurrence of speeding. Only the variable "proportion of arterial roads", included in the design category, showed a correlation to speeding, at a statistical significance of 95%, with 100% of TAZs presenting a negative coefficient, therefore, an inverted correlation to speeding. The characteristics of arterial roads in Curitiba regarding infrastructure and traffic control presented a reduction to speeding behavior.

**Keywords:** Built environment. Speeding behavior. Road safety.

## RESUMO

Os sinistros de trânsito são causa de 1,35 milhão de mortes e 50 milhões de vítimas feridas por ano, sendo a oitava causa de morte no mundo. As mortes no trânsito envolvendo pedestres, ciclistas e motociclistas representam mais da metade do valor total das mortes no trânsito em todo o mundo. O comportamento de motoristas relacionado ao excesso de velocidade é um dos principais fatores de risco de sinistros de trânsito, influenciando na gravidade e no risco desses sinistros. A maioria dos sinistros de trânsito e conflitos ocorrem em áreas urbanas. As características do desenvolvimento espacial de uma cidade, incluindo o ambiente construído, podem influenciar o desempenho da segurança viária nessas áreas. O objetivo principal desta pesquisa é investigar a influência do ambiente construído na segurança viária, utilizando a cidade de Curitiba, Brasil, como cenário do estudo. O ambiente construído consiste em características físicas dentro da cidade, incluindo padrões de desenvolvimento e características das vias, e pode ser dividido em seis categorias: densidade, diversidade, design, acessibilidade ao destino, distância ao trânsito e dados demográficos. Taxa de excesso de velocidade foi usada como um indicador de desempenho de segurança viária. O modelo estatístico de Regressão Geograficamente Ponderada (RGP) foi utilizado para explorar a correlação entre as variáveis do ambiente construído (AC) e a ocorrência de excesso de velocidade. Trabalhos anteriores utilizaram o RGP para explorar a correlação entre o AC e a ocorrência de acidentes, devido à capacidade do modelo de analisar cenários que são espacialmente não estacionários. Os dados de velocidade foram coletados como parte de um Estudo Naturalístico de Condução (ENC). O ENC consiste em monitorar o comportamento dos motoristas em seus próprios veículos, tanto em condições normais como em condições críticas de segurança, com a utilização de sensores GPS e câmeras equipadas nos carros dos participantes. Neste trabalho, a amostra foi composta de 32 condutores, 1002 viagens, 382.98 horas de condução e 9,312.82 km de distância percorrida em Curitiba e sua região metropolitana, no período entre 2019 e 2021. O modelo RGP foi aplicado usando as zonas de tráfego (ZTs) de Curitiba como nível zonal. Vários tipos de kernel e tamanhos de largura de banda foram testados. Os diagnósticos do modelo mostraram que alguns modelos RGP tiveram um desempenho melhor do que a regressão global, mas nenhum dos modelos pôde prever a heterogeneidade espacial associada à ocorrência do excesso de velocidade com um desempenho desejável. Apenas a variável “proporção de vias arteriais”, incluída na categoria de design, apresentou correlação com o excesso de velocidade, com significância estatística de 95% e com 100% das ZTs apresentando coeficiente negativo, portanto, com uma correlação invertida em relação ao excesso de

velocidade. As características das vias arteriais em Curitiba em relação à infraestrutura e ao controle de tráfego influenciaram na redução no excesso de velocidade.

**Palavras-chaves:** Ambiente construído. Excesso de velocidade. Segurança viária.

## LIST OF FIGURES

FIGURE 1 – ROAD TRAFFIC RATES IN OECD COUNTRIES . . . . .	15
FIGURE 2 – ROAD TRAFFIC DEATHS IN BRAZIL . . . . .	16
FIGURE 3 – ROAD TRAFFIC MORTALITY RATE IN BRAZIL . . . . .	17
FIGURE 4 – ROAD TRAFFIC FATALITY RATE IN BRAZIL . . . . .	18
FIGURE 5 – MOTORIZATION RATE IN BRAZIL . . . . .	18
FIGURE 6 – VEHICLE FLEET SIZE AND TYPE IN BRAZIL . . . . .	19
FIGURE 7 – ROAD CRASHES AS A CONSEQUENCE OF SPEEDING ON BRAZILIAN HIGHWAYS . . . . .	20
FIGURE 8 – ROAD TRAFFIC DEATHS IN CURITIBA . . . . .	21
FIGURE 9 – MOTORIZATION RATES IN BRAZILIAN STATES CAPITAL CITIES, IN 2019 . . . . .	21
FIGURE 10 – MORTALITY RATES IN BRAZILIAN STATES CAPITAL CITIES, IN 2019 . . . . .	22
FIGURE 11 – VEHICLE FLEET SIZE AND TYPE IN CURITIBA . . . . .	23
FIGURE 12 – FATALITY RATES IN BRAZILIAN STATES CAPITAL CITIES, IN 2019	23
FIGURE 13 – DEATHS FROM ROAD CRASHES THAT HAPPENED IN CURITIBA	24
FIGURE 14 – HADDON MATRIX . . . . .	25
FIGURE 15 – RELATIONSHIP BETWEEN SPEED AND BRAKING DISTANCE	28
FIGURE 16 – RELATIONSHIP BETWEEN SPEED AND KINETIC ENERGY . .	29
FIGURE 17 – PROBABILITY OF PEDESTRIAN FATALITY AT DIFFERENT IM- PACT SPEEDS . . . . .	29
FIGURE 18 – GREENSHIELDS MODEL . . . . .	32
FIGURE 19 – EXTRACTION OF FREE-FLOW AND SPEEDING EPISODES FROM TRIPS . . . . .	33
FIGURE 20 – BUILT ENVIRONMENT AND TRAFFIC SAFETY . . . . .	35
FIGURE 21 – LAND ZONING GROUPS IN CURITIBA . . . . .	43
FIGURE 22 – LAND USE DENSITIES IN CURITIBA . . . . .	44
FIGURE 23 – ROAD HIERARCHY IN CURITIBA (LAND ZONING) . . . . .	45
FIGURE 24 – ROAD HIERARCHY IN CURITIBA (CTB) . . . . .	46
FIGURE 25 – BEHAVIORAL TRAFFIC SAFETY STUDIES . . . . .	46
FIGURE 26 – KERNEL FUNCTIONS PLOT . . . . .	54
FIGURE 27 – CAMERA POSITIONING INSIDE THE VEHICLE . . . . .	56
FIGURE 28 – CAMERA IMAGES . . . . .	57
FIGURE 29 – NATURALISTIC DATA COLLECTION AND PROCESSING . . . . .	57

FIGURE 30 – VALID TIME SELECTION . . . . .	58
FIGURE 31 – ROAD AXIS BUFFER . . . . .	59
FIGURE 32 – SPEEDING OCCURRENCE AND SPEEDING OPPORTUNITY . . . . .	61
FIGURE 33 – PD AND LDI . . . . .	62
FIGURE 34 – DIS AND DSC . . . . .	63
FIGURE 35 – TSD AND PAR . . . . .	63
FIGURE 36 – SND AND DCSU . . . . .	64
FIGURE 37 – BSD AND AVI . . . . .	65
FIGURE 38 – GWR MODELLING PROCESS . . . . .	65
 FIGURE 39 – DISTANCE TRAVELED PER DAY OF THE WEEK . . . . .	70
FIGURE 40 – TRIPS PER DAY OF THE WEEK . . . . .	70
FIGURE 41 – DISTANCE TRAVELED PER HOUR OF THE DAY . . . . .	71
FIGURE 42 – TRIP START PER HOUR OF THE DAY . . . . .	71
FIGURE 43 – TRAVELED DISTANCE PER TAZ . . . . .	72
FIGURE 44 – SPEEDING PER DAY OF THE WEEK . . . . .	73
FIGURE 45 – SPEEDING PER HOUR OF THE DAY . . . . .	73
FIGURE 46 – TYPES OF SPEEDING BEHAVIOR OF DRIVERS . . . . .	74
FIGURE 47 – TAZ CONSIDERED IN THE SAMPLE . . . . .	75
FIGURE 48 – SPEEDING PER TAZ . . . . .	76
FIGURE 49 – SPEARMAN CORRELOGRAM OF INDEPENDENT VARIABLES	77
FIGURE 50 – GW LOCAL $R^2$ . . . . .	79
FIGURE 51 – SPEEDING GW LOCAL MEAN . . . . .	80
FIGURE 52 – SPEEDING GW LOCAL SD . . . . .	80
FIGURE 53 – MODEL INTERCEPT ESTIMATES . . . . .	81
FIGURE 54 – PAR COEFFICIENT ESTIMATES . . . . .	81
FIGURE 55 – TSD COEFFICIENT ESTIMATES . . . . .	82
FIGURE 56 – DCSU COEFFICIENT ESTIMATES . . . . .	82
FIGURE 57 – LDI COEFFICIENT ESTIMATES . . . . .	83
FIGURE 58 – BSD COEFFICIENT ESTIMATES . . . . .	83
FIGURE 59 – DSC COEFFICIENT ESTIMATES . . . . .	84
FIGURE 60 – AVI COEFFICIENT ESTIMATES . . . . .	85
FIGURE 61 – PD COEFFICIENT ESTIMATES . . . . .	85
FIGURE 62 – SND COEFFICIENT ESTIMATES . . . . .	86
FIGURE 63 – DIS COEFFICIENT ESTIMATES . . . . .	86
 FIGURE 64 – SPEEDING CLUSTERS AND ÁREA CALMA . . . . .	87
FIGURE 65 – SPEEDING CLUSTERS AND DESTINATION OF TRIPS . . . . .	88

FIGURE 66 – SPEEDING CLUSTERS AND ROAD NETWORK HIERARCHY . . .	90
FIGURE 67 – ROAD NETWORK HIERARCHY AND SPEED CAMERAS . . . .	91

## LIST OF TABLES

TABLE 1 – FACTORS THAT AFFECT SPEEDING AND SPEED CHOICE . . . . .	31
TABLE 2 – BUILT ENVIRONMENT VARIABLES . . . . .	36
TABLE 3 – CORRELATION BETWEEN DENSITY AND ROAD SAFETY OUTCOMES . . . . .	36
TABLE 4 – CORRELATION BETWEEN DIVERSITY AND ROAD SAFETY OUTCOMES . . . . .	37
TABLE 5 – CORRELATION BETWEEN DESIGN AND ROAD SAFETY OUTCOMES . . . . .	39
TABLE 6 – CORRELATION BETWEEN DESTINATION ACCESSIBILITY AND ROAD SAFETY OUTCOMES . . . . .	40
TABLE 7 – CORRELATION BETWEEN DISTANCE TO TRANSIT AND ROAD SAFETY OUTCOMES . . . . .	41
TABLE 8 – CORRELATION BETWEEN DEMOGRAPHICS AND ROAD SAFETY OUTCOMES . . . . .	41
TABLE 9 – NATURALISTIC DRIVING STUDIES PROGRAMS . . . . .	48
TABLE 10 – KERNEL FUNCTIONS . . . . .	53
TABLE 11 – GWR AND ROAD SAFETY STUDIES . . . . .	55
TABLE 12 – BUILT ENVIRONMENT VARIABLES . . . . .	61
TABLE 13 – DESCRIPTIVE STATISTICS OF TRIPS . . . . .	69
TABLE 14 – DESCRIPTIVE STATISTICS OF SPEEDING RATE PER TRIP AND DRIVER . . . . .	74
TABLE 15 – DESCRIPTIVE STATISTICS OF VARIABLES . . . . .	76
TABLE 16 – MODEL DIAGNOSTICS . . . . .	77
TABLE 17 – SUMMARY OF LINEAR MODEL ESTIMATES . . . . .	78
TABLE 18 – DESCRIPTIVE STATISTICS OF GWR COEFFICIENT ESTIMATES . . . . .	78
TABLE 19 – PERCENTAGE OF TAZ WITH POSITIVE/NEGATIVE COEFFICIENTS	84

## SUMMARY

<b>1</b>	<b>INTRODUCTION</b>	<b>11</b>
1.1	OBJECTIVES	12
1.2	JUSTIFICATION	13
1.3	THESIS STRUCTURE	13
<b>2</b>	<b>LITERATURE REVIEW</b>	<b>14</b>
2.1	ROAD SAFETY SCENARIO	14
2.2	ROAD SAFETY RISK FACTORS	24
2.3	SPEEDING AS A RISK FACTOR	27
2.4	ROAD SAFETY PERFORMANCE AND THE BUILT ENVIRONMENT	34
2.5	URBAN PLANNING IN CURITIBA-PR	42
2.6	NATURALISTIC DRIVING STUDIES	44
2.7	GEOGRAPHICALLY WEIGHTED REGRESSION	52
<b>3</b>	<b>METHODS</b>	<b>56</b>
3.1	NATURALISTIC DATA COLLECTION	56
3.2	DATA PROCESSING AND VARIABLE CONSTRUCTION	59
3.2.1	Speeding	59
3.2.2	Built Environment	60
3.3	GEOGRAPHICALLY WEIGHTED REGRESSION MODELLING	64
3.4	IDENTIFICATION OF CLUSTERS	67
<b>4</b>	<b>RESULTS</b>	<b>69</b>
4.1	NATURALISTIC DATA	69
4.2	SPEEDING DATA	72
4.3	GEOGRAPHICALLY WEIGHTED REGRESSION RESULTS	75
<b>5</b>	<b>DISCUSSION</b>	<b>87</b>
<b>6</b>	<b>CONCLUSIONS</b>	<b>92</b>
	<b>BIBLIOGRAPHY</b>	<b>94</b>

## 1 INTRODUCTION

In 2010, the United Nations (UN) declared the Decade of Action for Road Safety 2011-2020, calling the signatory countries to reduce by half the predicted number of deaths and injuries in traffic until 2020 (WHO, 2011). In Brazil, the National Plan of Reduction of Traffic Deaths and Injuries (PNATRANS) was created in 2018, aiming to reduce the national fatality rate (deaths per 10,000 vehicles) and mortality rate (deaths per 100,000 population) by half, from 2019 through 2028 (MINISTRY OF CITIES, 2018). Following the Decade of Action 2011-2020, the UN declared another Decade of Action for Road Safety with renewed objectives, but considering the period between 2021 and 2030 (WHO, 2020).

In 2019, Brazil presented 31,945 road traffic deaths. Since 2012, when the country reached a peak value of 44,812, the number of road traffic deaths has been declining (MINISTRY OF HEALTH, 2020). In Curitiba, the number of road traffic deaths was 246 in 2019, according to the Ministry of Health (2020) database. The highest value in the database happened in 1994, which contains 663 deaths. Based on data from the municipal government of Curitiba (CURITIBA, 2021), the city had 181 road traffic deaths in 2020.

One of the main risk factors of road crashes is speeding behavior, which increases the risk and severity of crashes (MOHAN, 2016a). One of the aspects which can influence the severity of injuries in case of a road crash is the force of impact, which is directly related to the amount of speed. In urban areas, the severity of crashes has a higher impact on more vulnerable users, like pedestrians and cyclists (WELLE et al., 2016). In Curitiba, speeding behavior was the second-highest causing factor of road traffic fatal crashes between 2011 and 2019 (CURITIBA, 2020). The characteristics inside the urban environment, including land use codes and the built environment, can mitigate the occurrence of speeding behavior and improve road safety performance (KNOFLACHER, 2016).

The built environment influences the overall mobility, road safety, and health levels inside a city, affecting the physical activity within its territory. Overall, the built environment consists of physical elements and features, including the development pattern and the roadway design of a city (EWING; CERVERO, 2010). These features are related to the choice of destination, modal choice, travel distances, and routes, causing an impact on the road safety performance of a city (TIWARI, 2016). Therefore, this manuscript better explores the relationship between the built environment inside an

urban scenario and the level of road safety performance, considering the occurrence of speeding as an intermediate outcome. The behavioral data utilized in this work was extracted from a research project based on a Naturalistic Driving Study (NDS): The Brazilian Naturalistic Driving Study (NDS-BR). This project started in 2019 in the city of Curitiba (CEPPUR, 2021).

## 1.1 OBJECTIVES

In the context of urban planning and road safety management, the main objective of this research is to investigate the influence of demographics, land use, and built environment on the engagement of speeding behavior. The scenario of the study is the city of Curitiba, the capital of the state of Paraná, Brazil. The correlation will be analyzed with the use of the Geographically Weighted Regression (GWR) statistical model.

With the use of speeding data collected from drivers that participated in a NDS performed in Curitiba, this investigation aims to establish the relationship between variables from the built environment (BE) and the speeding behavior. These BE variables are categorized by Ewing and Dumbaugh (2009) in five groups called “5D”: density, diversity, design, destination accessibility, and distance to transit. In addition to these variables, this study aims to relate income, as a demographic variable, to speeding behavior as well.

As co-benefits in the investigation, this thesis aims to offer some level of insight regarding the development and update of speed control management in urban areas, considering the operational and structural planning guidelines for the road systems and land use. With these factors in mind, there is a potential of presenting new ideas to the planning practices in Curitiba, regarding mobility plans, master plans, and zoning laws.

In addition, the following list contains specific objectives to be investigated in order:

1. Verify if speeding behavior in Curitiba is spatially autocorrelated;
2. Verify if the GWR model can properly analyze the influence of the BE in the occurrence of speeding in a spatially autocorrelated scenario;
3. Identify evidences of the influence of the BE in the occurrence of speeding in Curitiba;
4. Identify practical solutions to mitigate speeding behavior through urban planning practices, based on the results.

## 1.2 JUSTIFICATION

Speeding behavior performed by vehicle drivers in urban environments is one of the main risk factors in the chance and severity of road crashes. This severity can be higher in urban environments, where there is a great volume of interaction between motorized and non-motorized (more vulnerable) users (ELVIK et al., 2009). Considering the direct relationship between mobility, land use patterns, and the built environment (DE VOS; WITLOX, 2013), it is important to investigate these factors in search of improvements in the road safety management process.

Having in mind that most of the traffic crashes and conflicts occur in cities (WHO, 2018), as a consequence of the fast process of urbanization in the last decades, it is crucial to create safer conditions in these areas. In Brazil, the management of traffic and mobility is the responsibility of the municipalities (BRASIL, 1997). Therefore, road safety management (including speed management), as an inherent task to traffic management, is also the responsibility of the municipalities. It is necessary to consider the issues of road safety in cities when conducting the process of urban planning. Some national laws foresee this integration between the planning process and the sustainable mobility by the municipalities as a clear concept: The Statute of the Cities (BRASIL, 2001) and The Law of the Urban Mobility (BRASIL, 2012).

According to Ewing and Dumbaugh (2009), the built environment can affect traffic safety through three main aspects: traffic volumes, traffic conflicts, and traffic speeds – which can directly affect the crash occurrence and severity in urban environments. Driving task complexity (ONATE-VEGA; OVIEDO-TRESPALACIOS; KING, 2020) and road user distraction (CHEN; LYM, 2021) are other aspects that can be affected by the built environment. Traffic crashes are a final outcome of the problems involving road safety. Intermediate outcome or safety performance indicators (SPI) might be used to analyze the operational conditions of traffic safety in cities (BASTOS, 2014); which, in terms of the current study, can be the amount of speeding that occurs across an area.

## 1.3 THESIS STRUCTURE

This document is divided into six chapters. Next to this chapter, Chapter 2 includes the literature review, Chapter 3 contains the methodological procedures applied in this work, and Chapter 4 includes the data that resulted from the method implementation and its analysis. Chapter 5 contains the discussion based on the data of the results. Finally, Chapter 6 includes the conclusion of the manuscript.

## 2 LITERATURE REVIEW

This chapter is divided into seven sections, each presenting a relevant subject to the study. Section 2.1 has discussions involving the road safety scenario in Brazil and Curitiba, in comparison to the international scenario. Section 2.2 presents road safety risk factors and how they can be managed. Section 2.3 presents the main risk factor investigated in this document: speeding behavior. It is discussed how it is related to road safety, the factors that can influence speeding, and how its occurrence can be investigated. Section 2.4 includes the discussion about the built environment and its variables, relating to road safety performance. Section 2.5 presents urban planning practices in Curitiba. Section 2.6 discusses naturalistic driving studies as a method of speeding data collection, and how it was performed in previous works. Section 2.7 discusses the geographically weighted regression statistical method, and how it can be used to investigate built environment variables and road safety outcomes.


### 2.1 ROAD SAFETY SCENARIO

Road traffic crashes around the world claim more than 1.3 million lives each year, representing the eighth leading cause of death and causing up to 50 million injured victims. Low- and middle-income countries (LMICs), including Brazil, suffers from traffic crashes death rates three times higher when compared to developed countries (WHO, 2018). The increasing number of traffic crashes deaths in LMICs is a consequence of an intense motorization process that has been occurring in the last decades. According to Bhalla and Mohan (2016), it is important to understand the evolution of road safety management in Organization for Economic Co-operation and Development (OECD) developed countries to overcome the road safety problems in LMICs.

Over the last century, the road safety performance of the OECD countries showed a consistent pattern. The road traffic death rate (per 100,000 population) in these countries was rising until the 1960s, as seen in FIGURE 1. After this period, all countries showed a declining pattern, whilst the LMICs still had a rising pattern due to the rapid growth in their motor vehicle fleets. This behavior of rising and declining trend on the road traffic death rate could be explained by three phenomena: economic determinism, risk substitution, and a political shift in the road safety paradigm (BHALLA; MOHAN, 2016).

In the scope of economic determinism, road traffic deaths are defined as a process related to the country's development. The rising pattern is associated with the

FIGURE 1 – ROAD TRAFFIC RATES IN OECD COUNTRIES

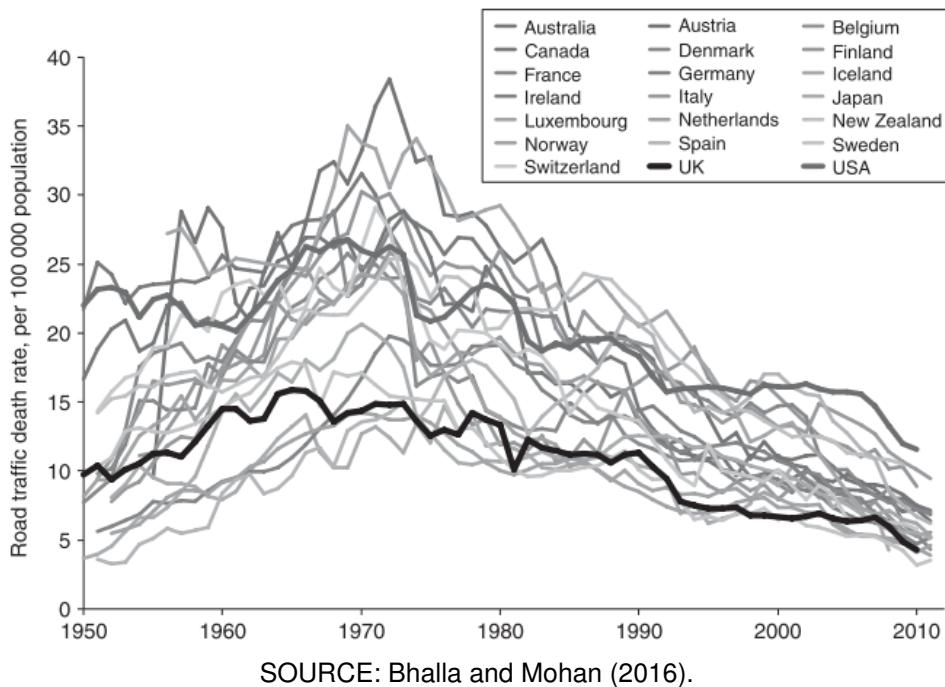

SOURCE: Bhalla and Mohan (2016).

increase in motorization, and the decreasing pattern appears after a certain level of development is achieved, in other words, the countries have the means to implement effective investments in road safety. But this hypothesis has some flaws. This creates an impression that LMICs are not able to invest in road safety before becoming fully developed, which is inaccurate. Also, this idea shifts the focus on investment in direct interventions, encouraging the countries to focus on income growth as a strategy for road safety (BHALLA; MOHAN, 2016).


As mobility, in general, becomes more motorized towards car use, pedestrians start shifting into car users. This circumstance is known as risk substitution, where the increase in car users occurs at the same time as the number of pedestrians declines, lowering the exposure to more severe road traffic injuries like the collision between cars and pedestrians and lowering the number of road traffic deaths. However, this phenomenon can be imprecise when considering the motorization of LMICs, in which mass transit, motorcycles, and other non-motorized transportation means have a greater role on the vehicle fleet (BHALLA; MOHAN, 2016).

A factor that explains this pattern in a more precise way is the political shift in the road safety paradigm that happened in the OECD countries. Before the 1950s, the belief that drivers were the only ones responsible for road crashes lead the discussions regarding road safety. Therefore, most of the interventions in road safety management ignored the design and development of the built environment and the vehicles. Between

the 1960s and the 1970s, OECD countries started to regulate transport to tackle the road safety problems that were rising, establishing new laws and road safety management institutions on national and local levels. (BHALLA; MOHAN, 2016). Analyzing the road safety data from Brazil, it is possible to correlate the current stage with the stage experienced by the OECD countries during the 1970s.

According to WHO (2018), it was predicted that Brazil would have a road traffic mortality rate (number of deaths per 100,000 inhabitants) of 22.5 in 2016, the highest rate among the South American countries. In 2019 (the last data entry available by the Ministry of Health (2020)), road crashes were responsible for 31,945 deaths. Considering the Decade of Action for Road Safety 2011-2020 (WHO, 2011), Brazil reached the goal of reducing the road traffic deaths by half (comparing to the number projected for 2020, in case of a rising trend in deaths) by the end of the 2010s. FIGURE 2 contains the time series of road traffic deaths in the last decades.


FIGURE 2 – ROAD TRAFFIC DEATHS IN BRAZIL

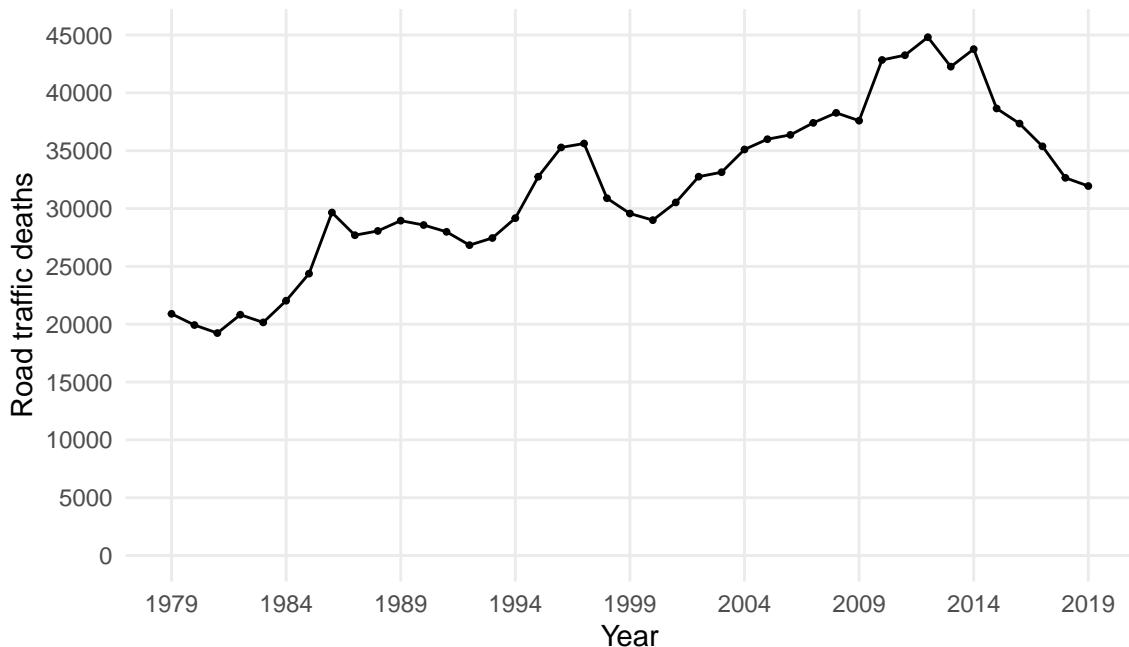

SOURCE: The Author, based on Ministry of Health (2020).

The year 1979 is the earliest official data entry available. Starting in the 1980s, there is an overall rising trend in the number of road traffic deaths, that reach its peak in 2012, then it starts to decline. In 2010, the year before the Decade of Action, Brazil had 42,844 deaths and reached the maximum value in 2012: 44,812 road traffic deaths. Almost at the end of the decade, the number of deaths declined, reaching 31,945. The next plot (FIGURE 3) includes a time series of the mortality rate in Brazil, considering the same period. In general, it follows the same pattern of absolute road traffic deaths.

FIGURE 3 – ROAD TRAFFIC MORTALITY RATE IN BRAZIL

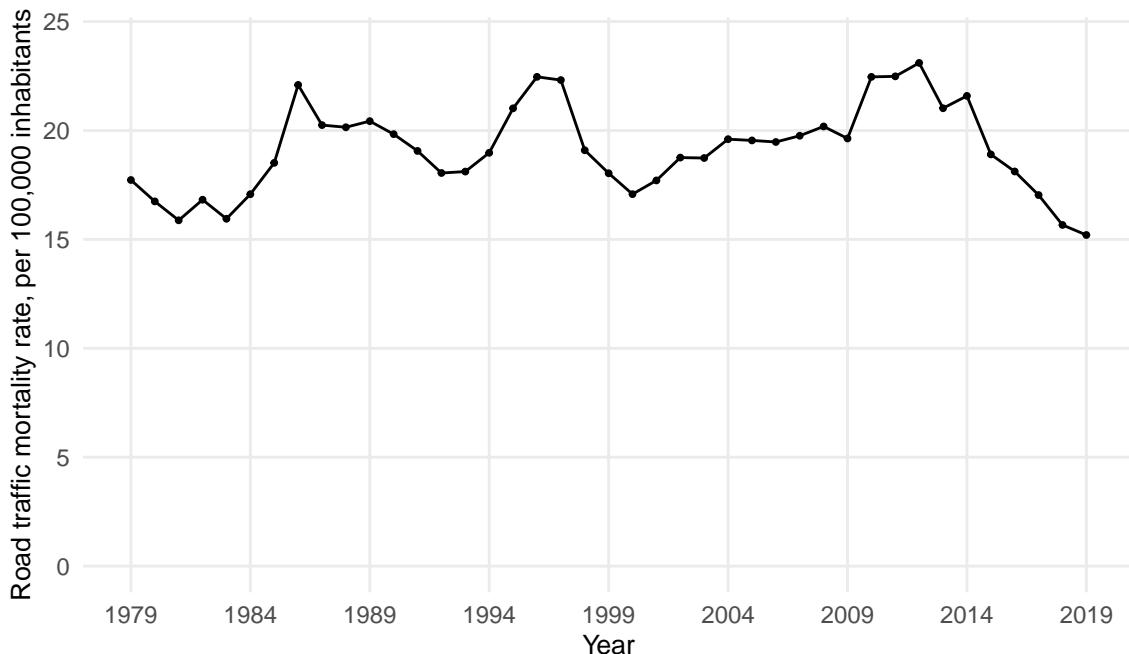


SOURCE: The Author (2021), based on Ministry of Health (2020, 2021).

The maximum registered mortality rate is 23.1 deaths per 100,000 inhabitants in 2012, the same year in which Brazil reached its maximum value for absolute road traffic deaths. Since then, the mortality rate has been declining, reaching a rate of 15.2 deaths per 100,000 inhabitants in 2019. In comparison to the OECD countries (FIGURE 1), Brazil presented a strong decreasing pattern a few years later, after the 2010s. Another indicator that considers the exposition to traffic hazards is the fatality rate – the number of deaths per 10,000 vehicles (FIGURE 4). The oldest entry of fleet size in the DENATRAN (2020) database is 1998.

Between 1998 and 2019 there is a declining pattern in the fatality rate, starting with 12.7 deaths per 10,000 vehicles in 1998 and ending with 3.0 in 2019, representing a reduction of 76%. This declining pattern can be explained by the continuous rise of the motorization rate (FIGURE 5). In 1998, motorization rate was 151 vehicles per 1,000 inhabitants, increasing to the rate of 499 in 2019. Motorization can be defined as one indicator of development in the country. Considering the motorization stages defined by Jørgensen (2005), Brazil can be classified nowadays with exploding motorization.

The first stage of motorization – developing motorization – occurs when a country has a motorization rate between 50 and 100 vehicles per 1,000 inhabitants. This first stage happened in Brazil before 1998. The explosion of the motorization is the second stage, and it happens with a motorization rate of between 300 and 400. The third and the last stage is saturation and occurs when the motorization rate reaches


FIGURE 4 – ROAD TRAFFIC FATALITY RATE IN BRAZIL

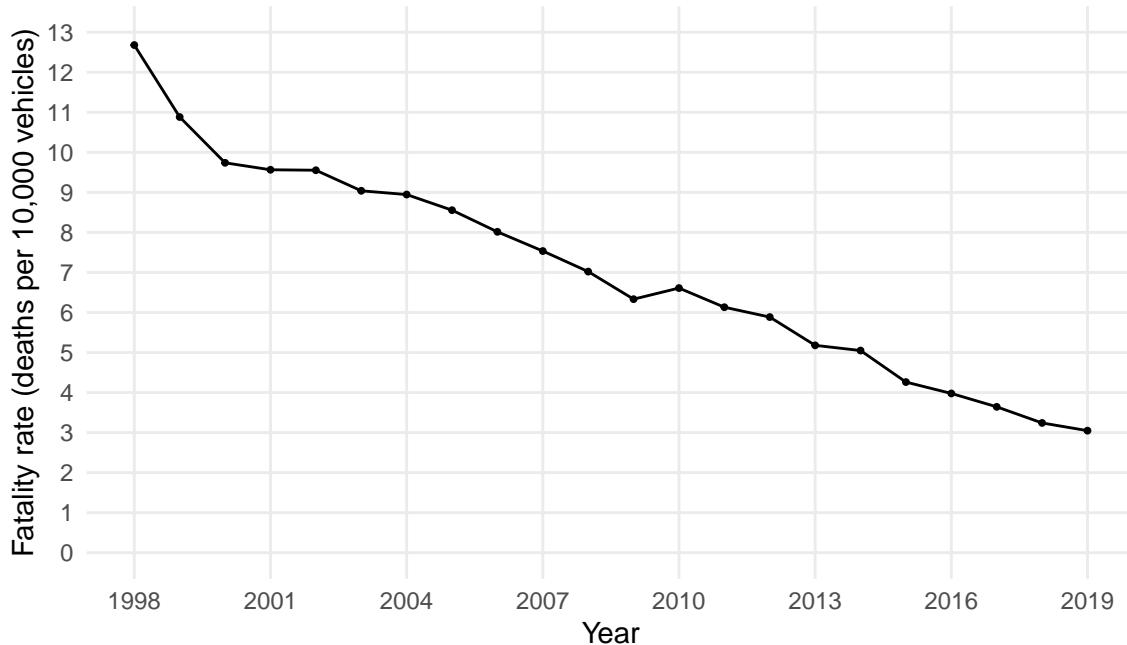

SOURCE: The Author (2021), based on Ministry of Health (2020) and DENATRAN (2020).

more than 400 and its tendency stops rising (JØRGENSEN, 2005). Although Brazil has a present motorization rate above 400, it is plausible to state that the country still hasn't reached the stage of saturation, considering that the rates are still through a rising pattern.


FIGURE 5 – MOTORIZATION RATE IN BRAZIL

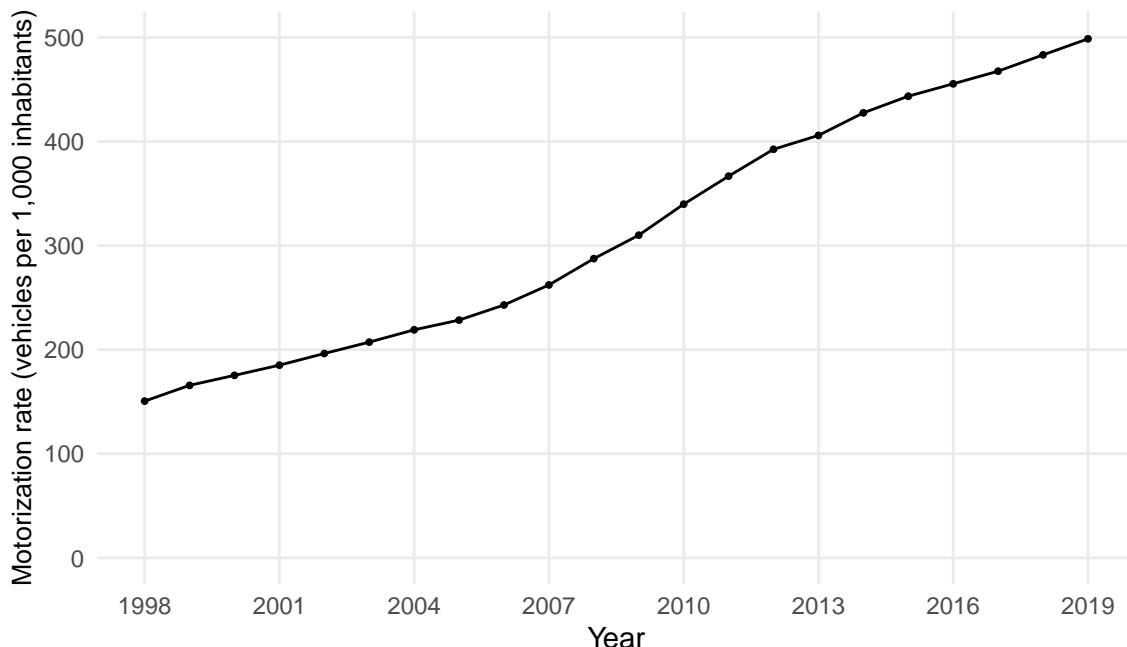

SOURCE: The Author (2021), based on Ministry of Health (2021) and DENATRAN (2020).

The evolution of Brazil's fleet size between 1998 and 2019 is presented in FIGURE 6. Between 2007 and 2018, the quantity of vehicles in the country doubled. Car is the type of vehicle with the most quantity in all years presented in the time series. Motorcycle comes in second, followed by the quantity of trucks. In 2019, 66% of the vehicle fleet was composed of cars. Motorcycles represented 27% of the fleet, followed by trucks (3%), other (3%) and buses (1%).

FIGURE 6 – VEHICLE FLEET SIZE AND TYPE IN BRAZIL

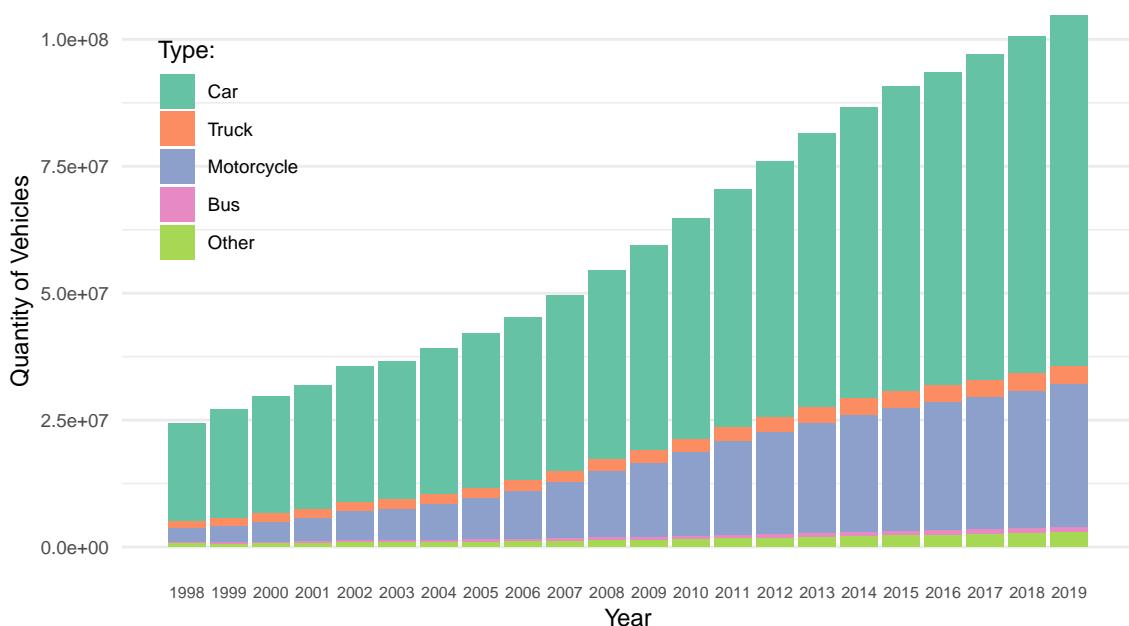


SOURCE: The Author (2022), based on DENATRAN (2020)

Considering road crashes in federal highways, occurrences as a consequence of speeding are presented in FIGURE 7. The earliest official data entry made available by the Federal Highway Police (PRF) is the year 2007, and the latest is 2020. In 2007, 6,011 road crashes happened as a consequence of speeding. The highest value of the time series happened in 2013, with 18,694 road crashes. In 2020, the number of road crashes reduced to 5,886. Regarding road crashes related to speeding in urban environments, it was not possible to find a database with this information.

In the 1970s, Brazil has undergone through intense development in the car industry, lowering the price of vehicles and increasing the development of road infrastructure in cities and rural areas. It produced a direct impact on the rise of motorization in the country (VASCONCELLOS, 2013). According to Harvey (1982), this incentive to motorization created an urban environment that was planned to answer the increasing demand for car use. This process lead to worse safety conditions in Brazilian cities, especially for non-motorized users in the road system.

FIGURE 7 – ROAD CRASHES AS A CONSEQUENCE OF SPEEDING ON BRAZILIAN HIGHWAYS

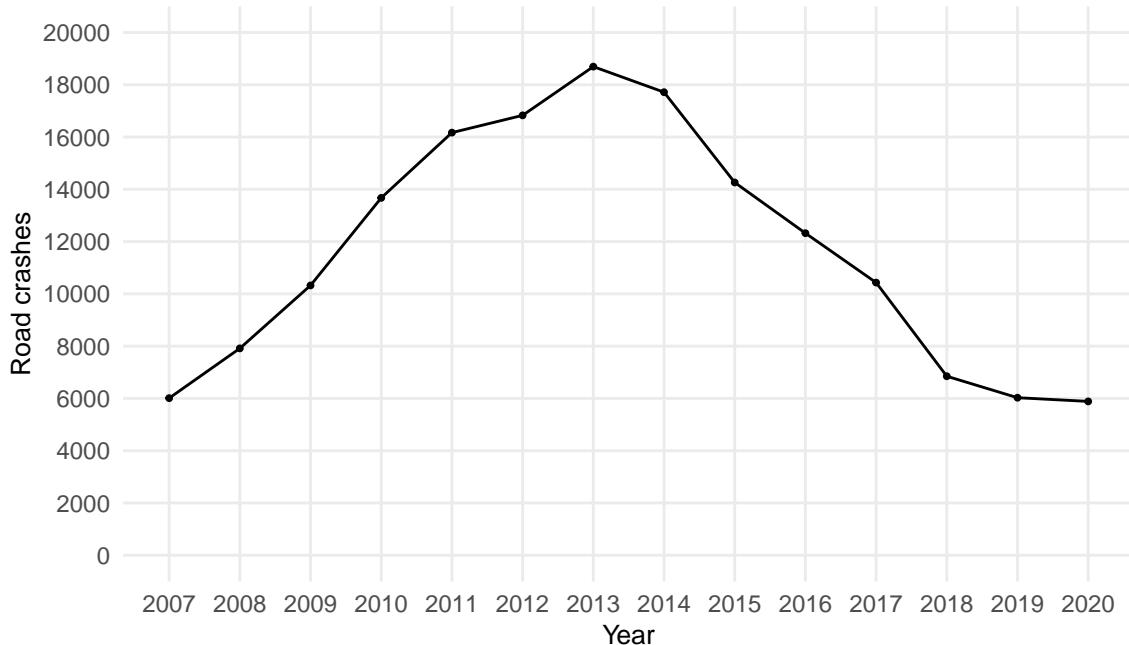


SOURCE: The Author (2021), based on PRF (2021)

The variation in the number of road traffic deaths and road traffic mortality is heavily influenced by the socio-economic development and political landscape (FERRAZ et al., 2012). The country had different economical situations between the 2000s and the 2010s. From 2000 to 2010, Brazil had continuous economic growth, which was reflected in the rising pattern of road traffic deaths and road traffic mortality rates. After 2010, the country entered into an economic recession, leading to the reduction of these numbers (BASTOS et al., 2020a). Focusing on the area of study, the road traffic deaths in Curitiba are presented in FIGURE 8.

The tendency of road traffic deaths presented a rising pattern between 1979 and 1994, starting with 312 deaths and reaching a maximum of 663 deaths. Overall, the pattern of the time series started declining after 1995, ending with a minimum value of 246 in 2019. Following the Brazilian trend, Curitiba's motorization rate kept rising in the last decades. The increase in motorized transit can lead to more exposition to traffic crashes and injuries, in case road safety interventions are not implemented correctly. The plot in FIGURE 9 compares the motorization rate between all Brazilian states' capital cities.


Curitiba was, in 2019, the second most motorized capital in Brazil, with a motorization rate of 825 vehicles per 1,000 inhabitants, higher than the Brazilian average of 499 vehicles per 1,000 inhabitants, only behind Belo Horizonte, which presented a motorization rate of 907 vehicles per 1,000 inhabitants. When comparing the road

FIGURE 8 – ROAD TRAFFIC DEATHS IN CURITIBA

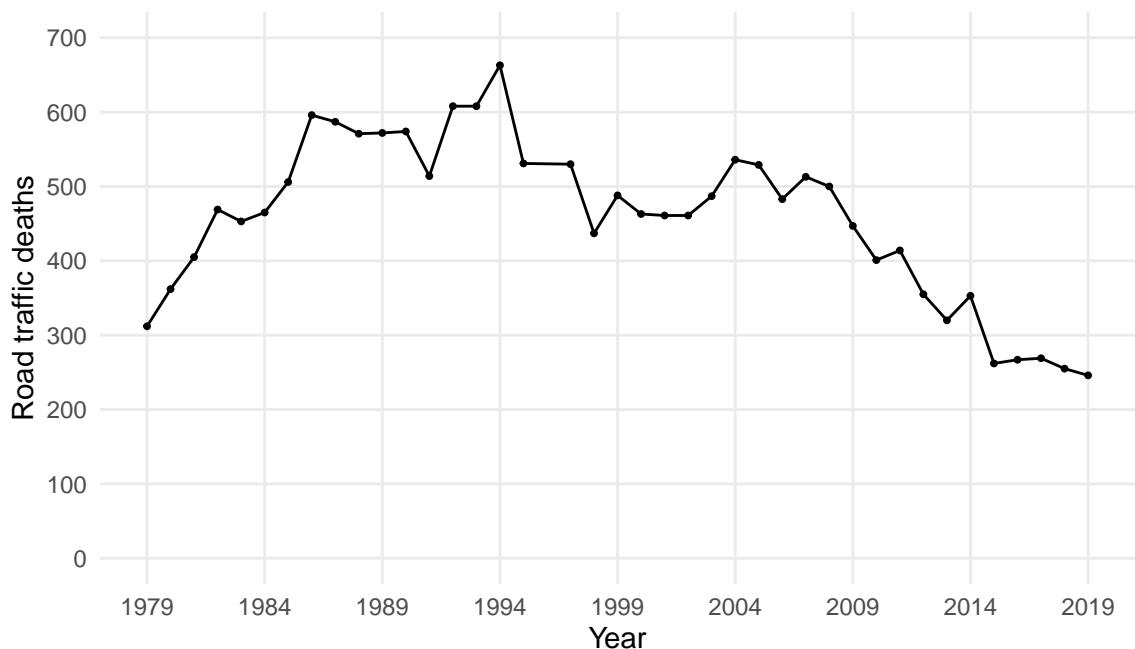

SOURCE: The Author (2021), based on Ministry of Health (2020).


FIGURE 9 – MOTORIZATION RATES IN BRAZILIAN STATES CAPITAL CITIES, IN 2019

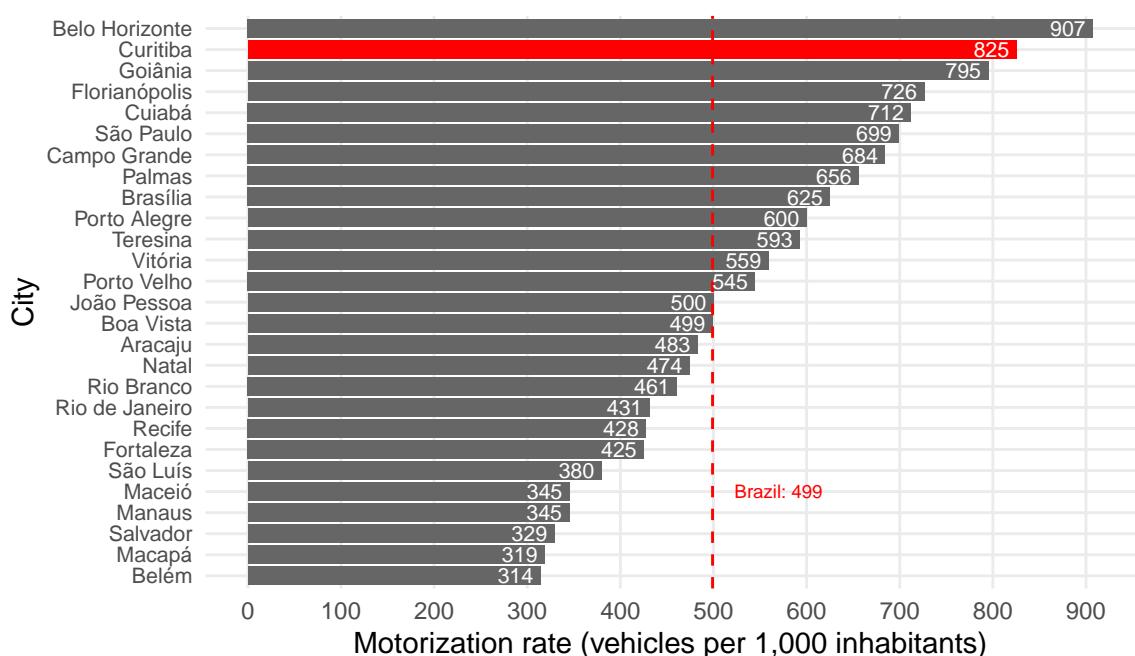

SOURCE: The Author (2021), based on Ministry of Health (2021) and DENATRAN (2020).

traffic mortality rate (FIGURE 10), Curitiba stays in the 13th place between the capitals, with 12.7 deaths per 100,000 inhabitants, below the Brazilian average of 15.2 in 2019. The lowest value of road traffic mortality rate belongs to Rio de Janeiro, presenting a rate of 5.7 deaths per 100,000 inhabitants, and the highest belongs to Palmas, with an alarming rate of 36.4. In 2015, Curitiba had a mortality rate of 13.94 deaths per 100,000 inhabitants, a substantially high value when comparing to more developed countries, like Sweden (2.8), the UK (3.1), and Germany (4.1). Curitiba's rate for 2015 has a similar value to other Latin American countries: Mexico (13.1), Uruguay (13.4), Peru (13.5), and Argentina (14.00) (WHO, 2018).

FIGURE 10 – MORTALITY RATES IN BRAZILIAN STATES CAPITAL CITIES, IN 2019

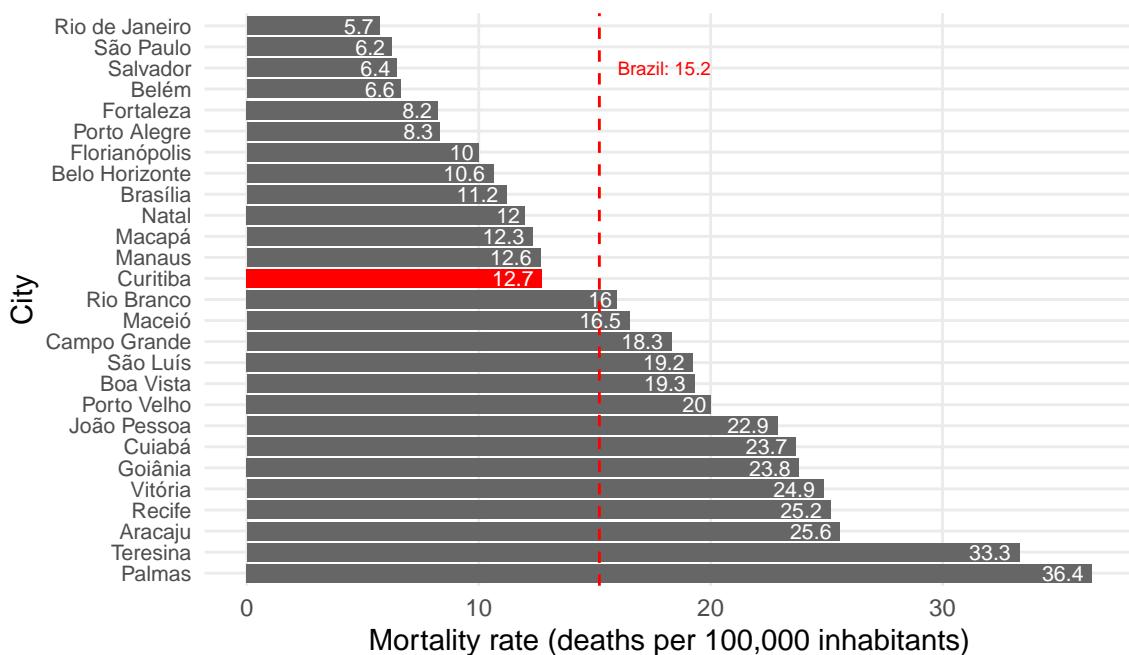


SOURCE: The Author (2021), based on Ministry of Health (2020, 2021).

The evolution of vehicle fleet size in Curitiba is shown in FIGURE 11. Following the Brazilian trend (FIGURE 6), Curitiba's vehicle fleet is mostly composed of cars (82%). Motorcycles represent 11% of the fleet, followed by trucks (3%), other (3%) and buses (1%). The car percentage in Curitiba's fleet is higher than the Brazilian average (66%) for the same year, and the motorcycle percentage is lower (11% vs 27%).

Considering the fatality rate as a road safety performance indicator, Curitiba has the 6th best performance (FIGURE 12), with a fatality rate of 1.5 deaths per 10,000 vehicles. São Paulo is the capital with the lowest fatality rate (0.9) and Recife has the highest one (5.9). Observing the fatality rate in Brazil in the same period (3.0), Curitiba is below the country average, with exactly 50% fewer deaths per 10,000 vehicles. Road traffic crashes and their related injuries have become a serious health problem across


FIGURE 11 – VEHICLE FLEET SIZE AND TYPE IN CURITIBA

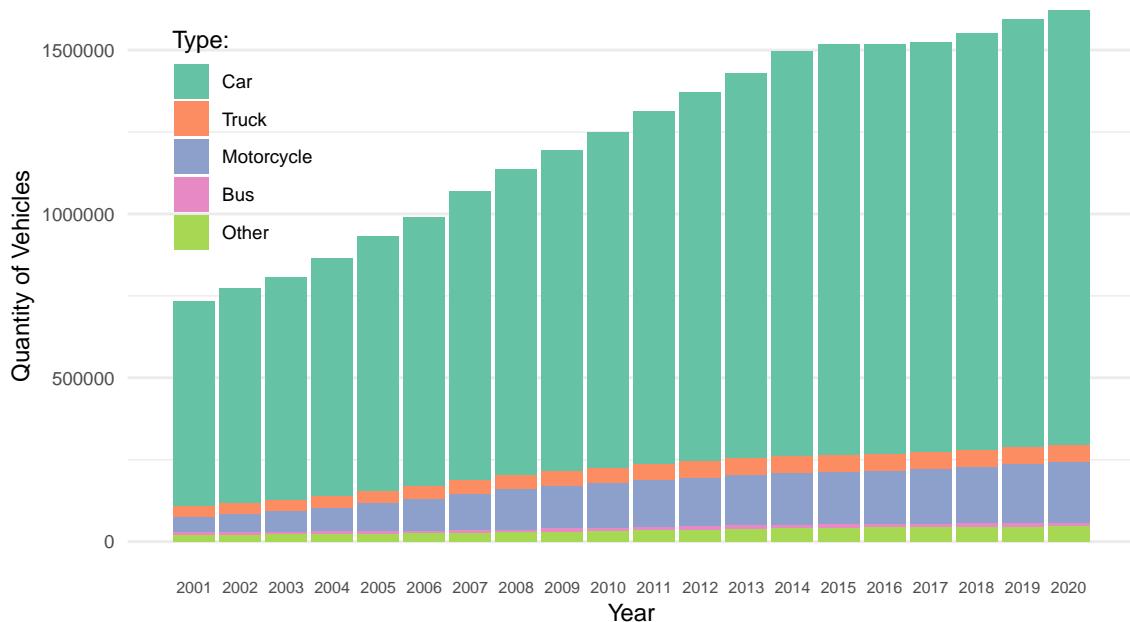

SOURCE: The Author (2022), based on DENATRAN (2020)

Brazilian cities. As motorization increases, the number of conflicts and possible crashes increases as well.

FIGURE 12 – FATALITY RATES IN BRAZILIAN STATES CAPITAL CITIES, IN 2019

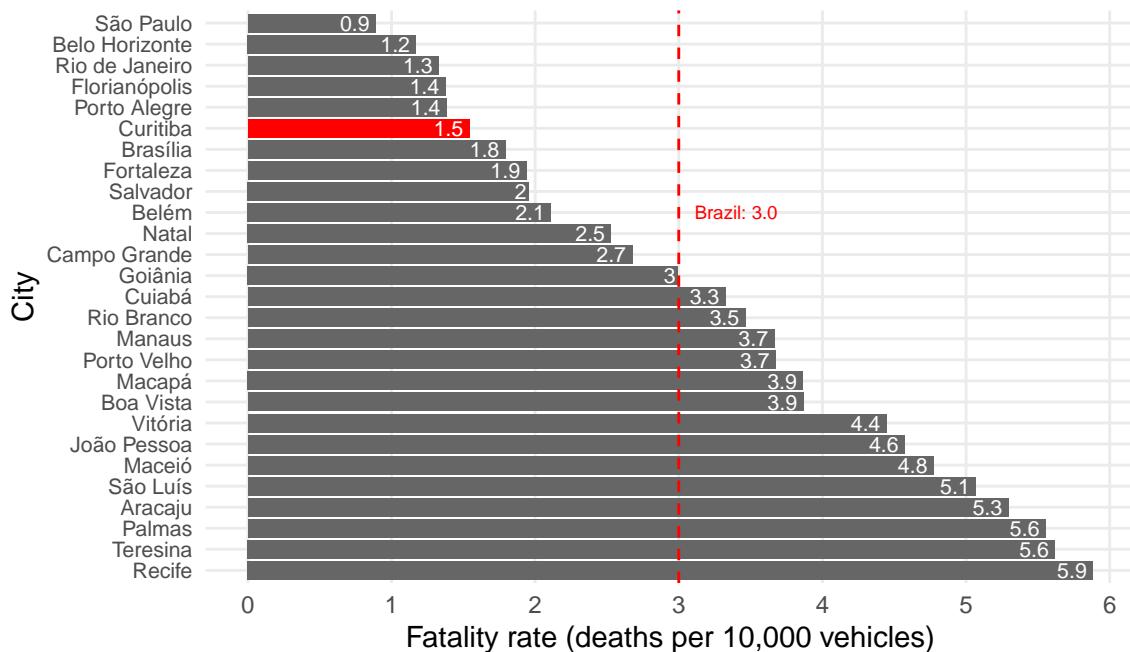


SOURCE: The Author (2021), based on Ministry of Health (2020) and DENATRAN (2020).

The road traffic deaths data made available by the Ministry of Health (2020) do not only count the occurrences from road crashes that happened in Curitiba, but also

consider the deaths that occurred in the city's hospitals and ambulances. Therefore, this data also can include deaths from crashes that happened outside Curitiba, but the rescue of the victim was carried out inside the city health system. To overcome this inaccuracy in the data, the municipal government of Curitiba has been compiling the data of road traffic deaths that happened only inside the city's territory since 2018, with the earliest entry in 2011 and the latest in 2020, as shown in FIGURE 13.

FIGURE 13 – DEATHS FROM ROAD CRASHES THAT HAPPENED IN CURITIBA

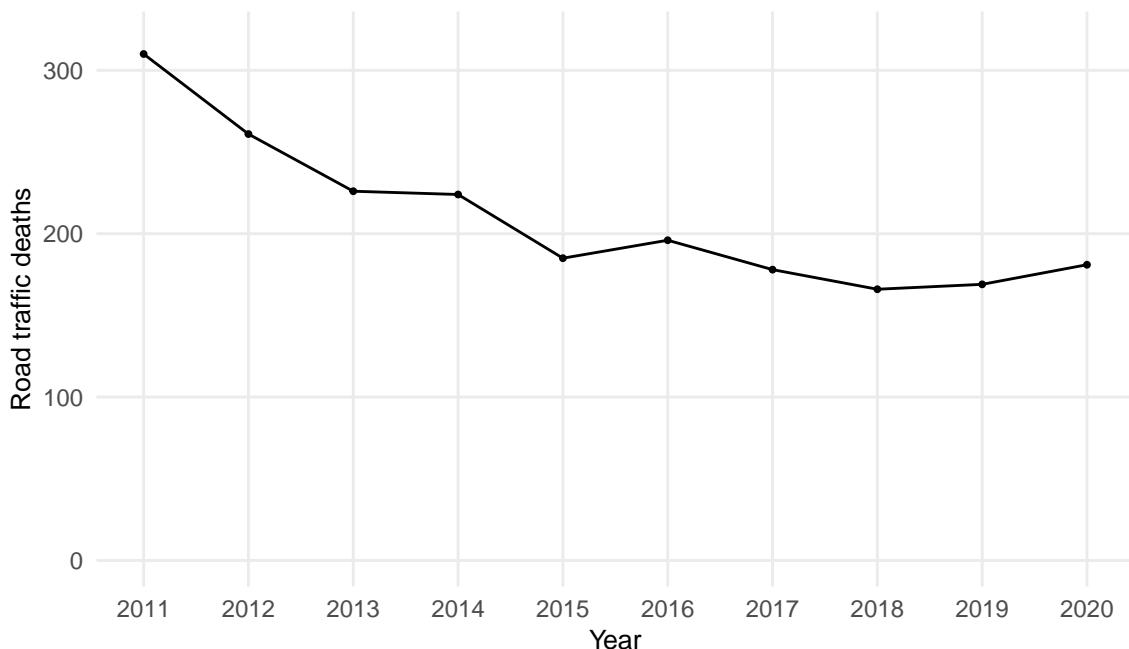

SOURCE: The Author (2021), based on Curitiba (2021).

According to Curitiba (2021), 310 road traffic deaths occurred in 2011, the highest value of the time series. In 2018, the number of road traffic deaths reached its lowest value: 166. In the most recent entry, road traffic deaths reached a value of 181. Between 2011 and 2019, speeding was the second-highest causing factor of road traffic fatal crashes in Curitiba. The highest cause of fatalities was driving under influence (CURITIBA, 2020). Between 2012 and 2020, pedestrian fatalities consisted of 37% of total road traffic deaths, and cyclists' fatalities consisted of 8% (CURITIBA, 2021).


## 2.2 ROAD SAFETY RISK FACTORS

Capable interventions in road safety need to consider traffic deaths and injuries as serious public health problems. Therefore, its control must follow the principle of control of any other public health problem. Road traffic injuries are the result of a complex interaction of multiple factors. These factors can involve human, environmental and vehicle factors, in addition to sociological, psychological, physical, and technological

factors that are present in the process of traffic crashes. Like other health problems, it is possible to analyze road traffic injuries considering three different phases in time: pre-crash, during the crash, and post-crash (MOHAN, 2016a).

These distinct phases of time and factors of road traffic crashes can be arranged into a matrix created by Haddon (1980) to map all causes related to an injury. Named after its author, the Haddon matrix (FIGURE 14) consists of two dimensions: one for the time aspect of the event and a second one representing three main factors: human, vehicle, and environment. Crossing each step of the two dimensions (factors and phases) leads to nine cells, in which a list of countermeasures to control the damage or to prevent a possible incident can be made, associating these measures to each pair of factors.

FIGURE 14 – HADDON MATRIX

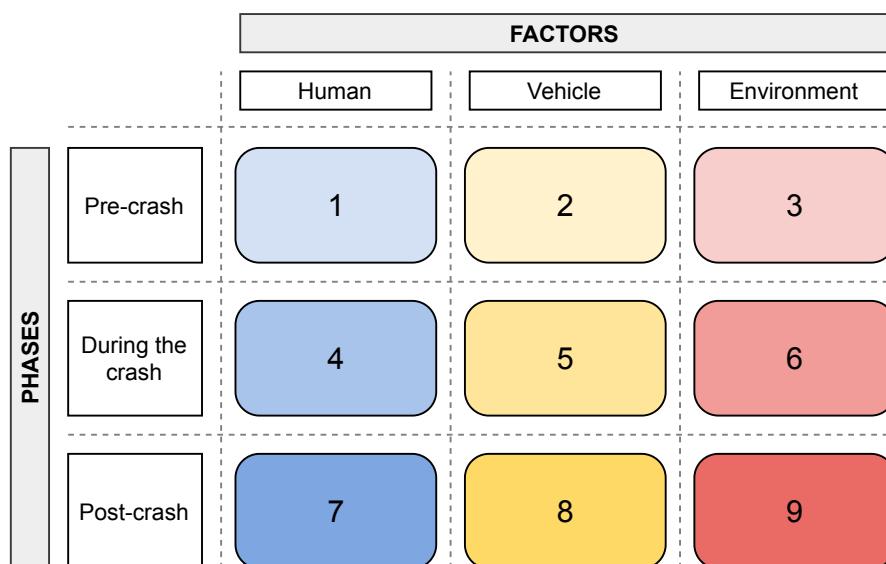

SOURCE: The Author (2021), based on Haddon (1980).

Cells 1, 2, and 3 contain measures towards the prevention of crashes. On a road traffic crash scenario, cell 1 considers the behavior (e.g., aggressive driving, driving under influence, distraction) and training of the road users (e.g., pedestrians, drivers, motorcyclists, and cyclists), cell 2 presents safety interventions related to the vehicles (e.g., use of daylight headlights, speed control systems, etc.) and cell 3 contains all elements of the road infrastructure and build environment that influences directly into the occurrence of this event. Cells 4, 5, and 6 comprehend measures that can reduce the severity during the occurrence of a crash event.

In cell 4 some measures include the use of seat belts, helmets, and protective clothing. Cell 5 considers the crash worthiness and safety design of the vehicles and cell 6 includes elements (or lack of elements) that can influence the severity in case of

a collision (e.g., guard rails, concrete barriers, street furniture, etc.). In the last row, the measures related to the control and treatment of injuries after the event are included. Cell 7 presents the treatments related to the victims (e.g., hospital care and rehabilitation); cell 8 contains measures related to the safety systems of a vehicle and cell 9 considers the general management of a crash scene (MOHAN, 2016a).

The road safety problems that happen in urban environments may differ from the ones that happen in major roadways. Even with lower operating speeds, the number of conflicts in urban road systems can be substantially higher when comparing to rural roadways, considering the quantity of different motorized and non-motorized transport modes that use the infrastructure at the same time. Consequently, it is essential to follow the requirements for safe infrastructure. The three main ones are functionality, homogeneity, and recognition (SWOV, 2003). Each road on a network needs to have a specific function (balance between mobility and access), with traffic distribution working as intended. Homogeneity consists in reducing the points of conflict between transport modes with a great difference of mass and speed. Finally, the situations on traffic should have a level of predictability, which consists of the road users' expected behavior.

To reduce road traffic crashes and possible consequent injuries or deaths, it is relevant to consider the main risk factors that cause and intensify these events. According to WHO (2004), the risk in road traffic can be classified into four elements that are directly influenced: exposure, crash involvement, crash severity, and post-crash severity. The risk factors that can be classified in these elements also can be distributed within the Haddon matrix as well (FIGURE 14). The main risk factors related to the protection of the user consist of the usage of seat belts, helmets, airbags, child restraints, and helmets. Focusing on the behavioral factors, the main ones are driving under influence of alcohol and other drugs (DUI), distraction, and inattention (SHINAR, 2017).

The Safe System Approach is a framework that aims to develop road systems that establish a better management of crash forces, being able to accommodate human error in a way that is not fatal for the users (ITF, 2008). In this framework, the road safety interventions previously described are maintained and intensified, added to a safety management process that integrates key aspects of road user behavior, traffic environment, speed management and vehicle systems for the increase in road safety performance. According to Larsson and Tingvall (2013), road safety interventions in the Safe Systems does not treat the human error as an individual error, but as system's failure.

Considering that this failure will continue to occur, the safe system focus on

prevention of serious injuries and deaths. Therefore, the design of the road system should guide the users to a safer behavior, mitigating more severe outcomes. The physical vulnerability of the human body is at the center of the Safe System Approach. Speed limits and road infrastructure must be compatible to this tolerance. The safe systems evolve from traditional approaches to safety problems, not relying on how well the road users performs their tasks. The design of the road transport system should guide the road user to a safer speed levels, mitigating possible crashes and injuries (ITF, 2008; WEGMAN, 2017).

The excess of speed and the speed differential in urban environments are two risk factors that affect the chance of traffic crashes occurrence and the severity of these crashes. Speed differential is the disparity of speeds between vehicles on the same road, leading to higher chances of conflicts. Speeding, which consists of exceeding the speed limit of a road, is a complex phenomenon with multiple causes, consequences, and methods of prevention. Given its complexity, this risky behavior is discussed in the next section (2.3).


### 2.3 SPEEDING AS A RISK FACTOR

Speeding is one of the primary global causes of road traffic fatalities, affecting two main dimensions: probability and severity (WHO, 2013). The increase in vehicle speeds is directly correlated to the increase in the occurrence of crashes and their average severity, hence, strongly related to road safety (MOHAN, 2016b). Another speed-related risk factor is the speed differential, which is the speed deviation from the average operating speed (SHINAR, 2017). Ferraz et al. (2012) define speeding as an inappropriate speed, leading to more conflict and crashes in certain traffic conditions.

The excess of speed can influence three main aspects in the occurrence of a traffic conflict: reaction time, braking distance, and force of impact, which is directly correlated to the severity of injuries (MOHAN, 2016b). Reducing the speed helps the driver to increase its reaction time, and to take correctional action to anticipate crashes (ELVIK et al., 2009). Regarding the braking distance, lower speeds reduce the distance necessary to fully stop the vehicle. In FIGURE 15, it is possible to verify the reaction time of a vehicle added to the braking distance, resulting in the distance traveled by the vehicle until the complete stop. The dashed line represents a pedestrian standing 35 meters from the moving vehicle.

The horizontal lines from the plot show the cruising speeds of the vehicle before they start breaking, longer lines at higher speeds represent greater reaction times. In this scenario, only speeds equal to or below 40 km/h can avoid a collision with the

FIGURE 15 – RELATIONSHIP BETWEEN SPEED AND BRAKING DISTANCE

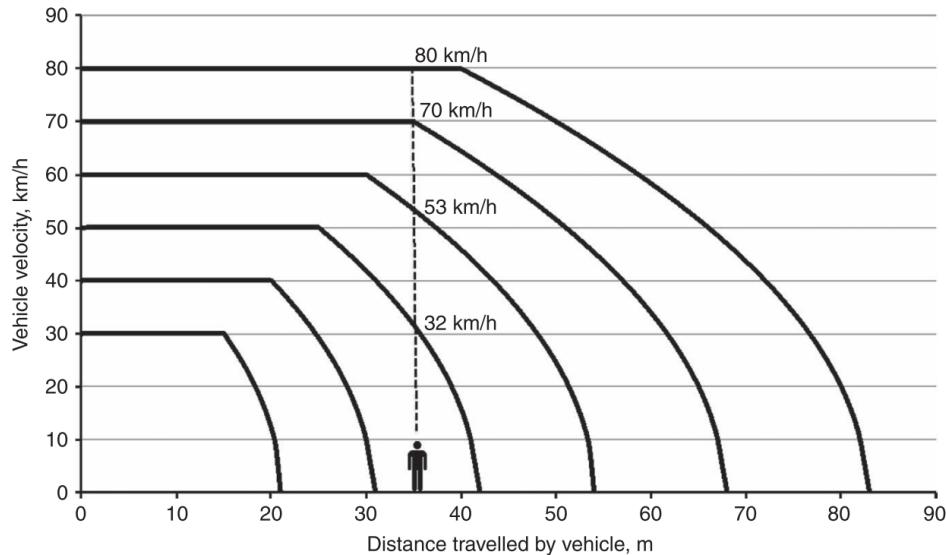

SOURCE: Mohan (2016b).

pedestrian. As the vehicle speed rises, the impact speed rises as well. This leads to an increase in the force of impact between vehicles and pedestrians. The severity of injuries sustained by pedestrians depends on the energy of impact – the kinetic energy transferred to the human body. This energy of an object (the vehicle) is directly related to its velocity and mass, detailed in the following equation:


$$E = 0.5 \times M V^2; \quad (2.1)$$

where  $E$  is the kinetic energy,  $M$  is the object's mass and  $V$  is the velocity of the object. The plot in FIGURE 16 shows the increase in kinetic energy, considering an average car mass of 1,500 kg (ZERVAS; LAZAROU, 2008) and speeds varying between 0 and 100 km/h. The quantity of energy doubles when the speed changes from 40 km/h to 60 km/h, and almost triples at 70 km/h. This variation shows how the reduction of speed limits can greatly change the energy of impact.

Considering the event of an impact between the front of a car and a pedestrian, Ashton (1980) presented the relationship between the impact speed and the percentage of fatally injured pedestrians per speed window, represented in the plot of FIGURE 17. The curve shows how a reduction from 60 km/h to 40 km/h on the speed of impact can reduce the chance of a fatal injury from 90% to 30%, approximately. Reducing the speed of impact to 30 km/h will reduce the chance of a fatal injury to approximately 10%. In general, as the speed of impact rises, the chance of a fatal injury rises too, with a greater variation between speeds of 30 km/h and 60 km/h.


The risks related to speeding behavior highlight the importance of proper speed management in road traffic, especially in urban environments. Roadways have higher

FIGURE 16 – RELATIONSHIP BETWEEN SPEED AND KINETIC ENERGY

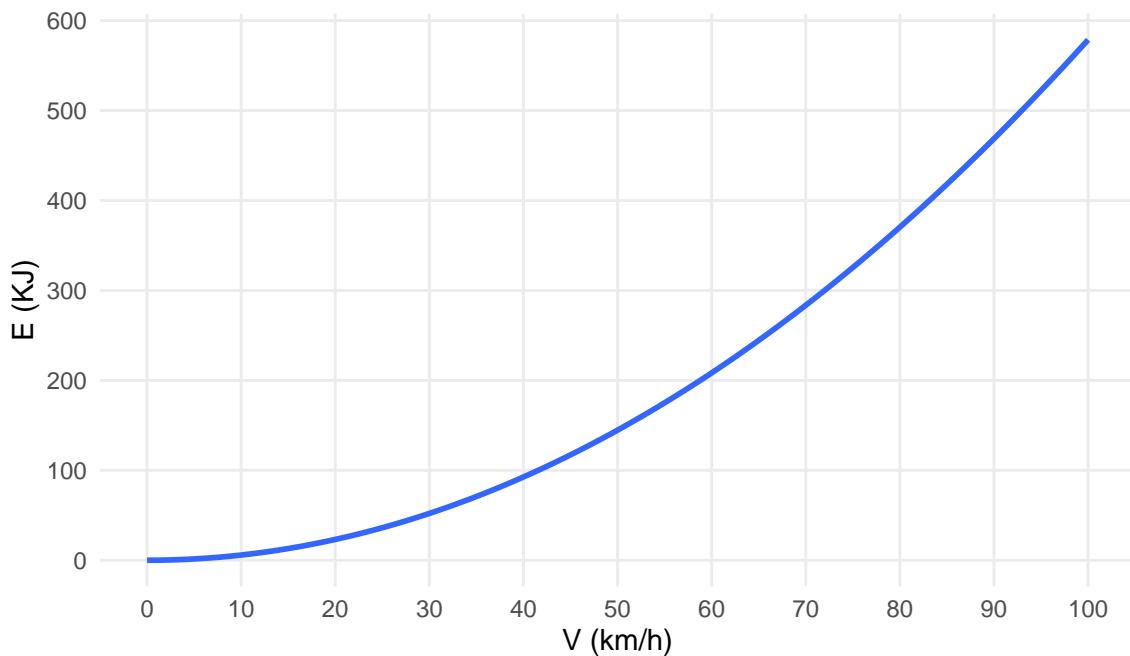

SOURCE: The Author (2021).

FIGURE 17 – PROBABILITY OF PEDESTRIAN FATALITY AT DIFFERENT IMPACT SPEEDS

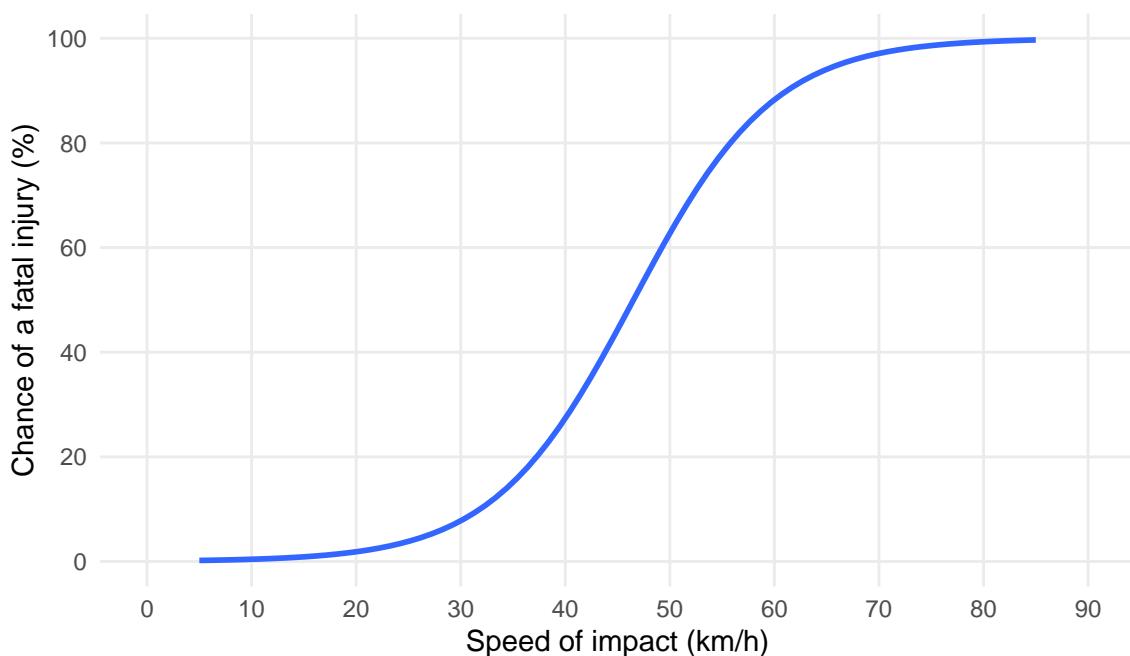

SOURCE: The Author (2021), based on data from Ashton (1980).

operational speeds, but cities contain a more expressive interaction between motorized and vulnerable users, in which even lower speeds can still represent a risk to pedestrians and cyclists. One method to manage the operating speed is the enforcement of speed limits. It is recommended a speed limit of 30 km/h in areas where there are a great number of interaction between vulnerable road users and vehicles, except where strong evidence exists that higher speeds are safe (WHO, 2020, 2021). Reducing the mean speeds can greatly favor the decline in fatal, non-fatal, and property damage only (PDO) road crashes (ELVIK, 2013). In Brazil, speed limits in cities are defined based on the category of road hierarchy. In decreasing order, rapid transit roads have a limit of 80 km/h, followed by arterial roads, with a limit of 60 km/h; collector roads – 40 km/h; and local roads, with a limit of 30 km/h (BRASIL, 1997).

The operating and mean speed of the road traffic depends on how drivers choose the speed. This choice is related to the power and stability of the user's vehicle, to road and traffic conditions, to driver's perception of safety, to the level of enforcement, to travel motivations, to personal characteristics, and to the behavior of other drivers (MOHAN, 2016b; SHINAR, 2017). Considering all these factors, it is not effective to rely only on traffic limits to prevent speeding. If the design speed of a road is higher than the speed limit and the road traffic has a low density, it is more difficult to avoid the driver to reach the desired speed. The difficulty to enforce the speed limits may be higher in LMICs, where there are fewer resources to adopt the proper road designs policies and lower enforcement available required to this task (MOHAN, 2016b).

In TABLE 1 a few groups of factors affecting speeding and speed choice are presented, with its categorization based on the three main discrete factors of road crashes established by Haddon (1980): human, vehicle and environment. Analyzing the human (or driver) factors, the background characteristics include the level of experience, education, and training of the drivers. Demographic characteristics consider the groups of age, gender, and income. The general health of the driver, including the conditions of vision, hearing, and sleep patterns, are included in the physiological factors. The last factor in the human group – attitudes, beliefs, and motivations considers how the road user perceives the control and norms present in traffic situations (RICHARD et al., 2013b).

All these human factors are related to the general driver profile and its performance when driving the car. As an example of the influence of the individual differences present in the demographic characteristics, younger drivers are more likely to speed than mature and older drivers; and men are more likely to speed than women (SHINAR, 2017). The vehicle characteristics also affect the speed choice of the user. The type, engine power, comfort, field of view, and age of the vehicle can affect the possibility of

TABLE 1 – FACTORS THAT AFFECT SPEEDING AND SPEED CHOICE

Human	Vehicle	Environment
Background characteristics	Type/Size	Road elements
Demographic characteristics	Engine power	Weather
Physiological factors	Comfort	Traffic conditions
Attitudes, beliefs, and motivations	Field of view	Surroundings
	Age	Speed Enforcement

SOURCE: The Author (2021), based on Richard et al. (2013b), Shinar (2017), and WHO (2008).

the driver to reach the desired speed.


The environmental factors affecting speed choice consist of all the elements external to the vehicles and are greatly related to how the driver behaves and to how the vehicle can operate. Road elements can include the general characteristics of a road layout, quantity, and type of intersections, design, and level of maintenance, based on its alignment, gradient, width, surface condition, geometric pattern, and road lighting. The presence of intersections and the high density of traffic controls the operating speeds in urban areas (MOHAN, 2016b). Weather can also affect how the driver will choose his speed, considering its effects on surface conditions (dry, wet, ice) and natural light.

The speed and speed variance are to a certain extent determined by the traffic flow regime (SHINAR, 2017). Depending on the level of flow and density or any other operational condition of the traffic, the driver cannot be able to reach a higher desired speed, removing his ability to have an opportunity to speed (RICHARD et al., 2013b; BASTOS et al., 2021). The plot in FIGURE 18 illustrates the relationship between speed, density, and volume (or flow) in uninterrupted flow conditions of a certain road. This relationship was modeled by Greenshields et al. (1934) and named after its author. This type of flow occurs in areas without interference from external factors, like intersections or crossings (GREEN; LEWIS, 2020).

When density and volume are at their lowest value, the road user can reach higher speeds without having traffic to prevent it (point A). Between points A and B, volume and density rise, and speeds decline a little but still are high enough to be characterized as a free-flow speed. In this situation, the driver starts to experience a lack of maneuver freedom, but it still has the opportunity to speed. At the highest level of density (point C), speed declines as density rises. Between C and D, density rises until it reaches its maximum value, reducing the overall traffic stream speed and flow (GREEN; LEWIS, 2020). In this last stage, the drivers have less flexibility to choose the desired speed, having to operate in a forced flow condition.

Established as an environmental factor affecting speeding choice (TABLE 1), the surroundings of the road, including equipment and some traffic-calming techniques

FIGURE 18 – GREENSHIELDS MODEL

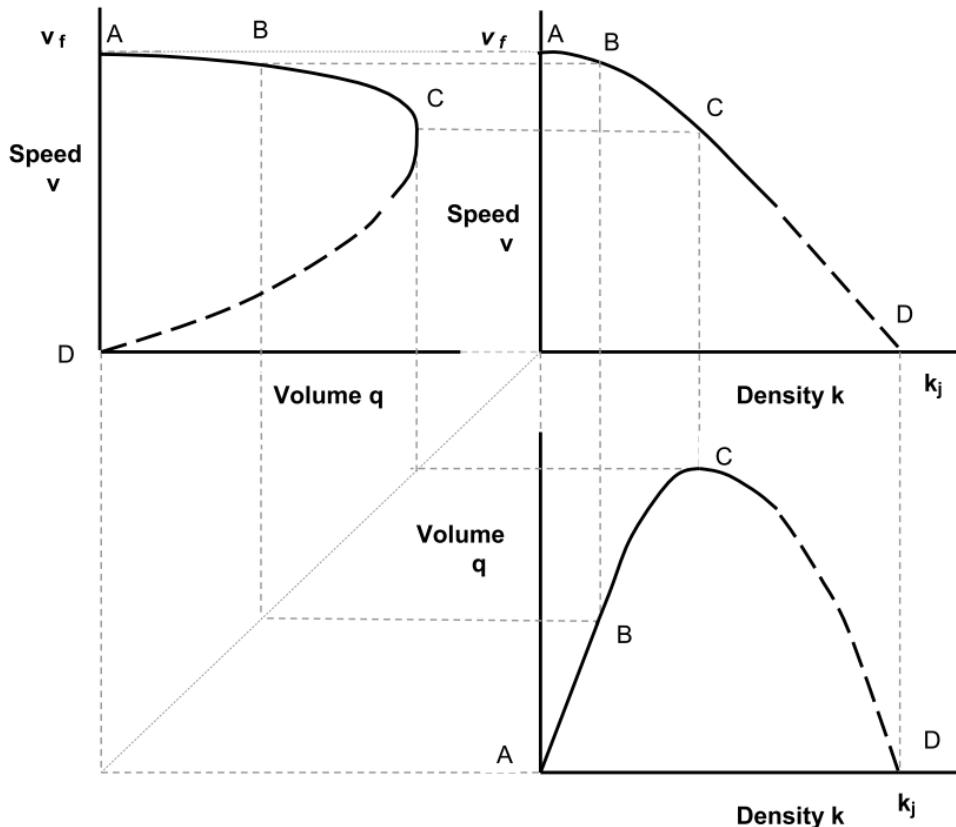

SOURCE: Green and Lewis (2020), based on Greenshields et al. (1934).

like gateway treatments can be perceived by the driver as elements that give hints to avoid higher speeds (WHO, 2008). Overall, the built environment and its five elements – density, design, diversity, destination accessibility, and distance to transit – can be perceived as environmental factors which affect road safety, through the relationship to the number of road crashes and occurrence of speeding. These characteristics are better explored in the next section (2.4).


To collect speeding data and to compute a reliable road safety performance indicator, it is important to establish what defines speeding and to identify a measure of exposure to speeding. To Richard et al. (2013a), defining speeding and its constitution is one of the key challenges of speeding studies. The authors presented five distinct approaches for speeding definition: *ad hoc*, analytical, kinematic, psychological, and behavioral. The *ad hoc* approach assumes that the fastest driving in a sample is a proxy for speeding, and considers the top X% of speeds above the speed limit. Although this approach can provide sufficient data for analysis, the speeding collected might not be related to behavior or safety.

The analytical approach fixes a criterion relative to the speed limit (+ X% or + X km/h). It is a simple method to implement, but can miss some factors related to

road type and overall speed level. The analytical approach is used in this work and its process of implementation is detailed in Section 3.2. The kinematic approach considers the driving environment and its operational conditions, to connect the speed behavior to specific situations. This approach requires a certain level of quantity and quality of GIS data to support it. The psychological approach is based on what the driver considers to be speeding, providing insight into factors that are related to an individual's perception of speeding. The need for additional previous information about the speeding beliefs and attitudes of the drivers can be a disadvantage of this approach. At last, the behavioral approach sets four speed bands to describe different behavior in each one, related to the chosen speed by the driver (RICHARD et al., 2013a).

The operational aspects of urban road traffic (mostly in interrupted flow conditions) arbitrarily reduce the amount of speeding being measured. To address this problem, it is necessary to extract the free-flow situations of the trip from the total trip distance, removing situations in which drivers had no opportunity to speed. This process of extracting parts of the trip in which the driver is exposed to speeding is presented in FIGURE 19. Therefore, the actual measure of speeding is distance performed in speeds above the speed limit compared to the distance performed in free-flow speed. This process was applied in this work, and it is described in Section 3.2.

FIGURE 19 – EXTRACTION OF FREE-FLOW AND SPEEDING EPISODES FROM TRIPS

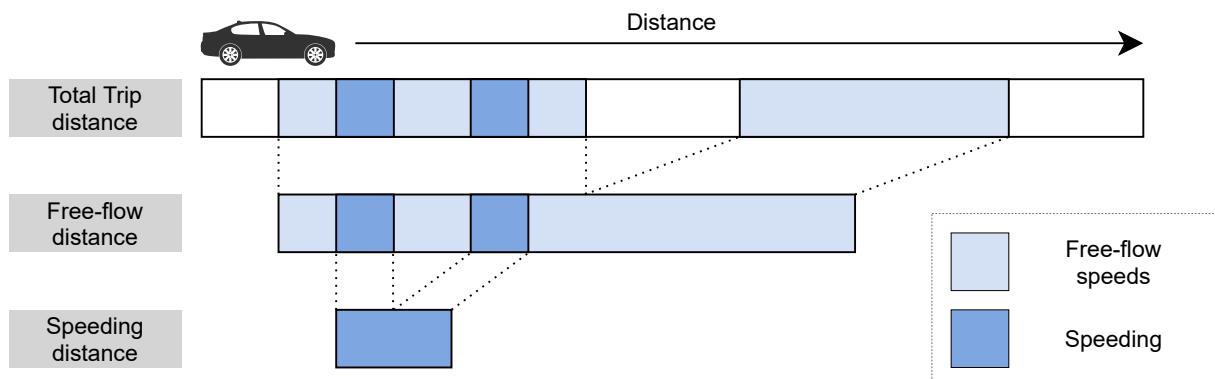

SOURCE: The Author (2021), based on Richard et al. (2013a).

The collected data also depends on the method applied. The collection of speed data can be done with the use of speed traps – fixed or mobile (HIDALGO-SOLÓRZANO et al., 2020; WHO, 2008), the analysis of road crashes reports (WATSON et al., 2015), roadside observational studies (SHINAR, 2017), questionnaires (DINH; KUBOTA, 2013), smartphone data (WARREN; LIPKOWITZ; SOKOLOV, 2019) and GPS data collection (MORENO; GARCÍA, 2013; WANG et al., 2018). Studies that use naturalistic data include the video recording data from the drivers and GPS data, which together can relate the speeding action registered with a certain behavioral action from

drivers (BASTOS et al., 2020b) and environmental factors (MORENO; GARCÍA, 2013). The speeding data collected from driving simulation studies can also be correlated with other environmental or behavioral factors (YADAV; VELAGA, 2020). The aspects of naturalistic driving studies and their comparison to other methods will be better explored in Section 2.6.

Through the knowledge of the factors that affect speeding and the methods to collect and analyze speeding data, it is possible to plan countermeasures to this risk factor in road traffic crashes. Following the categories established by Haddon (1980) and presented in TABLE 1, these countermeasures can be classified into behavioral (human), vehicular and environmental approaches. Behavioral approaches include the education and training to teach speed awareness to drivers. Enforcement is also a behavioral approach. Enforcement by the police or other traffic authority is related to a greater rate of speed limit compliance, but it is a highly localized measure (SHINAR, 2017).


The vehicle approach to intervening in speeding practices includes speed limits and advisory systems in cars. Environmental approaches consist of direct changes in infrastructure, including traffic-calming measures, and policy approaches, including the establishment of speed limits and administrative actions. Speed bumps, lane narrowing, roundabouts, and rumble strips are some traffic-calming techniques that are capable to reduce speeds in urban environments (WELLE et al., 2016). Key elements of urban design, including the built environment, also can influence in practice of speeding. This influence is discussed in Section 2.4

## 2.4 ROAD SAFETY PERFORMANCE AND THE BUILT ENVIRONMENT

The built environment consists of physical elements and features, including the development pattern and the roadway design of a city. The built environment affects the physical activity inside the city, including overall mobility, road safety, and health. According to Ewing and Dumbaugh (2009), the frequency and severity of road traffic crashes are related to the built environment through three mediators: traffic volume, traffic conflict, and traffic speed, as shown in FIGURE 20. Therefore, the land use and transport plans influence the choice of destination, modal choice, travel distances, and routes, impacting road traffic safety (TIWARI, 2016).

Traffic volume is directly related to the crash frequency and the increase of vehicle miles traveled (VMT), which is an exposure variable to the occurrence of road traffic crashes. Traffic speed (thus, speeding), the main factor investigated in this paper, is affected by the operating and encouraged speed defined by the roadway design

FIGURE 20 – BUILT ENVIRONMENT AND TRAFFIC SAFETY

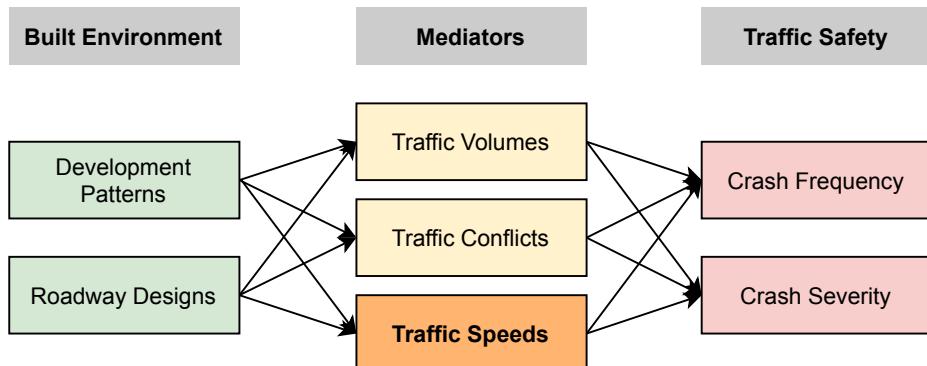

SOURCE: The Author (2021), based on Ewing and Dumbaugh (2009).

and the development pattern. Traffic conflicts are related to the increase in vehicle flow and traffic speed (EWING; DUMBAUGH, 2009). Overall, the built environment can be characterized into five “D” variables: (i) density, (ii) diversity, (iii) design, (iv) destination accessibility, and (v) distance to transit, being defined as the 5D (EWING; CERVERO, 2010). Demographics of residents, while not being part of the built environment, can be considered as the sixth “D”.

TABLE 2 contains the categories previously described and their corresponding variables. It is important to note that it is not presented all the possible built environment variables, only the main ones found in previous papers. In addition, these are rough categories, divided by boundaries that are subject to change (EWING; CERVERO, 2010). Density measures a variable of interest per unit of area and can include the quantity of population, housing, or the number of jobs, showing the “hotspots” of the overall activity in a city. Diversity refers to different land use types within a given area, ranging from single-use environments to more varied land uses. The street network and its characteristics are included in the design category, and it considers elements like block size, type/quantity of intersections, street widths, the number of pedestrian crossings, and street network density.

Destination accessibility measures how easy it is to access places of attraction, including jobs, services, commerce, and districts of overall interest, considering business districts and city downtown. Distance to transit is usually measured by the supply level of transportation services, being measured by the number of transit stops and network density. Network density can also be included in the design category. Demographics, while not being a characteristic of the built environment itself, can influence the occurrence of speeding in urban environments, including income, age, and gender. In the following tables (TABLE 3 to TABLE 8) the built environment categories and the variables considered in this work are presented, including the authors that investigated

TABLE 2 – BUILT ENVIRONMENT VARIABLES

Category	Variable
Density	Population
	Housing
	Employment
Design	Land use
	Block size
	Type / Quantity of intersections
	Street widths
	Quantity of pedestrian crossings
Destination Accessibility	Road hierarchy
	Street network density
	Quantity of commercial and service units
Distance to Transit	Distance to city center
	Quantity of jobs
	Quantity of bus stops
Demographics	Distance to the nearest transit stop
	Income
	Age
	Sex

SOURCE: The Author (2021), based on Ewing and Dumbaugh (2009), Ewing and Cervero (2010) and Obelheiro et al. (2020).

them related to the road safety performance in urban areas, with the focus on one final outcome indicator (road crashes) and one mediator (occurrence of speeding).

TABLE 3 contains a list of authors who investigated the relationship between population density and road safety in urban areas. Regarding road traffic crashes, Dumbaugh and Rae (2009) and Obelheiro et al. (2020) found an inverted correlation between the number of inhabitants per area and the occurrence of road crashes. Higher density environments cause people to drive less (DUMBAUGH; RAE, 2009), reducing the exposure to road traffic accidents. Research considering road safety and BEs about another Southern Brazilian city – Porto Alegre – also presented a result of an inverted relationship between injury crashes and population density in most of the city's area.

TABLE 3 – CORRELATION BETWEEN DENSITY AND ROAD SAFETY OUTCOMES

Category	Variable	Road safety outcomes	
		Crashes	Speeding
Density	Population	(–) Dumbaugh and Rae (2009)	—
		(+) Dumbaugh, Li, and Joh (2013)	—
		(+) Lee, Abdel-Atty, and Jiang (2015)	—
		(–) Obelheiro et al. (2020)	—
		(+) Pirdavani et al. (2014)	—
		(±) Welle et al. (2016)	—

SOURCE: The Author (2021).

NOTE: (+): positive correlation between variable and outcome; (–): inverted correlation between variable and outcome; (±): correlation not clear / depends on other factors.

Dumbaugh, Li, and Joh (2013), Lee, Abdel-Atty, and Jiang (2015) and Pirdavani

et al. (2014) found a direct relationship between population density and the occurrence of road crashes. There is a positive relationship between population density and total pedestrian crashes (DUMBAUGH; LI; JOH, 2013), in addition to motor vehicle crashes and bicycle crashes (LEE; ABDEL-ATY; JIANG, 2015) and injury crashes (PIRDAVANI et al., 2014). According to Welle et al. (2016), higher density areas contain fewer motorized trips, which can reduce crashes involving cars, but can increase the number of conflicts within the area, therefore increasing the risk of overall crashes. Concerning the chance of speeding occurrence, a study relating population density as a BE variable to the speeding practice could not be found. Most authors investigate the speeding occurrence as a risk factor for these crashes. The statistical relationship between BE variables and the occurrence of motor vehicle speeding still needs to be better explored. It can be assumed that higher density areas can lead to a higher density of traffic vehicles, inducing an interrupted flow and reducing the capacity to reach free-flow speeds and speeds above the posted limits.

TABLE 4 contains a set of previous works that discussed the relationship between BE diversity and road safety outcomes, focusing on the diversity of land use in urban areas. Regarding road crashes, all listed authors found a direct correlation between diversity and the safety outcome. To Obelheiro et al. (2020) and Obelheiro, Silva, and Nodari (2019), more diverse environments can lead to higher traffic volumes and conflicts, due to the attraction of distinct types of users, leading to a higher chance of accidents. A higher level of mixed land use is correlated with more crashes from multiple categories: pedestrian, bicycles, injuries, and fatal crashes (OUYANG; BEJLERI, 2014). The same relation was found by Rhee et al. (2016) considering the injuries and fatal crashes in the city of Seoul, in Korea.

TABLE 4 – CORRELATION BETWEEN DIVERSITY AND ROAD SAFETY OUTCOMES

Category	Variable	Road safety outcomes	
		Crashes	Speeding
Diversity	Land use	(+) Amoh-Gyimah, Saberi, and Sarvi (2017)	
		(+) Obelheiro, Silva, and Nodari (2019)	
		(+) Obelheiro et al. (2020)	—
		(+) Ouyang and Bejleri (2014)	
		(+) Rhee et al. (2016)	

SOURCE: The Author (2021).

NOTE: (+): positive correlation between variable and outcome; (–): inverted correlation between variable and outcome; (±): correlation not clear / depends on other factors.

Regarding the occurrence of speeding, it could not be found previous papers that have a statistical investigation relating this BE category and speeding behavior data. A hypothesis that can be explored is the idea that areas with a higher level of mixed land use can lead to more attraction and generation of motorized and non-motorized

trips. Therefore, the increase in conflicts and traffic control can induce the reduction of the average speeds. Similar to the population density, this correlation still needs to be better explored.

TABLE 5 contains previous works that discussed the relationship between road safety outcomes and five design variables: intersections, speed cameras, signalized intersections, arterial roads, and street network density. Concerning the density of intersections, Dumbaugh and Li (2011), Dumbaugh, Li, and Joh (2013), Elvik et al. (2009) and Huang, Wang, and Patton (2018) correlate this variable directly with the occurrence of road traffic crashes. 4-way intersections were found to have a direct correlation to pedestrian and bicycle crashes (DUMBAUGH; LI, 2011; DUMBAUGH; LI; JOH, 2013) and all vehicle categories (HUANG; WANG; PATTON, 2018).

Diversely, three other authors discussed an inverse correlation between intersections and the number of road traffic crashes. The density of intersections is correlated to fewer road crashes in all levels of severity (MARSHALL; GARRICK, 2011; OUYANG; BEJLERI, 2014) and non-motorized crashes (ZHANG, Y. et al., 2015). Considering the type of intersection, 4-way intersections can lead to more crashes, but 3-way intersections lead to the reduction of crashes (EWING; DUMBAUGH, 2009). Intersections can have mixed effects on crash incidence. The increase in conflicts caused by intersections can increase the incidence of road crashes, but it reduces the amount of more severe crashes, considering the speed reduction.

Regarding speeding outcomes, all listed authors correlated the number of intersections with less occurrence of speeding. A higher number of intersections decreases traffic flow and average speeds (ELVIK et al., 2009; EWING; DUMBAUGH, 2009). The number of intersections can be related to block sizes. More intersections mean a shorter length of road sections between nodes, reducing the opportunity for the drivers to reach higher desired speeds.

Regarding the correlation between speed cameras and road crashes, Park, Park, and Kwon (2019) observed a direct correlation between the implementation of speed cameras and the overall number of road crashes, but the severity of these crashes was reduced. To Høye (2015) and Li, Graham, and Majumdar (2013), speed cameras reduced the occurrence of road crashes inside a certain buffer, with their effect decreasing as distance from cameras increase. In addition, the crash-reducing effect of speed cameras decreases after a certain time of installation (LI; ZHANG; REN, 2020). Li, Graham, and Majumdar (2013) and Oliveira et al. (2015) detected a speed reduction inside a 200 m buffer from the camera. To Li, Zhang, and Ren (2020), the speed before and near the camera is reduced, but the average speeds can increase after the speed

TABLE 5 – CORRELATION BETWEEN DESIGN AND ROAD SAFETY OUTCOMES

<b>Variable</b>	<b>Road safety outcomes</b>	
	<b>Crashes</b>	<b>Speeding</b>
Density of intersections	(±) Dumbaugh and Rae (2009)	(–) Dumbaugh and Rae (2009)
	(+) Dumbaugh and Li (2011)	(–) Elvik et al. (2009)
	(+) Dumbaugh, Li, and Joh (2013)	(–) Ewing and Dumbaugh (2009)
	(+) Elvik et al. (2009)	(–) Huang, Wang, and Patton (2018)
	(±) Ewing and Dumbaugh (2009)	(–) Obelheiro, Silva, and Nodari (2019)
	(+) Huang, Wang, and Patton (2018)	(–) Obelheiro et al. (2020)
	(–) Marshall and Garrick (2011)	
	(–) Ouyang and Bejleri (2014)	
Density of speed cameras	(–) Y. Zhang et al. (2015)	
	(–) Høye (2015)	(±) Amancio (2021)
	(–) Li, Graham, and Majumdar (2013)	(–) Li, Graham, and Majumdar (2013)
	(–) Li, Zhang, and Ren (2020)	(±) Li, Zhang, and Ren (2020)
Traffic signal density	(+) Park, Park, and Kwon (2019)	(–) Oliveira et al. (2015)
	(+) Obelheiro et al. (2020)	(±) Elvik et al. (2009)
	(+) Lovegrove and Sayed (2006)	(±) Furth et al. (2018)
Proportion of arterial roads	(+) Lee, Abdel-Aty, and Jiang (2015)	
	(+) Dumbaugh and Rae (2009)	(+) Dumbaugh and Li (2011)
	(+) Dumbaugh and Li (2011)	(+) Dumbaugh, Li, and Joh (2013)
	(+) Dumbaugh, Li, and Joh (2013)	(+) Ewing and Dumbaugh (2009)
	(+) Ewing and Dumbaugh (2009)	(+) Huang, Wang, and Patton (2018)
	(+) Huang, Wang, and Patton (2018)	(+) Obelheiro et al. (2020)
	(+) Obelheiro et al. (2020)	(+) Welle et al. (2016)
	(+) Ukkusuri et al. (2012)	
Network density	(+) Welle et al. (2016)	
	(+) Yu and Xu (2017)	
Network density	(–) Marshall and Garrick (2010)	—
	(–) Marshall and Garrick (2011)	

SOURCE: The Author (2021).

NOTE: (+): positive correlation between variable and outcome; (–): inverted correlation between variable and outcome; (±): correlation not clear / depends on other factors.

camera, due to the “kangaroo effect”, where the road users tend to compensate for the “wasted” time caused by the reduction of speeds when passing through the speed cameras. Amancio (2021) also detected this effect on the speed of cars on arterial roads.

The number of traffic signals can have mixed effects on speeding, and presented a positive correlation in all listed works. Lovegrove and Sayed (2006) and Lee, Abdel-Aty, and Jiang (2015) observed a positive correlation between the density of traffic signals and crashes from motorized and non-motorized vehicles. To Obelheiro et al. (2020), traffic signals are usually installed in areas with more traffic conflicts, therefore it can act as a proxy for higher traffic volumes and exposure to crashes. Concerning speeding, the effects of traffic signals depend on the cycle length, progression speed, and space between signalized intersections. Longer cycles create better speeding opportunities, in addition to closer intersection spacing (ELVIK et al., 2009; FURTH et al., 2018).

Across all the listed works, it is unanimous the identification of a positive correlation between arterial roads and both road safety outcomes: occurrence of road crashes and speeding. Arterial roads favor mobility and higher operating speeds, regularly containing a higher number of lanes and larger lanes, in comparison to collector and local roads. This increase in the occurrence of crashes is directly related to the increase in overall speed and the occurrence of speeding episodes. As discussed in the last section, higher speeds can increase the number and severity of road traffic crashes.

Finally, the last variable listed on TABLE 5 is street network density. To Marshall and Garrick (2010), a higher risk of fatal or severe crashes occurs in areas with very low street network density, and the occurrence of crashes is higher in these areas (MARSHALL; GARRICK, 2011). Regarding the occurrence of speeding, studies correlating the two variables could not be found. It might be possible to relate the street network density to the intersection density, therefore elaborating a hypothesis of an inverted correlation between network density and speeding, but further investigation is still needed.

TABLE 6 contains a couple of studies that discuss the correlation between the density of commercial and services units, as a variable that measures the destination accessibility, and road traffic crashes, a road safety outcome. To Ouyang and Bejleri (2014) and Welle et al. (2016), areas with easy access to destination generate fewer vehicle-kilometers traveled by motorized vehicles, therefore reducing exposure to road traffic crashes. The correlation between the density of commercial and services units and the occurrence of speeding still needs further investigation. The reduction in the use of cars in areas with better accessibility can be related to road infrastructure that is less focused on motorized vehicles and more focused on the well-being of pedestrians and cyclists, leading to the reduction in speeding.

TABLE 6 – CORRELATION BETWEEN DESTINATION ACCESSIBILITY AND ROAD SAFETY OUTCOMES

Category	Variable	Road safety outcomes	
		Crashes	Speeding
Destination Accessibility	Density of commercial and services units	(–) Ouyang and Bejleri (2014) (–) Welle et al. (2016)	—

SOURCE: The Author (2021).

NOTE: (+): positive correlation between variable and outcome; (–): inverted correlation between variable and outcome; (±): correlation not clear / depends on other factors.

The listed studies in TABLE 7 show a direct correlation between bus stop density, as a measure of distance to transit, and road crashes. Bus stops lead to more traffic conflicts, being an increased activity generator, both as origin and destination, to

pedestrians (KIM; PANT; YAMASHITA, 2010). Regarding speeding, the presence of bus stops on a road can reduce the free-flow speed of other motorized vehicles (BANSAL; AGRAWAL; TIWARI, 2014; KOSHY; ARASAN, 2005), therefore reducing the opportunity of speeding.

TABLE 7 – CORRELATION BETWEEN DISTANCE TO TRANSIT AND ROAD SAFETY OUTCOMES

<b>Variable</b>	<b>Road safety outcomes</b>	
	<b>Crashes</b>	<b>Speeding</b>
Bus stop density	(+) Obelheiro et al. (2020) (+) Ouyang and Bejleri (2014) (+) Wei and Lovegrove (2013) (+) Kim, Pant, and Yamashita (2010)	(-) Bansal, Agrawal, and Tiwari (2014) (-) Koshy and Arasan (2005)

SOURCE: The Author (2021).

NOTE: (+): positive correlation between variable and outcome; (-): inverted correlation between variable and outcome; (±): correlation not clear / depends on other factors.

TABLE 8 presents a list of studies that discussed the correlation between road crashes and level of income. Higher income level is related to fewer road traffic crashes. To Obelheiro, Silva, and Nodari (2019), the income level of a region can directly represent the overall quality of its road system infrastructure. The age and maintenance level of vehicles can be related to the level of income, which is a risk factor as well. In consideration of the occurrence of speeding, it could not be found a study that discusses its correlation to the income level of an area.

TABLE 8 – CORRELATION BETWEEN DEMOGRAPHICS AND ROAD SAFETY OUTCOMES

<b>Category</b>	<b>Variable</b>	<b>Road safety outcomes</b>	
		<b>Crashes</b>	<b>Speeding</b>
Demographics	Income	(-) Obelheiro, Silva, and Nodari (2019) (-) Marshall and Ferenchak (2017)	—

SOURCE: The Author (2021).

NOTE: (+): positive correlation between variable and outcome; (-): inverted correlation between variable and outcome; (±): correlation not clear / depends on other factors.

Most of the built environment variables discussed are influenced by the planning process of a city. Master plans establish built area densities and the type of activities that should be allowed in specific areas. Therefore, the exposure to traffic risks is influenced by these policies. The travel demand is a function of the level of economic activities and income level, and its direction depends on the localization of the economic activities, representing the land use patterns. Different types of travel and flows might have different and conflicting requirements, a scenario of conflict which is common in cities (TIWARI, 2016). The next section (2.5) contains a brief discussion regarding the urban planning practices in Curitiba.


## 2.5 URBAN PLANNING IN CURITIBA-PR

In 1942, the Agache Plan established a radial expansion to Curitiba's territory. In the 1960s, the city experienced unprecedented growth, unforeseen by the Agache Plan, creating new housing and mobility problems. Having these problems in mind, the Instituto de Pesquisa e Planejamento de Curitiba (Institute of Research and Planning of Curitiba - IPPUC) was created in 1965, to develop a new and formal master plan. The main cornerstone of the plan was the integration between mobility and land use, consisting of five main corridors of growth. These corridors contain mixed-use, high-rise developments and bus rapid systems (BRT) to attend to this new demand (ROSÁRIO, 2016).

Curitiba's master plan promotes the integration between the road system, transport, and land use, as an urban development policy (CURITIBA, 2015). The land use integration with mobility is based on the road hierarchy and the distribution of population and economic activities into areas with the required infrastructure. On a macro scale, zoning in Curitiba is driven by axes, classified in four categories: metropolitan, structural, densification and connector axes. Structural axes are the main axes of growth, including areas that expand the traditional city center and create corridors of mixed land use of high density, supported by mobility and public transport infrastructure. Densification and connector axis acts as a complement to this urban structure, including mixed land use and medium levels of density. The metropolitan axis is a transit axis which integrates Curitiba's metropolitan region. Equal to the structural axes, it also includes high density and mixed land use zoning (CURITIBA, 2019). These axes and the overall land zoning groups are shown in FIGURE 21.

Curitiba's land zoning plan splits the micro zoning system into four categories: central, residential, mixed use, and specific destination (CURITIBA, 2019). Central zoning involves the traditional downtown of the city, characterized by a high concentration of services, commerce, and jobs. Residential zones compass different types, depending on the density. It can include commercial units and a limited occupancy rate, depending on the environmental characteristics. Mixed use zones encourage the coexistence of residential and non-residential uses, mixing residences, services, and commercial units of medium density. Specific destination zoning can include educational, military, historic, and industrial uses, among others. Environmental protection areas have regulations that allow a safe level of occupation to the local environment. Preservation areas do not allow building occupation, in order to preserve bodies of water and its surroundings. Special sectors are areas destined to social housing projects, involving low and medium density residential zoning.

FIGURE 21 – LAND ZONING GROUPS IN CURITIBA

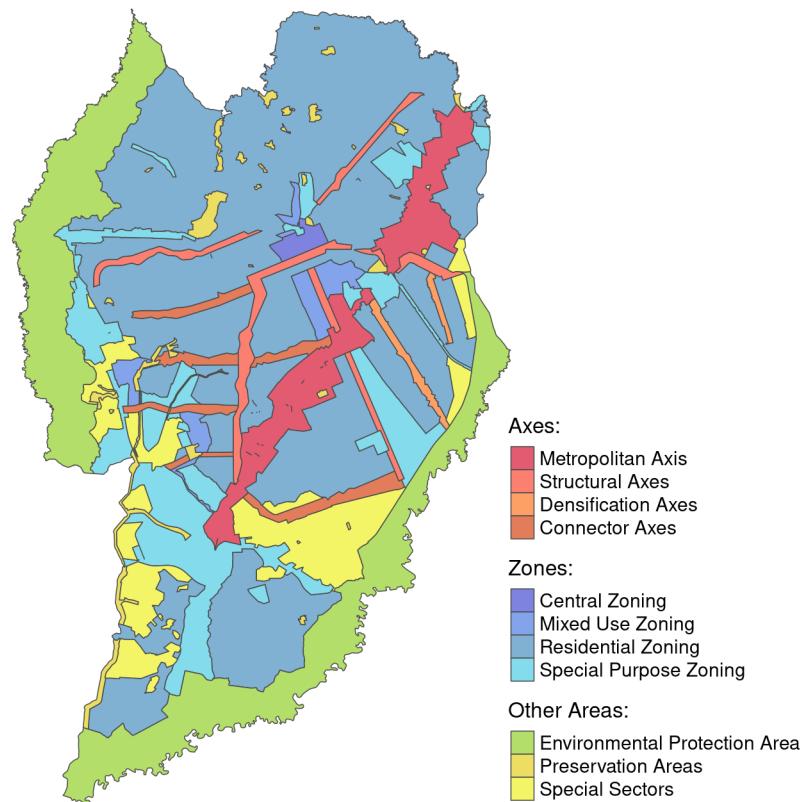


SOURCE: The Author (2022), based on IPPUC (2021).

Regarding the population density, Curitiba (2015) establishes a low density level as 80 residences per hectare, medium density between 80 and 200 residences per hectare, and high density between 200 and 400 residences per hectare. FIGURE 22 shows how these higher densities are set in the metropolitan and structural axes. The areas in red represent the higher density zoning. Medium density zoning is established in the densification and connector axes.

Road hierarchy in Curitiba can be classified using the land zoning characteristics, defined by Curitiba (2019), and using the definition established by the Brazilian Traffic Code (*Código de Trânsito Brasileiro - CTB*). In FIGURE 23, a map with Curitiba road hierarchy, based on land zoning, is presented. Highways are high-speed roads that are administrated by state and federal governments. Structural roads are positioned inside the structural axes. They are arranged in a trinary system, which includes a dedicated bus lane among slow lanes in the center, and two parallel external one-way streets, destined for the continuous flow of vehicles. Sectorial roads have long extension and connects multiple regions of the city and its neighbors, with a good integration to the structural system. Collector roads have medium to small extension and are designed to handle local traffic. Prioritized roads are located close to the city center. They are

FIGURE 22 – LAND USE DENSITIES IN CURITIBA

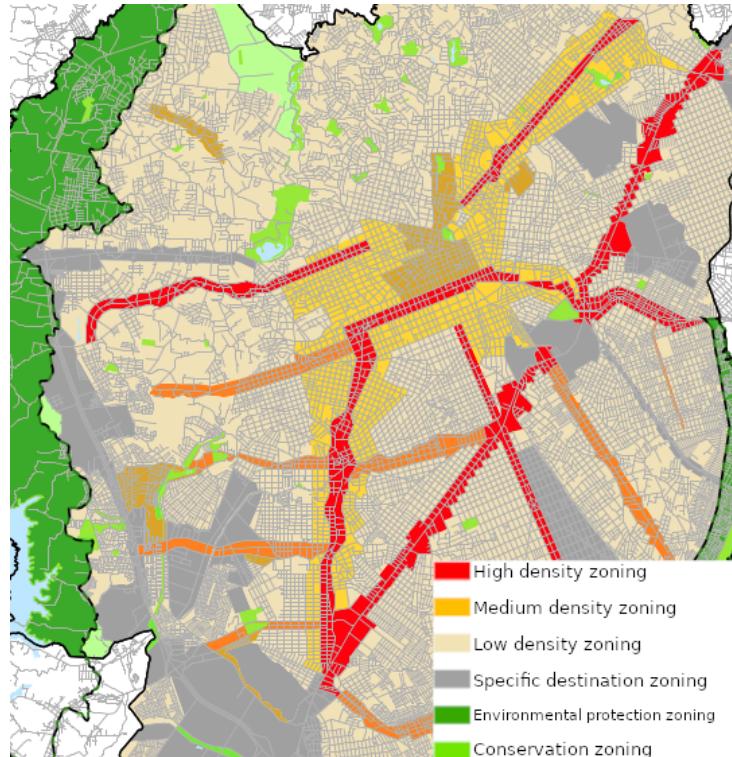

SOURCE: Adapted from Curitiba (2015).

designed to handle a great volume and flow of traffic. The “other” category are streets that are not directly characterized in Curitiba’s land zoning (CURITIBA, 2019).


In FIGURE 24, the road hierarchy in Curitiba is presented, based on the CTB classification. Rapid transit roads are designed to handle a high flow of vehicles in higher speeds. Arterial roads are designed to handle a high amount of traffic flow and volume, while still offering a certain level of access to lots. Collector roads handle local traffic and connects local roads to main arterial and rapid transit roads. Local road’s main function is to offer local access to neighboring lots (BRASIL, 1997).

From decades ago until today, the majority of the urban environment was built for and around the needs of car users. Building and land use codes impact road traffic accident rates, including speeding as a major risk factor (KNOFLACHER, 2016). Urban planners and decision-makers need to recognize and understand the traffic safety impacts generated by planning policy and practice, as well as the benefits of creating new spaces and land patterns that favor adequate road safety levels for all users.

## 2.6 NATURALISTIC DRIVING STUDIES

Human behavior research with a focus on road traffic safety might be performed applying multiple methods, including digital simulations, driving simulators, and on-the-

FIGURE 23 – ROAD HIERARCHY IN CURITIBA (LAND ZONING)

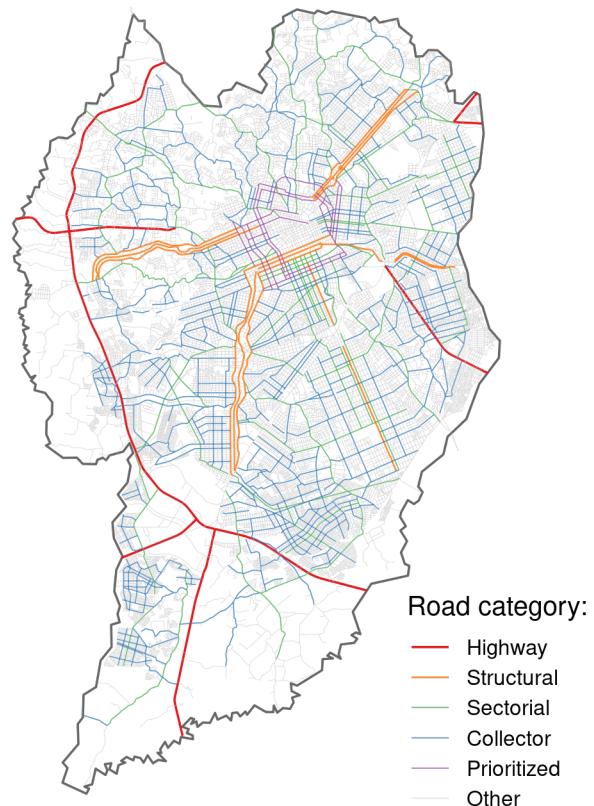


SOURCE: The Author (2022), based on IPPUC (2021).

road studies. Digital simulations studies consist of modeling a hypothetical situation based on statistical and microsimulation functions, which can be run multiple times in software. Driving simulation studies contain a physical mockup of a real vehicle, where the subject drives on the computer-generated scenario. On-the-road studies consist of using scenarios with real road users and can be categorized into two types: experimental and observational studies (SHINAR, 2017).

Experimental studies contain some level of manipulation or control of the situation, where the independent variable is manipulated. This allows to better analyze the involved variables individually, but creates an artificial scenario, different from everyday situations. One popular type of experimental method is the field operational test (FOT). In FOT, volunteers are provided with cars equipped with multiple unobtrusive sensors, to investigate how they react to a specific system installed by the researchers. Diversely, in observational studies, researchers simply observe the behavior of drivers in natural conditions, without the control of dependent and independent variables (SHINAR, 2017).


A type of observational study is the naturalistic driving study (NDS). NDS consists of monitoring drivers' behavior in their cars, both in normal and safety-critical conditions. Participants' cars are usually equipped with video cameras, GPS systems

FIGURE 24 – ROAD HIERARCHY IN CURITIBA (CTB)

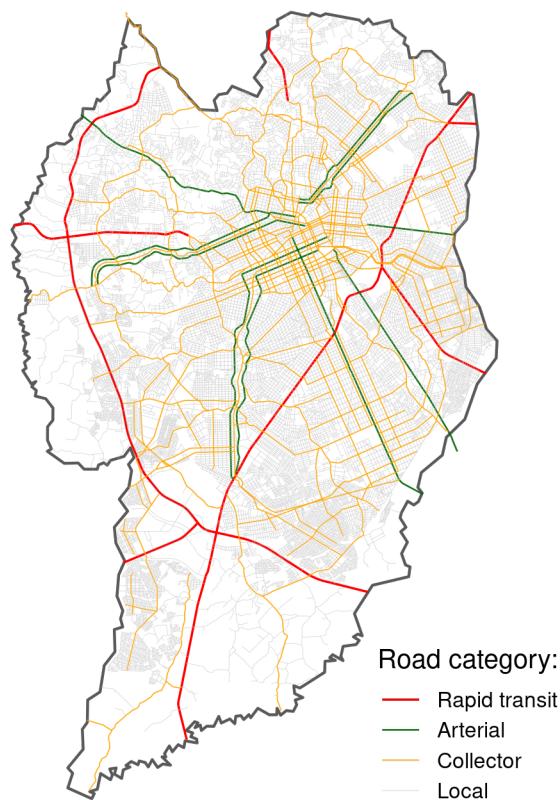

SOURCE: The Author (2022), based on IPPUC (2021).

FIGURE 25 – BEHAVIORAL TRAFFIC SAFETY STUDIES

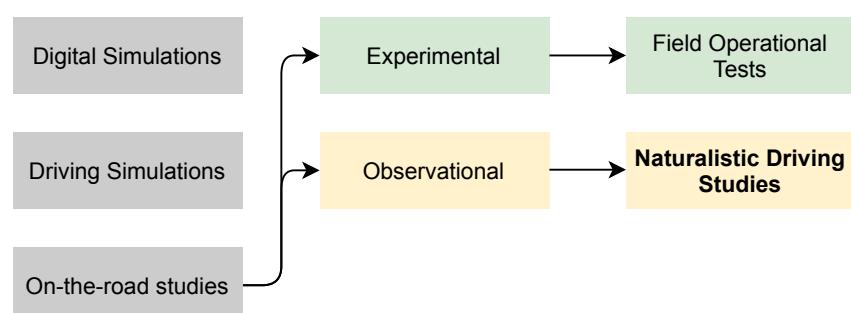

SOURCE: The Author (2021), based on Shinar (2017).

and other sensors. The objective of the NDS is to record the driver's behavior during an everyday scenario. The cameras allow the recording of the driver, the car panel, instruments, and the recording of the surrounding areas, including other vehicles, pedestrians, and environmental elements. GPS or similar equipment allow the registration of the driver's instant speed and position (SHINAR, 2017). Therefore, NDS is a method that can collect information about the environment, the vehicle, and human behavior.

The main difference between FOT and NDS is the element of study. FOT's usual objective is to evaluate a particular system or instrument inside or outside the vehicle. NDS' main objective is to record typical driving behaviors in multiple situations, including situations that present a risk for the occurrence of road traffic crashes, like speeding behavior and use of mobile phones, for example. NDS generates big data sets in comparison to other methods like FOT or driving simulators, but the method has its disadvantages as well.

In the field of behavioral studies, NDS could be considered as an "improvement" in comparison to driving simulation studies. Its advantages and disadvantages make NDS a complementary method, not a competitive one. In a driving simulation, the sample size is smaller, and the immersion is not perfect, given the possibility of the occurrence of motion sickness and adaptation period of the participants. However, the main strength of driving simulators is the fact that it is possible to create and control events and stimuli in the scenario, enabling researchers to better isolate variables and replicate crashes, near-crashes, and critical events (SHINAR, 2017).

In comparison, NDS has a typically large sample size and provides practically total immersion in the participants' everyday trips. The events that occurred in traffic are uncontrolled and real. This gives a higher "credibility" to the collected data, but makes it harder to isolate the desired variables under investigation. The exposure to the experiment is usually higher in NDS, given that the participants have the data registered over multiple trips (CARSTEN; KIRCHER; JAMSON, 2013). In general, the NDS characteristics and advantages are valuable to the present study, considering its capability of collecting a comparably large dataset of speeds and locations throughout the city's territory. In other words, instant speed data from real drivers spread into a real driving scenario is a desirable basis for understanding the influence of the built environment on speed choice behavior.

TABLE 9 contains some main NDS researches performed in the last two decades. The 100-Car Naturalistic Driving Study, conducted by the Virginia Tech Transportation Institute (VTTI), was the first-large scale NDS, and it was performed in the United States. Its instrumentation was composed of 5 cameras, 1 accelerometer and

1 GPS sensor, among other monitoring devices. Some vehicles were owned by the researchers and others by the participants. The main location of the study was the metropolitan area of Northern Virginia and Washington, D.C. The main goal of the research was to maximize the potential to record crash and near-crash events. In total, 100 vehicles were used, including 241 participants. The total trip time of the data collected was above 40,000 hours, with a distance above 3 million kilometers (NEALE et al., 2005).

TABLE 9 – NATURALISTIC DRIVING STUDIES PROGRAMS

<b>Program</b>	<b>Countries</b>	<b>Vehicles</b>	<b>Drivers</b>	<b>Hours</b>	<b>Distance [km]</b>
100 Car NDS	USA	100	241	42,300	3,218,688
SHRP2 NDS	USA	3,500 <sup>(2)</sup>	3,500 <sup>(2)</sup>	1,000,000 <sup>(2)</sup>	56,327,040
ANDS	Australia	346	409	716,320	1,512,630
UDRIVE	EU <sup>(1)</sup>	287	287	87,870	4,000,000 <sup>(2)</sup>
CNDS	Canada	140	149	53,000 <sup>(2)</sup>	1,800,000 <sup>(2)</sup>
Candrive I	Canada	100	100	-	-
-	Japan	60	60	-	-
SH-NDS	China	5	60	-	161,055
-	Iran	52	52	546 <sup>(2)</sup>	25,740 <sup>(2)</sup>
NDS-BR	Brazil	32	32	383	9,313

SOURCE: The Author (2021).

NOTES: <sup>(1)</sup>: United Kingdom, Netherlands, France, Spain, Germany, and Poland; <sup>(2)</sup>: Approximate values.

Another NDS study performed in the United States was the SHRP2 (Strategic Highway Research Program-2) NDS, gathering a massive quantity of data. The study was conducted in 6 states, with more than 3,500 vehicles, one million hours of video and trip data collected and 56 million kilometers traveled. More than 1,500 crashes were registered, establishing a valuable sample for road safety studies (NJORD; STEUDLE, 2015). The Australian Naturalistic Driving Study (ANDS) launched in 2015, aiming to collect road safety data from 360 vehicles – 180 in Sydney and 180 in Melbourne. Vehicles are equipped with 4 cameras, GPS sensors, and an accelerometer (ANDS, 2017). According to Larue et al. (2019), the ANDS was able to collect data from 346 vehicles and 409 participants. The last report related a collection of more than 700,000 hours of traveled period and more than 1,500,000 kilometers of traveled distance (ANDS, 2017).

In the European Union, the UDRIVE naturalistic driving study was a large-scale program performed in 6 EU countries: United Kingdom (UK), the Netherlands, France, Spain, Germany, and Poland. It lasted for 5 years, between 2012 and 2017, and its objective was to collect behavioral data from three transportation modes: cars, trucks, and powered two-wheelers. Two hundred eighty-seven vehicles and drivers were part of the research. The data collected reached almost 90,000 hours of driving data and approximately 4,000,000 kilometers of traveled distance (NES et al., 2019).

The Canadian Naturalistic Driving Study (CNDS) instrumented a total of 140 vehicles, including cars, pickup trucks, and minivans, with 4 cameras, a frontal radar sensor, and one GPS radar. One hundred forty-nine drivers participated in the study, with approximately 53,000 hours of data collected and 1,800,000 kilometers of traveled distance (CNDS, 2021). Also in Canada, the first phase of the Canadian Safe Driving Study (Candrive I) had the participation of 100 active drivers, with age equal to or above 70 years old. The main objective of this NDS was to investigate the fitness to drive of older drivers (MARSHALL et al., 2013).

In Japan, an NDS was conducted between 2006 and 2008, with the participation of 60 drivers and vehicles. The study was conducted in 16 different regions in Japan. The DAS utilized in the study contained a GPS sensor, 5 cameras, an accelerometer, a steering sensor, and digital switches to detect the use of brake and turn signals (UCHIDA et al., 2010). The Shanghai Naturalistic Driving Study (SH-NDS) was conducted between 2012 and 2015 in Shanghai, China. The study contained 60 participants, who drove 161,055 kilometers. Five vehicles equipped with a DAS developed by VTTI were used in this research (ZHU et al., 2018). Also in Asia, an NDS was conducted in Iran, between April 2017 and April 2018. The study had the participation of 52 drivers, with a pair of cameras equipped in their vehicles. The cameras allowed the recording of conflict events between motorized vehicles and pedestrians in marked ( $n = 392$ ) and unmarked ( $n = 956$ ) crosswalks (SHEYKHFARD et al., 2021). The sample contained approximately 546 hours of data collected and 25,740 kilometers of traveled distance.

In Brazil, a naturalistic driving study was established in 2019 in the city of Curitiba-PR, conducted by the Universidade Federal do Paraná, funded by the National Council for Scientific and Technological Development (CNPq) and by the National Observatory for Road Safety. A group of partner universities also participate in the project. The Naturalistic Driving Study – Brazil (NDS-BR) has already collected data from 16 instrumented vehicles, each with a set of 3 cameras and 1 GPS sensor. Currently, NDS-BR collected almost 383 hours of driven time and 9,313 km of traveled distance in Curitiba and the metropolitan area. This research is still ongoing, and further details about the process of data collection are discussed in Section 3.1.

NDS allows the investigation of speeding episodes and how other factors can influence the occurrence of speeding. These factors can include environmental elements (road infrastructure, built environment, weather, traffic conditions, etc.), human and behavior elements (age, gender, secondary tasks engagement, education, personality), and vehicle characteristics (engine power, level of conservation). Richard et al. (2013a, 2017, 2020) used NDS speed data to better understand different types of speeding and how the drivers behave towards them. Richard et al. (2013a) established a classification

called behavioral speeding, splitting it into 4 types. The first type consists of speed below the posted limit. In the second type, drivers are speeding, but they feel like they are driving at a safe speed. On the third type, speed is above the enforcement limit, and the driver starts to accept a higher level of risk. The 4th type consists of reckless speeding, where the driver reaches speeds way above the speed limit, without any consideration to the risks.

Richard et al. (2017) clustered speeding behavior into 6 categories, from NDS data collected from 88 drivers in Seattle. The authors used the k-means method on the sample, resulting in 6 clusters: (i) speeding up, (ii) speed drop, (iii) incidental speed, (iv) casual speeding, (v) cruising speeding, and (vi) aggressive speeding. Speeding up behavior consists of reaching a high exceeding speed in a short period, with high variability. Speed drop is complementary to speeding up, representing characteristics that are consistent with a braking behavior when entering a lower speed limit zone.

Incidental speeding was the most common speeding type detected in the sample. It consisted of mean speeds barely above the speed limit, occurring in longer periods. Casual speeding was the second most common type, and it had similar behavior to incidental speeding, but it had a higher level of mean speed above the speed limit, with similar lengths of occurrence. Cruising speeding was a deliberate type of speeding, most common on freeways and state highways – places with more opportunity for speeding. Aggressive speeding presented higher levels of mean speed, with high variability in longer periods. In this cluster, drivers engaged in repeated speed adjustments, always trying to reach maximum speed.

Richard et al. (2020) used a sample of 100 trips from the SHRP2 NDS database to examine how the occurrence of speeding episodes is affected by basic factors. The authors found drivers in the age group between 16 and 24 had more speeding episodes than other age categories. Considering the days of the week, the occurrence of speeding was lower between Monday and Thursday. Highways present higher free-flow and speeding episodes in comparison to other types of roads.

Ellison and Greaves (2015) analyzed speeding data from 106 drivers in Sydney, collected with the use of NDS, to establish how much time drivers are saving with speeding in urban environments. The speeding stretch of a trip was compared to a simulated stretch with the speed limit traveling the same length. Then, the time delta between the two scenarios was calculated to create the time saved during the speeding episode. The results showed an average time saving of 26 seconds per day or 3 minutes per week. Considering the median driver, less than 2 hours per year is saved, and 75% of drivers never save more than 3 min in a single day.

Hamzeie, Savolainen, and Gates (2017) investigated how the average speed chosen by drivers was influenced by the traffic conditions and how it affected the risk of crashes. The authors used the SHRP2 NDS data and concluded that higher travel speeds were directly correlated to higher speed limits, and high speed variance is correlated to a higher risk of a crash. Kong et al. (2020) also investigated speeding behavior patterns related to the traffic and road conditions, from a sample of naturalistic data collected from 92 vehicles. The authors concluded that speeding duration is related to driving on roadways with higher function classes, to longer trips, and to speed loss caused by congestion, causing the idea of needing to “recover the lost time” by the drivers.

Using the NDS-BR data, Bastos et al. (2021) compared risky behavior between carpooling and non-carpooling drivers, including speeding. The authors concluded that carpooling drivers presented a safer behavior towards speeding, having fewer episodes in comparison to non-carpooling drivers. Bastos et al. (2020b) also investigated the occurrence of mobile phone use (MPU) while driving and concluded that MPU occurs in higher frequencies when the average speed is lower. To analyze the relationship between speeding and speed cameras, Amancio (2021) also used the NDS-BR dataset to investigate the effect of speed cameras on the average speeds of vehicles on arterial roads. The author concluded an average speed reduction before and near the cameras, and an increase after passing through the speed cameras. Considering other physical elements of the road network, Suginoshita et al. (2020) investigated elements of arterial roads and its effects on average speeds, and Szeliga, Chaves, and Bastos (2020) and Szeliga et al. (2021) investigated the effects of horizontal curves and conversion maneuvers on the practiced speeds of drivers.

With the use of the SHRP2 NDS database, Dingus et al. (2016) investigated 905 crash events, relating them to the behavior of the drivers. The authors focused on four behavioral categories: observable impairment; driver performance error; driver judgment error; and observable driver distraction. Speeding behavior was considered a judgment error. Results include that speeding behavior increases crash risk 12.8 times more than the “model driving episodes” (without speeding). Overall, the papers cited in this section are just a small sample of the existing studies including speeding behavior and NDS data. In the scope of the NDS projects that were concluded or are ongoing, there is a comprehensive database of speed and speeding episodes, making it possible to continuously investigate this risk behavior.

## 2.7 GEOGRAPHICALLY WEIGHTED REGRESSION

Regression analysis is a tool to investigate the dependency between variables and to predict future parameters based on previous ones. This type of statistical analysis can show the relationship between dependent variables (LINDLEY, 1987). In the investigation of the effects of the built environment on the occurrence of crashes in urban areas, negative binomial (NB) regression is a traditional model used (WEI; LOVE-GROVE, 2013; ZHANG, C. et al., 2014). However, the quality of this model is limited by the incapacity of analyzing the spatial dependency and heterogeneity expected to happen on road safety factors related to the urban environment (OBELHEIRO; SILVA; NODARI, 2019).

To overcome this limitation, the Geographically Weighted Regression (GWR) allows the exploration of the relationship between variables in a spatial nonstationarity context. The spatial nonstationarity context consists of a scenario where it is assumed that parameters are not constant across the space. A global regression model may be incapable of explaining the relationship between a set of variables with an acceptable level of precision in this scenario. The GWR model considers that the nature of the model must alter over space to reflect the structure within the data, allowing the actual parameters for each location in space to be modeled and mapped (BRUNSDON; FOTHERINGHAM; CHARLTON, 1996).

The basic form of GWR is detailed on the following equation:

$$y_i = \beta_{i0} + \sum_{k=1}^m \beta_{ik} x_{ik} + \epsilon_i; \quad (2.2)$$

where  $y_i$  is the dependent variable at location  $i$ ,  $x_{ik}$  is the value of the  $k$ th independent variable at location  $i$ ,  $m$  is the number of independent variables,  $\beta_{i0}$  is the intercept parameter at location  $i$ ,  $\beta_{ik}$  is the local regression coefficient for the  $k$ th parameter at location  $i$ , and  $\epsilon_i$  is the random error at location  $i$ . The GWR model depends on a spatial weighting function called  $w_{ij}$  that controls the contribution of point  $j$  on the calibration of a model for point  $i$ . The spatial weighting function represents the idea that for each point,  $i$  there is a bump of influence around it. Considering this “bump”, observations closer to  $i$  have more influence in the estimation of  $i$ ’s parameters (BRUNSDON; FOTHERINGHAM; CHARLTON, 1996; GOLLINI et al., 2013).

In the context of a multivariate GW model, these influences are calculated by a weighted least squares approach, described in the following equation:

$$\hat{\beta}_i = (X^T W(u_i, v_i) X)^{-1} X^T W(u_i, v_i) y; \quad (2.3)$$

where  $X$  is the matrix of the independent variables with a column of 1s (ones) for the intercept,  $y$  is the dependent variable vector,  $\hat{\beta} = (\beta_{i0}, \dots, \beta_{im})^T$  is the vector of  $m+1$  local regression coefficients and  $W_i$  is the diagonal matrix denoting the spatial weighting ( $w_{ij}$ ) of each observed data for regression point  $i$  at location  $(u_i, v_i)$  (defined by the selected spatial weighting function) (GOLLINI et al., 2013). The spatial weighting function is also known as the kernel function. This function can have multiple configurations, including Gaussian, Exponential, Boxcar, Bisquare, and Tricube configurations, as detailed in TABLE 10.

TABLE 10 – KERNEL FUNCTIONS


Kernel	Equation
Global Model	$w_{ij} = 1$
Gaussian	$w_{ij} = \exp\left(-\frac{1}{2}\left(\frac{d_{ij}}{b}\right)^2\right)$
Exponential	$w_{ij} = \exp\left(-\frac{ d_{ij} }{b}\right)$
Boxcar	$w_{ij} = \begin{cases} 1 & \text{if }  d_{ij}  < b, \\ 0 & \text{otherwise} \end{cases}$
Bisquare	$w_{ij} = \begin{cases} \left(1 - (d_{ij}/b)^2\right)^2 & \text{if }  d_{ij}  < b, \\ 0 & \text{otherwise} \end{cases}$
Tricube	$w_{ij} = \begin{cases} \left(1 - ( d_{ij} /b)^3\right)^3 & \text{if }  d_{ij}  < b, \\ 0 & \text{otherwise} \end{cases}$

SOURCE: Gollini et al. (2013)

The distance between observations  $i$  and  $j$  is defined by  $d_{ij}$ , inside a chosen  $b$  bandwidth, which is the key controlling parameter in all kernel functions. FIGURE 26 presents the plot of the kernel functions, for a generic bandwidth  $b = 1000$ , where  $w$  is the weight and  $d$  is the distance between two observations. As the plot shows, the global kernel function represents a global linear regression, where all the variables are constant across the space. The bandwidth has two configurations: fixed or adaptive. Fixed bandwidth consists of an absolute value of distance, presenting better outcomes for uniform-sized zonal levels (HUANG; WANG; PATTON, 2018), including grids with equal areas. Adaptive bandwidth consists in choosing a fixed quantity of neighbors for each regression point  $i$ , with variable sizes. This configuration works better for zonal levels with irregular sizes, including traffic analysis zones (TAZ) and census blocks (YU; XU, 2017). The size of bandwidth can be chosen with the use of a cross-validation function or testing multiple values to reach a lower value of corrected Akaike information criterion ( $AIC_c$ ). These processes will be better explored in Section 3.3.

The GWR model presented in equation 2.2 has a limitation: it can be used only when the distribution of the dependent variable is Gaussian (SILVA; RODRIGUES, 2013).

FIGURE 26 – KERNEL FUNCTIONS PLOT

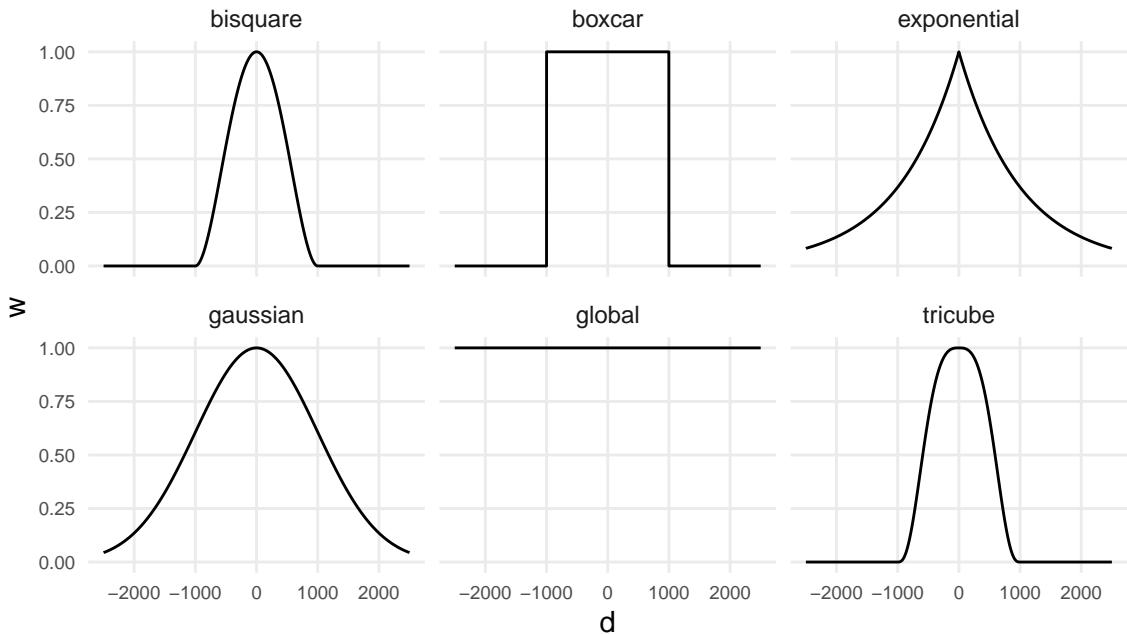

SOURCE: The Author (2021), based on Gollini et al. (2013).

Therefore, count data needs other GWR configurations to fit in the model, including Poisson and Negative Binomial distributions. The Geographically Weighted Poisson Regression (GWPR) is described by Obelheiro et al. (2020) and Nakaya et al. (2005) with the following equation:

$$y_i \sim \text{Poisson} \left[ t_i \exp \left( \sum_k \beta_{ik} (u_i, v_i) x_{ik} \right) \right]; \quad (2.4)$$

where  $t_i$  is an offset variable and remaining variables are defined in equations 2.2 and 2.3. The Geographically Weighted Negative Binomial Regression (GWNBR) described by Silva and Rodrigues (2013) with the following equation:

$$y_i \sim \text{NB} \left[ t_i \exp \left( \sum_k \beta_{ik} (u_i, v_i) x_{ik} \right), \alpha (u_i, v_i) \right]; \quad (2.5)$$

where NB represents negative binomial and  $\alpha$  is the parameter of over dispersion with spatial variation  $(u_i, v_i)$ .

TABLE 11 contains a set of studies in which GWR models were used to investigate the relationship between BE variables and road safety performance, measured by the occurrence of road crashes. Regarding the zonal level, most investigations used TAZ as the unit of analysis. Obelheiro et al. (2020) created a traffic safety zonal level (TSZ) based on census blocks. All authors but one used an area as zonal level. Arvin, Kamrani, and Khattak (2019) performed GWR models using intersection points as the location of regression.

TABLE 11 – GWR AND ROAD SAFETY STUDIES

<b>Author</b>	<b>Zonal level</b>	<b>Distribution</b>	<b>Kernel</b>	<b>Bandwidth</b>
Amoh-Gyimah, Saberi, and Sarvi (2017)	TAZ, grid	Poisson	Bisquare, gaussian	Adaptive
Arvin, Kamrani, and Khattak (2019)	Intersections	Poisson	Bisquare, gaussian	Adaptive
Hadayeghi, Shalaby, and Persaud (2010)	TAZ	Poisson	Bisquare, gaussian	-
Huang, Wang, and Patton (2018)	Census block	Gaussian	-	Fixed
Obelheiro, Silva, and Nodari (2019)	TAZ	Poisson, NB	-	Adaptive
Obelheiro et al. (2020)	TSAZ	Poisson, NB	-	Adaptive
Pirdavani et al. (2014)	TAZ	Gaussian	Bisquare, gaussian	Adaptive
Rhee et al. (2016)	TAZ	Gaussian	Gaussian	Fixed
Yu and Xu (2017)	Census block	NB	-	Adaptive
Y. Zhang et al. (2015)	TAZ	Poisson	-	-

SOURCE: The Author (2021)

Regarding the type of GW model, most authors chose GWNBR or GWPR, considering that road crash count distribution fits better in these models. Concerning kernel type, it only varied between two options: Bisquare and Gaussian. Most studies contained the use of adaptive kernels, which is a better option for zonal levels with irregular sizes. In conclusion, GWR is a method that enables the exploration of findings that might otherwise be missed if only a global regression method is applied. It is always important to check if the GWR model better describes the data than a global regression model, comparing the results from both. All the processes of constructing a GWR model and its parameters for this work are described in Section 3.3.


### 3 METHODS

This chapter is divided into 4 sections. Section 3.1 contains the steps of collecting and processing naturalistic driving data. Section 3.2 presents the process of creating the dependent and independent variables. Section 3.3 includes the process of elaborating a GWR model. Section 3.4 contains the process of calculating a local indicator of spatial association (LISA) using the Local Moran statistic to identify spatial clusters in the GWR results and desired variables. All process described in Sections 3.2 through 3.4 were executed using the R programming language (R CORE TEAM, 2021). The code can be accessed at Santos (2022).

#### 3.1 NATURALISTIC DATA COLLECTION

The Naturalistic Driving Study – Brazil (NDS-BR) utilized non-intrusive instrumentation of vehicles, with two data acquisition systems (DAS). Each DAS contained three high-definition cameras, one GPS sensor, one laptop with a GNU/Linux operating system distribution, and one power supply. One camera was positioned on the right window of the car, towards the inside of the vehicle, facing the driver. Two other cameras were positioned on the windshield of the car, facing towards the front outside. Considering these two, one camera was facing slightly to the left and another one to the right. The visual scheme of camera positioning is presented in FIGURE 27.

FIGURE 27 – CAMERA POSITIONING INSIDE THE VEHICLE

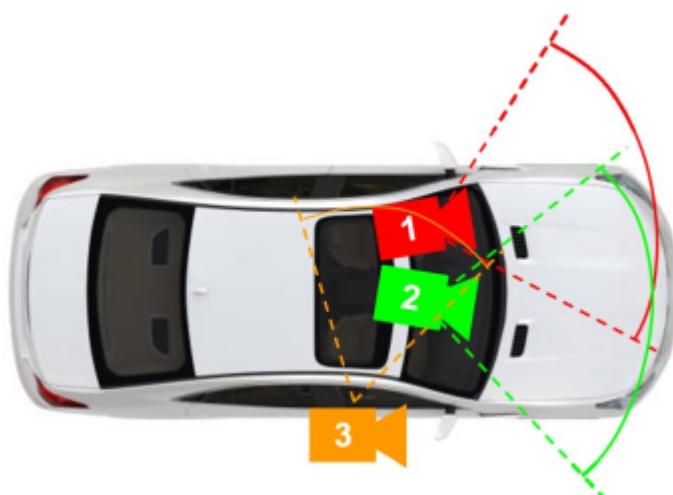

SOURCE: Amancio (2021).

The GPS sensor was positioned near the car panel. The cameras and GPS sensor were connected to the laptop, which controlled and synchronized the data acqui-

sition. The laptop was installed inside a box, positioned on the floor by the passenger's seat. The DAS was installed in the private vehicle of each participant. There was no audio recording from inside the vehicle, to not inhibit possible conversation of the driver during the study. Cameras 1 and 2 enabled the recording of visual data about the environment outside the vehicle – traffic conditions, traffic control, weather, conflicts with other vehicles, etc. Camera 3 allowed the collection of visual data about the behavior of the driver, including the use of seatbelt, mobile phone use, etc. FIGURE 28 contains images collected by the cameras.


FIGURE 28 – CAMERA IMAGES



SOURCE: The Author (2021).

The DAS allowed the acquisition of GPS and video data in synchronization, collecting information in a frequency of one second. The process of acquisition is illustrated in FIGURE 29. The main controller of the data collection was the laptop. At the beginning of each trip, the driver needed to manually turn on the laptop after starting the car engine and before beginning the driving task. If the driver didn't turn on the equipment, intentionally or not, the data collection process was not executed. A Bash script was written to run each time the laptop was turned on, to start two main Python scripts used in the data acquisition: `gps-read.py` and `video.py` (BORGUEZANI et al., 2020).

FIGURE 29 – NATURALISTIC DATA COLLECTION AND PROCESSING

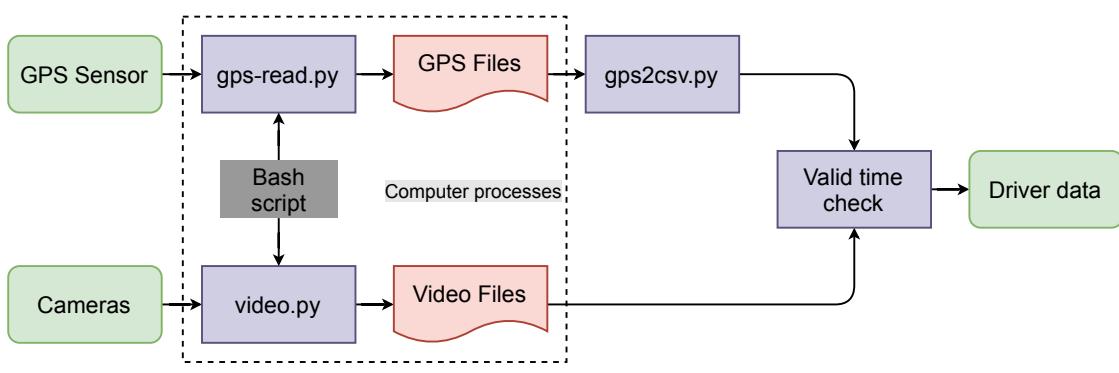


SOURCE: The Author (2021).

The GPS sensor signals were translated into a `.nmea` format file, with the execution of `gps-read.py`. To analyze the collected data, `gps2csv.py` was used by the

NDS-BR researchers to translate the .nmea into a .csv file (PEREIRA; BORGUEZANI, 2020). The GPS registered information including latitude and longitude coordinates, date, time, speed, heading, and altitude. The video files from all cameras were processed by the video.py script, having the timestamp and date printed on the screen.

After data was extracted from the laptop, it was necessary to make a valid time check, to exclude times from the final sample where the driver wasn't driving the vehicle. In FIGURE 30, it is possible to observe how these invalid times were removed from the sample. For each trip, the period between the start of the car and when the participant started driving was considered invalid. During the trip, if the driver pulled over briefly and then started driving again, this period between the actions was considered as invalid as well. Finally, the gap between parking the car and turning off the DAS was discarded from the sample.

FIGURE 30 – VALID TIME SELECTION

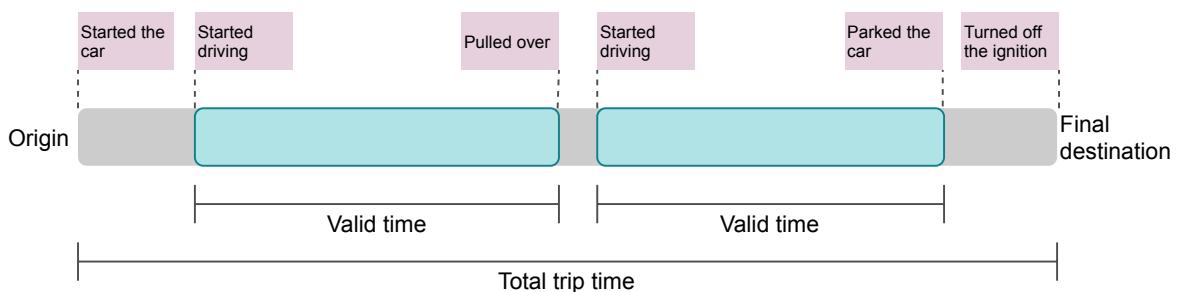

SOURCE: The Author (2021).

The first trip of each driver was defined as invalid. This trip was considered to be, to the driver, a time of getting familiar with the monitoring system. Moments with failure on the DAS, where the GPS or video data weren't properly recorded, also were considered invalid time. The process of identifying invalid times was based on manual coding. A group of researchers identified the invalid times using the video data as a reference.

The NDS-BR data collection started in August 2019. The local of the study is Curitiba and its metropolitan region. Curitiba is the capital city of the State of Paraná, in Brazil. Until December 2021, the project collected data from 32 participants, which composed a sample of naturalistic data used in this thesis. The drivers participated through a survey that was divulged on social networks. The age of the drivers varied between 21 and 63 years old, with 18 females and 14 males. The duration of data collection from each driver varied between 5 and 20 days. Regarding the participants' vehicles, the model year varied between 2001 and 2020, with horsepower varying between 66 and 166 HP.

Regarding driving experience, the driving license of the participants varied

between 2 and 38. All participants received a briefing on how to operate the equipment and signed a term of the agreement, allowing the use of their data for academic research purposes. Overall, a total of 1002 trips were performed, resulting in 382.98 hours of driving and 9,312.82 km of traveled distance. Only two drivers had a car with an automatic gearbox. All other drivers had vehicles with a manual gearbox. Four drivers occasionally made trips in carpooling situations, offering rides to passengers with the use of carpooling apps. Three drivers worked as mobility app drivers.


### 3.2 DATA PROCESSING AND VARIABLE CONSTRUCTION

This section includes the methods utilized to construct all the utilized variables, divided into two subsections: the speeding variable (dependent variable) and built environment variables (independent variables). This process is detailed in the following subsections: Subsection 3.2.1 and Subsection 3.2.2.

#### 3.2.1 Speeding

To extract speeding information from the NDS sample, it was necessary to compare the performed speeds from drivers with the respective speed limit. Speed limit data was collected from the road axis in the Shapefile format, obtained from OpenStreetMap (OPENSTREETMAP CONTRIBUTORS, 2017), completing some missing information with speed limits from IPPUC road axis data (IPPUC, 2021). A 10-meter buffer was created around each link of the road axes. In sequence, a spatial join between the NDS points and the road buffer was performed to associate the speed limit and the performed speed to the same point in space. All geometrical operations were executed in R, using the `sf` package (PEBESMA, 2018). This process is illustrated in FIGURE 31.

FIGURE 31 – ROAD AXIS BUFFER

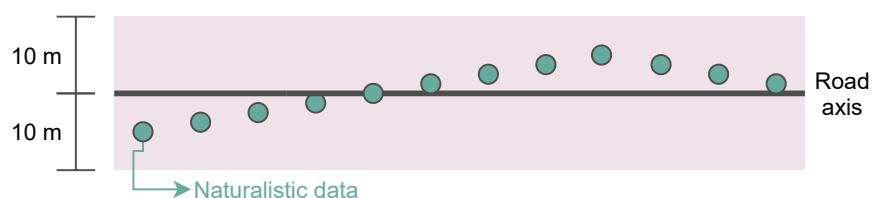

SOURCE: The Author (2021).

Points outside the buffers (in the middle of street blocks, for example) were removed from the sample. Also, points without speed limit and performed speed data were removed from the sample. The extraction of free-flow and speeding events followed a method defined by Richard et al. (2013a), presented in FIGURE 19. The occurrence of speeding was represented by the proportion of distance traveled in speeds above the

speed limit, divided by the distance performed in free-flow speeds. It was necessary to remove sections of the sample where drivers had no opportunity to speed. Therefore, the occurrence of speeding is defined in the following equation:

$$SP = \frac{D_{V_{sp}}}{D_{Vf}} ; \quad (3.1)$$

where  $D_{V_{sp}}$  is the distance performed in speeds exceeding 5 km/h above the speed limit (analytical approach) and  $D_{Vf}$  is the distance performed in free-flow speeds.


In Brazil, a speeding infraction is considered when the driver exceeds the speed limit plus 10% of the speed limit. Therefore, in a rapid transit road with an 80 km/h speed limit, a driver would be fined if its performed speed reaches above 88 km/h. Considering other urban road hierarchies and limits defined by Brasil (1997), speeding in arterial roads (speed limit of 60 km/h) would be considered as speeds above 66 km/h; in collector roads (speed limit of 40 km/h) – speeds above 44 km/h; and local roads – speeds above 33 km/h (speed limit of 30 km/h). Therefore, based on the thresholds of 8 km/h, 6 km/h, 4 km/h, and 3 km/h, it was decided to establish a standard threshold for speeding of 5 km/h above the speed limit. Free-flow speeds included performed speeds higher than the speed limit minus 10 km/h (and lower than the speeding threshold). The free-flow threshold was based on the value established by Richard et al. (2017) of 5 mph. Direct conversion to km/h would result in 8.05 km/h, therefore it was decided to round the threshold to 10 km/h.  $SP$  values can vary between 0 and 1, where 0 represents a section without any speeding, and 1 represents a section traveled only in speeds that exceed the limits. FIGURE 32 contains a representative section of a trip on a road with a 30 km/h speed limit, illustrating the thresholds previously described.

To calculate distance, a line connecting the GPS coordinates was created. These lines are known as linestrings, a geometry type from the Well-known text (WKT) format. Only points with a 1-second gap from each other (observed from the time variable) were connected with a linestring. Total distances, distances performed in free-flow speeds, and distances in speeding were calculated for each TAZ in Curitiba, to calculate the occurrence of speeding.

### 3.2.2 Built Environment

All variables (speeding and built environment) were calculated for each traffic analysis zone (TAZ) inside Curitiba. One hundred thirty-five TAZ, established in Curitiba's origin – destination survey made by IPPUC in 2018, was used for this work (IPPUC, 2018). The TAZ is an aggregation of multiple census tracts with similar characteristics inside a defined territory. These tracts were defined in the last census that was executed in Brazil, performed in 2010 (IBGE, 2021). The BE variables that were calculated are

FIGURE 32 – SPEEDING OCCURRENCE AND SPEEDING OPPORTUNITY

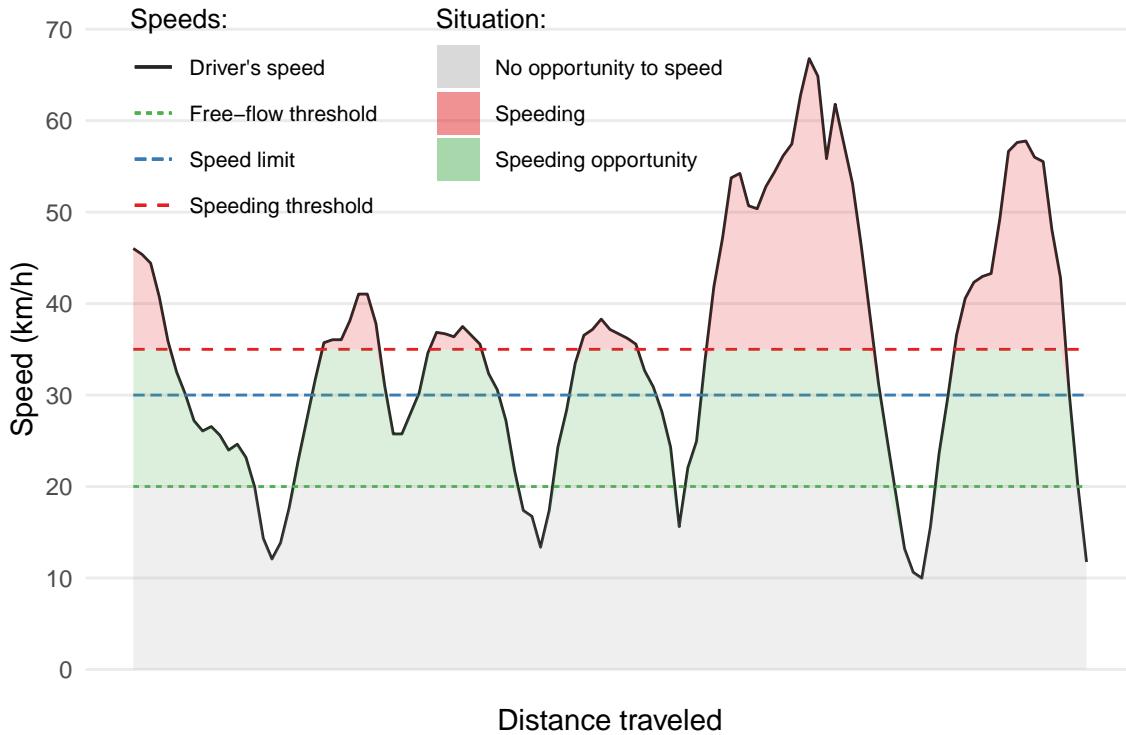

SOURCE: The Author (2021).

listed in TABLE 12. Inside the density category, population data were obtained from the last Brazilian Census in 2010 (IBGE, 2021). Using the available census tracts, it was possible to calculate the population density (PD) data into the TAZ.

TABLE 12 – BUILT ENVIRONMENT VARIABLES

Category	Variable	Description [unit]
Density	PD	Population Density [ <i>inhab/km</i> <sup>2</sup> ]
Diversity	LDI	Land use diversity index
Design	DIS	Density of intersections [no./km]
	DSC	Density of speed cameras [no./km]
	TSD	Traffic signal density [no./km]
	PAR	Proportion of arterial roads
	SND	Street network density [km/km <sup>2</sup> ]
Destination accessibility	DCSU	Density of commercial and services units [no./km <sup>2</sup> ]
Distance to transit	BSD	Bus stop density [no./km]
Demographics	AVI	Average income [BRL]


SOURCE: The Author (2021)

Inside the diversity category, the land use diversity index (LDI) was based on information from Curitiba's zoning plan (CURITIBA, 2019) as input for its calculation. For each TAZ, the diversity index was calculated based on the following equation (HUANG; WANG; PATTON, 2018):

$$LDI = \frac{-\sum_i^n P_i \times \ln(P_i)}{\ln(n)} ; \quad (3.2)$$

where  $i$  is the type of land use,  $n$  is the total number of land use types in a TAZ, and  $P_i$  is the proportional area of land use type  $i$ . LDI varies between 0 and 1, where 0 represents a single land use zone and 1 represents a perfect distribution of land uses. The GIS data of each zoning type was obtained from IPPUC (2021). PD and LDI variables are plotted in FIGURE 33.

FIGURE 33 – PD AND LDI

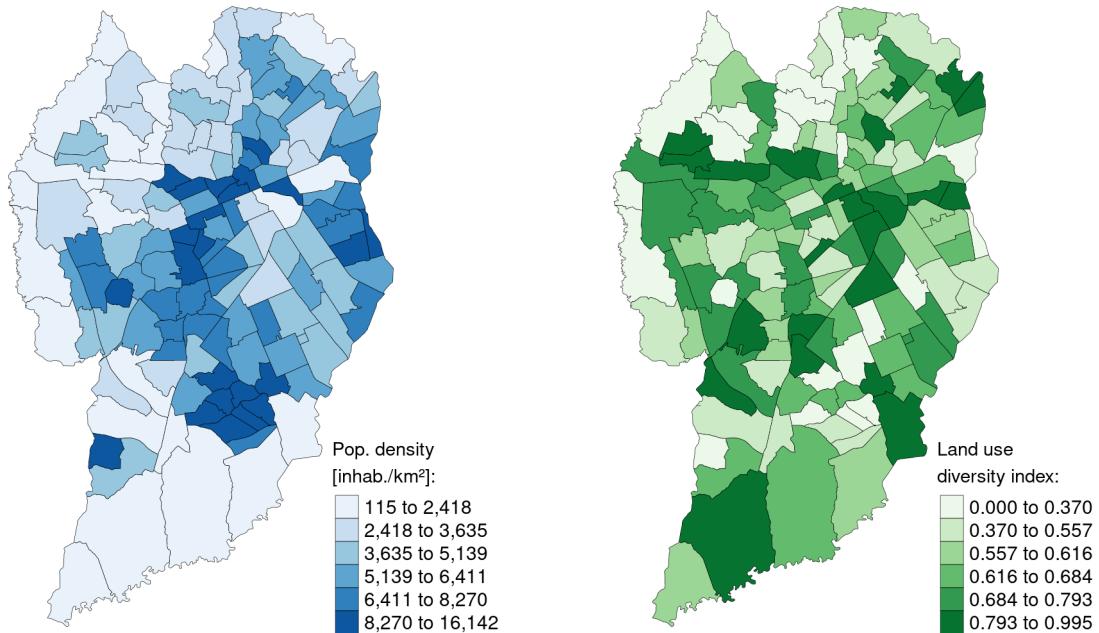


SOURCE: The Author (2021)

Regarding the design category, the density of intersections (DIS) was calculated based on the number of intersections divided by the length of roads. The intersection points and road lengths were extracted from the IPPUC (2021) road axis data. Intersection points were extracted using the “line intersection” function included in QGIS (QGIS DEVELOPMENT TEAM, 2022). The density of speed cameras (DSC) and traffic signal density (TSD) computation followed the same method applied to the density of intersections. Speed camera points were obtained from the Municipal Office of Social Defense and Transit of Curitiba (SETRAN, 2020), and traffic signal points were obtained from IPPUC (2021). DIS and DSC variables are plotted in FIGURE 34.

The proportion of arterial (PAR) was based on the IPPUC road axis data as well. The road hierarchy data followed the categories established by the Brazilian Traffic Code (BRASIL, 1997): rapid transit, arterial, collector, and local roads. In this variable, rapid transit and arterial roads were combined into one category representing arterial roads. Both rapid transit and arterial roads in Curitiba present a speed limit equal to or above 60 km/h, and both classes of roads have similar physical and operation characteristics, which justifies this union of categories. Hence, the proportion of arterial roads was


FIGURE 34 – DIS AND DSC

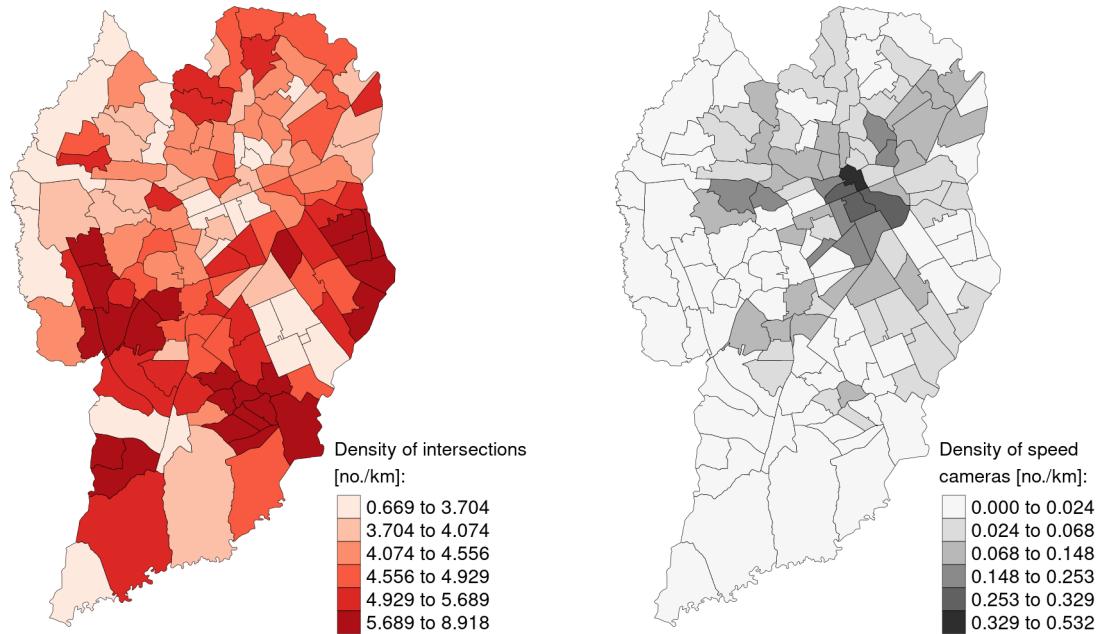

SOURCE: The Author (2022), based on IPPUC (2018, 2021) and SETRAN (2020)

based on the division between arterial roads length and total road length. TSD and PAR variables are plotted in FIGURE 35.

FIGURE 35 – TSD AND PAR

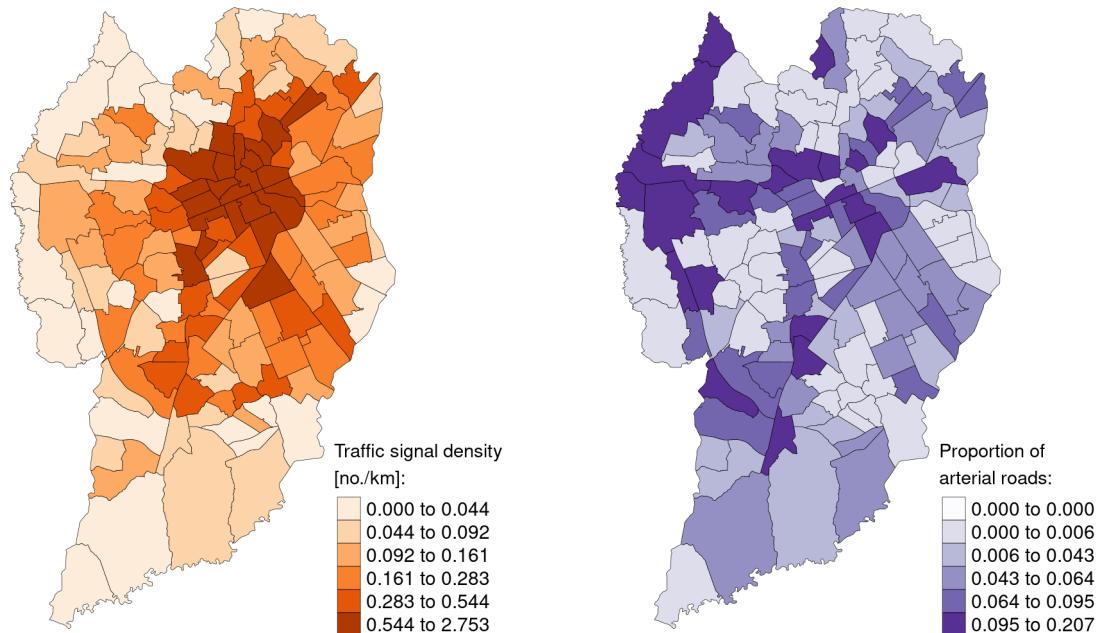


SOURCE: The Author (2022), based on IPPUC (2018, 2021)

Street network density (SND) is the total road length divided by the area in square kilometers of the respective TAZ. Regarding the destination accessibility, the

location of commercial and services units from 2019 was provided by IPPUC (2021), making possible the calculation of the density of commercial and services units (DCSU) per TAZ. SND and DCSU variables are plotted in FIGURE 36.

FIGURE 36 – SND AND DCSU

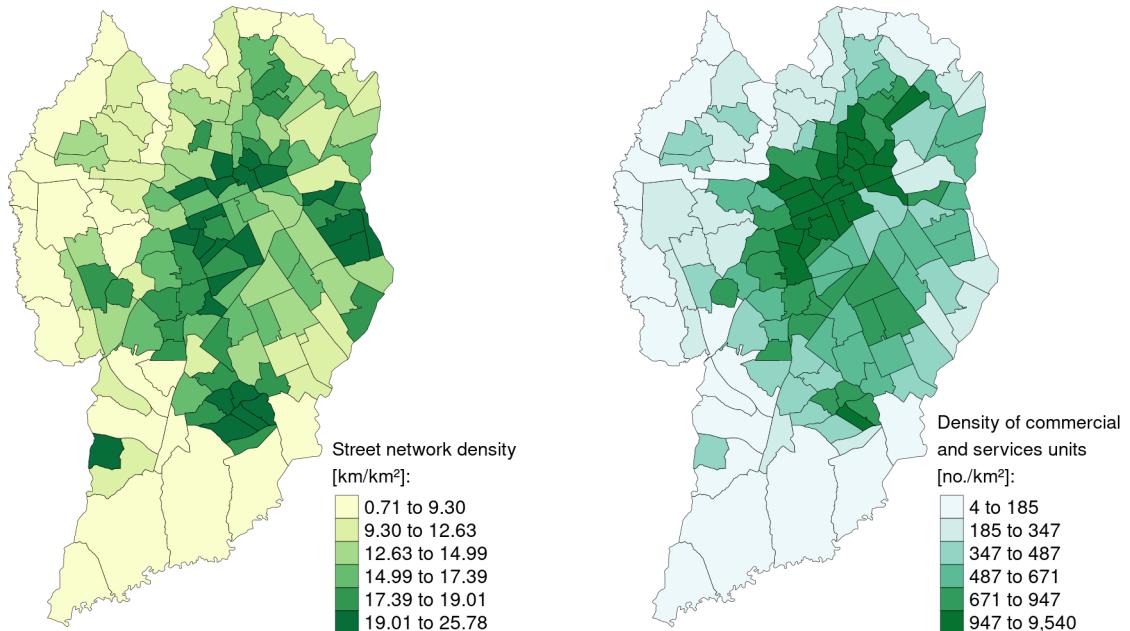


SOURCE: The Author (2022), based on IPPUC (2018, 2021)

The distance to transit is represented by the bus stop density (BSD) per road length. The location of bus stops across the city was provided by IPPUC and URBS (2020), with data from 2020. Bus stops located in dedicated bus lanes and streets were removed from the sample. The average income (AVI), representing the demographic category, was obtained from the Brazilian Census of 2010 (IBGE, 2021). BSD and AVI variables are plotted in FIGURE 37.

### 3.3 GEOGRAPHICALLY WEIGHTED REGRESSION MODELLING


This section contains the process of modeling a GWR. The steps performed in this section are described in FIGURE 38. They were implemented using the R programming language as the main tool, with the aid of functions extracted from the *GWmodel* (GOLLINI et al., 2013) and *spdep* (BIVAND; PEBESMA; GOMEZ-RUBIO, 2013) packages. The TAZ data passed through five main steps to construct and make a diagnostic of the GWR model: data arrangement, bandwidth size selection, kernel type selection, calculation of a global linear model and Moran's *I* application on the model's residuals.

FIGURE 37 – BSD AND AVI

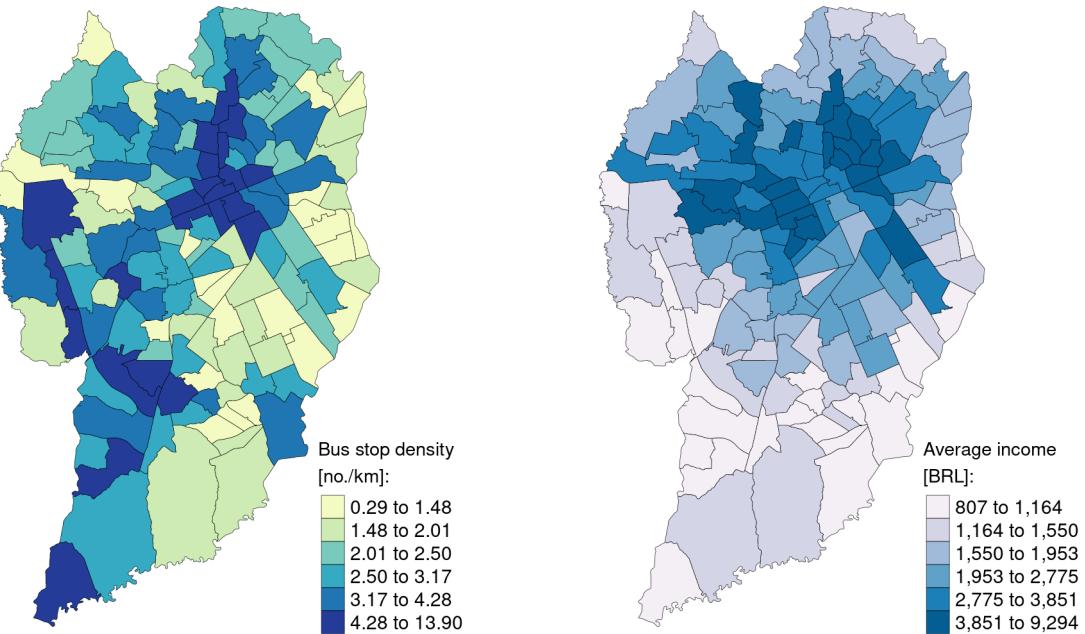

SOURCE: The Author (2022), based on IPPUC (2018), IPPUC and URBS (2020) and IBGE (2021)

FIGURE 38 – GWR MODELLING PROCESS

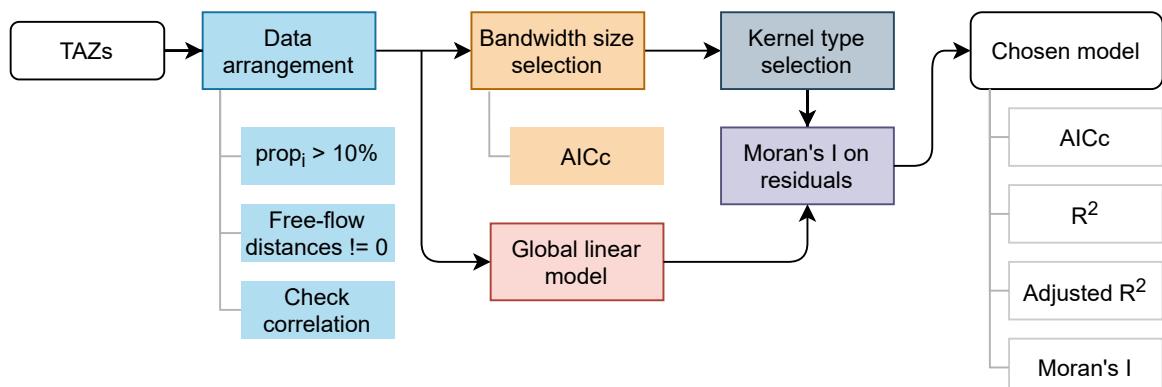

SOURCE: The Author (2021).

The first two steps of the data arrangement process are related to how the naturalistic data of traveled distances are distributed across the TAZ. To check these distances, a new variable was created to represent the proportion of traveled distances per TAZ total road length ( $prop_i$ ). This variable is defined in the following equation:

$$prop_i = \frac{D_i}{R_i} ; \quad (3.3)$$

where  $D_i$  is the distance traveled in the  $i$ -th TAZ and  $R_i$  is the total road length inside the  $i$ -th TAZ. Hence, all TAZ with a value above 10% were kept in the sample. This process was made to keep TAZ with a significant amount of travel data.

The second step of data arrangement was the exclusion of TAZ without free-flow episodes. Distances performed in free-flow speed corresponds to the exposure

variable of the speeding variable. TAZ with zero free-flow distances could not be used in the process of calculating speeding, therefore they were removed from the sample. Finally, Spearman correlation was performed between all the independent variables. This correlation is based on the following equation (DODGE, 2010):

$$\rho = 1 - \frac{6 \sum d_i^2}{n(n^2 - 1)} ; \quad (3.4)$$

where  $d_i$  is the difference between two ranks of  $i$ -th observations from different variables and  $n$  is the total number of observations. The inclusion of independent variables with correlations above 0.8 can influence negatively the quality of the GWR model (GOLLINI et al., 2013). Therefore, variables with a Spearman correlation above 0.8 were removed from the sample.

Considering the variability of TAZ sizes in the sample, the adaptive bandwidth has better performance than a fixed bandwidth (HUANG; WANG; PATTON, 2018), therefore an adaptive bandwidth was used in this work. To choose the best kernel type, it was necessary to calculate the adaptive bandwidth size (number of neighbors) for each kernel type (gaussian, bisquare, tricube, boxcar, and exponential). The GWmodel package in R has a function (`bw.gwr`) for automatic bandwidth selection. This function runs multiple GWR models with multiple bandwidth values and extracts the bandwidth size for the GWR model with the lowest value of corrected Akaike Information Criterion ( $AIC_c$ ) (GOLLINI et al., 2013).

Minimizing  $AIC_c$  to select the bandwidth provides a trade-off between goodness of fit and degrees of freedom. (FOTHERINGHAM; BRUNSDON; CHARLTON, 2002). For GWR,  $AIC_c$  is defined as:

$$AIC_c = 2n \log_e(\hat{\sigma}) + n \log_e(2\pi) + n \left\{ \frac{n + \text{Tr}(S)}{n - 2 - \text{Tr}(S)} \right\} ; \quad (3.5)$$

where  $n$  is the sample size,  $\hat{\sigma}$  is the estimated standard deviation of the error term and  $\text{Tr}(S)$  is the trace of the hat matrix, which depends on the bandwidth (FOTHERINGHAM; BRUNSDON; CHARLTON, 2002). With the discovered optimal bandwidths, the basic form of GWR, presented previously in EQUATION 2.2, was performed five times, one for each type of kernel (TABLE 10). The application of the GWR method utilized the `gwr.basic` function of the `GWmodel` package. In addition, a global linear regression was performed to compare the results with GWR. It was necessary because it is important to verify if the GWR model has an advantage over an ordinary least squares (OLS) approach (BRUNSDON; FOTHERINGHAM; CHARLTON, 1996). The OLS approach also gives a diagnostic ( $p$ -value) for each estimated coefficient, which GWR is incapable to do.

Moran's  $I$  was applied to the models' residuals to examine the presence of spatial autocorrelation. It is designed to reject the null hypothesis of spatial randomness in favor of an alternative of clustering (ANSELIN, 2020). A regression model with a good spatial analysis performance shows a lack of spatial autocorrelation on its residuals. The results of Moran's  $I$  test varies between -1 and 1, where -1 represents a perfect dispersion pattern and 1 represents a perfect clustering pattern of the data. Results close to 0 and / or without the desired statistical significance ( $p$ -value) represent a lack of spatial autocorrelation. Moran's  $I$  consist of the following equation (GETIS; ORD, 2010):

$$I = \frac{n}{W} \times \frac{\sum_i \sum_j w_{ij}(x_i - \bar{x})(x_j - \bar{x})}{\sum_i (x_i - \bar{x})^2}; \quad (3.6)$$

where  $n$  is the sample size,  $w_{ij}$  is the matrix of spatial weights,  $W$  is the sum of all  $w_{ij}$ ,  $x$  is the variable of interest, indexed by  $i$  and  $j$ . and  $\bar{x}$  is the mean of  $x$ . This test was applied using the `moran.test` function included in the `spdep` package (BIVAND; PEBESMA; GOMEZ-RUBIO, 2013). The final step was to analyze the performance between models. This analysis was based on four performance indicators:  $AIC_c$ ,  $R^2$ , adjusted  $R^2$ , and the value of Moran's  $I$  on residuals. Higher values of  $R^2$  and adjusted  $R^2$  indicate a better performance.

### 3.4 IDENTIFICATION OF CLUSTERS

The identification of clusters in the GWR results and speeding variable is important to investigate hot spots and cold spots in the data, in addition to spatial outliers. For this objective, the Local Moran statistic was applied. Similar to Moran's  $I$ , Local Moran is a spatial autocorrelation statistic. Moran's  $I$  does not provide an indication of the location of the clusters. However, Local Moran, its local counterpart, does. Local Moran statistic is classified as a local indicator of spatial association (LISA). LISA is characterized for providing a spatial autocorrelation statistic for each location. It also establishes a proportional relationship between the sum of the local statistics and a corresponding global statistic (ANSELIN, 2010, 2020).

To Anselin (2020), most of the global spatial autocorrelation statistics can be expresses as a double sum over the  $i$  and  $j$  indices of  $g_{ij}$ :  $\sum_i \sum_j g_{ij}$ . The  $g_{ij}$  variable can be expressed as the combination of a measure of attribute similarity between a pair of observations ( $f(x_i, x_j)$ ) with an indicator for geographical similarity ( $w_{ij}$ ). Its local form is the sum of the relevant expression over the  $j$  index, for each location  $i$ . Therefore, the generic form for a LISA is:

$$\sum_j w_{ij} f(x_i, x_j). \quad (3.7)$$

Applying the same method as Moran's  $I$ , showed in EQUATION 3.6, the Local Moran statistic to each observation  $i$  is:

$$I_i = \frac{\sum_j w_{ij} z_i z_j}{\sum_i z_i^2}; \quad (3.8)$$

where  $z$  is the deviation from the mean of the variable of interest ( $x - \bar{x}$ ). The denominator is fixed in the local configuration, therefore, it can be ignored. Replacing the denominator by  $c$  and rearranging the equation, the obtained expression is:

$$I_i = c \times z_i \sum_j w_{ij} z_j; \quad (3.9)$$

representing the product of the value at a location  $i$  with the weighted sum of the values at neighboring locations  $j$ .

To address statistical significance, it is possible to calculate a pseudo  $p$ -value for each location. In this work, results with  $p$ -values below 0.05 were defined as statistically significant. It is possible to classify significant locations as High-High; Low-Low spatial clusters, and High-Low; Low-High spatial outliers. High-High locations have high values with neighboring locations that also have high values. The same situation applies to Low-Low spatial clusters, but considering low values. High-Low spatial outliers are locations with high values with neighboring locations that have low values. Low-High spatial outliers follow the same rule, but inverting the values. High and low is relative to the mean of the variable, and does not represent an absolute measure. It is important to observe that identified locations of spatial clusters are not actual clusters, but cores of a cluster. The full cluster is composed of the cores and its direct neighbors (ANSELIN, 2010).

The Local Moran statistic was applied in R, with the aid of the Rgeoda package (LI; ANSELIN, 2021). The `local_moran` function was applied to each coefficient of the GWR model, to SP variable, and to other model's parameter, including local  $R^2$ . The Local Moran statistic utilized the queen contiguity-based spatial weight. The queen criterion defines neighbors as spatial units sharing a common edge and / or vertices. In this configuration, all neighbors contain the same spatial weight (BIVAND; PEBESMA; GOMEZ-RUBIO, 2013).

## 4 RESULTS

This chapter focus on the results from the NDS-BR (Sections 4.1 and 4.2), the results from the GWR (Section 4.3), and further discussions (Section ??).

### 4.1 NATURALISTIC DATA

The process of removing invalid times from the total sample and choosing the traveled data that happened in Curitiba resulted in 6,074.38 kilometers of traveled distance and a total of 818 trips, representing a traveled time of 230.86 hours. Incomplete trips – when a portion of the trip happened inside Curitiba – were kept in the sample, without the sections that were traveled outside the city borders. TABLE 13 contains a descriptive summary of trip distance and quantity of trips per driver. Overall, all trips in the sample had a mean distance of 7.43 and a median of 4.82 kilometers traveled. The average quantity of trips per driver was 26, with a median value of 24 trips. The range of trips performed by drivers varies from a minimum of 3 trips to a maximum of 56 trips.

TABLE 13 – DESCRIPTIVE STATISTICS OF TRIPS


	<b>Distance of trips [km]</b>	<b>Quantity per driver</b>
Mean	7.43	26
SD	10.79	15
Min.	0.01	3
1Q	2.44	15
Median	4.82	24
3Q	9.27	38
Max.	175.35	56
Total	6,074.38	818

SOURCE: The Author (2021)

In FIGURE 39, the distribution of distance traveled per day of the week is presented. Tuesdays had most of the traveled distance, and Saturdays had the least traveled distance. Regarding the trips, FIGURE 40 contains information on the quantity per day of the week. Wednesdays had the highest amount of trips and Sundays the lowest. Overall, most traveled distances and trips happened in higher amounts during weekdays. FIGURE 41 and FIGURE 42 include traveled distance and trip start distribution per hour of the day, respectively.


Most of the traveled distance happened between 7:00 – 8:00 and 18:00 – 19:00. Most of the trips started between 7:00 – 8:00, followed by 17:00 – 19:00 and 12:00 – 13:00. FIGURE 43 contains the traveled distance per TAZ in Curitiba. The TAZ with the

FIGURE 39 – DISTANCE TRAVELED PER DAY OF THE WEEK

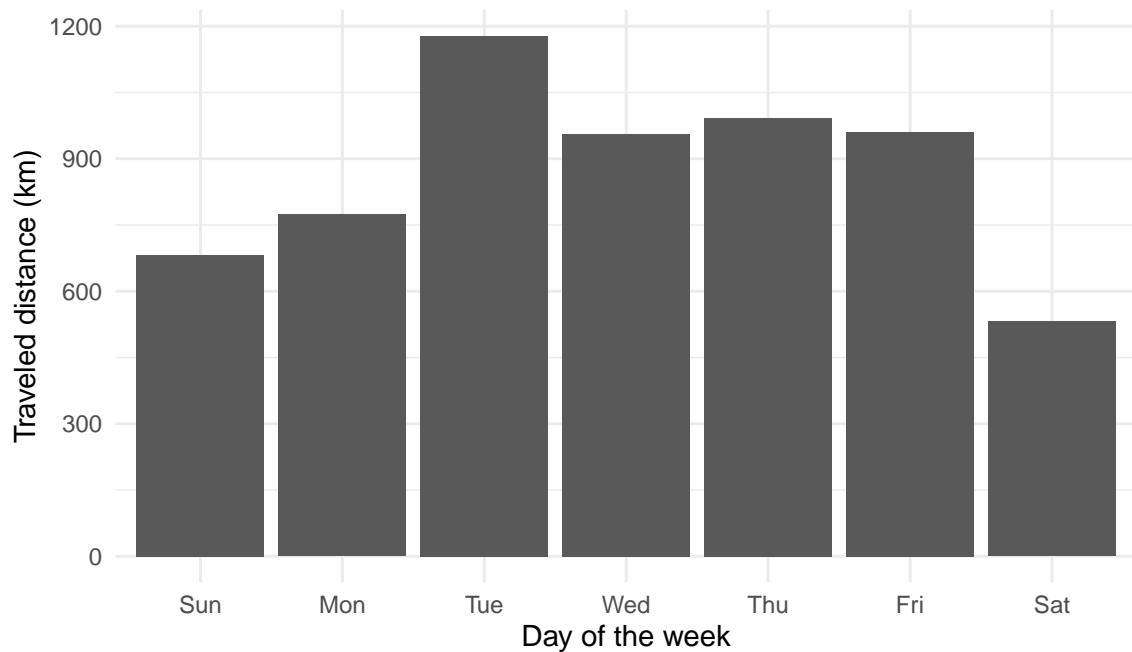


SOURCE: The Author (2021)

FIGURE 40 – TRIPS PER DAY OF THE WEEK

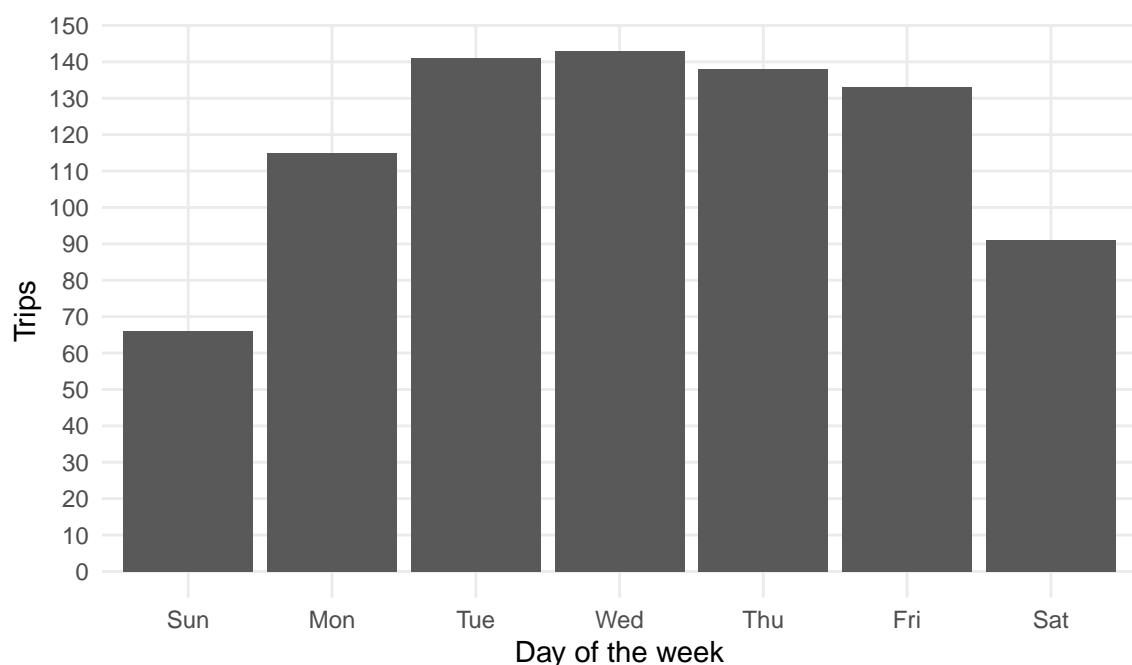


SOURCE: The Author (2021)

FIGURE 41 – DISTANCE TRAVELED PER HOUR OF THE DAY

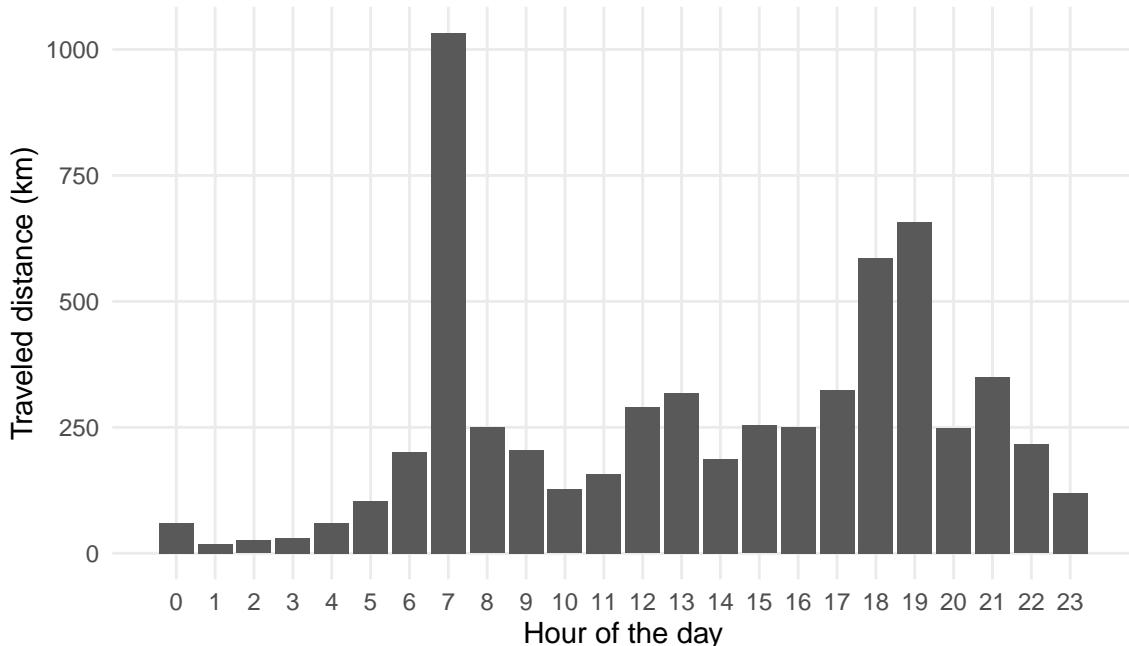

SOURCE: The Author (2021)


FIGURE 42 – TRIP START PER HOUR OF THE DAY

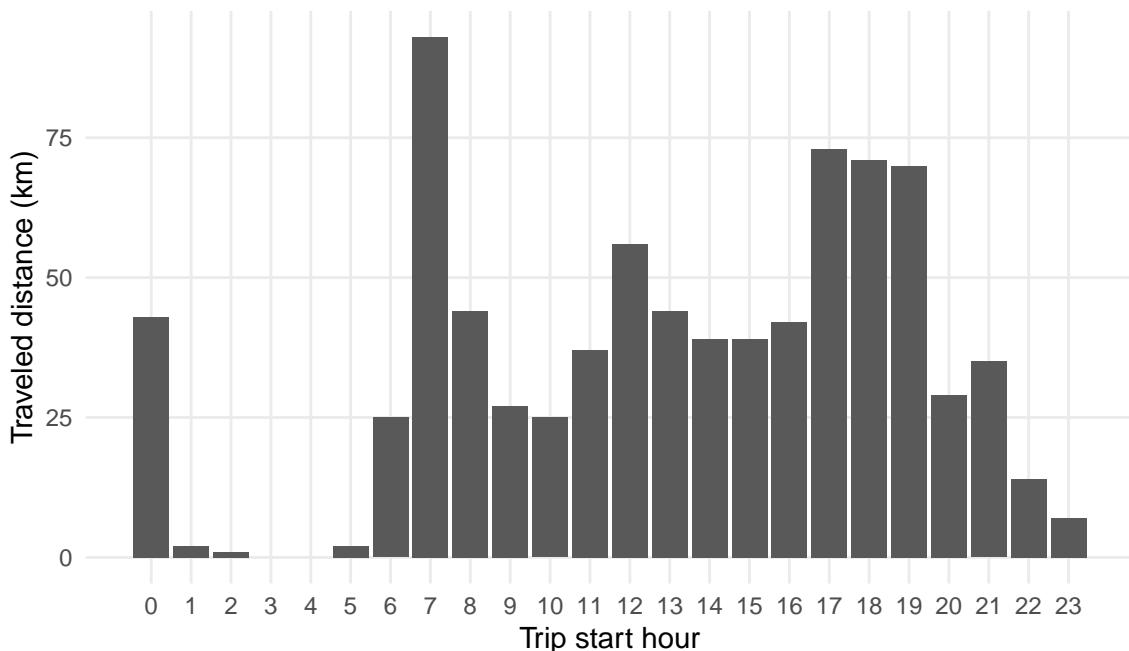

SOURCE: The Author (2021)

highest traveled distance had 230.34 kilometers, and the lowest had 0.2 kilometers. Five zones had no traveled distance. Most of the trips happened in central areas of the city.

FIGURE 43 – TRAVELED DISTANCE PER TAZ

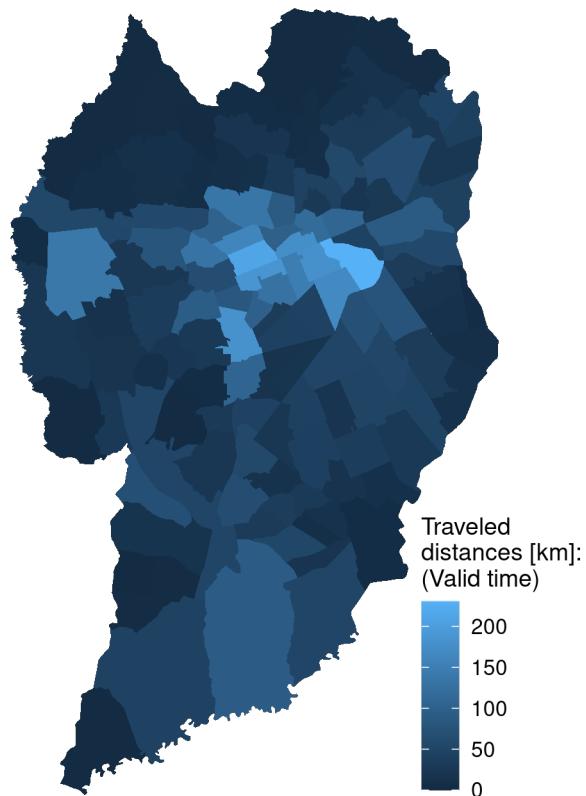


SOURCE: The Author (2021)

#### 4.2 SPEEDING DATA

TABLE 14 shows the summary of the speeding rate per trip and per driver. The mean speeding rate of trips was 0.40, with a standard deviation of 0.19. The minimum value was 0.00, indicating a trip without speeding, and the maximum value was 1.00, indicating a trip (or a segment of a trip) totally performed in speeding. Regarding the speeding rate per driver, the mean value was 0.44, with a standard deviation of 0.08. The driver with the least speeding presented a value of 0.28, and the driver with the highest level of speeding presented a value of 0.64.


Speeding values presented a similar value across all days of the week (FIGURE 44). Speeding on Tuesdays and Fridays was a bit higher than other days, and on Thursdays and Saturdays, it presented lower values. Regarding the hour of the day (FIGURE 45), the highest value of speeding happened between 0:00 – 1:00 and the lowest between 1:00 and 2:00.

FIGURE 44 – SPEEDING PER DAY OF THE WEEK

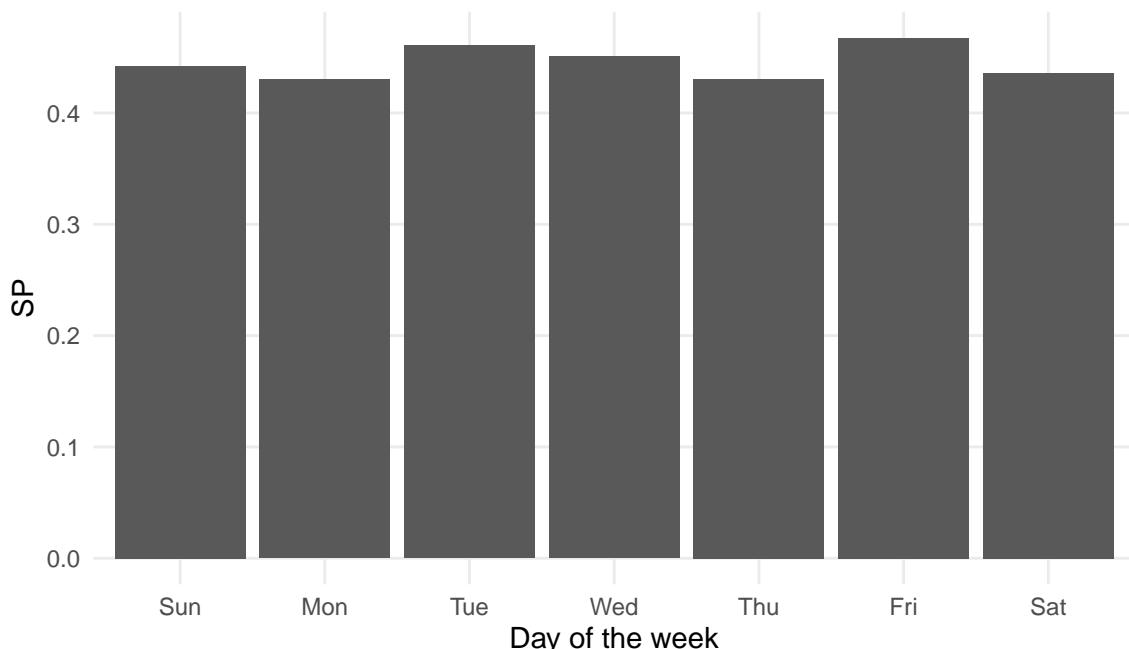

SOURCE: The Author (2021)

FIGURE 45 – SPEEDING PER HOUR OF THE DAY

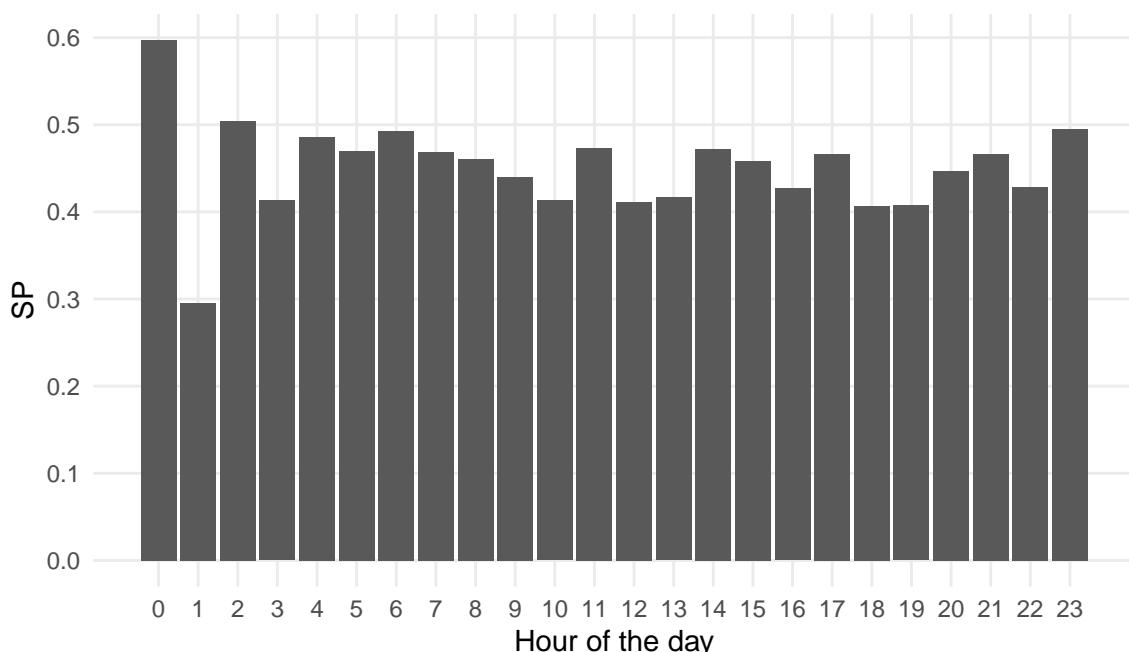

SOURCE: The Author (2021)


TABLE 14 – DESCRIPTIVE STATISTICS OF SPEEDING RATE PER TRIP AND DRIVER

	Trips	Drivers
Mean	0.40	0.44
SD	0.19	0.08
Min.	0.00	0.28
1Q	0.28	0.40
Median	0.41	0.45
3Q	0.52	0.51
Max.	1.00	0.64

SOURCE: The Author (2021).

Richard et al. (2013b) established four types of speeding behavior – situational speeding, incidental speeding, habitual speeding, and casual speeding – based on two variables: percentage of trips with any speeding and average speeding per trip, of each driver. The plotting of these variables and the setting of a zone boundary of 20% in each variable (arbitrarily defined by Richard et al. (2013b)) created 4 zones, one for each type of speeding behavior. FIGURE 46 graph manifests the result of this method applied to the speeding sample. In this plot, each dot represents a driver, and its size indicates the number of trips performed by each driver. The y-axis indicates the average speeding per trip of a driver. This speeding was calculated with the *SP* equation (3.1) for each trip. The x-axis indicates the percent of trips with any quantity of speeding.

FIGURE 46 – TYPES OF SPEEDING BEHAVIOR OF DRIVERS

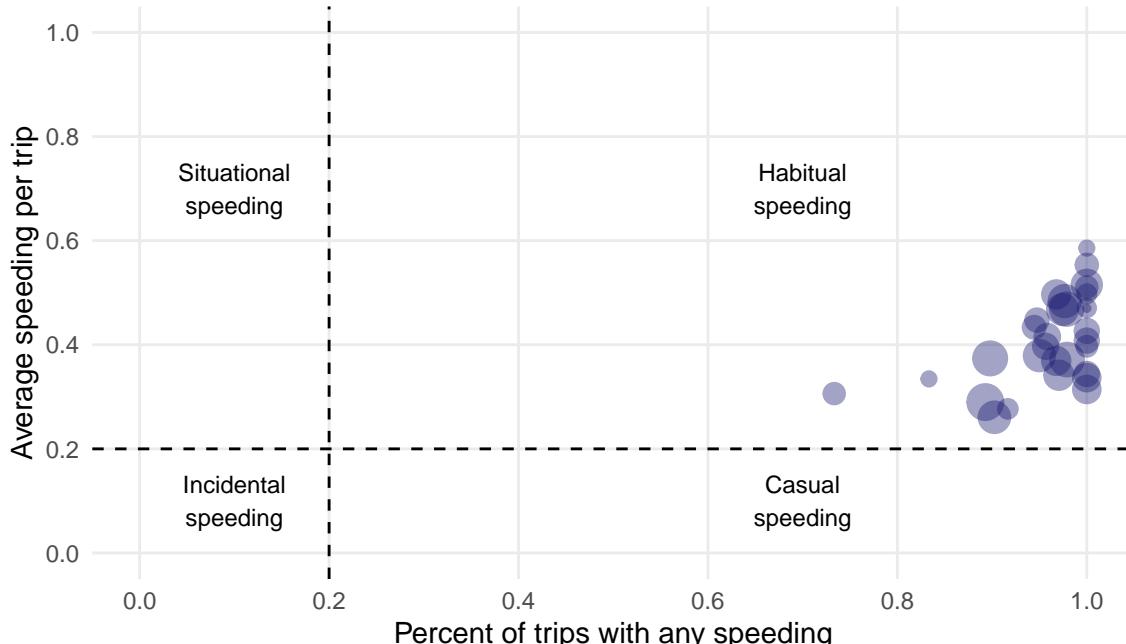

SOURCE: The Author (2021), based on Richard et al. (2013b)

NOTE: Dot size indicates quantity of trips.


In FIGURE 46, it is possible to observe that most of the drivers presented a speeding behavior in at least 80% of their trips. The average speeding per trip of

each driver varied between 20% and 60%. All 32 drivers were classified into habitual speeders, in which they regularly speed and have large proportions of speeding in their trips. Situational speeding happens when a high level of speeding per trip happens a few times, indicating that drivers classified in this category usually do not speed. Incidental speeding happens in small proportions of trips and a few trips, representing unintentional speeding events. Casual speeding consists of a higher percentage of trips with any speeding, but with low average speeding behavior per trip.

#### 4.3 GEOGRAPHICALLY WEIGHTED REGRESSION RESULTS

The data arrangement process reduced the total sample of 135 TAZ into 118 TAZ. This resulted in a remaining sample of 6,160.91 kilometers of total traveled distance, which includes 3,745.24 kilometers performed in free-flow speeds and 1,674.51 kilometers performed in speeding. In FIGURE 47 a map is presented with the remaining TAZ of the sample.

FIGURE 47 – TAZ CONSIDERED IN THE SAMPLE

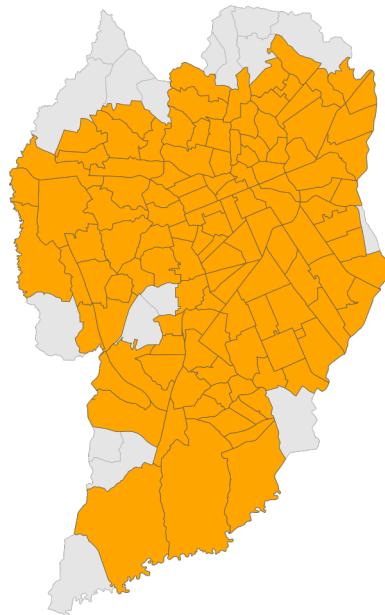

SOURCE: The Author (2021)

In TABLE 15 is included the descriptive statistics of the 11 variables, including speeding, and considering the 118 TAZ. The value of speeding for each TAZ varied between 0.01 and 0.65, with a mean value of 0.31. DSC, LDI, PAR, and TSD values resulted in zero for some TAZ, indicating a lack of speed cameras, arterial roads, and traffic signals in these zones. The map in FIGURE 48 shows the speeding results for each TAZ, including the Local Moran results for this variable. The Low-Low clusters


indicates lower values of SP in the central zones of the city and in the northeast zones. A Low-High outlier was detected between the Low-Low clusters. Regarding higher values of SP, High-High clusters can be observed at six different areas.

TABLE 15 – DESCRIPTIVE STATISTICS OF VARIABLES

Variable [unit]	Mean	SD	Min.	1Q	Median	3Q	Max.
AVI [BRL]	2,628.16	1,557.56	807.21	1,435.00	2,087.21	3,572.04	9,293.81
BSD [no./km]	3.04	2.15	0.29	1.78	2.49	3.54	13.90
DCSU [no./km <sup>2</sup> ]	847.34	1,184.30	12.30	337.76	533.36	877.57	9,539.73
DIS [no./km]	4.64	1.11	0.88	3.89	4.54	5.18	7.70
DSC [no./km]	0.06	0.09	0.00	0.00	0.03	0.08	0.53
LDI	0.61	0.22	0.00	0.52	0.65	0.74	0.99
PAR	0.05	0.05	0.00	0.00	0.05	0.08	0.21
PD [inhab./km <sup>2</sup> ]	5,672.35	3,113.04	114.68	3,286.27	5,489.84	7,244.98	16,142.06
SND [km/km <sup>2</sup> ]	15.08	4.41	3.68	12.54	15.63	18.14	25.78
SP	0.31	0.14	0.01	0.20	0.30	0.40	0.65
TSD [no./km]	0.37	0.48	0.00	0.09	0.20	0.40	2.75

SOURCE: The Author (2021).

FIGURE 48 – SPEEDING PER TAZ

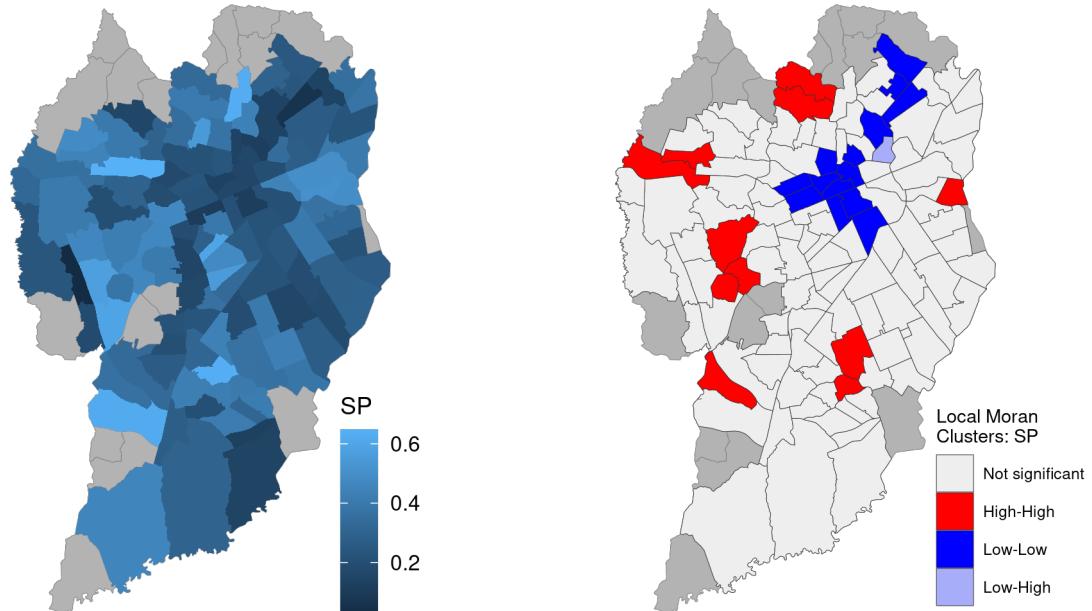


SOURCE: The Author (2022)

NOTE: Grey zones have no data.

The final step of the data arrangement process was the check of correlation between all independent variables, using the Spearman method. The results of this process are displayed in the correlogram in FIGURE 49. None of the variables presented a correlation equal to or above 0.8, therefore, all of them were kept in the regression model.

FIGURE 49 – SPEARMAN CORRELOGRAM OF INDEPENDENT VARIABLES

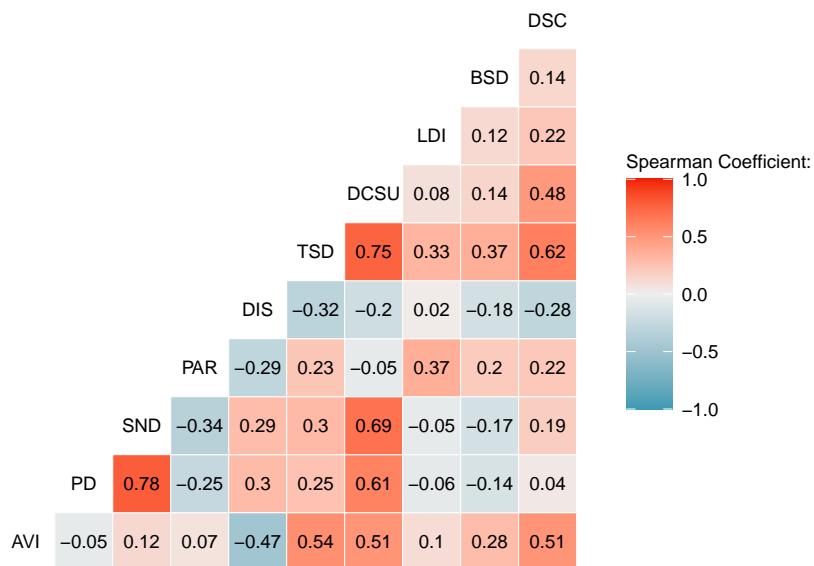

SOURCE: The Author (2021)

In TABLE 16, the model diagnostics of five GWR and one global linear model is shown, based on 4 performance indicators:  $AIC_c$ ,  $R^2$ , Adjusted  $R^2$ , and Moran's  $I$  on residuals. The  $p$ -value indicates the statistical significance of Moran's  $I$  results. The global linear regression presented the best  $AIC_c$  and adjusted  $R^2$  diagnostics, with values of -144.334 and 0.215, respectively. Regarding  $R^2$ , the GWR model with bisquare kernel showed the best diagnostic, with a value of 0.350. The boxcar kernel presented the lowest value of Moran's  $I$  on residuals (0.130). All GWR models presented a better performance in comparison to the global linear model when considering the spatial autocorrelation of the residuals, but the global model performed better when considering adjusted  $R^2$  and  $AIC_c$  values. Given that speeding behavior is spatially autocorrelated (FIGURE 48), it was decided to discard the global linear model in favor of a GWR model. Therefore, the GWR model with the boxcar kernel was selected, having the best adjusted  $R^2$  and Moran's  $I$  value between the GWR models.

TABLE 16 – MODEL DIAGNOSTICS

Model	Kernel	$AIC_c$	$R^2$	Adj. $R^2$	Moran's $I$	$p$ -value	Bandwidth
GWR	Gaussian	-143.664	0.298	0.207	0.169	0.003	115
	Bisquare	-136.431	0.350	0.197	0.131	0.016	115
	Tricube	-136.696	0.332	0.195	0.135	0.009	115
	Boxcar	-138.792	0.314	0.211	0.130	0.009	80
	Exponential	-142.001	0.340	0.207	0.158	0.001	115
Global linear	-	-144.334	0.282	0.215	0.178	0.006	-

SOURCE: The Author (2021).

In TABLE 17, the coefficient estimates of the linear regression model are shown, in addition to the standard error, *t*-values, and *p*-values. The only statistically significant coefficient at the 95% level was the proportion of arterial roads (PAR), which expressed an inverted correlation to speeding. It is necessary to observe the *p*-values of the linear model to identify statistical significance of the GWR parameter estimates, considering that GWR does not have a diagnostic value to analyze significance (e.g., *p*-value).

TABLE 17 – SUMMARY OF LINEAR MODEL ESTIMATES

Variable	Estimate	Std. Error	<i>t</i> -value	<i>p</i> -value
Intercept	3.688e-01	8.223e-02	4.485	1.84e-05
PAR	-9.005e-01	2.845e-01	-3.165	0.00202*
TSD	-9.115e-02	5.389e-02	-1.691	0.09368
DCSU	-6.311e-06	1.837e-05	-0.344	0.73188
LDI	8.370e-02	5.625e-02	1.488	0.13969
BSD	6.731e-03	7.467e-03	0.901	0.36940
DSC	-2.166e-01	1.914e-01	-1.132	0.26019
AVI	-2.937e-07	8.725e-06	-0.034	0.97321
PD	-4.012e-07	6.716e-06	-0.060	0.95248
SND	-4.496e-04	4.627e-03	-0.097	0.92278
DIS	-3.913e-03	1.460e-02	-0.268	0.78925

SOURCE: The Author (2021).

NOTE: \* Significance at 95%

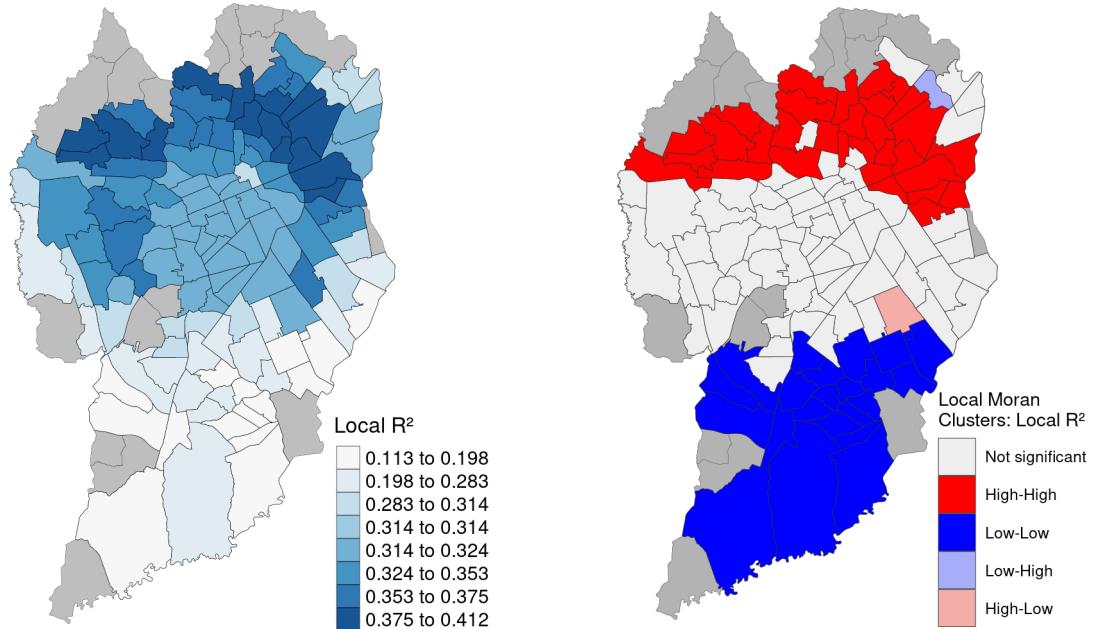
In TABLE 18, the descriptive statistics of the chosen GWR model coefficient estimates are showed. Maps in FIGURES 53 to 63 show these coefficients in each TAZ, in addition to the Local Moran clusters results. FIGURE 50 shows the variation of local geographically weighted  $R^2$ . Local Moran results shows a cluster with higher values in the northern part of the city and another cluster with low values in the southern part. Two outliers were detected, a Low-High and a High-Low. Local  $R^2$  values varied between 0.113 and 0.412.

TABLE 18 – DESCRIPTIVE STATISTICS OF GWR COEFFICIENT ESTIMATES

Variable	Min.	1Q	Median	3Q	Max.
Intercept	2.665e-01	3.611e-01	3.852e-01	4.135e-01	5.243e-01
PAR	-1.756e+00	-1.524e+00	-1.258e+00	-1.044e+00	-7.092e-01
TSD	-1.532e-01	-8.966e-02	-8.090e-02	-6.832e-02	-3.597e-02
DCSU	-2.206e-05	-1.386e-05	-1.136e-05	-5.634e-06	-7.798e-07
LDI	3.382e-02	7.092e-02	1.014e-01	1.595e-01	2.232e-01
BSD	-5.262e-03	4.542e-03	9.462e-03	1.098e-02	1.944e-02
DSC	-2.925e-01	-1.801e-01	-1.312e-01	-1.110e-01	-1.491e-02
AVI	-1.039e-05	-4.306e-06	-1.686e-06	3.367e-06	9.646e-06
PD	-2.946e-06	2.869e-07	1.847e-06	3.676e-06	7.650e-06
SND	-8.173e-03	-5.163e-03	-3.893e-03	-1.406e-03	2.626e-03
DIS	-1.961e-02	-1.046e-02	-8.472e-03	1.565e-03	2.257e-02

SOURCE: The Author (2021).

In FIGURE 51, the geographically weighted local mean of the speeding variable across Curitiba is displayed. The western and southern parts of the city presented higher

FIGURE 50 – GW LOCAL  $R^2$ 


SOURCE: The Author (2021)

values, as displayed by the High-High cluster, while the eastern area presented lower values of speeding, indicated by the Low-Low cluster. Regarding the geographically weighted standard deviation (SD) of the speeding variable (FIGURE 52), the western side of the city presented higher values, while the eastern side showed lower values. SD had a variation between 0.126 and 0.149 and local mean varied between 0.291 and 0.322. In FIGURE 53, the model intercept estimates are presented. The Local Moran results identified a High-High cluster in the western part of the city, four Low-Low clusters in the eastern part and one Low-Low cluster in the south.

The proportion of arterial roads coefficient estimates is displayed in FIGURE 54. All values resulted in negative coefficients, with a Low-Low cluster on the eastern part of the city and two High-High clusters: a bigger one on the south and a smaller one in the northern part. All values of traffic signal density (FIGURE 55) and density of commercial and services units (FIGURE 56) estimates also resulted in negative values. TSD estimates Local Moran resulted in High-High clusters distributed among two areas, one Low-Low cluster and three TAZ defined as outliers: two High-Low and one Low-High. Regarding DCSU estimates Local Moran, it resulted in High-High and Low-Low clusters, in addition to a Low-High outlier.


The land use diversity index coefficient estimates are presented in FIGURE 57. All TAZ presented a direct correlation with speeding, with a higher intensity on the northern side of the city, as shown by the High-High Local Moran cluster. On the

FIGURE 51 – SPEEDING GW LOCAL MEAN

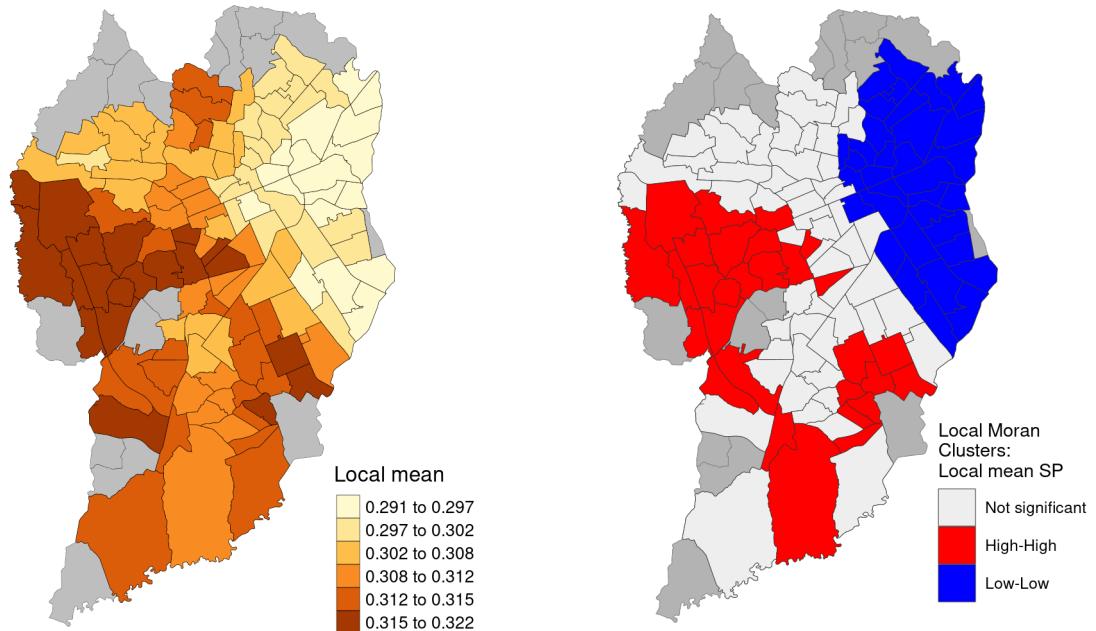


SOURCE: The Author (2021)

FIGURE 52 – SPEEDING GW LOCAL SD

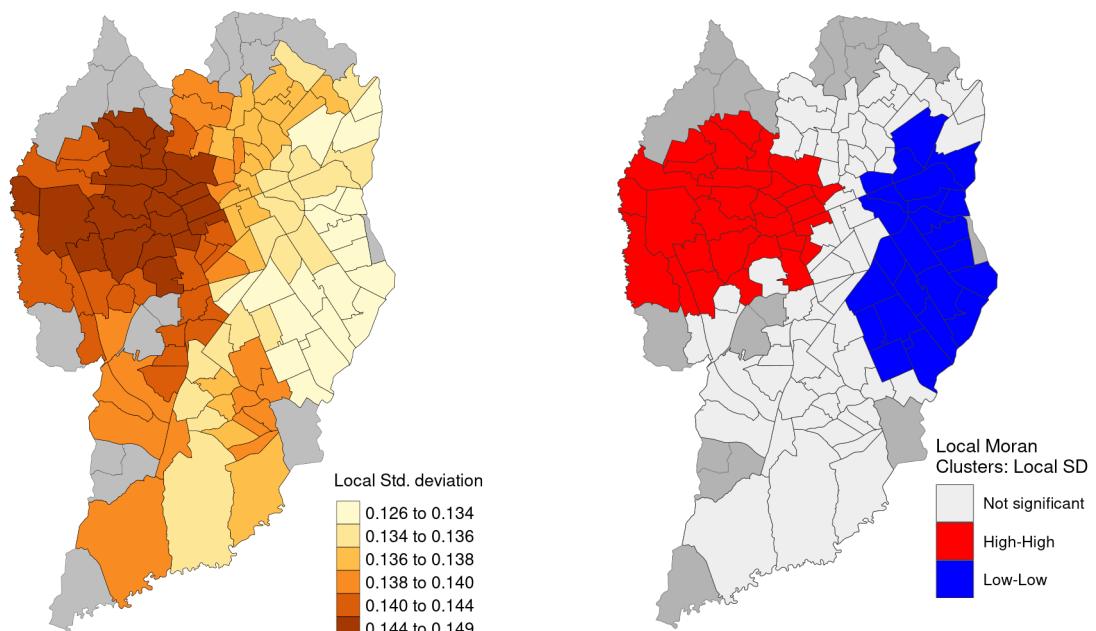


SOURCE: The Author (2021)

FIGURE 53 – MODEL INTERCEPT ESTIMATES

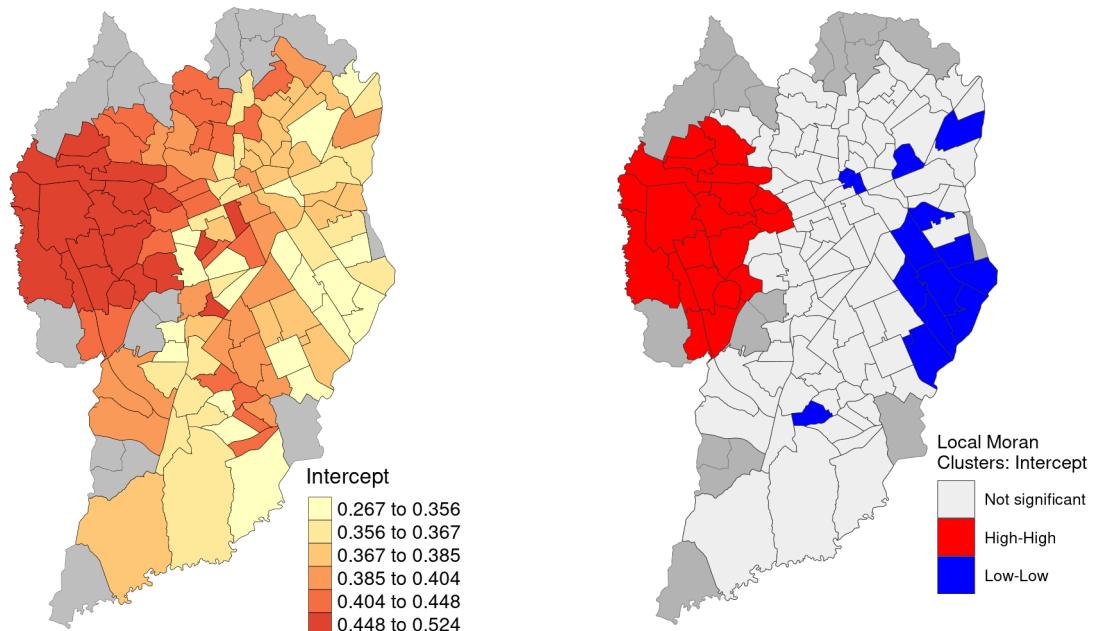


SOURCE: The Author (2021)

FIGURE 54 – PAR COEFFICIENT ESTIMATES

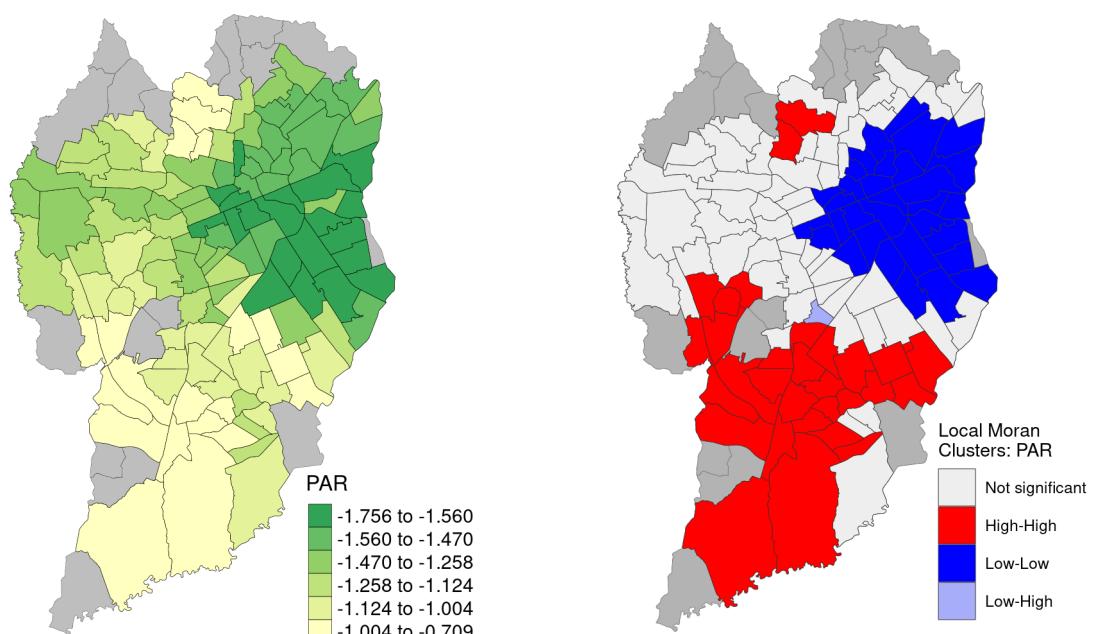


SOURCE: The Author (2021)

FIGURE 55 – TSD COEFFICIENT ESTIMATES

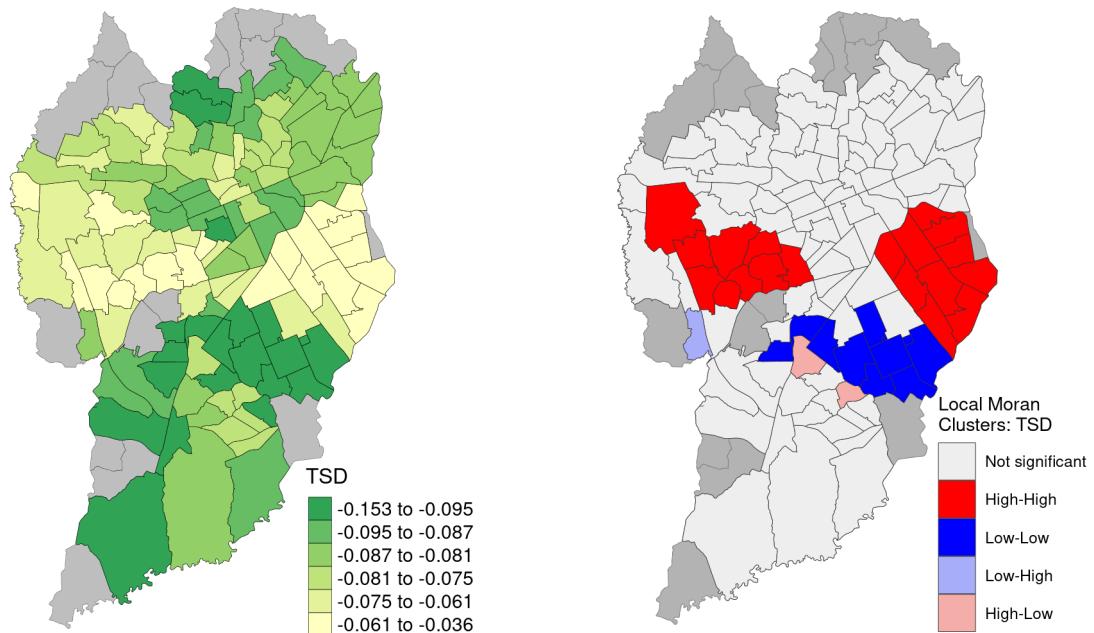

SOURCE: The Author (2021)


FIGURE 56 – DCSU COEFFICIENT ESTIMATES

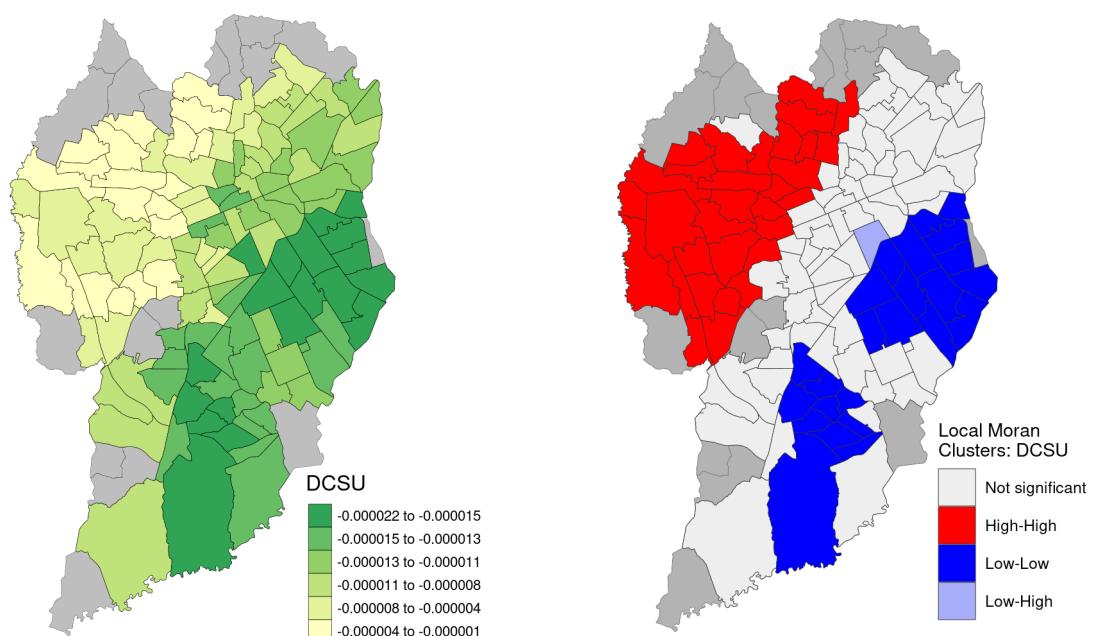

SOURCE: The Author (2021)


southern region, the Low-Low cluster indicates lower values of coefficient estimates. Regarding bus stop density coefficient estimates (FIGURE 58), most TAZ presented a direct correlation to speeding. The density of speed cameras coefficient estimates, presented in FIGURE 59, indicates an inverted correlation to speeding in all the TAZ.

FIGURE 57 – LDI COEFFICIENT ESTIMATES

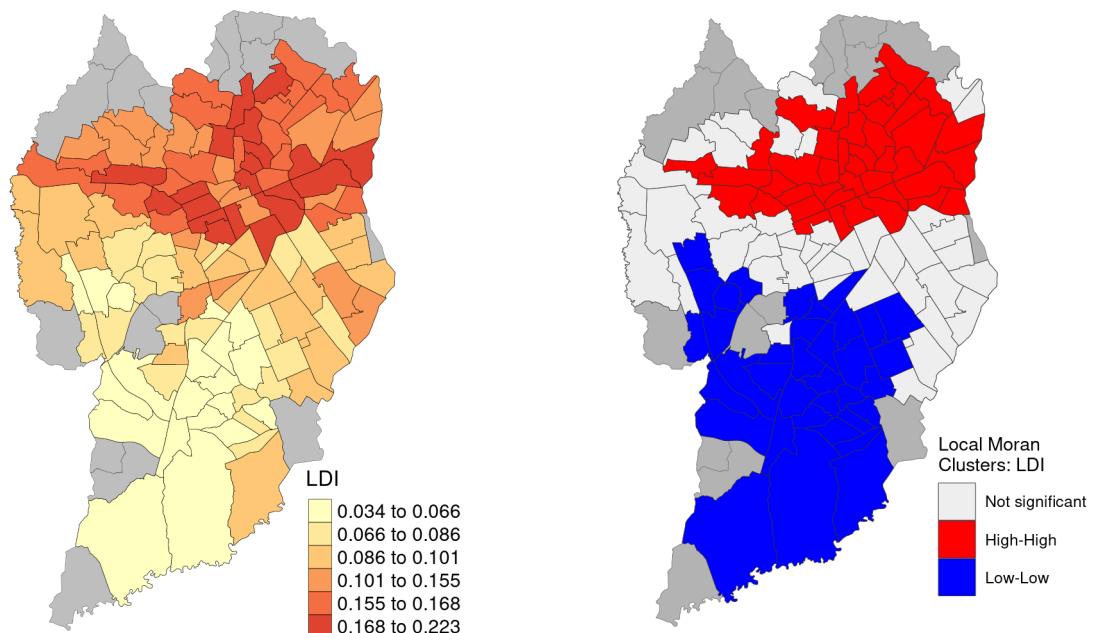


SOURCE: The Author (2021)

FIGURE 58 – BSD COEFFICIENT ESTIMATES

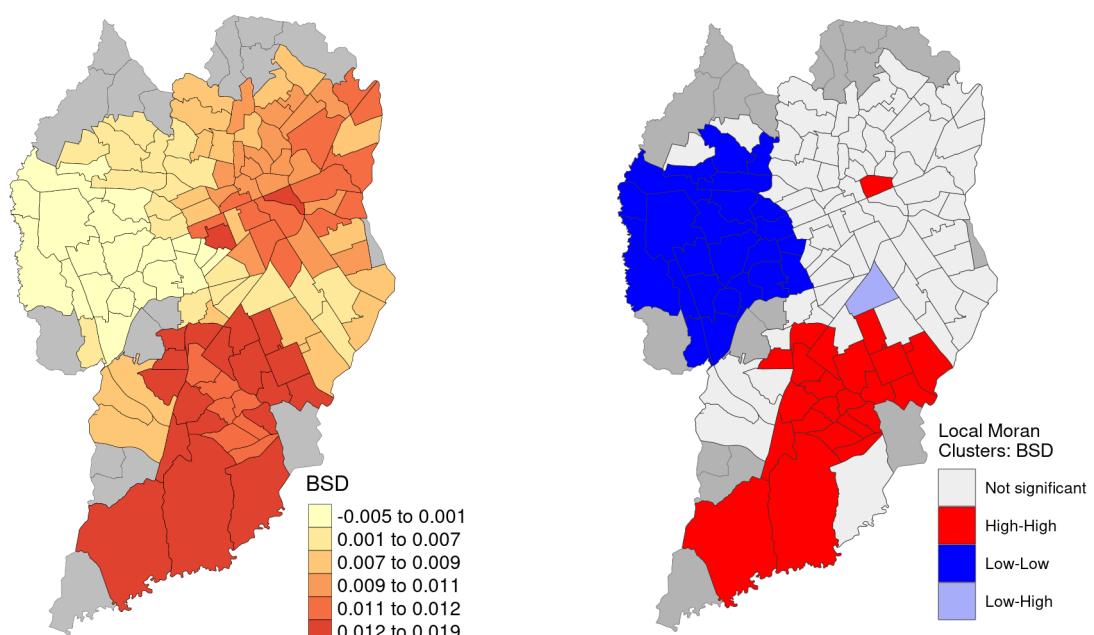

SOURCE: The Author (2021)

FIGURE 59 – DSC COEFFICIENT ESTIMATES

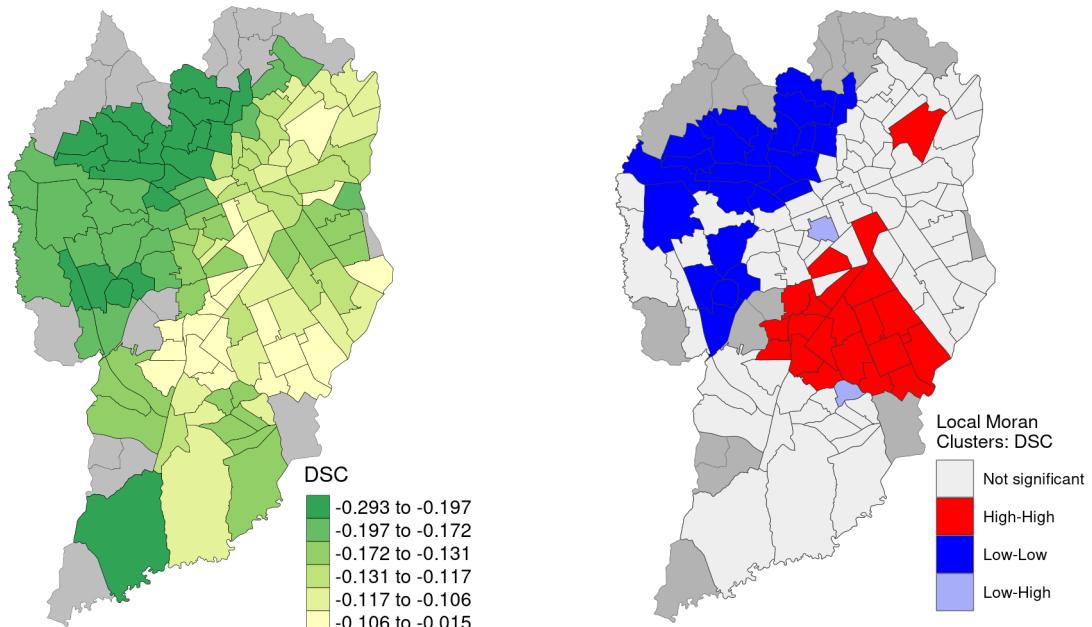

SOURCE: The Author (2021)

AVI estimates presented a mixed result, with positive values in the northeast part of the city and negative values in western and southern parts (FIGURE 60). PD estimates also were mixed, with the northern TAZ presenting an inverted correlation to speeding and the remaining areas showing a direct correlation (FIGURE 61). SND coefficient estimates resulted in direct correlation to speeding in the southern area of the city, and the remaining areas showed an inverted correlation (FIGURE 62).


The density of intersections coefficient estimates resulted in an inverted correlation to speeding in most of the TAZ. Few zones showed a stronger direct correlation to speeding (FIGURE 63). Finally, in TABLE 19 is presented a list with the percentage of TAZ with positive and negative coefficients, for each variable presented in the maps.

TABLE 19 – PERCENTAGE OF TAZ WITH POSITIVE/NEGATIVE COEFFICIENTS

Variable	Description	Negative	Positive
Intercept		0%	100%
PAR	Proportion of arterial roads	100%	0%
TSD	Traffic signal density	100%	0%
DCSU	Density of commercial and services units	100%	0%
LDI	Land use diversity	0%	100%
BSD	Bus stop density	12%	88%
DSC	Density of speed cameras	100%	0%
AVI	Average income	60%	40%
PD	Population density	18%	82%
SND	Street network density	81%	19%
DIS	Density of intersections	71%	29%


SOURCE: The Author (2021).

FIGURE 60 – AVI COEFFICIENT ESTIMATES

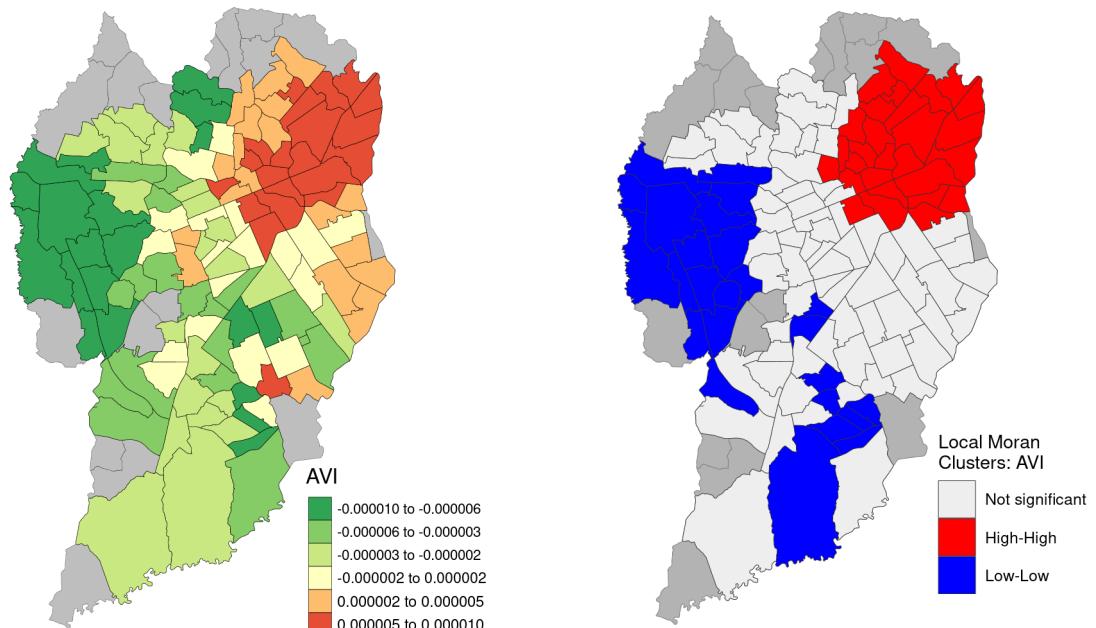


SOURCE: The Author (2021)

FIGURE 61 – PD COEFFICIENT ESTIMATES

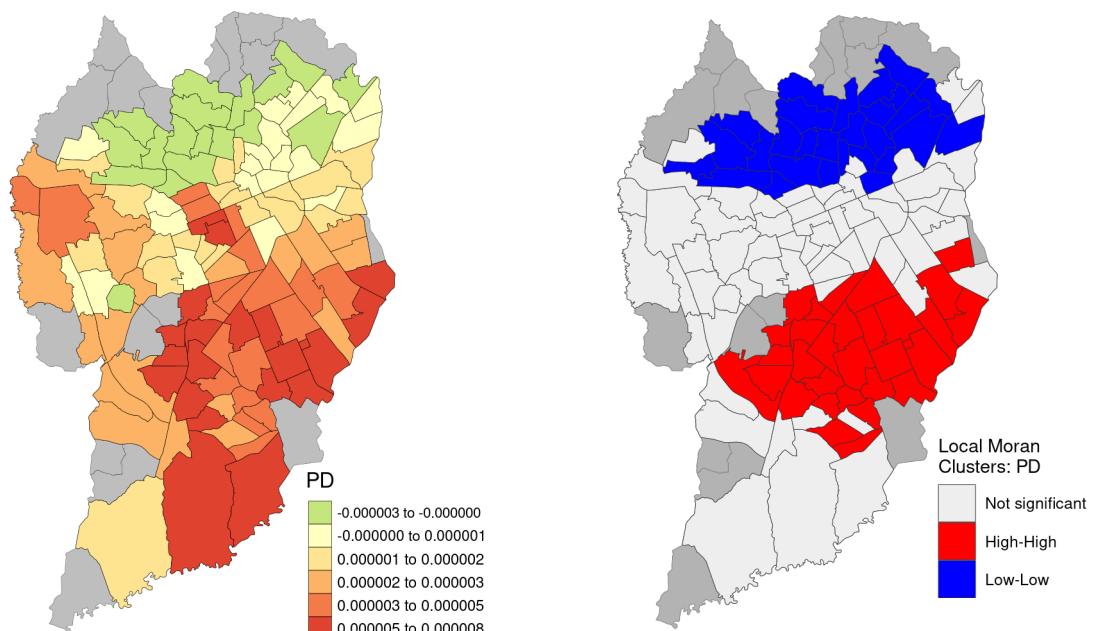


SOURCE: The Author (2021)

FIGURE 62 – SND COEFFICIENT ESTIMATES

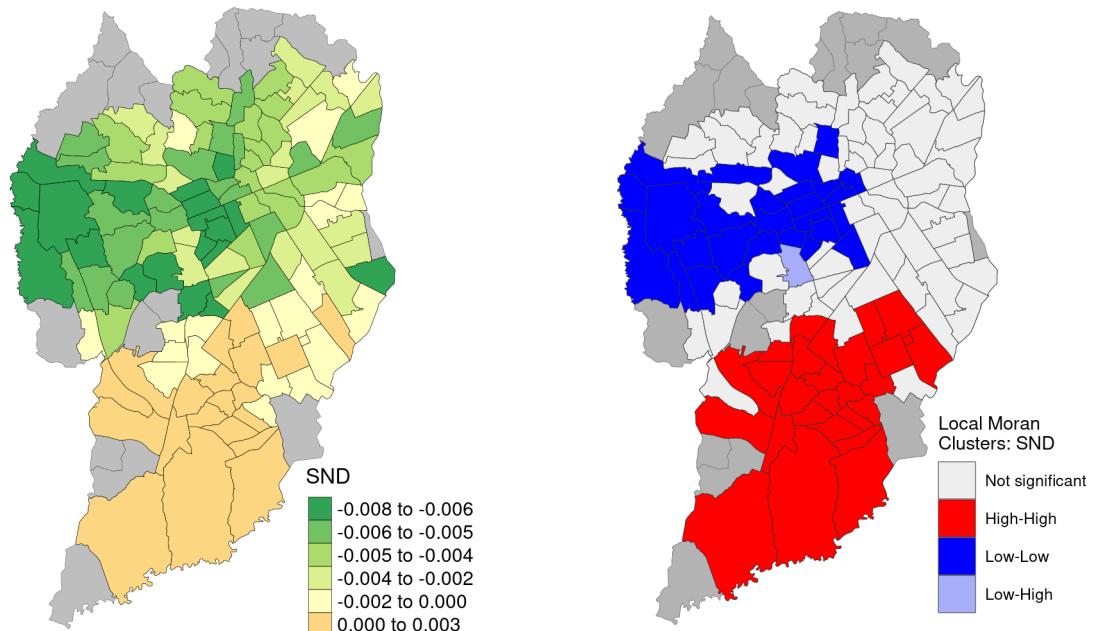

SOURCE: The Author (2021)

FIGURE 63 – DIS COEFFICIENT ESTIMATES

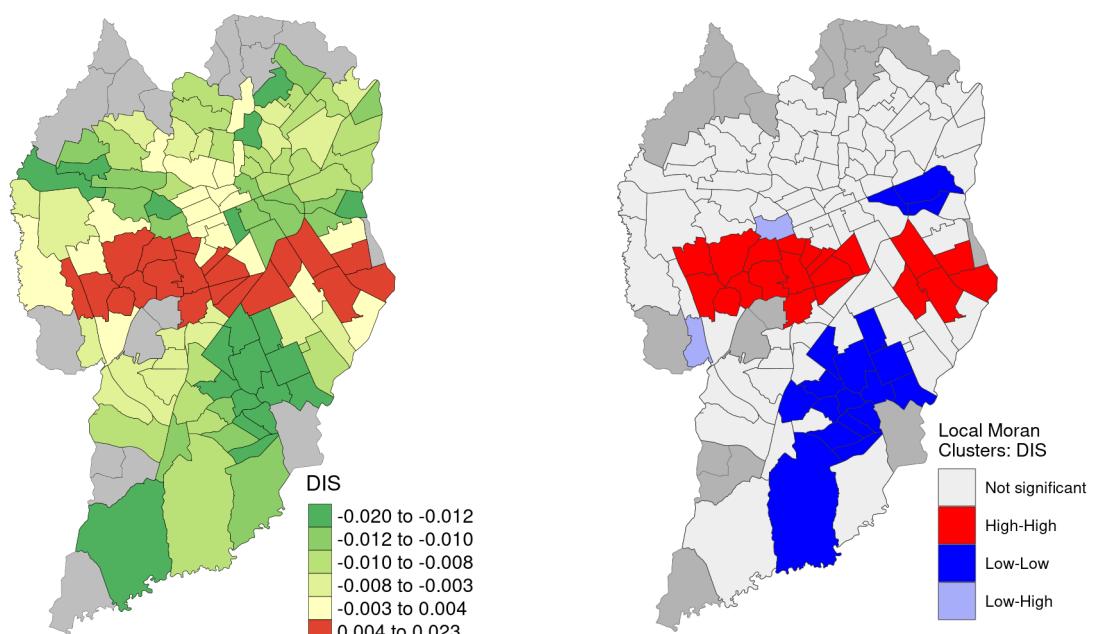


SOURCE: The Author (2021)

## 5 DISCUSSION

As shown in FIGURE 48, the speeding rate per TAZ is spatially autocorrelated. The Local Moran on speeding data showed areas with High-High and Low-Low clusters, in addition to a Low-High outlier. The High-High clusters were identified in six different positions. One Low-Low cluster was identified in the central area of the city, and another one was identified to the northeast of the first. The Low-High outlier is positioned between the Low-Low clusters. In FIGURE 64 is displayed the position of Curitiba's *Área Calma* and the speeding clusters. The *Área Calma* (or Calm Zone) is a region in the city center that have a speed limit of 40 km/h in all of its streets, in addition to traffic-calming measures and speed limit enforcement through speed cameras. One of the factors influencing the positioning of a Low-Low cluster in the city center could be the presence of the Calm Zone and its surroundings.

FIGURE 64 – SPEEDING CLUSTERS AND ÁREA CALMA

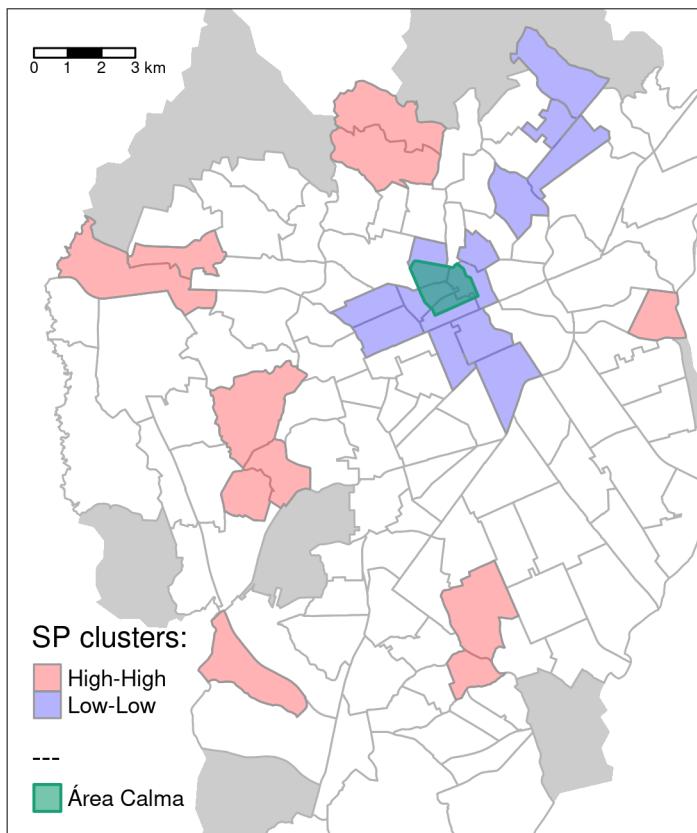


SOURCE: The Author (2022), based on IPPUC (2021).

Another reason for lower values of speeding in TAZ closer to the city center could be the higher volume of traffic and increased time delays in the area, causing congestion and mitigating the opportunity of drivers reaching their desired speeds. In

FIGURE 65 is presented the location of speeding clusters and the quantity of destination of trips per TAZ. The destination of trips data is available in Curitiba's origin destination survey of 2018 (IPPUC, 2018). Higher volume of destination of trips is present in the central area of the city, inside one of the Low-Low speeding clusters. High-High speeding clusters present lower values of destination of trips. The destination of trips distribution also shows a similar pattern to the traveled distances per TAZ from the naturalistic sample (FIGURE 43), indicating a certain level of significance of the research sample.

FIGURE 65 – SPEEDING CLUSTERS AND DESTINATION OF TRIPS

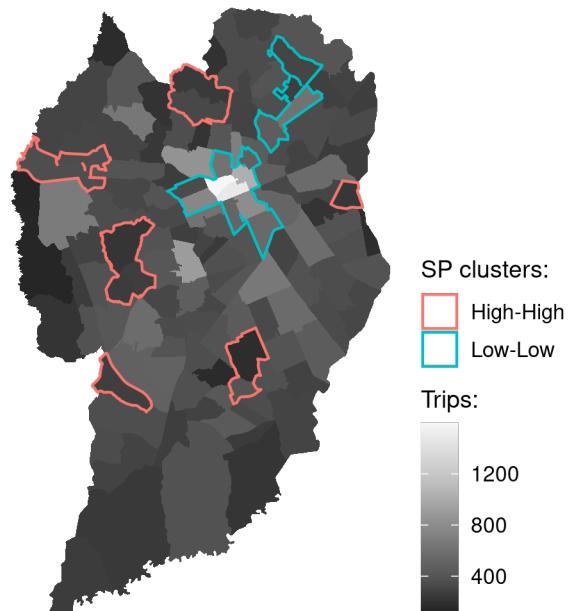

SOURCE: The Author (2022), based on IPPUC (2018).

After testing five different configurations of the GWR, the model with the boxcar kernel was chosen, with an adaptive bandwidth of 80 neighbors. As shown in TABLE 11, previous authors applied the GWR model using the bisquare or gaussian kernels for the analysis of road crashes. This difference in performance can be related to the different nature and pattern of the dependent variables, considering that road crashes consists mostly of count data and the speeding rate in this research is a continuous data. None of the models presented a good performance regarding the residuals, given that they are spatially autocorrelated (TABLE 18). Not all performance indicators showed an advantage to the GWR models in comparison to the global regression. Overall, the global regression presented better values of  $AIC_c$  and adjusted  $R^2$ , but worse value of Moran's  $I$  on residuals. The local  $R^2$  value of the chosen GWR model (FIGURE 50) indicates a better performance on northern part of the city and lower performance on southern areas.

According to the summary of the linear model estimates (TABLE 17), the


proportion of arterial roads (PAR) is the only statistically significant coefficient at the 95% level, with a *p*-value of 0.002. As presented in FIGURE 54 and TABLE 19, PAR coefficient estimates from the GWR model resulted in an inverted correlation to speeding in all the TAZ included in the research. Among previous authors that investigated the influence of the build environment on road safety, most observed a positive correlation between arterial roads and speeding (DUMBAUGH; LI, 2011; EWING; DUMBAUGH, 2009; HUANG; WANG; PATTON, 2018; OBELHEIRO et al., 2020). Therefore, the results found in this work show a different relationship between these variables, in comparison to previous research.

In FIGURE 66 is presented the road network hierarchy of Curitiba and the location of the speeding clusters. Overall, only Low-Low speeding clusters contain arterial roads, while High-High clusters contain more local roads. This related position of road hierarchy and speeding results could have led to the inverted correlation between proportion of arterial roads and speeding, detected by the GWR model. Other factor that could have influenced this result is the indirect and localized effect of speed cameras installed in arterial and rapid transit roads. To Li, Graham, and Majumdar (2013) and Oliveira et al. (2015), there is an effect of speed reduction inside a 200-meter buffer of the speed camera. However, this reduction can also lead to a “kangaroo effect”, a phenomenon where road users tend to compensate for the “wasted” time caused by this reduction (AMANCIO, 2021; LI; ZHANG; REN, 2020).

In FIGURE 67 is presented the positioning of 200-meter buffer of speed cameras in Curitiba and the road network hierarchy. Most of these buffers are positioned on arterial and rapid transit roads. The density of speed cameras (DSC) coefficient did not have a statistically significant result, however, the localized effect of speed cameras in arterial and rapid transit roads could be influencing the inverted correlation between PAR and speeding. A GWR model, having a spatial nature, may not be able to observe these localized effects. It might be possible that other elements of road design and traffic control (e.g., traffic signals, intersections) also affects speeding in a localized level and are not observed in a territorial level.

Between six categories of the built environment, only a variable of the design category resulted in a statistically significant coefficient after the application of the GWR model. It was observed a correlation implying that TAZ with a higher proportion of arterial roads (PAR) presents lower values of speeding rate. A secondary effect of higher values of PAR can be a higher level of road infrastructure and traffic control that characterizes these arterial roads, including traffic signals in intersections and higher presence of speed enforcement, reducing the speeding rate. Therefore, future policy regarding the reduction of speeding in Curitiba should consider these effects of traffic


FIGURE 66 – SPEEDING CLUSTERS AND ROAD NETWORK HIERARCHY

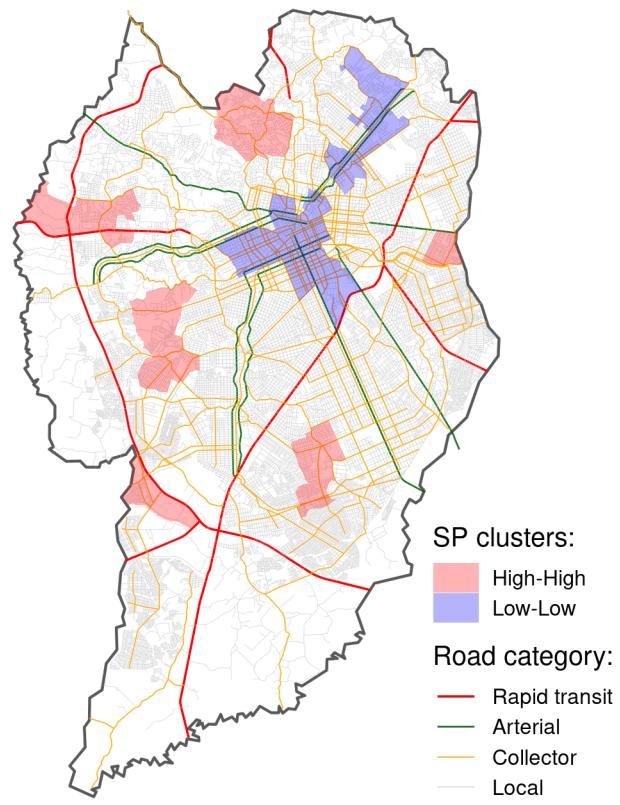

SOURCE: The Author (2022), based on IPPUC (2021)

control management on speeding behavior of car users.

FIGURE 67 – ROAD NETWORK HIERARCHY AND SPEED CAMERAS

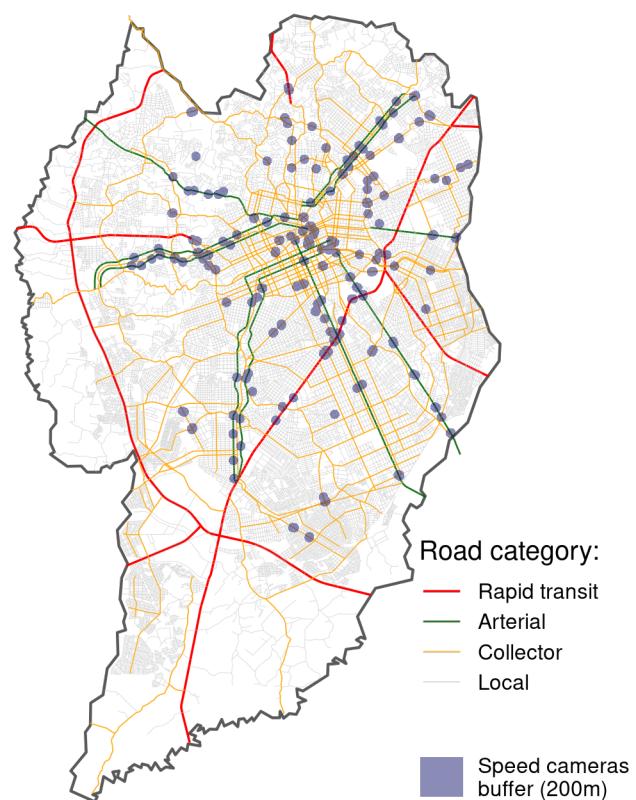

SOURCE: The Author (2022), based on IPPUC (2021) and SETRAN (2020)

## 6 CONCLUSIONS

The Naturalistic Driving Study enabled the collection of speed data from a sample of 32 drivers in the city of Curitiba, Brazil. Considering the valid data, it was possible to analyze 6.074.38 kilometers of traveled distance and a total of 818 trips, representing a traveled time of 230.36 hours. However, when comparing the current number of participants to the described NDS in Section 2.6, 32 participants correspond to a small sample to conduct a more statistically sound analysis. Regarding the spatial coverage, most of the traveled distance was performed in central areas of the city, in comparison to peripheral areas, similar to the distribution of destination of trips in the city. The amount of traveled distance wasn't enough to cover all the present TAZ in Curitiba (reducing from 135 to 118 zones).

Results indicate that the Geographically Weighted Regression with a boxcar kernel showed the best performance in comparison to other kernel types and the linear regression, considering the value of Moran's  $I$  on residuals and the adjusted  $R^2$ . However, none of the models presented a desirable performance, considering that the residuals from all models were spatially autocorrelated. This indicates that they couldn't validly predict the spatial heterogeneity present in the occurrence of speeding behavior. Not all GWR models showed a better performance than the linear regression. To Brunsdon, Fotheringham, and Charlton (1996), calibration of the GWR model for regions close to the edge of the study area is subject to greater sampling error. The "holes" present in the current sample of TAZ might have harmed the GWR performance.

Based on the results from the linear regression (TABLE 17), only the proportion of arterial roads (PAR) coefficient showed statistical significance. The GWR model indicates an inverted correlation between PAR and speeding on 100% of the current sample of TAZ (TABLE 19, FIGURE 54). The results from the GWR model shows a different relationship between PAR and speeding, considering that previous research found a direct correlation between PAR, speeding behavior and road crashes. The inverted correlation identified by the GWR model may be influenced by local characteristics of arterial roads in Curitiba, including a higher level of road infrastructure and traffic control.

In addition to the built environment, other attributes might influence resultant speeding values. Characteristics from the drivers (e.g., age, experience, license age, education) and the vehicles (e.g., age, engine power) might also influence speeding behavior. Using Richard et al. (2013b) method of speeding behavior classification, all drivers from the current sample were classified as "habitual speeders", which might

indicate a certain level of similarity concerning speeding behavior between participants. In this study, the analysis of built environment variables were not isolated from the behavioral aspects that can influence speeding occurrence.

Through the methods described in this work, it was possible to investigate the influence of the built environment on speeding behavior. The results indicate an influence of the design category, through an inverted correlation between proportion of arterial roads and speeding. This does not mean that future policies should increase the number of arterial and rapid transit, but understand the factors that lead to a greater level of safety performance on these roads, regarding speeding behavior, and apply them to other roads and regions in the city.

Future studies should consider the effects of traffic flow on speeding behavior in more detailed manner, regarding the spatial analysis of the built environment. Also, it would be important to increase the sample size and variety of the naturalistic data in Brazil, collecting data from other cities with different characteristics regarding population size and level of development. Data of different regions would help to better understand the effect of the built environment on speeding behavior, allowing the observation of results that does not only reflect characteristics from Curitiba.

## BIBLIOGRAPHY

- AMANCIO, Eduardo Cesar. **Influência de Dispositivos de Fiscalização Eletrônica de Velocidade no Comportamento do Condutor em Cenário Urbano**. 2021. Master Thesis – Universidade Tecnológica Federal do Paraná. Cit. on pp. 39, 51, 56, 89.
- AMOH-GYIMAH, Richard; SABERI, Meead; SARVI, Majid. The effect of variations in spatial units on unobserved heterogeneity in macroscopic crash models. **Analytic Methods in Accident Research**, v. 13, p. 28–51, Mar. 2017. ISSN 22136657. DOI: 10.1016/j.amar.2016.11.001. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S2213665716300471>. Cit. on pp. 37, 55.
- ANDS. **ANDS Progress report for May 2017**. [S.l.: s.n.], 2017. Available from: <http://www.andsw.unsw.edu.au/news-events/ands-progress-report-may-2017>. Cit. on p. 48.
- ANSELIN, Luc. Local Indicators of Spatial Association-LISA. **Geographical Analysis**, v. 27, n. 2, p. 93–115, 3 Sept. 2010. ISSN 00167363. DOI: 10.1111/j.1538-4632.1995.tb00338.x. Available from: <https://onlinelibrary.wiley.com/doi/10.1111/j.1538-4632.1995.tb00338.x>. Visited on: 12 Mar. 2022. Cit. on pp. 67, 68.
- \_\_\_\_\_. **Local Spatial Autocorrelation - LISA and Local Moran**. GeoDa - An Introduction to Spatial Data Science. 2020. Available from: [https://geodacenter.github.io/workbook/6a\\_local\\_auto/lab6a.html](https://geodacenter.github.io/workbook/6a_local_auto/lab6a.html). Cit. on p. 67.
- ARVIN, Ramin; KAMRANI, Mohsen; KHATTAK, Asad J. How instantaneous driving behavior contributes to crashes at intersections: Extracting useful information from connected vehicle message data. **Accident Analysis & Prevention**, v. 127, p. 118–133, June 2019. ISSN 00014575. DOI: 10.1016/j.aap.2019.01.014. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457518304950>. Cit. on pp. 54, 55.
- ASHTON, S J. A Preliminary Assessment of the Potential for Pedestrian Injury Reduction Through Vehicle Design. **SAE Technical Papers**, Sept. 1980. DOI: 10.4271/801315. Available from: <https://www.sae.org/content/801315/>. Cit. on pp. 28, 29.

BANSAL, Prateek; AGRAWAL, Rishabh; TIWARI, Geetam. Impacts of Bus-stops on the Speed of Motorized Vehicles under Heterogeneous Traffic Conditions: A Case-Study of Delhi, India. **International Journal of Transportation Science and Technology**, v. 3, n. 2, p. 167–178, June 2014. ISSN 20460430. DOI: 10.1260/2046-0430.3.2.167. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S2046043016300946>. Cit. on p. 41.

BASTOS, Jorge Tiago. **Análise Estratégica da Segurança viária no Brasil: Pesquisa de índices e Indicadores**. 2014. S. 290. PhD thesis – Universidade de São Paulo / Hasselt University. Cit. on p. 13.

BASTOS, Jorge Tiago et al. **Desempenho brasileiro na década de ação pela segurança no trânsito: análise, perspectivas e indicadores 2011-2020**. Brasilia: Viva editora, 2020. P. 120. Cit. on p. 20.

BASTOS, Jorge Tiago et al. Is organized carpooling safer? Speeding and distracted driving behaviors from a naturalistic driving study in Brazil. **Accident Analysis & Prevention**, v. 152, p. 105992, Mar. 2021. ISSN 00014575. DOI: 10.1016/j.aap.2021.105992. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457521000233>. Cit. on pp. 31, 51.

\_\_\_\_\_. Naturalistic Driving Study in Brazil: An Analysis of Mobile Phone Use behavior while Driving. **International Journal of Environmental Research and Public Health**, v. 17, n. 17, p. 6412, Sept. 2020. ISSN 1660-4601. DOI: 10.3390/ijerph17176412. Available from: <https://www.mdpi.com/1660-4601/17/17/6412>. Cit. on pp. 34, 51.

BHALLA, Kavi; MOHAN, Dinesh. Understanding the Road Safety Performance of OECD Countries. In: TIWARI, Geetam; MOHAN, Dinesh (Eds.). **Transport Planning and Traffic Safety - Making Cities, Roads and Vehicles Safer**. Boca Raton: CRC Press, 2016. P. 1–15. DOI: 10.1201/b19737-2. Cit. on pp. 14–16.

BIVAND, Roger S.; PEBESMA, Edzer; GOMEZ-RUBIO, Virgilio. **Applied spatial data analysis with R, Second edition**. [S.I.]: Springer, NY, 2013. Available from: <https://asdar-book.org/>. Cit. on pp. 64, 67, 68.

BORGUEZANI, Jackson Rossi et al. Plataforma de coleta de dados naturalísticos de segurança viária. In: 34º Congresso de Pesquisa e Ensino em Transporte da ANPET. [S.I.: s.n.], 2020. P. 2610–2617. Cit. on p. 57.

**BRASIL. Lei nº 10.257, de 10 de julho de 2001 - Estatuto das Cidades.** Brasília: Presidência da República, 2001. Cit. on p. 13.

\_\_\_\_\_. **Lei nº 12.587, de 3 de janeiro de 2012 - Política Nacional de Mobilidade Urbana.** Brasília: Presidência da República, 2012. Cit. on p. 13.

\_\_\_\_\_. Lei nº 9.503, de 23 de setembro de 1997. **Código de trânsito Brasileiro**, 1997. Cit. on pp. 13, 30, 44, 60, 62.

BRUNSDON, Chris; FOTHERINGHAM, A. Stewart; CHARLTON, Martin E. Geographically Weighted Regression: A Method for Exploring Spatial Nonstationarity. **Geographical Analysis**, v. 28, n. 4, p. 281–298, Sept. 1996. ISSN 00167363. DOI: 10.1111/j.1538-4632.1996.tb00936.x. Available from: <http://doi.wiley.com/10.1111/j.1538-4632.1996.tb00936.x>. Cit. on pp. 52, 66, 92.

CARSTEN, Oliver; KIRCHER, Katja; JAMSON, Samantha. Vehicle-based studies of driving in the real world: The hard truth? **Accident Analysis & Prevention**, v. 58, p. 162–174, Sept. 2013. ISSN 00014575. DOI: 10.1016/j.aap.2013.06.006. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457513002340>. Cit. on p. 47.

CEPPUR. **Estudo Naturalístico de Direção Brasileiro**. [S.l.: s.n.], 2021. Available from: <http://www.tecnologia.ufpr.br/portal/ceppur/estudo-naturalistico-de-direcao-brasileiro/>. Visited on: 17 Jan. 2022. Cit. on p. 12.

CHEN, Zhenhua; LYM, Youngbin. The influence of built environment on distracted driving related crashes in Ohio. **Transport Policy**, v. 101, p. 34–45, Feb. 2021. ISSN 0967070X. DOI: 10.1016/j.tranpol.2020.11.011. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0967070X20309288>. Cit. on p. 13.

CNDS. **Canada Naturalistic Dricing Study (CNDS)**. [S.l.: s.n.], 2021. Available from: <https://www.canada-nds.net/index.html>. Cit. on p. 49.

CURITIBA. Lei Nº 14.771. **Revisão do Plano Diretor de Curitiba**, 2015. Cit. on pp. 42–44.

\_\_\_\_\_. Lei Nº 15.511. **Zoneamento, Uso e Ocupação do Solo no Município de Curitiba**, 2019. Cit. on pp. 42–44, 61.

\_\_\_\_\_. **Perfil dos óbitos em acidentes de trânsito no município de Curitiba - 2011-2019**. Curitiba, 2020. Available from: <https://mid-transito.curitiba.pr.gov.br/2021/5/pdf/00004887.pdf>. Cit. on pp. 11, 24.

- CURITIBA. **Perfil dos óbitos em acidentes de trânsito no município de Curitiba - 2011-2020.** Curitiba, 2021. Available from: <https://mid-transito.curitiba.pr.gov.br/2021/5/pdf/00004888.pdf>. Cit. on pp. 11, 24.
- DE VOS, Jonas; WITLOX, Frank. Transportation policy as spatial planning tool; Reducing urban sprawl by increasing travel costs and clustering infrastructure and public transportation. **Journal of Transport Geography**, Elsevier Ltd, v. 33, p. 117–125, 2013. ISSN 09666923. DOI: 10.1016/j.jtrangeo.2013.09.014. Available from: <http://dx.doi.org/10.1016/j.jtrangeo.2013.09.014>. Cit. on p. 13.
- DENATRAN. **Estatísticas - Frota de veículos.** [S.l.: s.n.], 2020. Available from: <https://www.infraestrutura.gov.br/component/content/article/115-portal-denatran/8552-estat%C7Bi%D7sticas-frota-de-ve%C7B%C7Bi%D7culos-denatran.html>. Cit. on pp. 17–19, 21, 23.
- DINGUS, Thomas A. et al. Driver crash risk factors and prevalence evaluation using naturalistic driving data. **Proceedings of the National Academy of Sciences**, v. 113, n. 10, p. 2636–2641, Mar. 2016. ISSN 0027-8424. DOI: 10.1073/pnas.1513271113. Available from: <http://www.pnas.org/lookup/doi/10.1073/pnas.1513271113>. Cit. on p. 51.
- DINH, Do Duy; KUBOTA, Hisashi. Speeding behavior on urban residential streets with a 30km/h speed limit under the framework of the theory of planned behavior. **Transport Policy**, v. 29, p. 199–208, Sept. 2013. ISSN 0967070X. DOI: 10.1016/j.tranpol.2013.06.003. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0967070X13000905>. Cit. on p. 33.
- DODGE, Yadolah. **The Concise Encyclopedia of Statistics.** New York: Springer-Verlag, 2010. P. 502. ISBN 978-0-387-31742-7. Cit. on p. 66.
- DUMBAUGH, Eric; LI, Wenhao. Designing for the safety of pedestrians, cyclists, and motorists in urban environments. **Journal of the American Planning Association**, v. 77, n. 1, p. 69–88, 2011. ISSN 01944363. DOI: 10.1080/01944363.2011.536101. Cit. on pp. 38, 39, 89.
- DUMBAUGH, Eric; LI, Wenhao; JOH, Kenneth. The built environment and the incidence of pedestrian and cyclist crashes. **URBAN DESIGN International**, v. 18, n. 3, p. 217–228, Aug. 2013. ISSN 1357-5317. DOI: 10.1057/udi.2013.2. Available from: <http://link.springer.com/10.1057/udi.2013.2>. Cit. on pp. 36–39.

- DUMBAUGH, Eric; RAE, R. Safe Urban Form: Revisiting The Relationship Between Community Design and Traffic Safety. **Journal of the American Planning Association**, v. 75, n. 3, p. 309–329, 2009. Cit. on pp. 36, 39.
- ELLISON, Adrian B.; GREAVES, Stephen P. Speeding in urban environments: Are the time savings worth the risk? **Accident Analysis & Prevention**, v. 85, p. 239–247, Dec. 2015. ISSN 00014575. DOI: 10.1016/j.aap.2015.09.018. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457515300750>. Cit. on p. 50.
- ELVIK, Rune. A re-parameterisation of the Power Model of the relationship between the speed of traffic and the number of accidents and accident victims. **Accident Analysis and Prevention**, v. 50, p. 854–860, Jan. 2013. ISSN 00014575. DOI: 10.1016/j.aap.2012.07.012. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457512002667>. Cit. on p. 30.
- ELVIK, Rune et al. **The Handbook of Road Safety Measures**. Second edi. Bingley: Emerald Group Publishing Limited, 2009. ISBN 9781848552500. Cit. on pp. 13, 27, 38, 39.
- EWING, Reid; CERVERO, Robert. Travel and the built environment: A meta analysis. **Journal of the American Planning Association**, v. 76, n. 3, p. 265–294, 2010. ISSN 01944363. DOI: 10.1080/01944361003766766. Cit. on pp. 11, 35, 36.
- EWING, Reid; DUMBAUGH, Eric. The built environment and traffic safety: A review of empirical evidence. **Journal of Planning Literature**, v. 23, n. 4, p. 347–367, 2009. ISSN 08854122. DOI: 10.1177/0885412209335553. Cit. on pp. 12, 13, 34–36, 38, 39, 89.
- FERRAZ, Antonio Clóvis Pinto "Coca" et al. **Segurança viária**. São Carlos: [s.n.], 2012. ISBN 9788598156699. Cit. on pp. 20, 27.
- FOTHERINGHAM, A. Stewart; BRUNSDON, Christopher; CHARLTON, Martin. **Geographically Weighted Regression - the analysis of spatially varying relationships**. Chichester: John Wiley & Sons, Ltd, 2002. ISBN 0-471-49616-2. Cit. on p. 66.
- FURTH, Peter G. et al. Using Traffic Signal Control to Limit Speeding Opportunities on Bidirectional Urban Arterials. **Transportation Research Record: Journal of the Transportation Research Board**, v. 2672, n. 18, p. 107–116, Dec. 2018. ISSN 0361-1981. DOI: 10.1177/0361198118790638. Available from: <http://journals.sagepub.com/doi/10.1177/0361198118790638>. Cit. on p. 39.

- GETIS, Arthur; ORD, J. K. The Analysis of Spatial Association by Use of Distance Statistics. **Geographical Analysis**, v. 24, n. 3, p. 189–206, Sept. 2010. ISSN 00167363. DOI: 10.1111/j.1538-4632.1992.tb00261.x. Available from: <https://onlinelibrary.wiley.com/doi/10.1111/j.1538-4632.1992.tb00261.x>. Cit. on p. 67.
- GOLLINI, Isabella et al. GWmodel: an R Package for Exploring Spatial Heterogeneity using Geographically Weighted Models, June 2013. arXiv: 1306.0413. Available from: <http://arxiv.org/abs/1306.0413>. Cit. on pp. 52–54, 64, 66.
- GREEN, David; LEWIS, Kenneth. **Guide to Traffic Management Part 2: Traffic Theory Concepts**. 3.0. ed. Sydney: Austroads, 2020. P. 122. ISBN 978-1-925854-76-3. Cit. on pp. 31, 32.
- GREENSHIELDS, B D et al. The photographic method of studying traffic behavior. In: PROCEEDINGS of the Thirteenth Annual Meeting of the Highway Research Board. Washington, D.C.: [s.n.], 1934. P. 382–399. Available from: <https://trid.trb.org/view/120821>. Cit. on pp. 31, 32.
- HADAYEGHI, Alireza; SHALABY, Amer S.; PERSAUD, Bhagwant N. Development of planning level transportation safety tools using Geographically Weighted Poisson Regression. **Accident Analysis & Prevention**, v. 42, n. 2, p. 676–688, Mar. 2010. ISSN 00014575. DOI: 10.1016/j.aap.2009.10.016. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457509002954>. Cit. on p. 55.
- HADDON, W. Advances in the epidemiology of injuries as a basis for public policy. **Public Health Reports**, v. 95, n. 5, p. 411–21, 1980. ISSN 0033-3549. Available from: <http://www.ncbi.nlm.nih.gov/pubmed/7422807>. Cit. on pp. 25, 30, 34.
- HAMZEIE, Raha; SAVOLAINEN, Peter T.; GATES, Timothy J. Driver speed selection and crash risk: Insights from the naturalistic driving study. **Journal of Safety Research**, v. 63, p. 187–194, Dec. 2017. ISSN 00224375. DOI: 10.1016/j.jsr.2017.10.007. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0022437517300178>. Cit. on p. 51.
- HARVEY, D. O trabalho, o capital e o conflito de classes em torno do ambiente construído nas sociedades capitalistas avançadas. **Espaços e Debates**, Jun-Set, n. 6, p. 6–32, 1982. Cit. on p. 19.
- HIDALGO-SOLÓRZANO, Elisa et al. Prevalence of speeding and associated factors in four Mexican cities. **Journal of Epidemiology and Community Health**,

- jech–2019–213352, Apr. 2020. ISSN 0143-005X. DOI: 10.1136/jech-2019-213352. Available from: <http://jech.bmjjournals.org/lookup/doi/10.1136/jech-2019-213352>. Cit. on p. 33.
- HØYE, Alena. Safety effects of fixed speed cameras—An empirical Bayes evaluation. **Accident Analysis & Prevention**, v. 82, p. 263–269, Sept. 2015. ISSN 00014575. DOI: 10.1016/j.aap.2015.06.001. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457515002225>. Cit. on pp. 38, 39.
- HUANG, Yuan; WANG, Xiaoguang; PATTON, David. Examining spatial relationships between crashes and the built environment: A geographically weighted regression approach. **Journal of Transport Geography**, v. 69, p. 221–233, May 2018. ISSN 09666923. DOI: 10.1016/j.jtrangeo.2018.04.027. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0966692317306373>. Cit. on pp. 38, 39, 53, 55, 61, 66, 89.
- IBGE. **Censo 2010**. [S.l.: s.n.], 2021. Available from: <https://censo2010.ibge.gov.br/>. Cit. on pp. 60, 61, 64, 65.
- IPPUC. **Apresentação dos Resultados da Pesquisa Origem Destino**. [S.l.: s.n.], 2018. Available from: <https://www.ippuc.org.br/>. Cit. on pp. 60, 63–65, 88.
- \_\_\_\_\_. **Dados Geográficos**. [S.l.: s.n.], 2021. Available from: <https://ippuc.org.br/geodownloads/geo.htm>. Visited on: 10 July 2021. Cit. on pp. 43, 45, 46, 59, 62–64, 87, 90, 91.
- IPPUC; URBS. **Bus Stops in Curitiba - PR**. Curitiba: [s.n.], 2020. Cit. on pp. 64, 65.
- ITF. **Towards Zero: Ambitious Road Safety Targets and the Safe System Approach**. [S.l.]: OECD, Sept. 2008. ISBN 978-92-821-0195-7 978-92-821-0196-4. DOI: 10.1787/9789282101964-en. Available from: [https://www.oecd-ilibrary.org/transport/towards-zero\\_9789282101964-en](https://www.oecd-ilibrary.org/transport/towards-zero_9789282101964-en). Visited on: 18 Jan. 2022. Cit. on pp. 26, 27.
- JØRGENSEN, N.O. Traffic Safety. In: THAGESEN, Bent (Ed.). **Highway and Traffic Engineering in Developing Countries**. London: Chapman and Hall, 2005. chap. 6, p. 121–137. ISBN 0-203-22367-5. Cit. on pp. 17, 18.
- KIM, Karl; PANT, Pradip; YAMASHITA, Eric. Accidents and Accessibility: Measuring Influences of Demographic and Land Use Variables in Honolulu, Hawaii. **Transportation Research Record: Journal of the Transportation Research Board**, v. 2147, n. 1, p. 9–17, Jan. 2010. ISSN 0361-1981. DOI: 10.3141/2147-02. Available from: <http://journals.sagepub.com/doi/10.3141/2147-02>. Cit. on p. 41.

KNOFLACHER, Hermann. Road Safety in Urban Areas. In: TIWARI, Geetam; MOHAN, Dinesh (Eds.). **Transport Planning & Traffic Safety - Making Cities, Roads & Vehicles Safer**. Boca Raton: CRC Press, 2016. chap. 17, p. 223–240. Cit. on pp. 11, 44.

KONG, Xiaoqiang et al. Understanding speeding behavior from naturalistic driving data: Applying classification based association rule mining. **Accident Analysis & Prevention**, v. 144, p. 105620, Sept. 2020. ISSN 00014575. DOI: 10.1016/j.aap.2020.105620. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457519315593>. Cit. on p. 51.

KOSHY, Reebu Zachariah; ARASAN, V. Thamizh. Influence of Bus Stops on Flow Characteristics of Mixed Traffic. **Journal of Transportation Engineering**, v. 131, n. 8, p. 640–643, Aug. 2005. ISSN 0733-947X. DOI: 10.1061/(ASCE)0733-947X(2005)131:8(640). Cit. on p. 41.

LARSSON, Peter; TINGVALL, Claes. The Safe System Approach – A Road Safety Strategy Based on Human Factors Principles. In: HUTCHISON, David et al. (Eds.). **Engineering Psychology and Cognitive Ergonomics. Applications and Services**. Berlin, Heidelberg: Springer Berlin Heidelberg, 2013. v. 8020. P. 19–28. ISBN 978-3-642-39353-2 978-3-642-39354-9. DOI: 10.1007/978-3-642-39354-9\_3. Cit. on p. 26.

LARUE, Gregoire S. et al. Visualising data of the Australian Naturalistic Driving Study. In: 8TH International Symposium on Naturalistic Driving Research. [S.I.: s.n.], 2019. Cit. on p. 48.

LEE, Jaeyoung; ABDEL-ATY, Mohamed; JIANG, Ximiao. Multivariate crash modeling for motor vehicle and non-motorized modes at the macroscopic level. **Accident Analysis & Prevention**, v. 78, p. 146–154, May 2015. ISSN 00014575. DOI: 10.1016/j.aap.2015.03.003. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457515000779>. Cit. on pp. 36, 37, 39.

LI, Haojie; GRAHAM, Daniel J.; MAJUMDAR, Arnab. The impacts of speed cameras on road accidents: An application of propensity score matching methods. **Accident Analysis & Prevention**, v. 60, p. 148–157, Nov. 2013. ISSN 00014575. DOI: 10.1016/j.aap.2013.08.003. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S000145751300314X>. Cit. on pp. 38, 39, 89.

LI, Haojie; ZHANG, Yingheng; REN, Gang. A causal analysis of time-varying speed camera safety effects based on the propensity score method. **Journal of Safety**

- Research**, v. 75, p. 119–127, Dec. 2020. ISSN 00224375. DOI: 10.1016/j.jsr.2020.08.007. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0022437520300967>. Cit. on pp. 38, 39, 89.
- LI, Xun; ANSELIN, Luc. **Rgeoda: R Library for Spatial Data Analysis**. manual. [S.I.], 2021. Available from: <https://CRAN.R-project.org/package=rgeoda>. Cit. on p. 68.
- LINDLEY, D. V. Regression and Correlation Analysis. In: THE New Palgrave Dictionary of Economics. London: Palgrave Macmillan UK, 1987. P. 1–6. DOI: 10.1057/978-1-349-95121-5\_1873-1. Available from: [http://link.springer.com/10.1057/978-1-349-95121-5\\_1873-1](http://link.springer.com/10.1057/978-1-349-95121-5_1873-1). Cit. on p. 52.
- LOVEGROVE, Gordon R; SAYED, Tarek. Macro-level collision prediction models for evaluating neighbourhood traffic safety. **Canadian Journal of Civil Engineering**, v. 33, n. 5, p. 609–621, May 2006. ISSN 0315-1468. DOI: 10.1139/l06-013. Available from: <http://www.nrcresearchpress.com/doi/10.1139/l06-013>. Cit. on p. 39.
- MARSHALL, Shawn C. et al. The Canadian Safe Driving Study—Phase I pilot: Examining potential logistical barriers to the full cohort study. **Accident Analysis & Prevention**, v. 61, p. 236–244, Dec. 2013. ISSN 00014575. DOI: 10.1016/j.aap.2013.04.002. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457513001371>. Cit. on p. 49.
- MARSHALL, Wesley; FERENCHAK, Nicholas. Assessing equity and urban/rural road safety disparities in the US. **Journal of Urbanism: International Research on Placemaking and Urban Sustainability**, v. 10, n. 4, p. 422–441, Oct. 2017. ISSN 1754-9175. DOI: 10.1080/17549175.2017.1310748. Available from: <https://www.tandfonline.com/doi/full/10.1080/17549175.2017.1310748>. Cit. on p. 41.
- MARSHALL, Wesley; GARRICK, Norman. Does street network design affect traffic safety? **Accident Analysis and Prevention**, Elsevier Ltd, v. 43, n. 3, p. 769–781, 2011. ISSN 00014575. DOI: 10.1016/j.aap.2010.10.024. Available from: <http://dx.doi.org/10.1016/j.aap.2010.10.024>. Cit. on pp. 38–40.
- \_\_\_\_\_. Street network types and road safety: A study of 24 California cities. **URBAN DESIGN International**, v. 15, n. 3, p. 133–147, Sept. 2010. ISSN 1357-5317. DOI: 10.1057/udi.2009.31. Available from: <http://link.springer.com/10.1057/udi.2009.31>. Cit. on pp. 39, 40.
- MINISTRY OF CITIES. **National Plan of Reduction of Deaths and Injuries**. [S.I.: s.n.], 2018. Cit. on p. 11.

MINISTRY OF HEALTH. **Number of traffic fatalities in Brazil.** [S.I.]: Ministry of Health, 2020. Available from: <http://www2.datasus.gov.br/DATASUS/index.php?area=02>. Cit. on pp. 11, 16–18, 21–23.

\_\_\_\_\_. **Resident population in Brazil.** [S.I.: s.n.], 2021. Available from: <http://www2.datasus.gov.br/DATASUS/index.php?area=02>. Cit. on pp. 17, 18, 21, 22.

MOHAN, D. Road Traffic Injury as a Public Health Problem. In: TIWARI, Geetam; MOHAN, Dinesh (Eds.). **Transport Planning and Traffic Safety - Making Cities, Roads and Vehicles Safer.** Boca Raton: CRC Press, 2016. chap. 2, p. 18–28. ISBN 978-1-4987-5147-6. Cit. on pp. 11, 25, 26.

\_\_\_\_\_. Speed and its Effects on Road Traffic Crashes. In: TIWARI, Geetam; MOHAN, Dinesh (Eds.). **Transport Planning and Traffic Safety - Making Cities, Roads and Vehicles Safer.** Boca Raton: CRC Press, 2016. chap. 9, p. 127–137. ISBN 978-1-4987-5147-6. Cit. on pp. 27, 28, 30, 31.

MORENO, Ana Tsui; GARCÍA, Alfredo. Use of speed profile as surrogate measure: Effect of traffic calming devices on crosstown road safety performance. **Accident Analysis & Prevention**, v. 61, p. 23–32, Dec. 2013. ISSN 00014575. DOI: 10.1016/j.aap.2012.10.013. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457512003697>. Cit. on pp. 33, 34.

NAKAYA, T. et al. Geographically weighted Poisson regression for disease association mapping. **Statistics in Medicine**, v. 24, n. 17, p. 2695–2717, Sept. 2005. ISSN 02776715. DOI: 10.1002/sim.2129. Available from: <https://onlinelibrary.wiley.com/doi/10.1002/sim.2129>. Cit. on p. 54.

NEALE, Vicki L. et al. **An Overview of the 100-Car Naturalistic Driving Study and Findings.** Washington, D.C., 2005. Available from: [https://dot.alaska.gov/highwaysafety/assets/Occ\\_Prot-cellphone\\_National\\_study-Virginia\\_Tech\\_Transp\\_Institute.pdf](https://dot.alaska.gov/highwaysafety/assets/Occ_Prot-cellphone_National_study-Virginia_Tech_Transp_Institute.pdf). Cit. on p. 48.

NES, Nicole van et al. The potential of naturalistic driving for in-depth understanding of driver behavior: UDRIVE results and beyond. **Safety Science**, v. 119, p. 11–20, Nov. 2019. ISSN 09257535. DOI: 10.1016/j.ssci.2018.12.029. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0925753517320945>. Cit. on p. 48.

NJORD, John; STEUDLE, Kirk. Big Data Hit the Road - The First Year of Use of the SHRP 2 Safety Databases. **TR News**, p. 2–8, 2015. Available from: <http://onlinepubs.trb.org/onlinepubs/trnews/trnews300BigData.pdf>. Cit. on p. 48.

OBELHEIRO, Marta Rodrigues; SILVA, Alan Ricardo; NODARI, Christine Tessele. UMA ANÁLISE DA RELAÇÃO ENTRE AMBIENTE CONSTRUÍDO E ACIDENTES DE TRÂNSITO EM ZONAS DE TRÁFEGO. **33º Congresso de Pesquisa e Ensino em Transporte da ANPET**, p. 3696–3707, 2019. Cit. on pp. 37, 39, 41, 52, 55.

OBELHEIRO, Marta Rodrigues et al. A new zone system to analyze the spatial relationships between the built environment and traffic safety. **Journal of Transport Geography**, v. 84, p. 102699, Apr. 2020. ISSN 09666923. DOI: 10.1016/j.jtrangeo.2020.102699. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S096669231930225X>. Cit. on pp. 36, 37, 39, 41, 54, 55, 89.

OLIVEIRA, Daniele Falcí de et al. Do speed cameras reduce speeding in urban areas? **Cadernos de Saúde Pública**, v. 31, suppl 1, p. 208–218, Nov. 2015. ISSN 0102-311X. DOI: 10.1590/0102-311X00101914. Available from: [http://www.scielo.br/scielo.php?script=sci%7B%5C\\_%7Darttext%7B%5C&%7Dpid=S0102-311X2015001300208%7B%5C&%7Dlng=en%7B%5C&%7Dtlng=en](http://www.scielo.br/scielo.php?script=sci%7B%5C_%7Darttext%7B%5C&%7Dpid=S0102-311X2015001300208%7B%5C&%7Dlng=en%7B%5C&%7Dtlng=en). Cit. on pp. 38, 39, 89.

ONATE-VEGA, Diana; OVIEDO-TRESPALACIOS, Oscar; KING, Mark J. How drivers adapt their behavior to changes in task complexity: The role of secondary task demands and road environment factors. **Transportation Research Part F: Traffic Psychology and behavior**, v. 71, p. 145–156, May 2020. ISSN 13698478. DOI: 10.1016/j.trf.2020.03.015. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S1369847819308691>. Cit. on p. 13.

OPENSTREETMAP CONTRIBUTORS. **Planet dump retrieved from https://planet.osm.org**. [S.l.: s.n.], 2017. <https://www.openstreetmap.org>. Cit. on p. 59.

OUYANG, Yiqiang; BEJLERI, Ilir. Geographic Information System-Based Community-Level Method to Evaluate the Influence of Built Environment on Traffic Crashes. **Transportation Research Record: Journal of the Transportation Research Board**, v. 2432, n. 1, p. 124–132, Jan. 2014. ISSN 0361-1981. DOI: 10.3141/2432-15. Available from: <http://journals.sagepub.com/doi/10.3141/2432-15>. Cit. on pp. 37–41.

PARK, Shin Hyung; PARK, Shin Hyoung; KWON, Oh Hoon. K-Means and CRP-Based Characteristic Investigating Method of Traffic Accidents with Automated Speed Enforcement Cameras. In: PARK, J. et al. (Eds.). **Advanced Multimedia and**

- Ubiquitous Engineering.** Singapore: Springer, 2019. P. 631–637. DOI: 10.1007/978-981-13-1328-8\_81. Available from: [http://link.springer.com/10.1007/978-981-13-1328-8%7B%5C\\_%7D81](http://link.springer.com/10.1007/978-981-13-1328-8%7B%5C_%7D81). Cit. on pp. 38, 39.
- PEBESMA, Edzer. Simple Features for R: Standardized Support for Spatial Vector Data. **The R Journal**, v. 10, n. 1, p. 439–446, 2018. DOI: 10.32614/RJ-2018-009. Available from: <https://doi.org/10.32614/RJ-2018-009>. Cit. on p. 59.
- PEREIRA, Djenifer Renata; BORGUEZANI, Jackson Rossi. **gps2csv. GitHub repository**, GitHub, 2020. Available from: <https://github.com/djeni98/gps2csv>. Cit. on p. 58.
- PIRDAVANI, Ali et al. Application of Geographically Weighted Regression Technique in Spatial Analysis of Fatal and Injury Crashes. **Journal of Transportation Engineering**, v. 140, n. 8, p. 04014032, Aug. 2014. ISSN 0733-947X. DOI: 10.1061/(ASCE)TE.1943-5436.0000680. Available from: <http://ascelibrary.org/doi/10.1061/%7B%5C%%7D28ASCE%7B%5C%%7D29TE.1943-5436.0000680>. Cit. on pp. 36, 37, 55.
- PRF. **Road crashes - open data**. [S.I.: s.n.], 2021. Available from: <https://www.gov.br/prf/pt-br/acesso-a-informacao/dados-abertos/dados-abertos-acidentes>. Cit. on p. 20.
- QGIS DEVELOPMENT TEAM. **QGIS Geographic Information System**. [S.I.], 2022. Available from: <https://www.qgis.org>. Cit. on p. 62.
- R CORE TEAM. **R: A Language and Environment for Statistical Computing**. Vienna, Austria, 2021. Available from: <https://www.R-project.org/>. Cit. on p. 56.
- RHEE, Kyoung-Ah et al. Spatial regression analysis of traffic crashes in Seoul. **Accident Analysis & Prevention**, v. 91, p. 190–199, June 2016. ISSN 00014575. DOI: 10.1016/j.aap.2016.02.023. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457516300562>. Cit. on pp. 37, 55.
- RICHARD, Christian M. et al. Investigating speeding behavior with naturalistic approaches. **Transportation Research Record**, v. 2365, n. 2365, p. 58–65, Jan. 2013. ISSN 03611981. DOI: 10.3141/2365-08. Available from: <http://journals.sagepub.com/doi/10.3141/2365-08>. Cit. on pp. 32, 33, 49, 59.

- RICHARD, Christian M. et al. **Motivations for Speeding, Volume II: Findings Report.** Washington, D.C., 2013. Available from:  
<https://www.safercar.gov/sites/ntsa.gov/files/811818.pdf>. Cit. on pp. 30, 31, 74, 92.
- RICHARD, Christian M. et al. Using Naturalistic Driving Data to Develop a Typology of Speeding Episodes. **Transportation Research Record: Journal of the Transportation Research Board**, v. 2659, n. 1, p. 91–97, Jan. 2017. ISSN 0361-1981. DOI: 10.3141/2659-10. Available from:  
<http://journals.sagepub.com/doi/10.3141/2659-10>. Cit. on pp. 49, 50, 60.
- RICHARD, Christian M. et al. Using SHRP2 naturalistic driving data to examine driver speeding behavior. **Journal of Safety Research**, v. 73, p. 271–281, June 2020. ISSN 00224375. DOI: 10.1016/j.jsr.2020.03.008. Available from:  
<https://linkinghub.elsevier.com/retrieve/pii/S0022437520300384>. Cit. on pp. 49, 50.
- ROSÁRIO, Maria do Rocio. Curitiba Revisited: Five Decades of Transformation. **Architectural Design**, v. 86, n. 3, p. 112–117, May 2016. ISSN 00038504. DOI: 10.1002/ad.2053. Available from: <http://doi.wiley.com/10.1002/ad.2053>. Cit. on p. 42.
- SANTOS, Pedro Augusto B. The Impact of Built Environment on Speeding Behavior in Curitiba - Brazil. **GitHub repository**, GitHub, 2022. Available from:  
[https://github.com/pabsantos/be\\_speeding](https://github.com/pabsantos/be_speeding). Cit. on p. 56.
- SETRAN. **Speed Cameras in Curitiba - PR**. Curitiba: Secretaria Municipal de Defesa Social e Transito de Curitiba, 2020. Cit. on pp. 62, 63, 91.
- SHEYKHFARD, Abbas et al. Analysis of the occurrence and severity of vehicle-pedestrian conflicts in marked and unmarked crosswalks through naturalistic driving study. **Transportation Research Part F: Traffic Psychology and behavior**, v. 76, p. 178–192, Jan. 2021. ISSN 13698478. DOI: 10.1016/j.trf.2020.11.008. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S1369847820305702>. Cit. on p. 49.
- SHINAR, D. **Traffic Safety and Human behavior**. Ed. by David Shinar. [S.I.]: Emerald Group Publishing Limited, Oct. 2017. ISBN 978-0-08-045029-2. DOI: 10.1108/9780080555874. Available from:  
<https://www.emerald.com/insight/publication/doi/10.1108/9780080555874>. Cit. on pp. 26, 27, 30, 31, 33, 34, 45–47.
- SILVA, Alan Ricardo da; RODRIGUES, Thais Carvalho Valadares. Geographically Weighted Negative Binomial Regression—incorporating overdispersion. **Statistics and**

- Computing**, May 2013. ISSN 0960-3174. DOI: 10.1007/s11222-013-9401-9.  
 Available from: <http://link.springer.com/10.1007/s11222-013-9401-9>. Cit. on pp. 53, 54.
- SUGUINOSHITA, Maria Clara et al. FATORES DETERMINANTES PARA O EXCESSO DE VELOCIDADE EM VIAS ARTERIAIS URBANAS. In: SIMPÓSIO DE Transportes DO Paraná, p. 63–74. DOI: 10.5380/2stpr2020.artcomp05p63-74. Available from: <https://eventos.ufpr.br/stpr/2stpr/paper/view/4449/954>. Visited on: 5 Apr. 2022. Cit. on p. 51.
- SWOV. **Sustainably safe road infrastructure: main requirements**. [S.I.], 2003. Cit. on p. 26.
- SZELIGA, Rafael A. et al. Análise Da Velocidade Praticada Em Manobras de Conversão a Partir de Um Estudo Naturalístico de Direção. In: 35º Congresso DE Pesquisa E Ensino EM Transporte DA ANPET. **Anais Do 35º Congresso de Pesquisa e Ensino Em Transportes**. [S.I.]: Associação Nacional de Pesquisa e Ensino em Transportes, 2021. ISBN 978-65-89319-01-6. Cit. on p. 51.
- SZELIGA, Rafael Alessandro; CHAVES, Bruno Henrique Suzuki; BASTOS, Jorge Tiago. IMPACTO DE CURVAS HORIZONTAIS NA VARIAÇÃO DA VELOCIDADE INSTANTÂNEA EM CENÁRIO URBANO. In: SIMPÓSIO DE Transportes DO Paraná, p. 113–120. DOI: 10.5380/2stpr2020.comtec01p113-120. Available from: <https://eventos.ufpr.br/stpr/2stpr/paper/view/4330/972>. Visited on: 5 Apr. 2022. Cit. on p. 51.
- TIWARI, Geetam. Land Use-Transportation Planning, Mobility and Safety. In: TIWARI, Geetam; MOHAN, Dinesh (Eds.). **Transport Planning & Traffic Safety - Making Cities, Roads & Vehicles Safer**. [S.I.]: CRC Press, 2016. chap. 4, p. 45–58. ISBN 978-1-4987-5147-6. Cit. on pp. 11, 34, 41.
- UCHIDA, Nobuyuki et al. An investigation of factors contributing to major crash types in Japan based on naturalistic driving data. **IATSS Research**, v. 34, n. 1, p. 22–30, July 2010. ISSN 03861112. DOI: 10.1016/j.iatssr.2010.07.002. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0386111210000105>. Cit. on p. 49.
- UKKUSURI, Satish et al. The role of built environment on pedestrian crash frequency. **Safety Science**, v. 50, n. 4, p. 1141–1151, Apr. 2012. ISSN 09257535. DOI: 10.1016/j.ssci.2011.09.012. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0925753511002578>. Cit. on p. 39.

VASCONCELLOS, Eduardo Alcântara de. **Políticas de Transporte no Brasil - A Construção da Mobilidade Excludente.** [S.I.]: Editora Manole, 2013. Cit. on p. 19.

WANG, Xuesong et al. Speed, speed variation and crash relationships for urban arterials. **Accident Analysis & Prevention**, v. 113, p. 236–243, Apr. 2018. ISSN 00014575. DOI: 10.1016/j.aap.2018.01.032. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457518300381>. Cit. on p. 33.

WARREN, Josh; LIPKOWITZ, Jeff; SOKOLOV, Vadim. Clusters of Driving behavior From Observational Smartphone Data. **IEEE Intelligent Transportation Systems Magazine**, v. 11, n. 3, p. 171–180, 2019. ISSN 1939-1390. DOI: 10.1109/MITSS.2019.2919516. Available from: <https://ieeexplore.ieee.org/document/8743351/>. Cit. on p. 33.

WATSON, B. et al. Profiling high-range speeding offenders: Investigating criminal history, personal characteristics, traffic offences, and crash history. **Accident Analysis & Prevention**, v. 74, p. 87–96, Jan. 2015. ISSN 00014575. DOI: 10.1016/j.aap.2014.10.013. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457514003108>. Cit. on p. 33.

WEGMAN, Fred. The Future of Road Safety: A Worldwide Perspective. **IATSS Research**, v. 40, n. 2, p. 66–71, Jan. 2017. ISSN 03861112. DOI: 10.1016/j.iatssr.2016.05.003. Cit. on p. 27.

WEI, Feng; LOVEGROVE, Gordon. An empirical tool to evaluate the safety of cyclists: Community based, macro-level collision prediction models using negative binomial regression. **Accident Analysis & Prevention**, v. 61, p. 129–137, Dec. 2013. ISSN 00014575. DOI: 10.1016/j.aap.2012.05.018. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457512002023>. Cit. on pp. 41, 52.

WELLE, Ben et al. **O Desenho de Cidades Seguras.** [S.I.], 2016. Cit. on pp. 11, 34, 36, 37, 39, 40.

WHO. **Global Plan - Decade of Action for Road Safety 2021-2030.** [S.I.], 2021. Available from: [https://cdn.who.int/media/docs/default-source/documents/health-topics/road-traffic-injuries/global-plan-for-road-safety.pdf?sfvrsn=65cf34c8%7B%5C\\_%7D33%7B%5C&%7Ddownload=true](https://cdn.who.int/media/docs/default-source/documents/health-topics/road-traffic-injuries/global-plan-for-road-safety.pdf?sfvrsn=65cf34c8%7B%5C_%7D33%7B%5C&%7Ddownload=true). Cit. on p. 30.

\_\_\_\_\_. **Global Plan for the Decade of Action for Road Safety 2011-2020.** [S.I.], 2011. Cit. on pp. 11, 16.

- WHO. **Global status report on road safety 2013 - supporting a decade of action.** [S.I.], 2013. P. 1–318. Available from: [http://www.who.int/about/licensing/copyright\\_form/en/index.html](http://www.who.int/about/licensing/copyright_form/en/index.html). Cit. on p. 27.
- \_\_\_\_\_. **Global status report on road safety 2018.** Geneva, 2018. Cit. on pp. 13, 14, 16, 22.
- \_\_\_\_\_. **Speed management: a road safety manual for decision-makers and practitioners.** Geneva: [s.n.], 2008. ISBN 978-2-940395-04-0. Cit. on pp. 31–33.
- \_\_\_\_\_. **Stockholm Declaration - Third Global Ministerial Conference on Global Safety: Achieving Global Goals 2030.** Stockholm, Feb. 2020. —undefined. Cit. on pp. 11, 30.
- \_\_\_\_\_. **World Report on Road Traffic Injury Prevention.** [S.I.], 2004. P. 238. ISBN 9789241562607. Available from: <http://whqlibdoc.who.int/publications/2004/9241562609.pdf>. Cit. on p. 26.
- YADAV, Ankit Kumar; VELAGA, Nagendra R. Alcohol-impaired driving in rural and urban road environments: Effect on speeding behavior and crash probabilities.
- Accident Analysis & Prevention**, v. 140, p. 105512, June 2020. ISSN 00014575. DOI: 10.1016/j.aap.2020.105512. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0001457519315866>. Cit. on p. 34.
- YU, Chia-Yuan; XU, Minjie. Local Variations in the Impacts of Built Environments on Traffic Safety. **Journal of Planning Education and Research**, p. 0739456x1769603, Mar. 2017. ISSN 0739-456X. DOI: 10.1177/0739456X17696035. Available from: <http://journals.sagepub.com/doi/10.1177/0739456X17696035>. Cit. on pp. 39, 53, 55.
- ZERVAS, Efthimios; LAZAROU, Christos. Influence of European passenger cars weight to exhaust CO<sub>2</sub> emissions. **Energy Policy**, v. 36, n. 1, p. 248–257, Jan. 2008. ISSN 03014215. DOI: 10.1016/j.enpol.2007.09.009. Available from: <https://linkinghub.elsevier.com/retrieve/pii/S0301421507003849>. Cit. on p. 28.
- ZHANG, Cuiping et al. Crash Prediction and Risk Evaluation Based on Traffic Analysis Zones. **Mathematical Problems in Engineering**, v. 2014, p. 1–9, 2014. ISSN 1024-123X. DOI: 10.1155/2014/987978. Available from: <http://www.hindawi.com/journals/mpe/2014/987978/>. Cit. on p. 52.
- ZHANG, Y. et al. Investigating the associations between road network structure and non-motorist accidents. **Journal of Transport Geography**, v. 42, p. 34–47, Jan. 2015.

ISSN 09666923. DOI: 10.1016/j.jtrangeo.2014.10.010. Available from:  
<https://linkinghub.elsevier.com/retrieve/pii/S0966692314002336>. Cit. on pp. 38, 39, 55.

ZHU, Meixin et al. Modeling car-following behavior on urban expressways in Shanghai: A naturalistic driving study. **Transportation Research Part C: Emerging Technologies**, v. 93, p. 425–445, Aug. 2018. ISSN 0968090X. DOI: 10.1016/j.trc.2018.06.009. Available from:  
<https://linkinghub.elsevier.com/retrieve/pii/S0968090X18308635>. Cit. on p. 49.