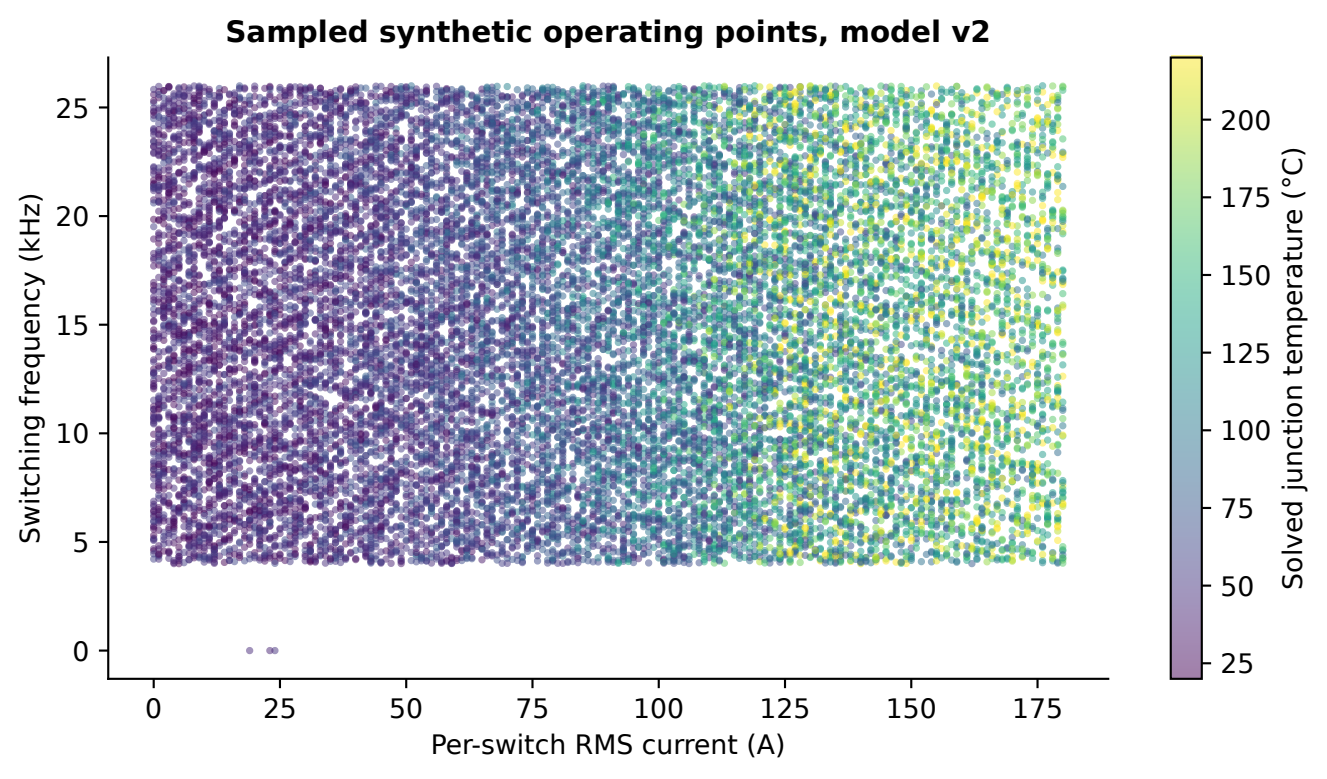

Sampled synthetic operating points, model v2
Switching frequency (kHz)
0
5
10
15
20
25
Per-switch RMS current (A)
0
25
50
75
100
125
150
175
Solved junction temperature (°C)
25
50
75
100
125
150
175
200