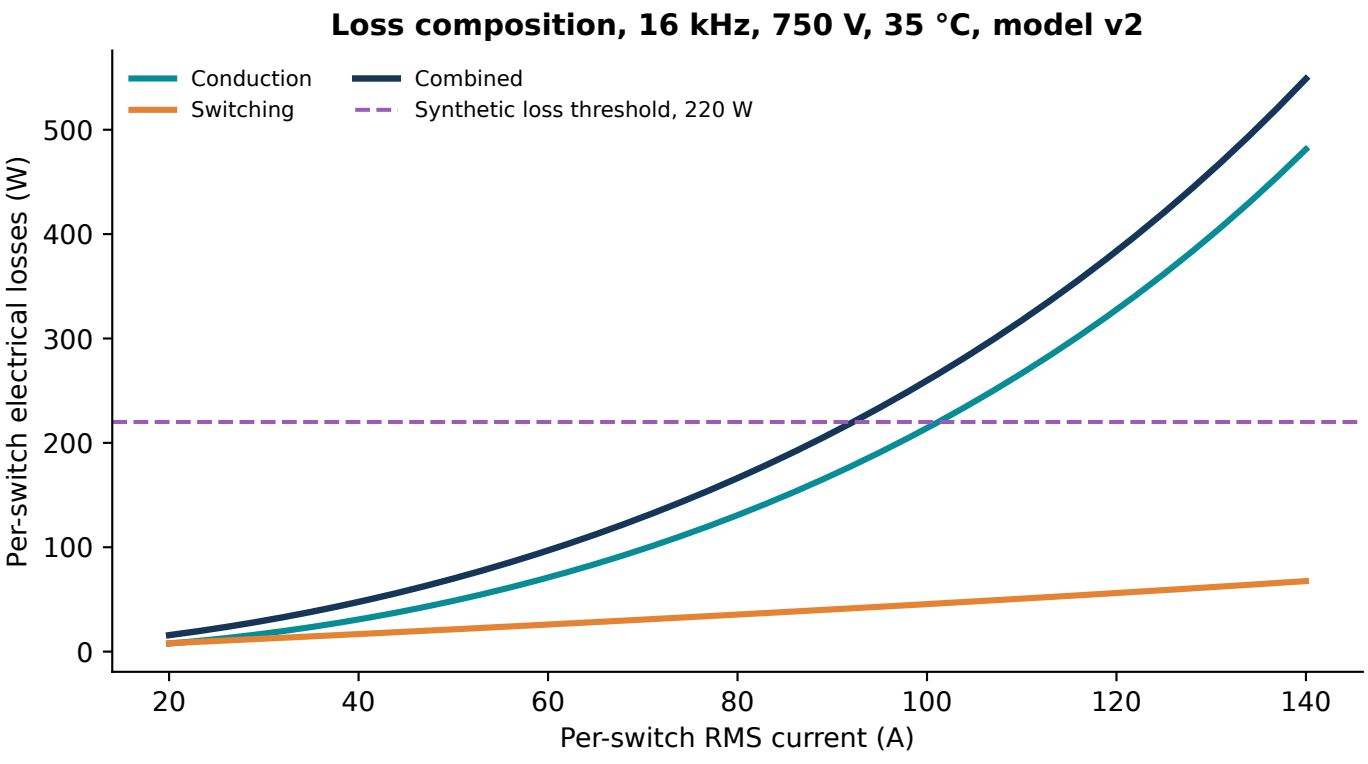
Loss composition, 16 kHz, 750 V, 35 °C, model v2
Conduction
Switching
Combined
Synthetic loss threshold, 220 W
Per-switch electrical losses (W)
0
100
200
300
400
500
20
40
60
80
100
120
140
Per-switch RMS current (A)