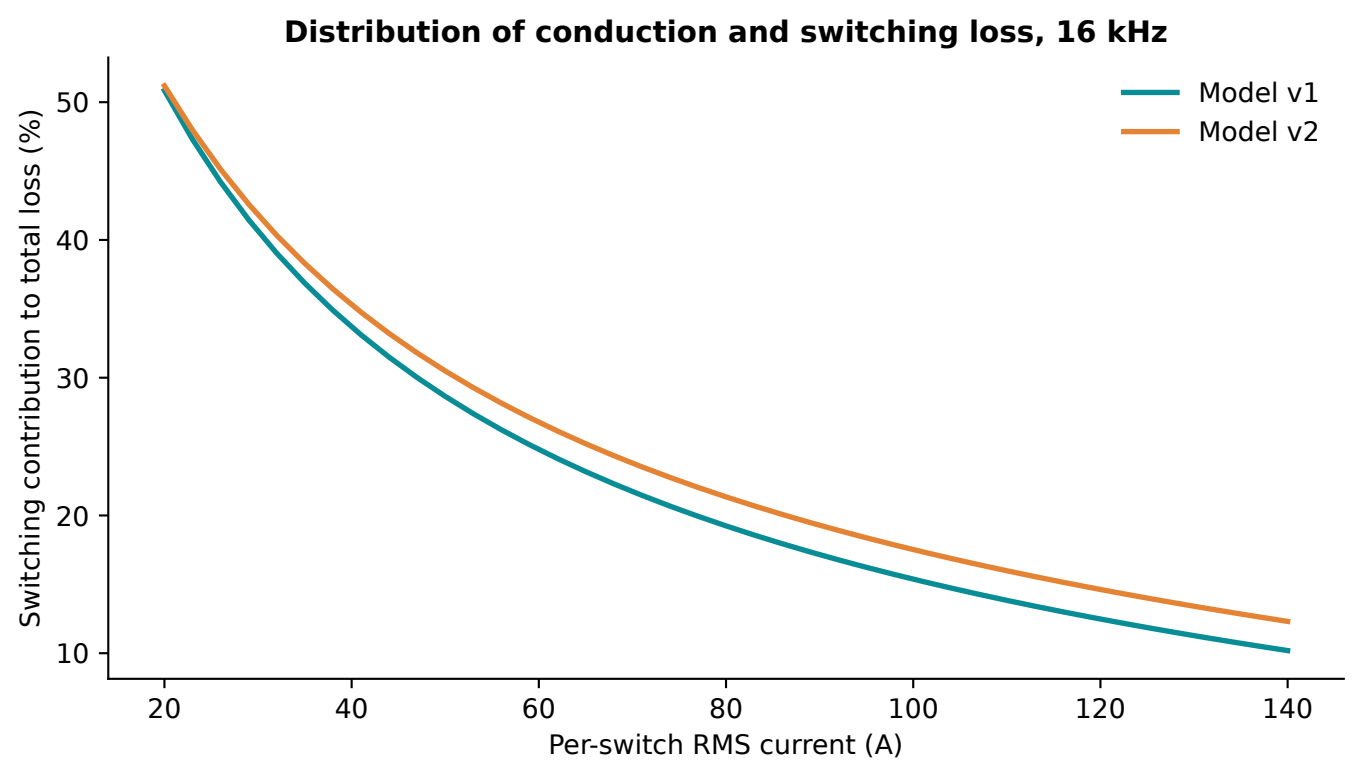
Distribution of conduction and switching loss, 16 kHz
Model v1
Model v2
Switching contribution to total loss (%)
50
40
30
20
10
20
40
60
80
100
120
140
Per-switch RMS current (A)