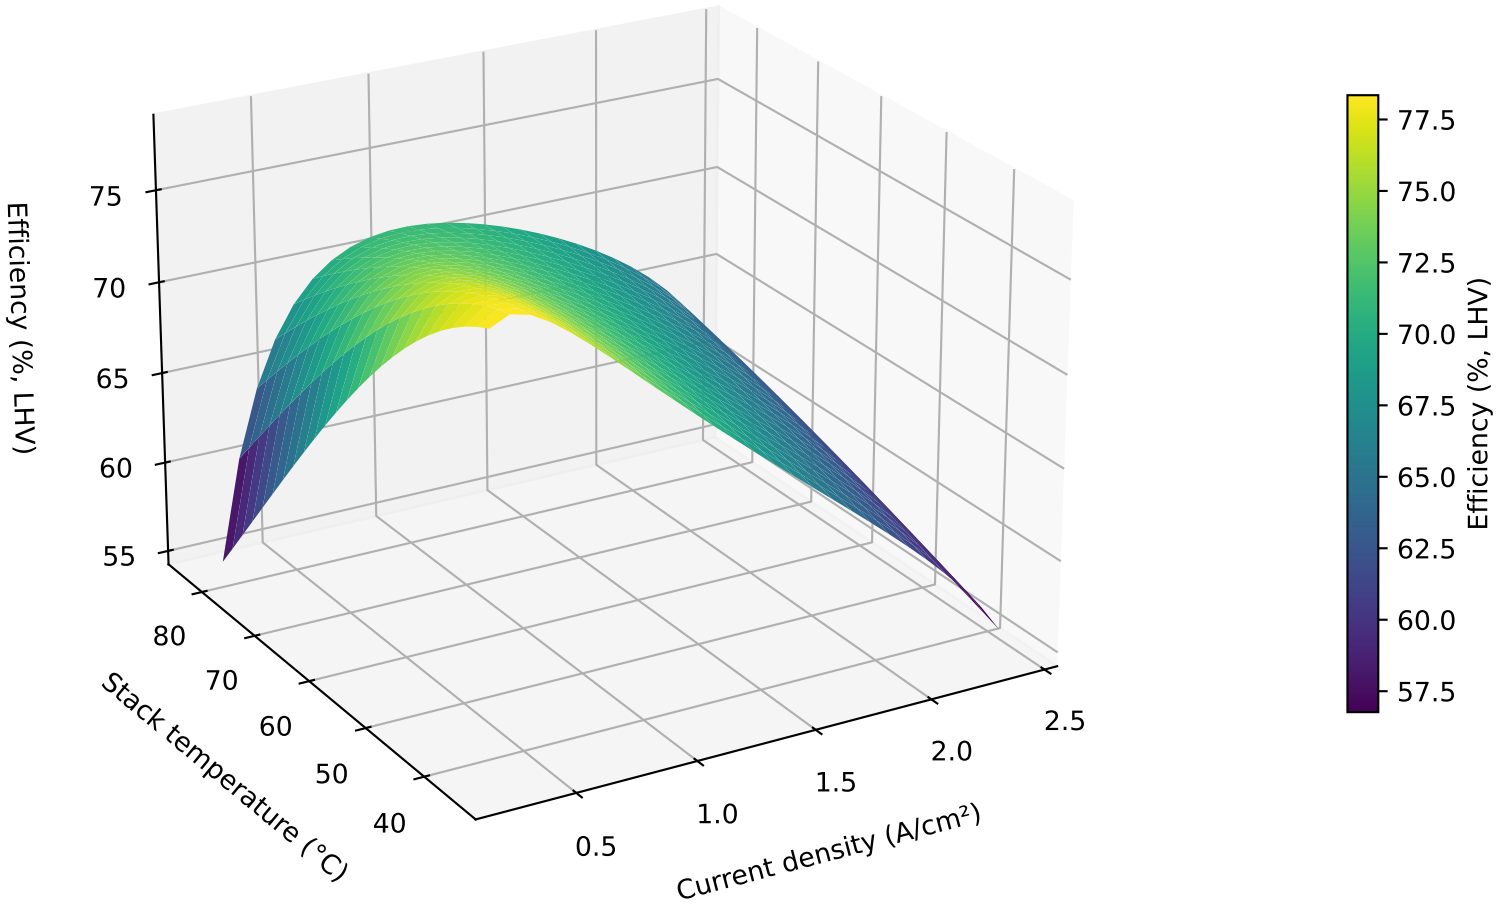System LHV efficiency under current and temperature changes