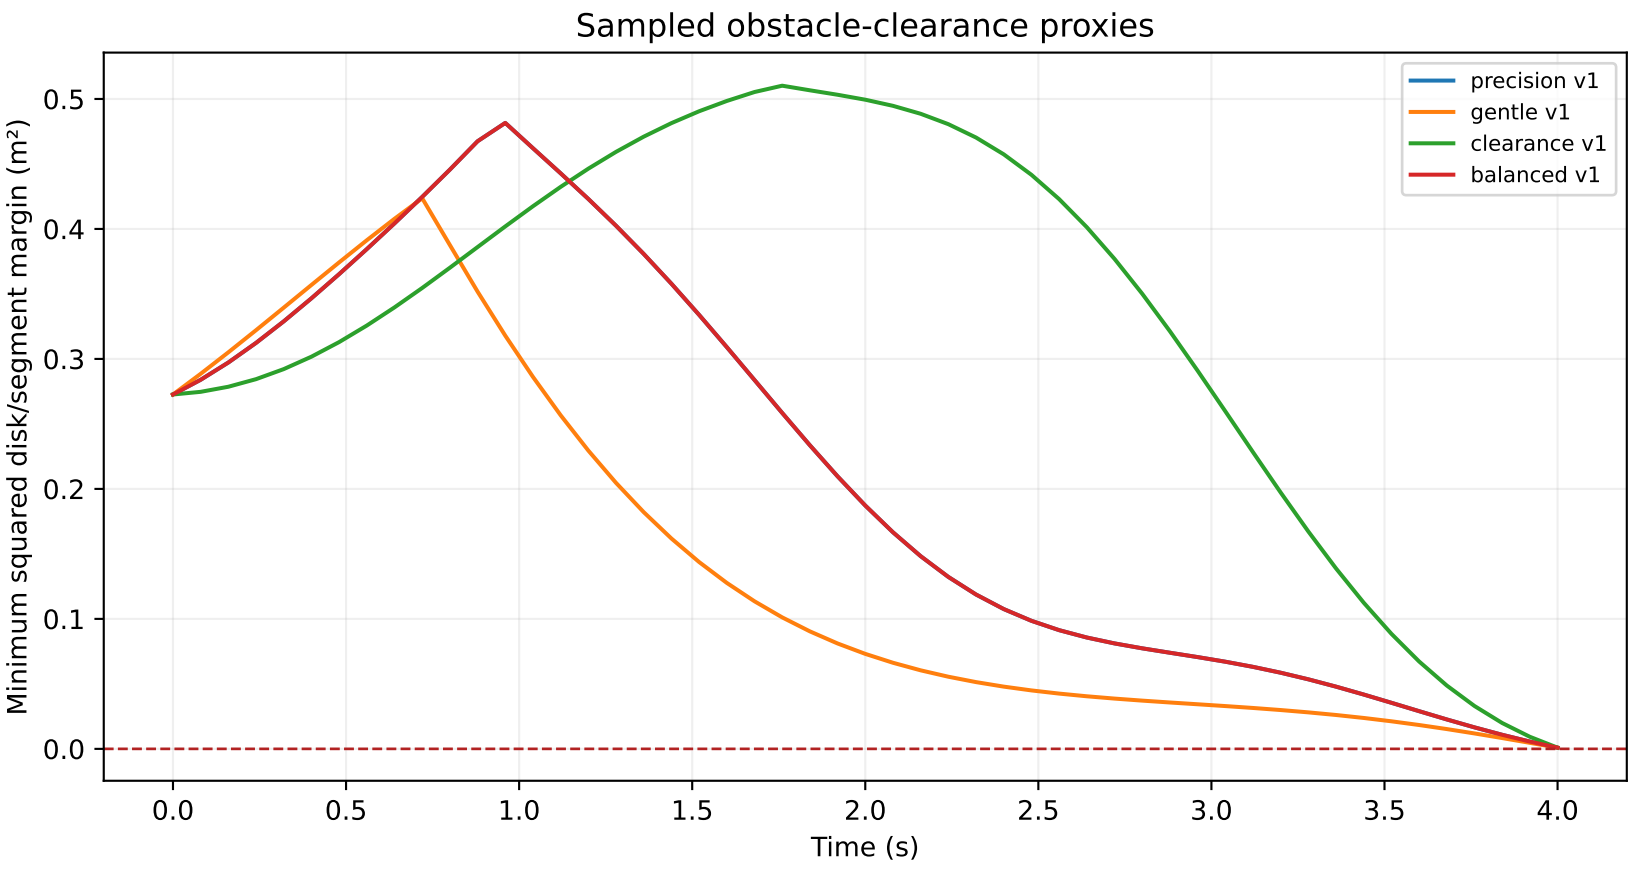
Sampled obstacle-clearance proxies
Minimum squared disk/segment margin (m²)
Time (s)
0.0
0.1
0.2
0.3
0.4
0.5
0.0
0.5
1.0
1.5
2.0
2.5
3.0
3.5
4.0
precision v1
gentle v1
clearance v1
balanced v1