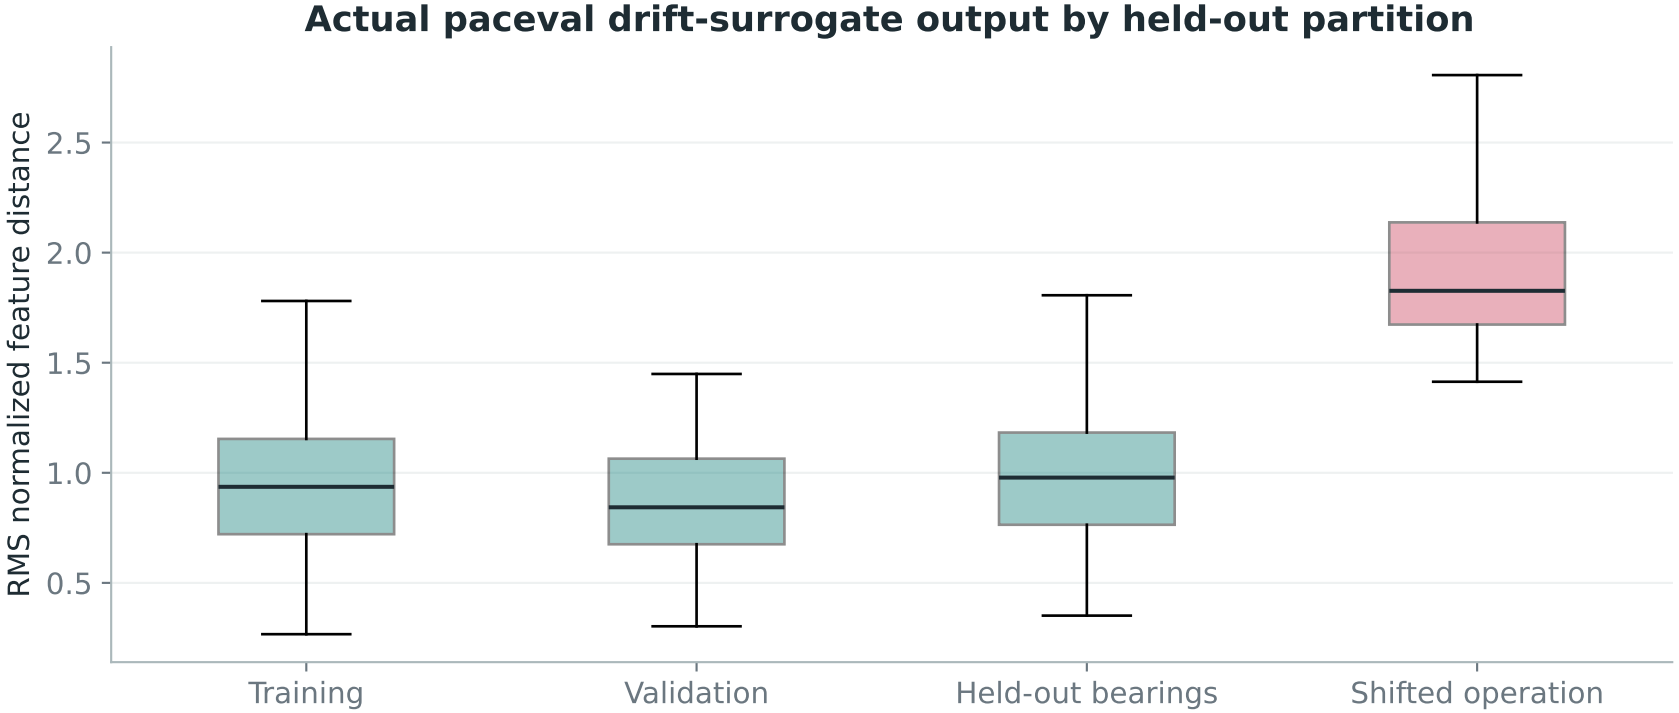
Actual paceval drift-surrogate output by held-out partition
RMS normalized feature distance
2.5
2.0
1.5
1.0
0.5
Training
Validation
Held-out bearings
Shifted operation