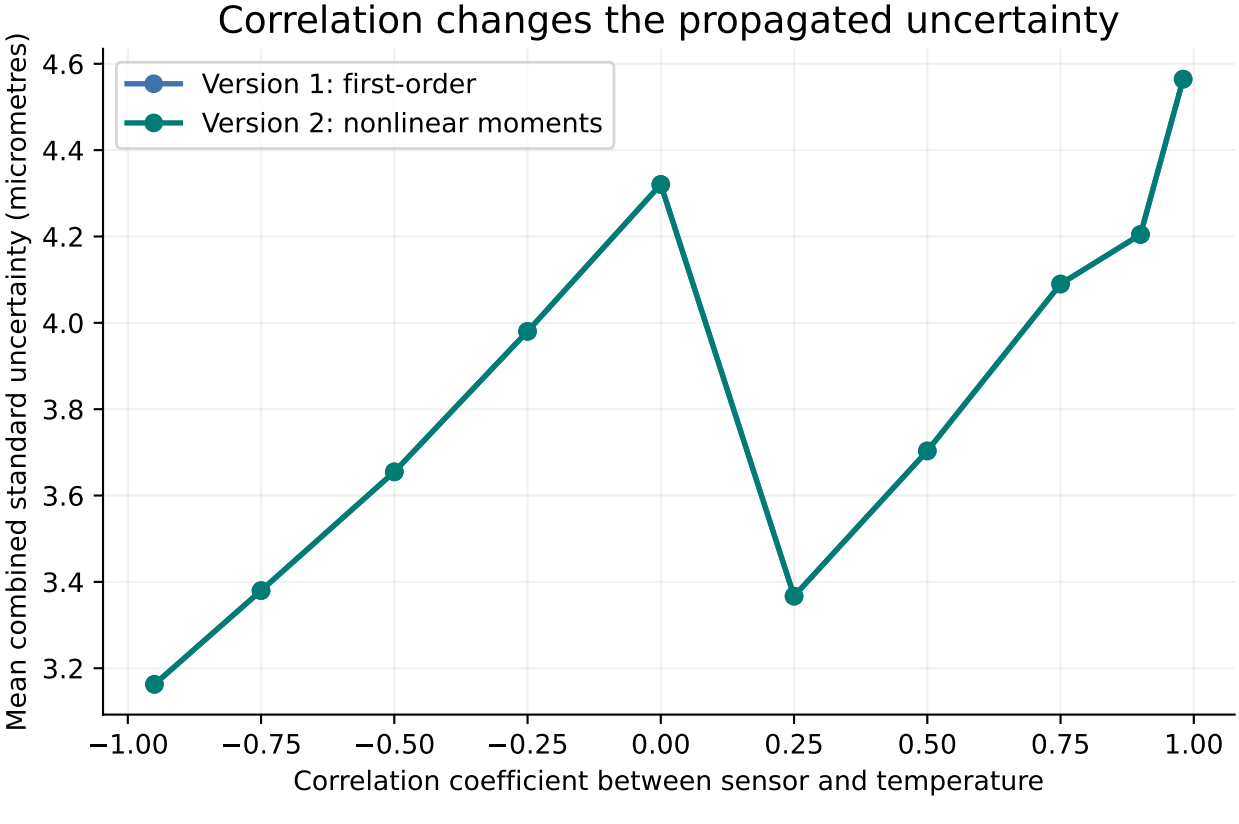
Correlation changes the propagated uncertainty
Version 1: first-order
Version 2: nonlinear moments
Mean combined standard uncertainty (micrometres)
4.6
4.4
4.2
4.0
3.8
3.6
3.4
3.2
−1.00
−0.75
−0.50
−0.25
0.00
0.25
0.50
0.75
1.00
Correlation coefficient between sensor and temperature