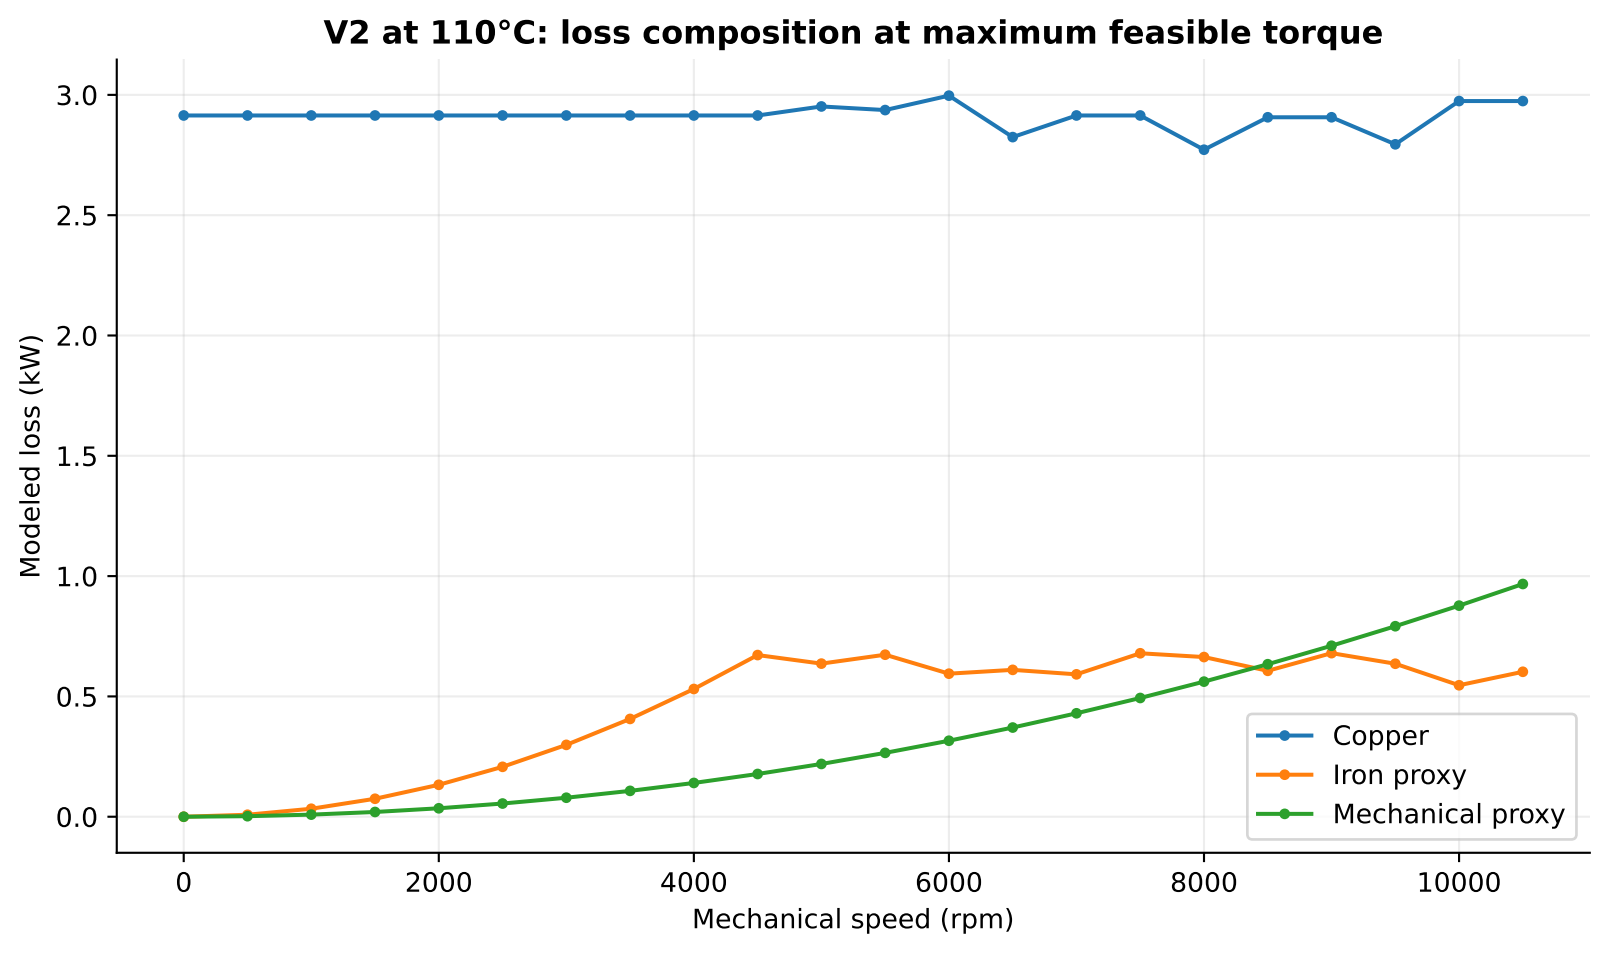
V2 at 110°C: loss composition at maximum feasible torque
Modeled loss (kW)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
0
2000
4000
6000
8000
10000
Mechanical speed (rpm)
Copper
Iron proxy
Mechanical proxy