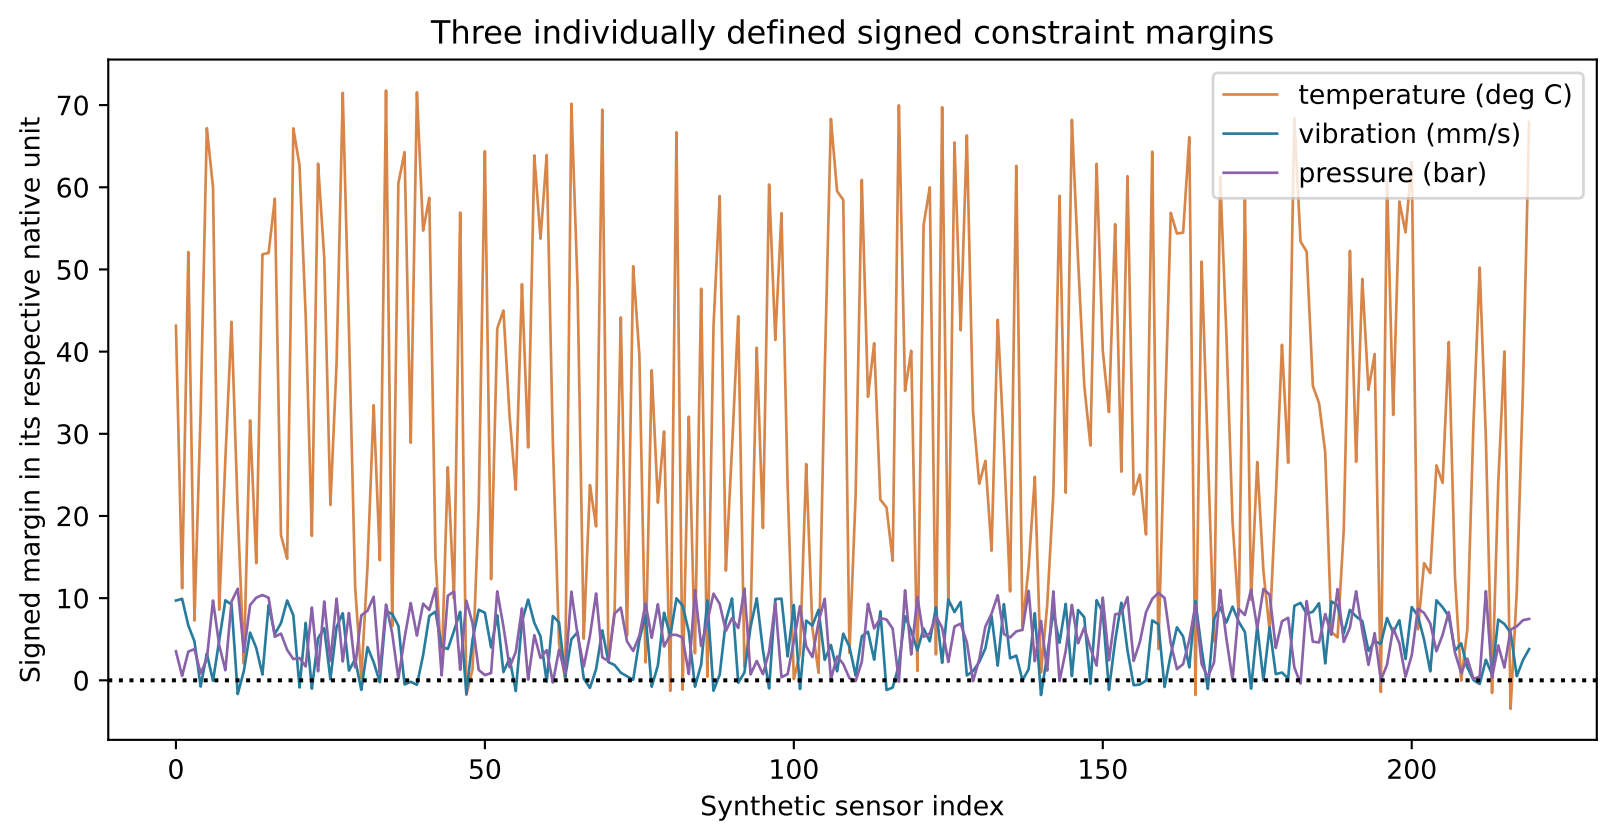
Three individually defined signed constraint margins
temperature (deg C)
vibration (mm/s)
pressure (bar)
Signed margin in its respective native unit
Synthetic sensor index
70
60
50
40
30
20
10
0
0
50
100
150
200