# Learning hierarchical representation of 3D objects

Dominik Belter, Marek Kopicki, Jeremy Wyatt




Fig. 1. General procedure of learning the hierarchical representation of objects

Abstract—

#### I. RELATED WORK

#### II. LEARNING

The procedure of learning hierarchical representation of objects is presented in Fig. 1. At the beginning, the input data are filtered to remove the noise introduced by the sensor. In the next step the first layer of the hierarchy is defined. Words from the first layer vocabulary are defined over the space of image features. For the grayscale images the Gabor filters might be used [1]. Each Gabor filter correspond to the edge of the object on the 2D image. Because we create hierarchy from range data the input feature corresponds to the surface of the object and the word in the first layer is represented by the planar patch.

In the next step of the learning procedure the first layer words (planar patches) are detected on the depth image. Input data is explained using first layer vocabulary. To create next layer vocabulary the size of the receptive field is increased. The words of the i-th layer are created from spatial combination of words of the previous layer. Then, the learning procedure selects representative words for the next layer vocabulary. It allows to reduce the number of words in the vocabulary and to obtain generative properties of the hierarchy. Similar parts are grouped in the same cluster. The whole cluster is represented on the higher level of the hierarchy by the representative part. The representative part might be the part in the center of the cluster. The procedure is repeated the desired number of layers is obtained. In general the size of the receptive field

## A. Implementation

We learn the hierarchy from range images obtained from Kinect-like sensors. We create two types of vocabularies. First layers of the hierarchy, which are view-dependent, are created using 2.5D depth image. This allows to build representation of the object which is visible from single viewpoint. To build full 3D hierarchical model of the object



Fig. 2. Point cloud obtained from single camera view divided into first layer receptive fields. Each color represent receptive field. Black points are not used to compute planar patches

we build volumetric words in 3D from many depth camera images.

To create first layer of the hierarchy we remove background from images. Then, we filter the image to remove noise introduced by the sensor. To this end, we applied median filter in  $7\times7$  window. In the hierarchy the first layer is represented by planar patch. According to the general procedure of the hierarchy learning (Fig. 1) the next step the input data is explained using first layer vocabulary. Thus we extract planar patches from the depth image. First we compute the normal vector for each point on the image. To compute normal vector we use Principal Component Analysis (PCA). We compute normal using  $7\times7$  window. Because PCA does not work properly on the edges we detect two surfaces inside the sliding window. Then, the points which don't lie on the surface corresponding to the considered point are removed from the patch.

To extract planar patches from the depth image we divide image space into regular grid. Each cell  $(5\times5$  patch) correspond to the receptive field. The surface of the object divided into receptive fields is presented in Fig. 2. Inside each receptive field the point which represent planar patch is found. To remove outliers the points are grouped according to the normal vector. For the most numerous group we compute mean normal vector and central position of the patch.

The next layer vocabulary is formed on the image plane. To create words of the l+1 layer the size of the receptive field is increased. The procedure is presented in Fig. 3. The receptive field of the l+1 layer covers nine receptive fields of the l-th layer. The second layer's word contains maximally nine planar patches. If the receptive fields does not cover the surface of the object the sub-part is represented by the background. The minimal number of sub-parts in the second layer word (part) is set to four. This is the minimal number of points required to compute similarity between parts.




Fig. 3. Representation of words in the view-variant layers




Fig. 4. Overlapping receptive fields: receptive field shifted by 0% (a), 33% (b) and 66% (c)

The words of the second layer are extracted from all images used for training the hierarchy. The variability of the words used for learning is increased by introduction overlapping receptive fields. Overlapping receptive fields allows also to deal with the problem related to the division of the image into regular grid. The position of the camera in relation to the object strongly influence the position of the receptive fields on the objects surface. The problem exists on the edges of the object. If the receptive field is shifted the part computed for the surface may overlap the object, the background or both. The position of the receptive field influences the part detected on the image. By applying overlapping receptive field the number of hypothesis about the point on the image plane is increased.

The overlapping receptive fields are presented in Fig. 4. The overlapping receptive field is moved by the width of the l-1 part (33% and 66% of the l-th layer part). It means that each point on the image might be explained by three different parts.

In the next step of the learning procedure the candidate vocabulary for i-th layer is extracted. Words obtained from all depth images and for all overlapping receptive fields are selected. Then, we select the next layer vocabulary by clusterization of parts (words) in the vocabulary. To this end, the hierarchical agglomerative clustering is used [3]. We merge clusters according to the similarity between parts. We stop the procedure if the distance (similarity) between parts  $d^c$  is bigger than threshold. Moreover, after each step which merges two clusters we compute maximal distance  $d^c_{\max}$  between parts inside the cluster. If the distance inside the cluster is bigger than threshold the cluster is splited into two separate clusters. By using this procedure we accept

maximal error between parts inside cluster. The number of obtained parts in the vocabulary depends on two parameters:  $d^c$  and  $d_{\rm max}$ .

To compute similarity between two view dependent parts  $p_A$  and  $p_B$  we defined the distance metric  $d_{\rm VD}$ :

$$d_{VD} = \sum_{i,j}^{N} (c_1 d(p_A^{ij}, p_B^{ij}) + c_2 \mathbf{N}_A^{ij} \cdot \mathbf{N}_B^{ij}), \tag{1}$$

where  $d(p_A^{\rm ij},p_B^{\rm ij})$  is the Euclidean distance between centers of corresponding patches,  $N_A^{\rm ij}$  and  $N_A^{\rm ij}$  are corresponding normal vectors in part A and B,  $c_1$  and  $c_2$  are constant values which scale Euclidean distance and dot product between normal vectors. The distance  $d_{\rm VD}$  is computed taking into account corresponding sub-part. If both sub-parts are background the distance value is not increased. If one of the corresponding sub-part is background and second corresponds to planar patch the distance  $d_{\rm VD}$  is increased by constant value  $c_3$ .

Despite of the fact that first layers of the hierarchy are view-dependent we store in the hierarchy parts which are view-invariant. It means that that we can distinguish between planar, concave, convex and other part independently from the angle of observation. It allows to reduce significantly the number of parts which are stored in the hierarchy. In contrast to hierarchy presented for 2D images [1] the discretization of normal vectors is not required in hierarchy of 3D parts. We store continues values of the normal vector. We can also learn hierarchy from few examples. Single camera image provides multiple realizations of parts. If parts are view-variant the number of learning examples should be significant to provide sufficient statistics for learning. In this case objects should be observed from multiply viewpoints.

To obtain view invariance of parts we solve optimization problem:

$$\arg\min_{\mathbf{T}} d_{\text{VD}}(\mathbf{T}),\tag{2}$$

where  ${\bf T}$  is special Euclidean group SE(3) rigid body transformation,  $d_{\rm VD}({\bf T})$  is the distance metric (1) computed for part  $p_A$  and part  $p_B$  transformed by  ${\bf T}$ . To find the rigid body transformation  ${\bf T}$  which aligns part A and part B we use Umeyama method [2]. Umeyama methods finds optimal transformation  ${\bf T}$  (root mean squared error is minimized) between points with known correspondence. To find correspondences between patches in parts we perform exhaustive search. We take into account 8 possible rotations of parts around central element. Note that we don't rotate part in 3D space. We modify correspondences between elements only. After this step the parts are aligned by Umeyama method and the similarity distance  $d_{\rm VD}({\bf T})$  between parts is computed.

To align parts from the the l-th layer the hierarchical structure of parts has to be used. Parts of higher layers are created from parts of the lower layers. To obtain point cloud, find correspondences and compute optimal alignment the subparts have to be recursively represented by points with normal vectors. Thus, the part of the first layer are

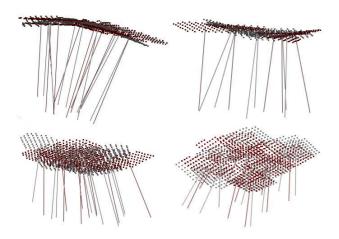


Fig. 5. Alignment of parts from the second layer. Gray – part A  $(p_A)$ , red – part B  $(p_B)$ 

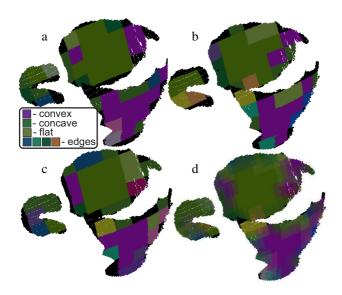


Fig. 6. Clusterization results for the second layer. Parts from the same group have the same color on the object visualization: overlap 0% (a), overlap 33% (b), overlap 66% (a), combination of hypotheses (d)

represented by single point, part of the second layer is represented by 9 points, third layer part by 81 points, size  $s_{l+1}$  of the l+1 layer part is  $9s_l$ .

The example alignment for parts from second layer is presented in Fig. 5. We represent each planar patch as a point cloud. The parts does not match perfectly. Small differences in position of subparts and their orientation and even missing sub-part are acceptable. This property enables the capability of the hierarchy to generalize learned models and classify parts properly despite of the sensor noise.

The variability of subparts is encoded in the clusters. Clusters are created without supervision. The algorithm can properly generate group of planar, concave and convex parts. Other groups contain various elements which represent edges on the depth image. These parts contain sub-parts created from planar patches and background. The example clusterization results for overlapping receptive fields and single camera view are presented in Fig. 6. The hierarchy can distinguish

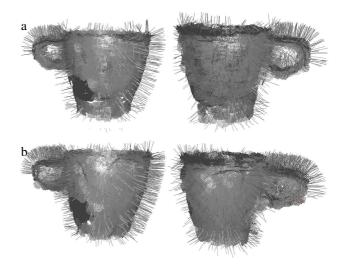


Fig. 7. Explanation of data using vocabulary from second layer without (659 parts) (a) and with compression (38 parts) (b)

between various parts and group them if the local shape is similar. Some surface are misclassified. The size of the receptive field in the second layers is small and the noise of the sensor plays important role here. However, the multiple hypothesis about the parts help to deal with this problem (Fig. 6).

## B. data explanation using l-th layer vocabulary

In the next step the input data is explained using the obtained l-th layer vocabulary. We explain the image using representative parts only. Thud, some areas of the image are replaced by l-th layer representative parts. This enables the compression of the input data as well as generalization. Using information about camera pose the parts can be moved into 3D space and reconstruct the object. Then, we can check visually the compression and clusterization results. The obtained representation of the object created from second layer vocabulary is presented in Fig. 7. In Fig. 7a the object created from 659 parts is presented. In this case the compression rate is set to 0%. In Fig. 7b the objects is created from 38 parts only. The compression rate for this layer is 5.8%. Despite of the high reduction of parts the explanation of the input data is still precise. Moreover, the normal angles are more smooth for the object created from compressed vocabulary. This property is comes out from the clusterization. The variation of the shape inside clusters which caused also by the sensor noise is represented by the "average" part in the center of the cluster.

The procedure of learning l-th layer vocabulary is repeated for view-dependent layers until the desired number of layers is obtained. The obtained alignment of parts in the third layer is presented in Fig. 8. The obtained clusters are presented in Fig. 9. For the third layer the compression rate is 25.2 %. For the third layer the obtained compression is significantly smaller than for the second layer. In the third layer the receptive fields are three times bigger than in the second layer (Fig. 3). At this size of the receptive field the difference

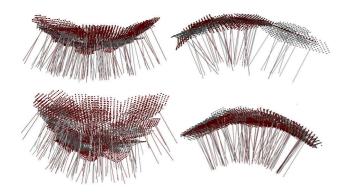


Fig. 8. Alignment of parts from the third layer. Gray – part A  $(p_A)$ , red – part B  $(p_B)$ 




Fig. 9. Clusterization results for the second layer. Parts from the same group have the same color on the object visualization: overlap 0% (a), overlap 33% (b), overlap 66% (a), combination of hypotheses (d)

between concave, convex and flat parts is bigger. On the other hand, parts overlapped by receptive fields are more unique and clusterization of parts produces higher number of groups. The higher compression is possible but the higher reconstruction error has to be accepted. The explanation of the input data using third layer vocabulary is presented in Fig. 10.

## C. View-invariant representation of parts

Parts obtained from single camera view do not provide full information about the shape of the object. It's difficult to conclude about parts which are located on the edges of the object. The system which learns from single view does not have information that some edges visible from a single view correspond to continuous surface of the object. The discrepancy between these parts is important when the robot grasp the object. The grasps that can be attached to the real 3D edge of the object and the edge visible from single camera view are different. Without the knowledge that some edges on 2D image might represent continuous surface the grasping method might fails.




Fig. 10. Explanation of data using vocabulary from third layer without (143 parts) (a) and with compression (36 parts) (b)




Fig. 11. Representation of words in the view-invariant layers

To deal with the proper representation of objects in 3D we build the hierarchy which contains view view-variant and view invariant layers. View-variants layers contain view-invariant parts (the id of the part depend on the local surface of the object and the id should be independent from camera viewpoint) obtained from single camera frame. The parts are created using 2.5D depth image space. The view-invariant layers are created from multiple camera frames in the volumetric space.

The general learning principle is the same for view-variant and view-invariant layers (Fig. 1). For view-invariant volumetric layers the receptive field is represented by the box. The relation between words from l and l+1 layers is presented in Fig. 11. The word of the l+1 layer consists 27 words (parts) from the l-th layer. The receptive fields for the volumetric layers grows in three dimensions.

## REFERENCES

- [1] S. Fidler, M. Boben, A. Leonardis, Learning a Hierarchical Compositional Shape Vocabulary for Multi-class Object Representation, Computer Vision and Pattern Recognition, 2014 (under review)
- [2] S. Umeyama, "Least-squares estimation of transformation parameters between two point patterns", IEEE Trans. on Pattern Analysis & Machine Intelligence, 13(4), 1991, 376–380.
  [3] C. D. Manning, P. Raghavan, H. Sch utze, Introduction to Information Retrieval, Cambridge University Press. 2008