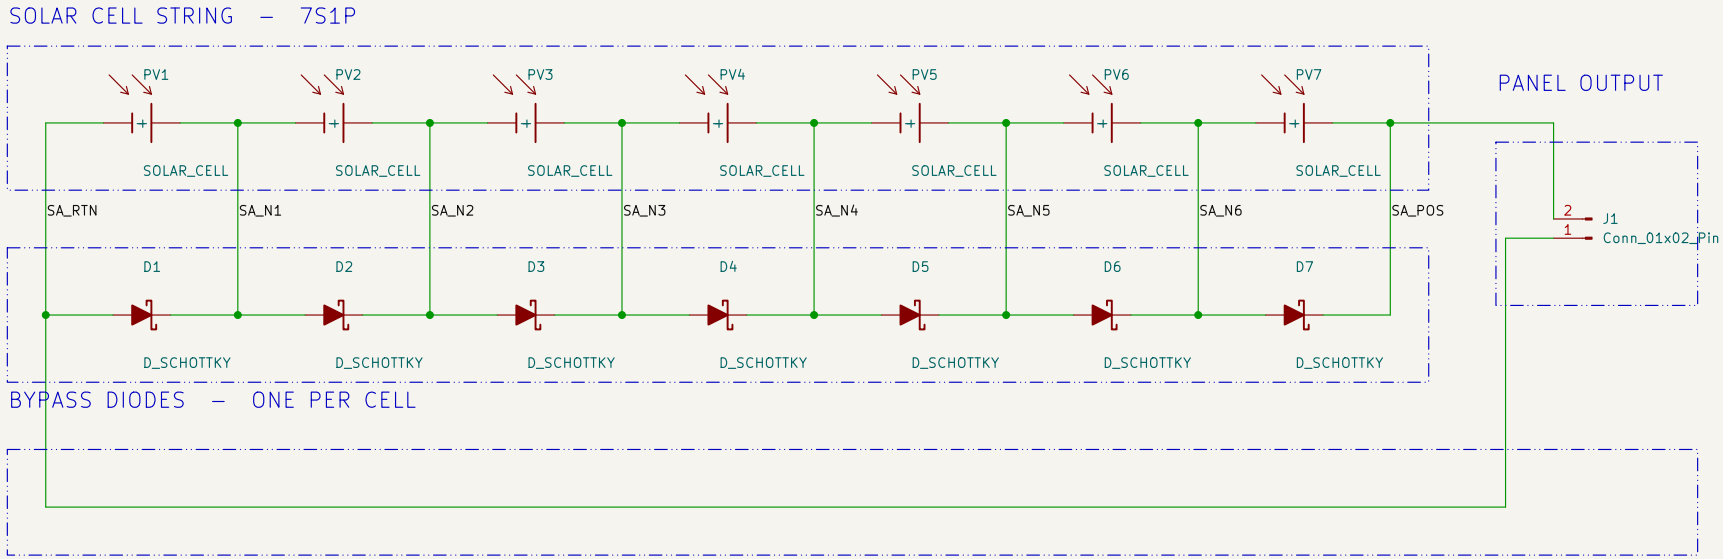


STRING 7S1P. Bypass diode across every cell, cathode to the cell (+) node – reverse biased in normal operation,

conducts only when its cell is shaded and driven into reverse bias by the string current.

NET NAMING SA_POS / SA_RTN = panel output. SA_Nn = node above cell n.

NO BLOCKING DIODE ON THE PANEL – provide reverse-current blocking and array OR-ing at the EPS input.

Sheet: / File: main_SolarPanelPCB.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.6		Id: 1/1