


SOLAR CELL STRING – 7S1P

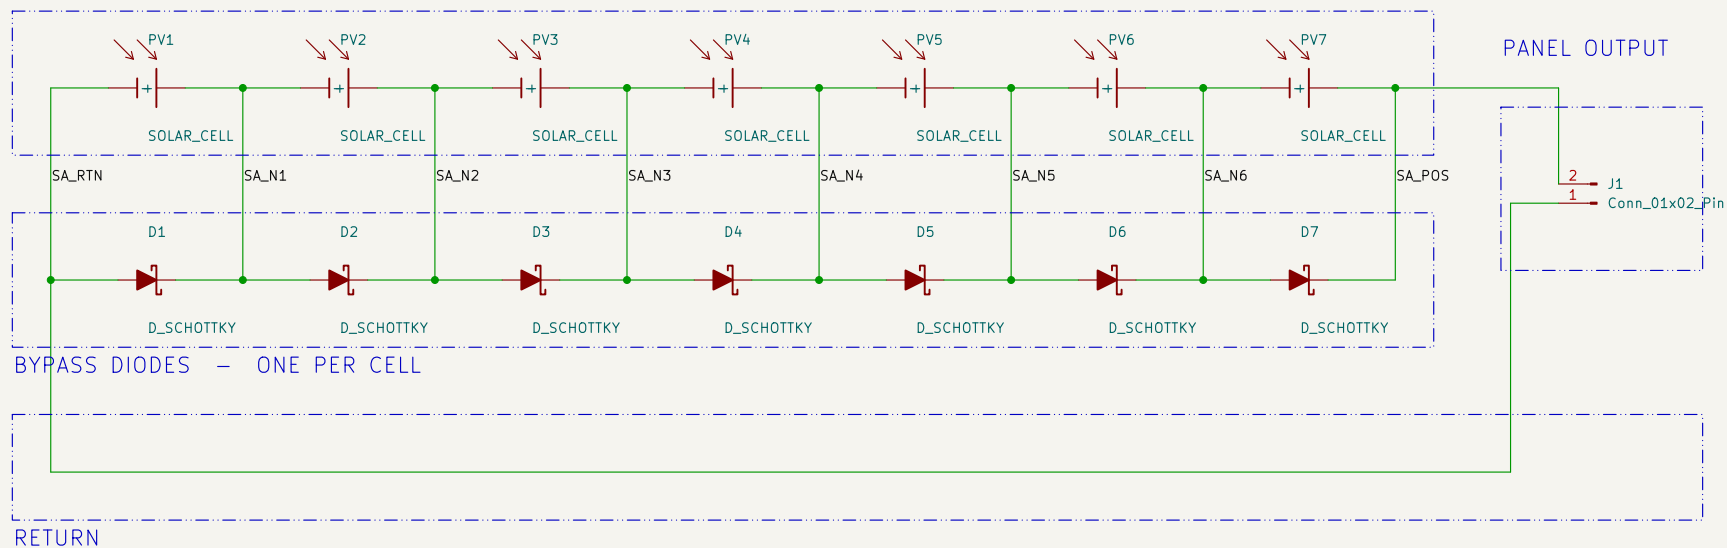

STRING 7S1P. Bypass diode across every cell, cathode to the cell (+) node – reverse biased in normal operation,

conducts only when its cell is shaded and driven into reverse bias by the string current.

NET NAMING SA_POS / SA_RTN = panel output. SA_Nn = node above cell n.

NO BLOCKING DIODE ON THE PANEL – provide reverse-current blocking and array OR-ing at the EPS input.

Sheet: /
File: main_SolarPanelPCB.kicad_sch

Title:

Size: A4 Date:

KiCad E.D.A. 10.0.6

Rev:

Id: 1/1