
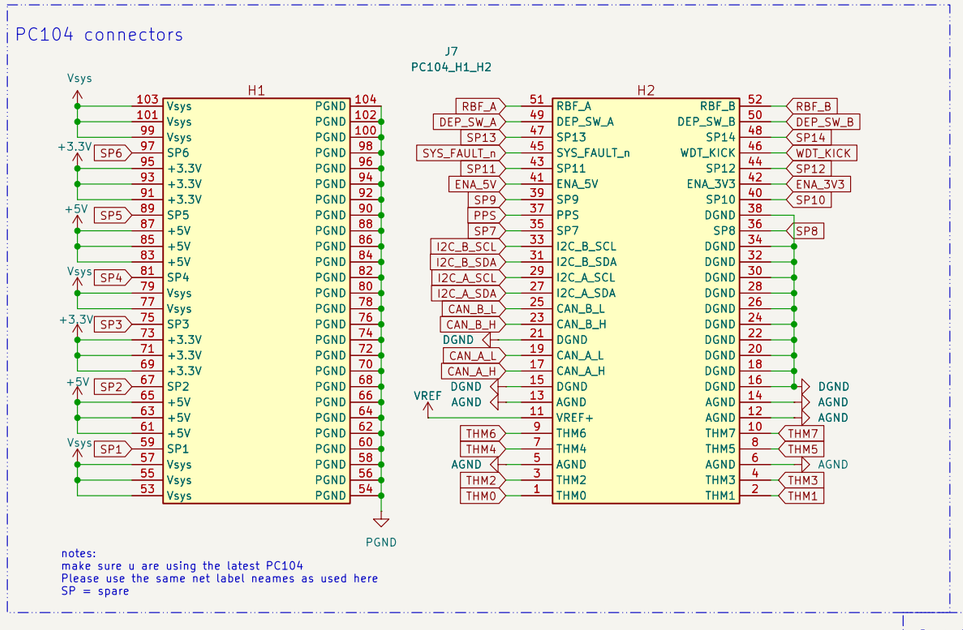
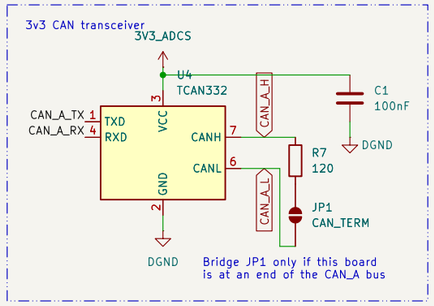
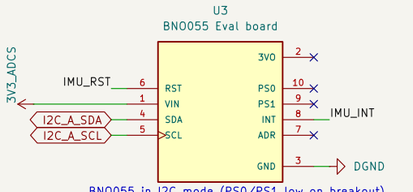








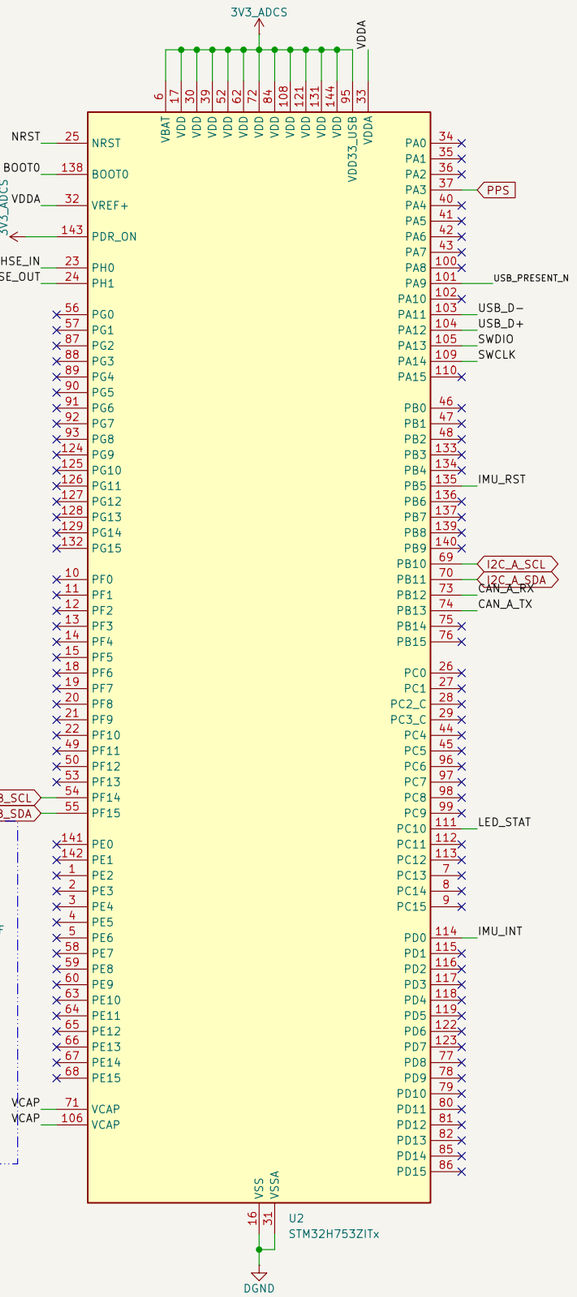



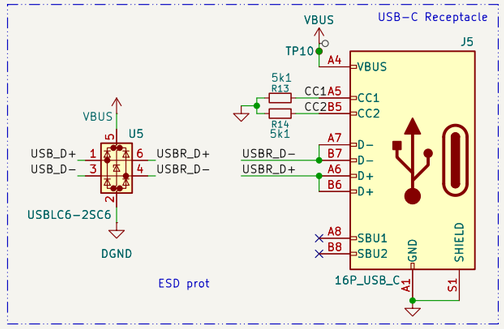



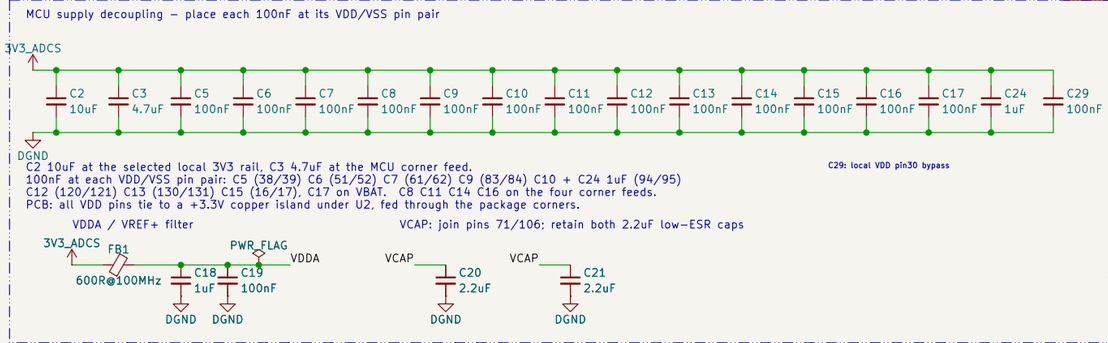



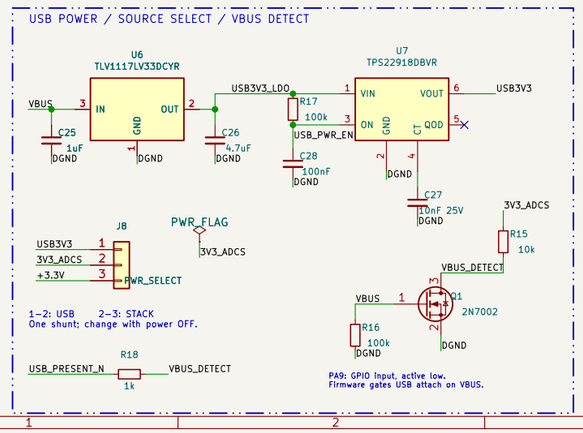


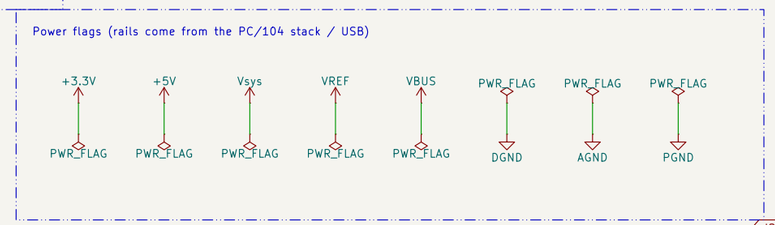
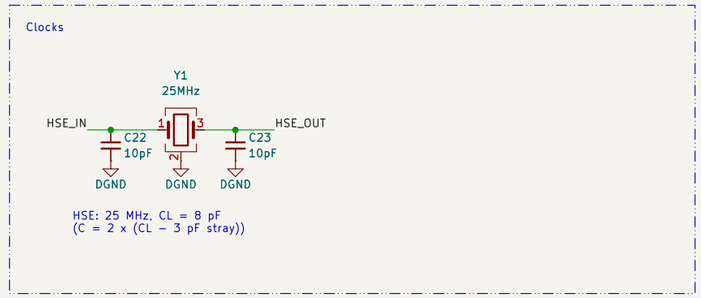



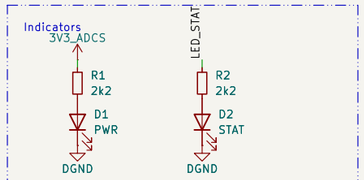




STM32H753 pin map (set the AF in firmware):
PA3 PPS TIM2_CH4 input capture
PF14/PF15 I2C_B I2C4 SCL/SDA
PB10/PB11 I2C_A I2C2 SCL/SDA
PB12/PB13 CAN_A FDCAN2 RX/TX via U4
PB10/PB11 BNO055 on I2C_A (I2C2), PB5 IMU_RST, PD0 IMU_INT
PA11/PA12 USB OTG_FS (no VBUS sensing), PA13/PA14 SWD, PC10 LED_STAT

STM32H753ZI + BNO055; CAN_A, I2C_A, I2C_B and PPS on the PC/104 stack

**Team Anant – 3U EM**

Sheet: /
File: main_ADCS.kicad_sch

***Title: AnantSAT−II ADCS board***

| Size: A3 | Date: 2026−09−27 | **Rev: 1.0** |
|---|---|---|
| KiCad E.D.A. 10.0.7 | | Id: 1/1 |