

# Comparing distance, time, and metabolic energy cost functions for walking accessibility in infrastructure-poor regions

Antonio Páez<sup>\*a</sup>, Zoha Anjum<sup>b</sup>, Sarah E. Dickson-Anderson<sup>c</sup>, Corinne J. Schuster-Wallace<sup>d</sup>, Belén Martín Ramos<sup>e</sup>, Christopher D. Higgins<sup>f</sup>

<sup>a</sup>*School of Geography and Earth Sciences, McMaster University, 1280 Main St W, Hamilton, ON, L8S 4K1 Canada*

<sup>b</sup>*Department Health Research Methods Evidence and Impact, McMaster University, 1280 Main St W, Hamilton, ON, L8S 4K1 Canada*

<sup>c</sup>*Dept. of Civil Engineering, McMaster University, 1280 Main St W, Hamilton, ON, L8S 4K1 Canada*

<sup>d</sup>*Dept. of Geography and Planning, University of Saskatchewan, Room 265 Arts, 9 Campus Drive, Saskatoon, SK, S7N 5A5 Canada*

<sup>e</sup>*Transport Research Centre (TRANSyT-UPM), Universidad Politécnica de Madrid, ETSI de Caminos, Canales y Puertos, Calle Profesor Aranguren s/n, 28040 Madrid, Spain*

<sup>f</sup>*Department of Human Geography, Room HL512 1265 Military Trail Toronto, ON, M1C 1A4 Canada*

## Abstract

Accessibility is a widely used concept in transportation planning and research. However a majority of the literature is concerned with accessibility in infrastructure-rich regions where it is used to assess the output of infrastructure. Relatively scant attention in contrast has been paid to the topic of accessibility in infrastructure-poor regions. These are regions characterized by non-homogeneous landscapes with limited or no transportation infrastructure. Even studies that deal with infrastructure-poor regions tend to transpose the methods used elsewhere. This practice seems inappropriate when mobility happens by active rather than motorized modes since the effort required for movement is likely different. The objective of this paper is to compare distance, time, and metabolic energy cost functions in walking accessibility. To this end, we present a case study of accessibility to water in central Kenya. The results indicate that Euclidean distance, surface distance, and travel time correlate better between them than any of them does with metabolic energy. Furthermore, while shortest paths tend to be symmetric for distance and time criteria, under consideration of metabolic energy expenditure pathways change significantly depending on the direction of movement. This has implications for measuring accessibility and equity. By providing alternate mechanisms for valuing the cost of movement, this research

---

<sup>\*</sup>Corresponding Author

Email addresses: paezha@mcmaster.ca (Antonio Páez), anjumz2@mcmaster.ca (Zoha Anjum), sdickso@mcmaster.ca (Sarah E. Dickson-Anderson), cschuster.wallace@usask.ca (Corinne J. Schuster-Wallace), belen.martin@upm.es (Belén Martín Ramos), cd.higgins@utoronto.ca (Christopher D. Higgins)

suggests avenues to consider vulnerable populations, such as pregnant women who require greater nutritional intake and expend more energy per unit activity. Directions for further research include certain trade-offs between route choice variables across various applications, for example, walking and cycling route choice algorithms.

Keywords: accessibility; walking; cost functions; Tobler's hiking function; distance; travel time; metabolic energy; water; Kenya; infrastructure-poor regions;

## 1 Introduction

Accessibility is a widely used concept in transportation planning and research as well as many allied disciplines. Operationally, accessibility has traditionally been estimated as a function of the availability of opportunities, and the cost of reaching said opportunities by using specific transport modes (Bocarejo and Oviedo 2012). According to Geurs and van Wee (2009), accessibility is “the extent to which land use and transport systems enable (groups of) individuals to reach activities or destinations by means of a (combination of) transport mode(s)”. Travel resistance or impedance is central in the implementation of accessibility approaches, measured as the cost of travel often in terms of distance, time, money, or generalized measures of cost (Ortega, Lopez, and Monzon 2014). A vast and rich literature exists for motorized accessibility in infrastructure-rich regions, where accessibility is often a tool used to assess the output of infrastructure (Lopez, Gutierrez, and Gomez 2008), as exemplified by studies on the effects of the Trans-European transport network (Gutierrez and Urbano 1996; Vickerman, Spiekermann, and Wegener 1999), high speed rail (Ortega, Lopez, and Monzon 2012, 2014), and major road projects (Linneker and Spence 1992; Hou and Li 2011; Gutiérrez and Gómez 1999).

More recently, there has also been growing interest in accessibility through non-motorized travel, or active transportation (e.g., Arranz-López et al. 2019; Iacono, Krizek, and El-Geneidy 2010; Vale, Saraiva, and Pereira 2015). The reasons for this are variegated. Active travel is seen as a reasonable solution to environmental, urban, and health issues (Rabl and Nazelle 2012; Sælensminde 2004). Much of the research on accessibility by active modes has tended to import the kind of criteria used in the analysis of motorized modes, namely travel distance and travel time (although not cost, since active modes are frequently free). There are reasons to believe that these cost criteria are not necessarily the most appropriate when examining accessibility by active modes, and there is a small but growing literature that examines in particular the metabolic cost of movement and how it influences trip length and accessibility (e.g., Jobe and White 2009; Hsu and Tsai 2014; Iseki and Tingstrom 2014; Macias 2016).

The objective of this paper is to contribute to this body of research by comparing several cost criteria in the calculation of accessibility measures for walking. In particular, we compare straight line distance, surface distance, travel time, and metabolic energy as alternative cost criteria. Our examination of these

cost functions is motivated by the analysis of accessibility in an infrastructure-poor region. These regions are typically characterized by non-homogeneous landscapes with limited or no transportation infrastructure where walking is likely a dominant mode of travel (Matous, Todo, and Mojo 2013). Accordingly, we present a case study of accessibility to water in a rural region in Kenya.

The case study illustrates some key aspects of measuring walking accessibility using different criteria. The results indicate that Euclidean distance, surface distance, and travel time correlate well, with uni-direction distances remaining similar. However, hysteresis is observed in surface distance and travel time routes when return paths are included. Furthermore, consideration of metabolic energy expenditure changes pathways significantly. This has implications for measuring accessibility and equity. By providing alternate mechanisms for valuing the cost of movement, it becomes possible to consider vulnerable populations, such as pregnant women who require greater nutritional intake and expend more energy per unit activity (Pommells et al. 2018). Directions for further research include certain trade-offs between route choice variables across various applications, for example, walking and cycling route choice algorithms.

## 2 Background

As a matter of practice, accessibility is often calculated in terms of straight-line distances between origins and destinations. This practice is due to the ease of calculating Euclidean distances, and is sometimes justified by the high correlation exhibited between straight-line distance and network distance (Apparicio et al. 2008). This approach has been used in European countries with dense infrastructure, for example in the study of catchment areas for public transport facilities (e.g., Gutierrez et al. 2008), but also to study access to basic health services in low-resource settings in Africa (e.g., Dangisso, Datiko, and Lindtjorn 2015; Macharia, Ouma, et al. 2017). Nonetheless, network distance is more realistic, and superior to straight-line distance, especially outside of network-dense regions (see Apparicio et al. 2008, 9).

Similarly, in infrastructure-poor regions it is tempting to assume that straight-line distance is a suitable approximation for the cost of movement. However, Ho et al. (2014) compared straight-line distance to distance on paths (i.e., a network) as inferred from satellite data and self-reported travel time and found that although straight-line distance and distance on paths were highly correlated, straight-line distance systematically underestimated the distance along paths. Furthermore, self-reported travel time correlated only poorly with straight-line distance. Underestimation of path distance by use of straight-line distance in this case is problematic because the effect is to artificially inflate accessibility by making things appear closer or more reachable than they are. This issue is perhaps more serious for walking trips given the steeper space-cost trade-offs of this mode compared to motorized modes (see Basu and Hunt 2014; Whalen, Páez, and Carrasco 2013).

Although path distances appear to offer a more accurate representation of travel behaviour in both infrastructure-rich and infrastructure-poor regions, a

key difference between these travel contexts is the way in which they facilitate or impede movement. In this sense, infrastructure-rich landscapes tend, by design, to restrict movement to specialized pieces of hardware (e.g., roads, streets, avenues, highways) and to otherwise limit movement by the very presence of other infrastructure (e.g., buildings). For this reason, infrastructure-rich landscapes tend to function as formal networks. In contrast, infrastructure-poor regions lack many of these restrictions, and movement tends to be constrained instead by features of the landscape that render some routes impossible (e.g., cliffs) or difficult (e.g., slopes). Consequently, these landscapes tend to operate more as informal networks (e.g., inferred networks in Ho, Russel, and Davis 2014) or grids. Consequently, infrastructure-rich environments are designed to facilitate mobility along prespecified routes, whereas infrastructure-poor environments may present fewer restrictions in terms of routes, but potentially more obstacles to mobility.

Within this context, walking is a fundamental transport mode and the availability of motorized modes or public transport are often limited (Matous, Todo, and Mojo 2013). For example, in parts of sub-Saharan African a lack of formal network infrastructure means these regions are inaccessible or accessible only with difficulty by motorized transport, even if motorized transportation was affordable, which highlights the importance of active accessibility (Porter 2002). In this sense, there is evidence showing that Kenyan children living in rural areas are more likely to use non-motorized travel modes such as walking and cycling than their urban counterparts (Ojiambo et al. 2012; Larouche et al. 2014). The burden faced by females in sub-Saharan Africa is also notable, since this is a region where women act as porters of water and other products perhaps beginning early in adolescence (Porter 2002; Sorenson, Morssink, and Campos 2011; Geere et al. 2018).

Where street or road networks are mostly absent, the cost of reaching destinations can be significantly influenced by the relief of the terrain and the direction of movement, in addition to other factors such as the quality of the surface or the land cover. The path selected may not be the same when walking to a destination as on the return journey due to the differences in efforts expended going up-slope versus down-slope. This is referred to as anisotropic movement (Ebener et al. 2005). Wood et al. (2018) studied the sensitivity in distance calculation to variations in three travel-time modeling approaches, taking as reference a model that accounted for variations in land cover and directionality in slope (anisotropy). They found that an approach based on measuring Euclidean distances on a flat surface underestimated the distance traveled, relative to the reference. The second approach, which calculated the distances constrained to a road network, also varied substantially from the reference, underestimating it in some areas and overestimating in others. Finally, the third approach, which accounted for land cover and elevation but ignored the directionality of slopes slightly underestimated travel times.

Along the same line of reasoning, the World Health Organization (WHO) developed the GIS-based tool AccessMod (WHO 2006) to model physical accessibility to healthcare. This tool computes travel time taking into account

different speeds associated with land uses and modes of transportation. In particular, it corrects walking speed depending on the steepness of the slope and direction of movement. This tool has been applied in several studies examining accessibility to specific health services in low-infrastructure regions, including Namibia (Alegana et al. 2012), Rwanda (Aoun, Matsuda, and Sekiyama 2015), Tanzania (Chen et al. 2017), and Kenya (Macharia, Odera, et al. 2017).

The above-mentioned accessibility studies (that do not assume terrain planarity) account for land uses, barriers, and anisotropic variations of walking speeds, and are based on the calculation of distances along least-cost paths. Least-cost modeling is a common raster technique for analyzing movements from an origin cell to the surrounding cells across a continuous surface (Adriaensen et al. 2003). By considering surface distances or introducing corrections to walking speeds depending on the slope and direction of travel, the distance or time friction associated with travel on continuous and complex landscapes can be modeled. Even though these studies are located in low-infrastructure regions, it is assumed that travel always occurs along optimum simulated paths that minimize total travelling time or distance (Ray and Ebener 2008).

This use of distance or travel time as key costs to be optimized is an assumption that is common in the literature on accessibility in infrastructure-rich regions. For example, Iacono et al. (2010) explored the issues related to the development of accessibility measures for non-motorized modes using time and distance as impedance variables in active accessibility calculations. Additionally, in their review of published research that measures active accessibility, Vale et al. (2015) concluded that slope should always be included in accessibility of bicycling and that it is also important for walking, however it is largely absent from the walking accessibility measures. However, the greater availability of elevation data and advances in research in other disciplines offer opportunities to better understand the behavior of individuals when traveling in poor-infrastructure contexts and challenge assumptions surrounding the most important costs to be minimized. Jobe and White (2009), for example, proposed a least-cost model of energetic expenditure for walking access to locations in a National Park. They posit that energetic expenditure is a better measure of the true physiological cost associated with hiking than velocity. The caloric cost of pedestrian travel across three dimensional terrains has also been used widely in archaeology and in anthropology (Wood and Wood 2006; Mlekuz 2014). Pedestrian efficiency in terms of energy consumption has so far been barely considered from a European and North American perspective, let alone from the perspective of low and middle income countries. In this sense, it is reasonable to question the validity of the assumption that travelers wish to minimize distance or time in infrastructure-poor regions, and if they do not, what are the implications for accessibility analysis. To illustrate these issues, we use an empirical example of access to water and examine changes in accessibility associated with different travel cost criteria.

### 3 Methods

While travel on formal networks can be modeled using linear features, modeling accessibility in infrastructure-poor contexts requires travel costs to be estimated over a landscape. Methodologically, this involves the conversion of a landscape to a network graph, conceptualizing nodal relations and graph conductance, and how these combine to permit the calculation of least-cost paths.

#### 3.1 Grids as graphs

Landscapes are often represented in digital form by means of *rasters* or *grids*. These are tessellations composed of regular *cells* or *pixels* arrayed in rows and columns. The cells are typically used to store information about the landscape, such as elevation in Digital Elevation Models (DEMs)/Digital Terrain Models (DTMs), temperature, and land cover. One approach to identify shortest paths in grids is to convert the grid into a graph. This is the approach adopted by van Etten (2017) in the R `gdistance` package; other packages, such as ArcMAP 10.3 (ESRI 2016), implement similar algorithms. These algorithms convert a grid into a graph by extracting the centroids of the cells to generate a set of *nodes*, which are then connected via *edges* or *links* according to some prespecified neighborhood criterion.

Examples of this process are shown in Figure 1. A starting grid is shown in the top panel of the figure. The middle panel shows the graph that is obtained from converting each cell centroid into a node connected to its orthogonal neighbors (using the so-called Rook criterion). The bottom panel shows the grid as a graph with each node connected to its orthogonal and diagonal neighbors (using the so-called Queen criterion). Other less common neighborhood criteria include Bishop (only the diagonal neighbors are connected) and Knight (16 neighbors).

This transformation from grid to graph has a key advantage in terms of the ability to store information. Whereas a grid can store information about the attributes of the landscape at the position of the cells, a graph can store the same information in the nodes, and can additionally store *relational* information in the links, that is information about how two linked nodes relate to each other. Simple examples of relational information include the geographical distance on the plane between nodes, or difference in elevations, as discussed below.

#### 3.2 Resistance/cost as relational information in a graph

Relational information in a graph concerns an attribute that is specific to a node pair  $i - j$ . This information can be directed, meaning that the relation between  $i - j$  can differ from the relation between  $j - i$ . Of particular relevance for the present discussion is the fact that links in a network can store information pertaining to transitions between nodes. Accordingly, a key item of relational information is the *resistance* or *cost* to transition between nodes in the graph. Resistance is a property of a link that measures friction to movement: the higher

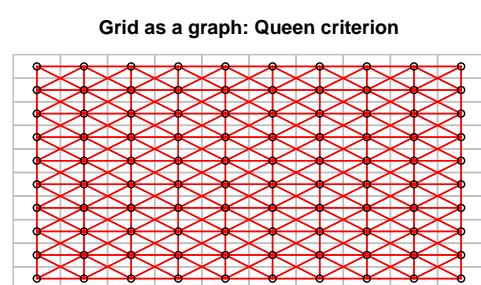
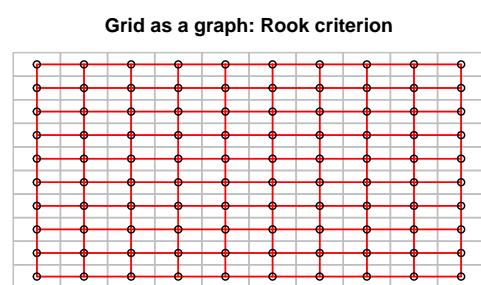
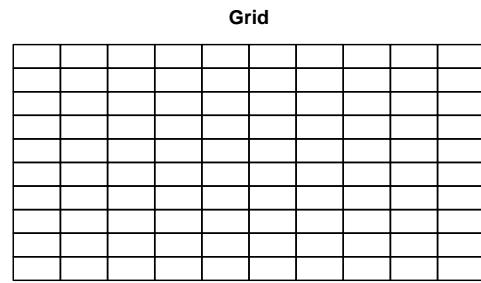


Figure 1: Converting a grid into graphs using the Rook and Queen criteria

the resistance between two nodes, the more difficult it is to transition between them.

There are different ways of defining resistance. When a DEM is available, two physical aspects of the landscape that relate to resistance can be obtained directly from the grid, namely the vertical displacement and the horizontal displacement between nodes  $i$  and  $j$ . The friction to movement is greater as the vertical and/or horizontal displacements increase ( $\Delta v$  and  $\Delta h$  respectively). Put differently, it becomes more expensive to transition from  $i$  to  $j$  as the distance between them in the horizontal and/or vertical direction increases.

On a flat, homogeneous plain, the horizontal distance is a reasonable measure of cost. Perhaps the simplest measure of resistance is the Euclidean distance between two arbitrary (and possibly non-contiguous) nodes  $i$  and  $k$ . This distance can be calculated by means of the Pythagorean theorem for small regions. Alternatively, for large regions, the great circle distance can be used, to account for the curvature of the Earth. These measures of distance do not require calculations on a raster, only the coordinates of the two nodes. On the other hand, when the landscape is not flat and/or is non-homogeneous, the horizontal distance becomes suspect as a measure of resistance. In this case, we might be interested in measuring resistance in other ways, for instance by considering the distance on the surface, the time that it takes to travel between nodes as a function of speed, or the energy needed to move between the nodes.

The distance on the surface of a landscape is a somewhat more sophisticated measure of resistance. Given a function  $y = f(x)$  that describes a transect on the surface of a landscape, the length  $\mathcal{L}$  of the segment of the line representing the distance on the surface between points  $i$  and  $j$  is given by:

$$\mathcal{L} = \int_i^j \sqrt{1 + \left(\frac{dy}{dx}\right)^2} dx \quad (1)$$

where  $x$  is the horizontal coordinate on the transect and  $y$  is the elevation.

A grid is essentially a discrete representation of the landscape, and therefore the length of the segment of a transect would instead be calculated for  $n$  line sub-segments between locations  $i$  and  $j$  as follows:

$$L = \sum_i^n d_i = \sum_i^n \sqrt{\Delta v_{ij}^2 + \Delta h_{ij}^2} \quad (2)$$

Given vertical displacement  $\Delta v$  and the horizontal displacement  $\Delta h$ , we can approximate the distance on the surface  $L$ , as the sum of segmental distances  $d_i$ . The approximation is only limited by the resolution of the grid: higher resolutions with small cells allow for better approximations of the distance on the surface of the landscape.

Another feature of the landscape that can be calculated from the vertical and horizontal displacements is the slope  $m$ . The instantaneous slope is given by the derivative of  $y = f(x)$  with respect to  $x$ . In the case of a grid, this is given by the following expression:

$$m = \frac{\Delta v}{\Delta h} \quad (3)$$

The slope is not typically used as a measure of resistance; however, it is an intermediate attribute that is linked to speed via Tobler's formula for hiking travel (Tobler 1993):

$$s = 100e^{(-3.5|m+0.05|)} \quad (4)$$

where the speed  $s$  is in  $m/min$ . To obtain a measure of resistance, the hiking speed in turn can be converted into travel time in minutes if we divide the distance by speed as follows:

$$t = \frac{d_i}{100e^{-3.5|m+0.05|}} = \frac{1}{100} d_i \cdot e^{3.5|m+0.05|} \quad (5)$$

where  $d_i$  can be the distance on the surface as discussed above, or can be approximated by the horizontal distance  $\Delta h$  (see Etten 2017, 13–16). Other speed formulas, including backpacker equations, are discussed by Doherty et al. (2014) and Herzog (2010).

The slope is also linked to the energy required to move. Minetti et al. (2002) investigated the metabolic energy cost of human movement on extreme slopes. This work updated and extended earlier work on the energy cost of walking on level surfaces (e.g., Marcaria 1938; Bobbert 1960) by examining a wider range of slope and speed values. Minetti and colleagues present an equation that relates the metabolic energy cost of walking to slope, as follows:

$$C_w = 280.5m^5 - 58.7m^4 - 76.8m^3 + 51.9m^2 + 19.6m + 2.5 \quad (6)$$

where  $m$  is the slope and  $C_w$  ( $J \cdot kg^{-1} \cdot m^{-1}$ ) is the energy cost of moving one unit of mass a horizontal distance equivalent to one unit of vertical displacement. Notice that due to the polynomial formulation, this equation is valid for a range of slopes approximately between  $-0.5$  and  $0.5$ , outside of which the behavior of the function becomes counterintuitive.

Surface distance can be rewritten as a function of slope as follows:

$$d = \sqrt{1 + m^2} \quad (7)$$

The three resistance functions above (Equations 5, 6, and 7) can be expressed in similar terms. As seen in Figure 2, resistance tends to increase as the slope increases. Surface distance and travel time are symmetric, although travel time is shifted to the left, to reflect somewhat shorter travel times (equivalently higher speeds) when the slope is moderately negative (reflective of movement along a gentle downward slope). The metabolic energy cost, in contrast, is not symmetric, and is further shifted to the left. This is because the metabolic cost of moving up a slope tends to be much higher than the cost of moving down a slope.

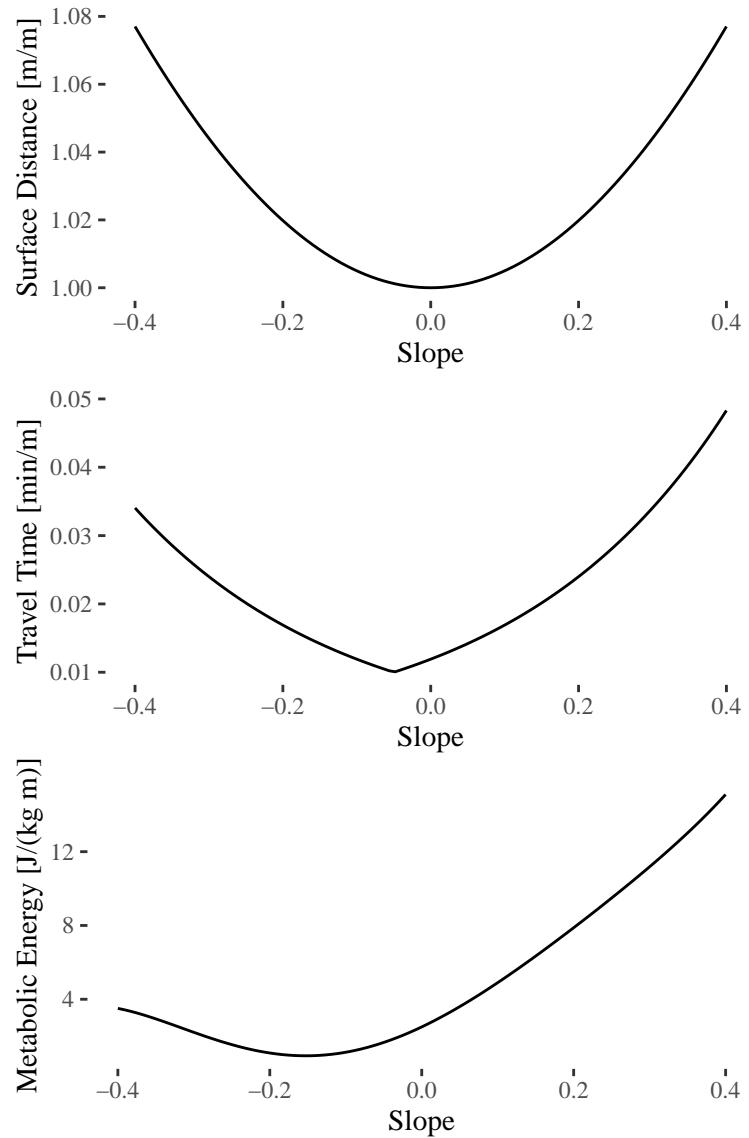


Figure 2: Various types of resistance as a function of slope (plots of equations 2, 5, and 6)

### 3.3 Conductance

Resistance is an intuitive way of thinking about the way the landscape tends to impose a cost to movement. When resistance is used it becomes necessary to impose some constraint to avoid “jumps” across the landscape, that is, non-continuous movement between cells that are not neighbors on the grid. In practice, this entails setting the resistance of non-contiguous pairs of nodes to a very large value (e.g., +Inf). Computationally, this has the disadvantage of requiring dense matrices to be stored, since every value must be explicitly retained (Etten 2017, 3). A more efficient approach involves working with the *conductance*, which is simply defined as the inverse of the resistance. Consequently, relational information for non-contiguous nodes can be set to zero. This allows the use of sparse matrix techniques, whereby only non-zero values are explicitly stored and zero values are ignored. The `gdistance` package, for example, works internally with the conductance. This means that instead of using, e.g., travel time for its calculations, it uses the inverse of time (or temporal rate), even if it reports the resistance (i.e., the time).

### 3.4 Shortest paths, cost, and accessibility indicators

Given a graph and resistance/conductance information, shortest paths and costs can be found using a conventional algorithm, such as Dijkstra (e.g., Cherkassky, Goldberg, and Radzik 1996).

Once the shortest paths have been obtained, accessibility can be calculated based on the associated costs. A general formulation of accessibility is as follows (see Paez, Scott, and Morency 2012):

$$A_i = \sum_{j \in D} g(W_j) f(c_{ij}) \quad (8)$$

where  $i$  is a point of origin and  $j$  corresponds to a destination in the set of locations  $D$  ( $\{j \in D | j = 1, \dots, J\}$ ). The functions  $g(\cdot)$  and  $f(\cdot)$  modify the opportunities  $W$  at  $j$  and the cost  $c_{ij}$  of moving between locations  $i$  and  $j$ , respectively. In this way, accessibility  $A_i$  is a weighted sum of opportunities, with weights that vary on the cost of reaching  $j$  from  $i$ .

Common formulations of accessibility include cumulative opportunities with  $g(W_j) = W_j$  and  $f(c_{ij}) = I(c_{ij} \leq c^*)$ :

$$A_i = \sum_{j \in D} W_j I(c_{ij} \leq c^*) \quad (9)$$

where  $I(\cdot)$  is an indicator function that takes the value of one if the argument is true and zero otherwise, and  $c^*$  is a cut-off or threshold value.

Gravity-type measures include inverse distance decay:

$$A_i = \sum_{j \in D} \frac{W_j}{c_{ij}^\alpha} \quad (10)$$

where  $\alpha$  is a cost decay parameter, and the negative exponential:

$$A_i = \sum_{j \in D} W_j \exp\left(-\alpha \frac{c_{ij}}{c^*}\right) \quad (11)$$

where  $c^*/\alpha$  is a kernel bandwidth that controls the rate of cost decay.

## 4 Empirical example

In this section we apply the methods discussed in the preceding sections to an empirical case study. Note that the source file for this paper is a reproducible R markdown document which, along with the data files, can be obtained from the following repository:

<https://github.com/paezha/Cost-Functions-for-Walking-Accessibility>

### 4.1 Context: accessibility to water

In 2010, the right to safe drinking water was recognized by the United Nations (2010) in resolution A/RES/64/292. Globally, 785 million people still do not have access to basic drinking water services, defined as an improved source that takes less than 30 minutes round trip, including queuing time (UNICEF-WHO 2019). By 2030, the world has committed to ensuring universal access to safely managed water supplies, i.e., sufficient supplies located on the premises and free from contamination (UNICEF-WHO 2019). In order to meet this Sustainable Development Goal (SDG) target (6.1), representative measures of accessibility will be critical for the determination of equitable water point locations. Note that 30 minutes is not how much individuals are willing or even able to travel, but rather a threshold for how much (at most) they should travel. In this sense, accessibility is a normative indicator (see Paez, Scott, and Morency 2012).

### 4.2 Case study

The case study is based on a Maasai-operated group ranch in Kenya. The members of this group ranch have settled seven neighborhoods on the outskirts of the land managed by the group. Field-based research with members of these communities revealed that inadequate access to drinking water was a priority area of concern. As result of this research, a mixed-methods collaborative study was launched to better understand the situation and to support decision-making (Barber et al. 2018).

As part of the study, GPS coordinates were collected for homesteads (called *bomas*) and water points in three of the neighborhoods in the group ranch. For analysis, the geospatial information is combined with a DEM to empirically explore the implications of using different cost functions (i.e., straight line distance, surface distance, travel time, and metabolic energy) in the analysis of accessibility to water points. Ultimately, this has implications for water point locations and equity.

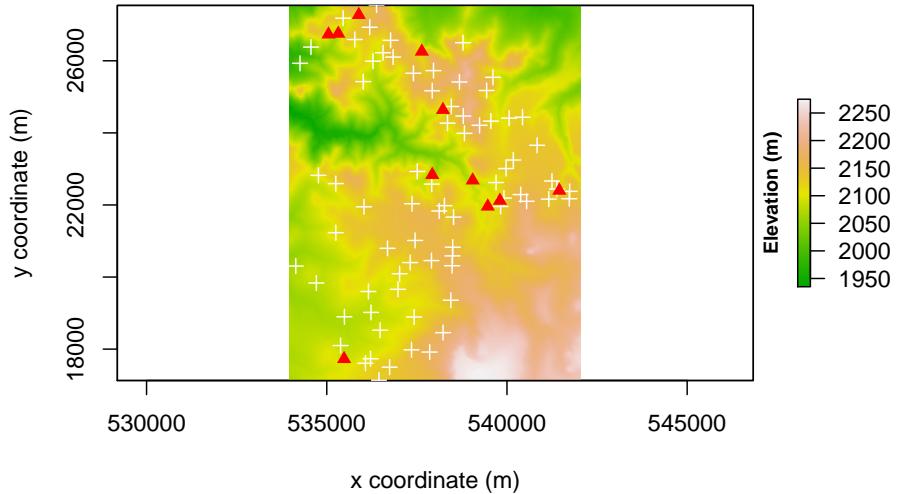


Figure 3: Digital elevation model and location of water sources (red triangles) and bomas (white crosses) in a region in Kenya (false origin)

Raster data (DEM) were obtained from Japan Aerospace Exploration Agency (JAXA) (<https://www.eorc.jaxa.jp/ALOS/en/aw3d30/data/index.htm>). The spacing of the raster is 1 arcsec (approximately 30 m) and elevation values are average over the range of 1 arcsec grid pixel rounded to the integer. To protect the privacy of respondents, all coordinates in this study are set to a false origin. As seen in Figure 3, the study area is approximately 8.1 km in the east-west direction, and 10 km in the north-south direction. The maximum difference in elevation is approximately 340 m. The locations of water sources are shown as red triangles, and bomas surveyed appear as white crosses.

#### 4.3 Shortest path analysis

There are several studies in the literature that report differences in paths when the definition of resistance changes (see *inter alia* Wood and Wood 2006, Fig.1; Herzog 2010, Fig. 3; Schamel and Job 2017, Fig. 3; Fonte, Parcero-Oubina, and Costa-Garcia 2017, Fig. 12; Kunitz, Lagree, and Weinig 2017, Fig. 8). However, to the best of our knowledge, there are no systematic investigations of these differences. Do least-distance paths generally coincide with least-time paths? How often do least-energy paths diverge from the other two? To answer these questions in our empirical example, we begin by calculating the shortest paths.

Shortest path calculations are implemented using the centroids of all raster cells in the study region as origins, and the water points as destinations. Calculations are based on straight-line distance, and functions for surface distance, time, and metabolic energy. Time and metabolic energy include the return-trip.

Figure 5 shows examples of shortest paths on the digital elevation model, according to different cost criteria. These examples show that the paths obtained using surface distance and time (i.e., least-distance and least-time) produce very similar results. As noted above (Figure 2), surface distance and speed change with slope in similar ways: both functions are symmetric on either side of their global minima, and the hiking function is only slightly shifted to the left, but perhaps not enough to make a practical difference in most situations. In contrast, when the criterion for resistance is metabolic energy (i.e., least-energy), the shortest paths are quite different. The function for metabolic energy is distinct from the surface distance and hiking speed functions in two important respects: it is not symmetric, and its minimum in the interval of interest is shifted to the left further than the hiking speed function. This reflects a more marked preference to reduce upward movement on slopes as the examples make clear; for instance, the outward trip may be more advantageous if following a route that presents more moderate downward slopes, whereas the return trip may try to avoid slopes as much as possible. This accounts for the change in routes depending on direction. Additionally, as seen in the figure, this function results in the kind of zig-zagging behavior often observed in movement on sloped terrain (Llobera and Sluckin 2007).

More generally, paths when minimizing surface distance are not perfectly symmetric in the outward and return trips, although the differences tend to be minimal. Symmetry is increasingly lost when minimizing time. As suggested by the scatterplots in Figure 4, the minimum surface distance and minimum time paths diverge more in real terrain - although they are still more direct routes between origins and destinations compared to the minimum metabolic energy paths. Minimizing metabolic energy results in paths that are substantially different from those estimated minimizing travel time and distance, and also less symmetric across the to and from directions.

Summary statistics of the costs associated with all shortest paths in this example are shown in Table 1. The summary statistics are obtained after calculating the shortest path from the centroids of all raster cells to all water sources. It can be seen there that the correlation between Euclidean and surface distance is practically perfect. The correlations between Euclidean distance and time, on the one hand, and energy, on the other, are weaker. Energy correlates only moderately with surface distance and travel time, and in these two cases it does so with a great deal of dispersion, especially for longer trips (see Figure 4). These results indicate that while straight line distance and surface distance might be reasonably used interchangeably, the same is not necessarily true of other measures of cost, particularly metabolic energy.

Inspection of the summary statistics raises a relevant question: how much do costs diverge when paths based on different criteria are used? Consider the paths shown in Figure 5. For the same origin-destination pair, there is a minimum

Table 1: Summary statistics of the cost of shortest paths according to different definitions of cost in the empirical example

Resistance	Summary Statistics						Correlation			
	Min.	X1st.Qu.	Median	Mean	X3rd.Qu.	Max.	Euclidean	Surface	Time	Energy
Euclidean Distance	2.43	2983.68	4530.69	4754.05	6282.97	11860.49	1.00	1.00	0.67	0.49
Surface Distance	0.00	3153.71	4787.95	5025.20	6624.31	12711.88	1.00	1.00	0.67	0.49
Travel Time	5.36	99.76	129.38	130.57	160.01	288.82	0.67	0.67	1.00	0.78
Metabolic Energy	806.91	29973.08	41599.21	41337.54	51851.57	105921.65	0.49	0.49	0.78	1.00

Note:

Euclidean and Surface distances are in m; Time is in min; Metabolic energy is in J (baseline weight is 50 kg)

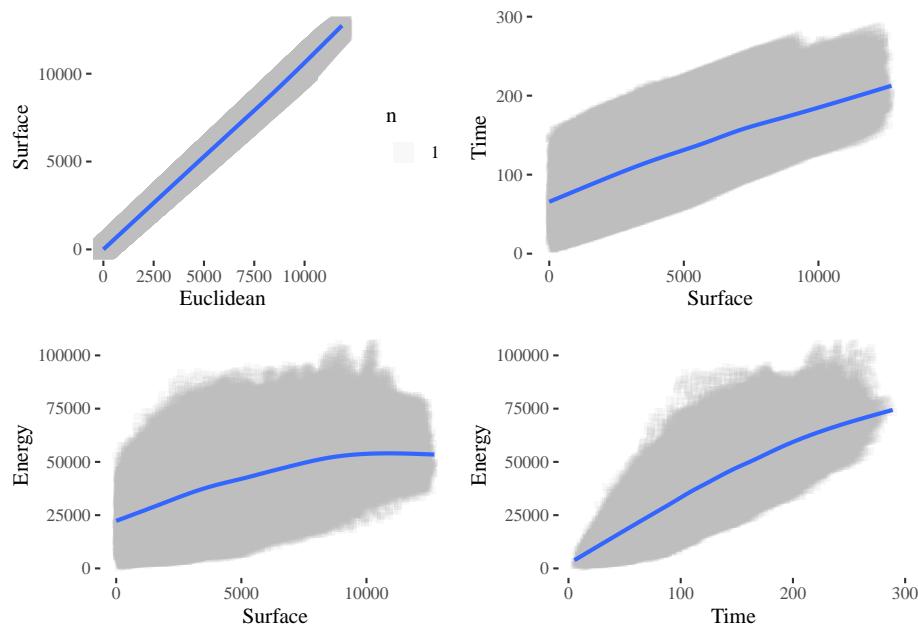


Figure 4: Scatterplots of shortest path costs for different definitions of resistance: empirical example

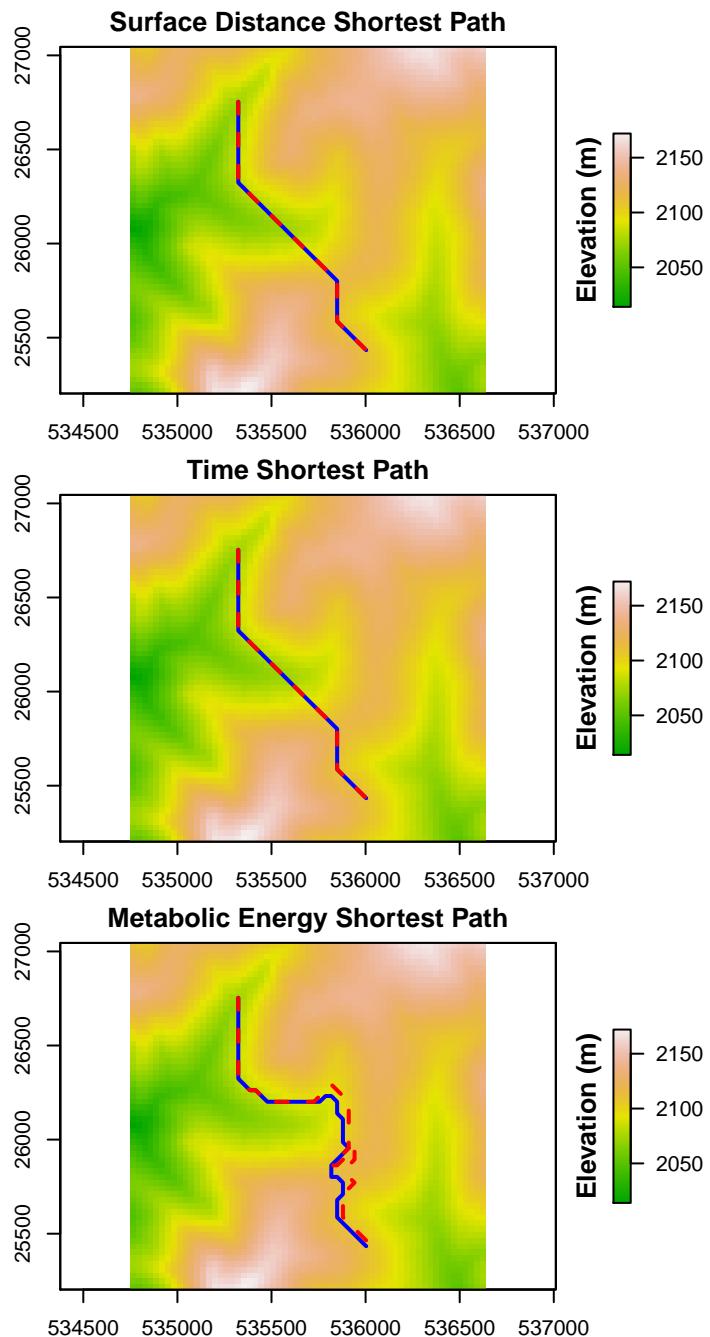


Figure 5: Examples of shortest paths using different definitions of resistance, case study (blue path is origin-destination, red dashed path is destination-origin, i.e., return trip)

surface-distance path, a minimum time path, and a minimum metabolic energy path. These are all generally different from each other. However, what is the surface distance over the minimum time path? And how different is it from the surface distance when it was minimized? Similarly, it is evident that minimum metabolic energy paths are longer than minimum surface distance and time paths, but by how much? To explore these questions, we take the origins and destinations in the empirical example (i.e., 73 bomas and 11 water points) and calculate the shortest paths according to surface distance, time, and energy criteria. Then, we re-analyze each shortest path to calculate the equivalent surface distance, equivalent time, and equivalent energy. The results of this analysis are shown in Figure 6.

In the scatterplots, the  $x$ -axis is the cost that was minimized. In the  $y$ -axis is the equivalent cost for the path between the same origin-destination pair. The black line is the 45-degree (i.e., the identity) line. Notice that the equivalent cost is *at least* the same as the minimized cost. This happens when the costs for the two criteria are identical for a path. More generally, the equivalent cost tends to be higher. That said, the surface distance over minimum time paths tends to be very similar to the minimum surface distance. The similarity is less marked in the converse case: times over minimum surface distance paths tend to be markedly longer than minimum times. The most important divergences are in terms of metabolic energy. Equivalent surface distance and time are considerably longer over minimum energy paths. Likewise, equivalent energy tends to be considerably higher over minimum surface distance and time paths.

These results indicate, again, that surface distance and time are potentially good proxies for each other, but neither is a good proxy for metabolic energy. In the following section this is seen more clearly when the results of the shortest path analysis are used for creating accessibility surfaces.

#### 4.4 Accessibility analysis

Once the shortest paths have been calculated, the results can be used to implement an accessibility indicator. For this analysis we select a cumulative opportunities measure (Equation 9). The critical value  $c^*$  for the two distance-based indicators (Euclidean and surface) is set to 1 km. The critical value  $c^*$  for travel time is 30 minutes for the round-trip journey (assuming that the queuing time at the source is zero, which is not necessarily true). There are no guidelines for how much *energy* should be spent fetching water. For the analysis we tune the critical value  $c^*$  in such a way that the equivalent energy is similar to a round trip of 30 minutes. Accessibility maps are shown in Figure 7.

The levels of accessibility are counts of accessible opportunities. As such, some regions have accessibility to zero water points, or to one water point, two water points, and so on. Bearing this in mind, the red regions indicate high priority areas for intervention since they do not satisfy the criteria for basic service, i.e., accessibility to at least one water source. Accessibility based on straight-line distance leads (as expected) to circular service areas. This symmetry is lost progressively as the effects of the landscape are captured by other cost

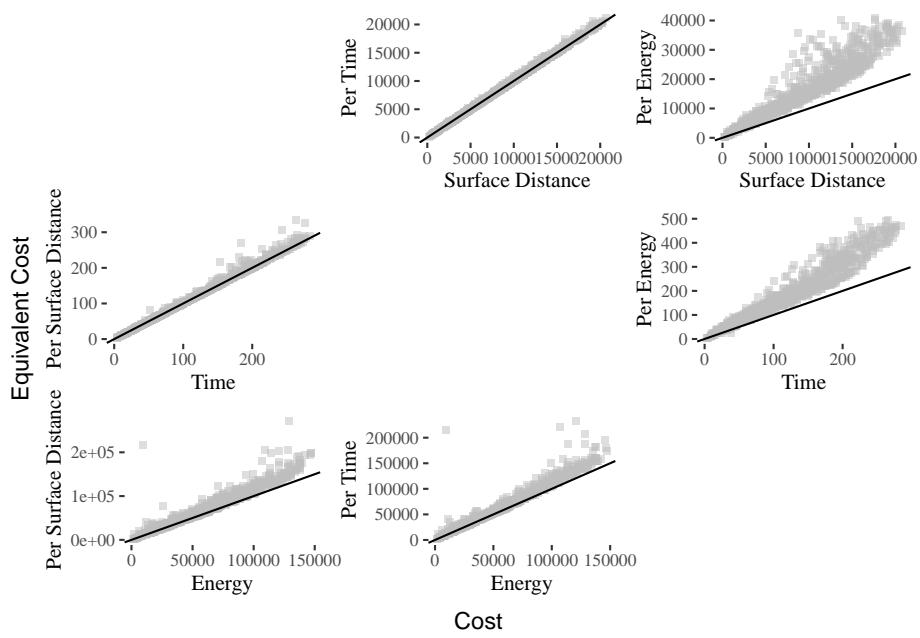


Figure 6: Scatterplots of shortest path costs and equivalent cost for different definitions of resistance

Table 2: Summary of accessibility analysis in case study: number of bomas with different levels of accessibility to water sources by cost criteria

Water Sources	Cost Criterion			
	Euclidean Distance	Surface Distance	Time	Energy
0	41	42	38	40
1	22	24	24	17
2	7	4	5	5
3	3	3	6	8
4	0	0	0	3

functions. Still, surface distance and travel time are remarkably similar, although travel time, even accounting for the return trip, gives a slightly more generous picture of accessibility than the distance criteria. In line with the discussion in the preceding subsection, metabolic energy-based accessibility is distinct, and does not replicate the somewhat artificial circular catchment areas around water sources. According to this criterion (keeping in mind that it was tuned to match a 30-minute travel time) there are fewer regions that lack basic access in the study area.

Table 2 presents the summary of results of the accessibility analysis from the perspective of bomas. The number of bomas with zero accessibility are 41 according to straight line distance, 42 according to surface distance, 41 according to straight line distance, 38 according to travel time, and 41 according to straight line distance, 40 according to metabolic energy. More bomas appear to have greater accessibility to water according to travel time and metabolic energy than either distance criteria.

#### 4.5 Discussion

The empirical example illustrates how there are potentially important differences in the conclusions that would be drawn depending on which cost criterion is used in the implementation of accessibility analysis. This prompts the question: what do we measure when we measure accessibility? An implicit (and often under-examined) assumption in many treatments of accessibility concerns the kind of behavior that accessibility analysis is meant to reflect (Paez, Scott, and Morency 2012). As the analysis above illustrates, this might not be critical when Euclidean distance, surface distance, and travel time are used, given the similarities in outcomes between least-distance and least-time behaviors. However, when least-effort is the determining factor, the results may change substantially. This, in turn, can be expected to have an impact on policy analysis and decision-making.

So, which criterion is more appropriate? The answer at this point is, we do not know for sure. Minimization of travel time may be a suitable assumption

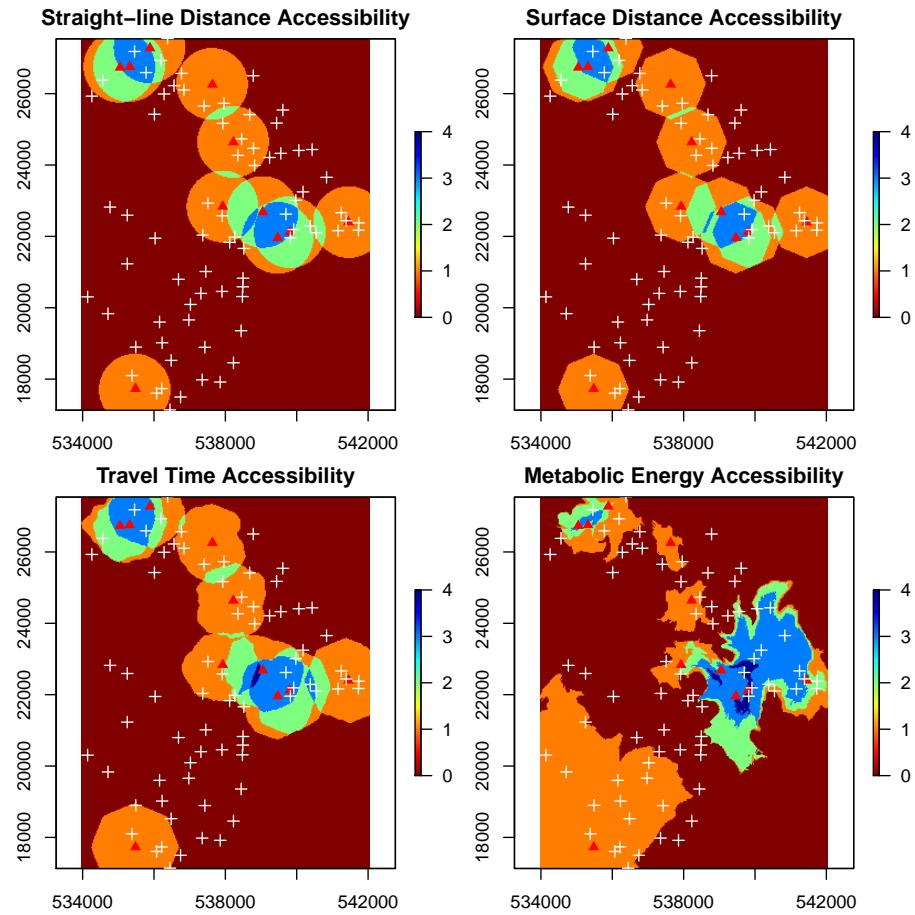


Figure 7: Cumulative opportunities accessibility maps in empirical example using different measures of resistance (Red = 0 water sources; Orange = 1 water source; Green = 2 water sources; Light Blue = 3 water sources; Dark Blue = 4 water sources)

for some activities - for instance, when evacuating or fleeing danger. However, the physical exertion involved in active travel may be better represented by cost in metabolic energy - which, as our research demonstrates, leads to results that are markedly different from distance and time, the two most widely used criteria. In fact, assuming that travelers minimize distance or time may lead to travel predictions that are wholly unreflective of actual cost-minimization behavior. Another reason this may be important is sensitivity to changes in the assumptions. For example, the friction of distance is symmetric on the outward and return trips. This may not be the case for travel time and energy. Suppose for instance that speed is reduced on the return trip - perhaps due to an increase in the load, if, for example, the purpose of the trip is to fetch water. Likewise, the metabolic energy requirements would increase with the load. In an infrastructure-poor context, our results show that longer, more time-consuming paths may be taken in exchange for reduced energy consumption. Such a scenario may be a valid hypothesis for water fetching in low- and middle-income countries, if for example, an individual fetching water is more concerned with metabolic pressures than time pressures. As a result, they may trade off distance and time for reduced energy expenditure in the to and from directions. Water fetching in sub-Saharan Africa broadly, and Kenya specifically, is a gendered norm that falls on women and girls and is exacerbated by pregnancy (women's reproductive role in society; Moser 1993). Given the existence of multi-directional relationships between nutritional requirements, time and energy required for water fetching, and susceptibility towards domestic violence if daily household duties are not completed (Pommells et al. 2018), metabolic energy may be a more important, if subconscious, choice factor in determining a water-fetching path.

This is not to say that an emphasis on minimizing travel time for reaching water by entities such as the World Health Organization is misplaced, only that its use should be more explicitly recognized and critically examined relative to assumptions about different travel behavior and mobility contexts. When an individual is travelling via a motorized mode, such as driving a car or riding transit, the minimization of travel time or distance seems like a reasonable assumption - the commuter with daily time constraints on available activities within in their potential path area may indeed seek to minimize travel time to better participate in activities of value. Similarly, a firefighter may not prioritize energy expenditure over travel time or distance when escaping a wildfire (Campbell, Dennison, and Butler 2017). For active travelers who face stricter capability constraints, for example due to nutrition deficiencies, poor health, age, or disabilities, minimizing the metabolic energy cost might well be a more accurate assumption about their behavior.

## 5 Conclusions

Research into accessibility makes some implicit assumptions about the travel behavior of individuals that are not always recognized. Much of the literature on accessibility specifies distance or travel time as the primary costs to be optimized and is generally carried on in what can be described as infrastructure-rich regions.

Moreover, most research is conducted under an assumption of topographical or topological planarity. However, the greater availability of enhanced geographic data on the relief of terrain, as well as advances in research into the temporal and metabolic costs of travel enable a greater understanding of the link between different travel cost attributes and how individuals interact with the natural and built environments in varied contexts.

In this paper, we utilized an empirical case study in rural Kenya to estimate the cost of active travel in an infrastructure-poor region. This is an example of an environment rich in topography but lacking in transportation infrastructure. Comparisons between distance, travel time, and energy expenditure revealed interesting differences in predicted travel paths. Results show that calculations of shortest-paths using Euclidean distance, distance on the 3D surface, and slope-aware travel time predicted by Tobler's Hiking Function were remarkably similar. Paths are also virtually identical in the to and from directions, with a predicted trajectory that is largely straight over the surface. In retrospect, the lack of difference between the 3D distance and travel time calculations is unsurprising, as slope and travel time are acutely linked in the specification of Tobler's function, particularly at more gentle path gradients. It may be that trips with steeper gradients or over longer distances are more sensitive to the velocity gradients in Tobler's function. When metabolic energy is used as a measure of cost, however, strikingly different results are found.

Our results, in the context of infrastructure-poor regions, offer provocative implications for accessibility research more generally. At a high level, our work challenges an implicit bias in accessibility research towards the minimization of travel time or distance. This bias could be understood as an outcome of early accessibility research associated with large transportation projects, mostly for motorized travel, in high income, infrastructure-rich countries. In this context, the benefits were often framed in terms of travel time savings, particularly for cost-benefit analysis. It is not difficult to imagine travel scenarios in these regions where optimization of travel time may not be the primary concern. For example, elderly individuals engaged in active travel may behave in a way that minimizes energy expenditure over time, selecting paths that offer lower metabolic resistance and reduced risk of travel difficulty. Cyclists may also optimize route choices based on terrain, preferring network paths that are longer but minimize uphill travel. In this light, route choice algorithms implemented in consumer mobile mapping software that recommend travel choices that minimize travel time may be insensitive to the actual cost optimization behavior of their users given different mobility and environmental contexts. Although accessibility research continues to evolve, it may be that these beginnings have led to a path dependency with respect to the focus of the analytical lens on travel time and distance.

In terms of future research, it is important to note that Tobler's hiking function and the metabolic cost function were calibrated for particular demographic groups. In this respect, Looney et al. (2018) discuss the need to (re)calibrate the metabolic energy functions for special population segments (also see Looney et al. 2019, and @Richmond2019terrain). This appears as an important direction

for future research. Metabolic energy in particular provides an intriguing avenue for researching the cost of movement, one that makes it possible to better understand vulnerable populations, such as older adults in urban settings, or pregnant women in rural areas who require greater nutritional intake and expend more energy per unit activity. Directions for further research include certain trade-offs between route choice variables across various applications, for example, walking and cycling route choice algorithms.

Furthermore, it is possible to envision scenarios where travel choices are made while optimizing several attributes simultaneously, such as the minimization of travel time, distance, monetary cost, and/or energy expenditure, as well as the potential for maximizing other attributes like safety or interest. In these cases, better insight into the choices made by individuals relative to their activities and time and mobility constraints is required. Similarly, alternative route choice algorithms that optimize several functions would be required to exploit this information for improved predictive modelling of active travel choices and accessibility. Finally, cognition imposes its own travel costs. Erath et al. (2017), for example, include a factor to modify *actual* travel time to obtain *perceived* travel time. In addition, there might be additional time and mental costs involved in the selection of paths on familiar or unfamiliar terrain. Cognition is incorporated into an individual's estimation of travel times on the cost surface through the search algorithm, and could be incorporated in shortest paths algorithms by allowing searches to happen on higher order spatial lags, beyond adjacent cells.

Finally, the discussion in this paper focused on the topographical features of terrain. It would also be interesting to examine the impact on accessibility of different land cover types, including the presence of potential barriers that must be crossed or circumvented (e.g., wetlands), or facilitators to travel (e.g., dirt trails or tracks on the terrain). This is a matter for future research.

### Acknowledgments

The following R packages were used in the course of this investigation and the authors wish to acknowledge their developers: `knitr` (Xie 2015, 2018), `tidyverse` (Wickham 2017), `raster` (Hijmans 2018), `gdistance` (Etten 2017), `gridExtra` (Auguie 2017), `spdep` (Bivand, Pebesma, and Gómez-Rubio 2013), `kableExtra` (Zhu 2018), `ggthemes` (Arnold 2018), `plot3D` (Soetaert 2017), and `rticles` (Allaire et al. 2018).

### References

- Adriaensen, F., J. P. Chardon, G. De Blust, E. Swinnen, S. Villalba, H. Gulinck, and E. Matthysen. 2003. "The Application of 'Least-Cost' Modelling as a Functional Landscape Model." Journal Article. *Landscape and Urban Planning* 64 (4): 233–47. [https://doi.org/10.1016/s0169-2046\(02\)00242-6](https://doi.org/10.1016/s0169-2046(02)00242-6).
- Alegana, V. A., J. A. Wright, U. Penetina, A. M. Noor, R. W. Snow, and P. M. Atkinson. 2012. "Spatial Modelling of Healthcare Utilisation for Treatment of

- Fever in Namibia.” Journal Article. *International Journal of Health Geographics* 11 (6): 1–13. <https://doi.org/10.1186/1476-072x-11-6>.
- Allaire, JJ, Yihui Xie, R Foundation, Hadley Wickham, Journal of Statistical Software, Ramnath Vaidyanathan, Association for Computing Machinery, et al. 2018. *Rticles: Article Formats for R Markdown*. <https://CRAN.R-project.org/package=rticles>.
- Aoun, N., H. Matsuda, and M. Sekiyama. 2015. “Geographical Accessibility to Healthcare and Malnutrition in Rwanda.” Journal Article. *Social Science & Medicine* 130: 135–45. <https://doi.org/10.1016/j.socscimed.2015.02.004>.
- Apparicio, Philippe, Mohamed Abdelmajid, Mylène Riva, and Richard Shearmur. 2008. “Comparing Alternative Approaches to Measuring the Geographical Accessibility of Urban Health Services: Distance Types and Aggregation-Error Issues.” *International Journal of Health Geographics* 7 (1): 7.
- Arnold, Jeffrey B. 2018. *Ggthemes: Extra Themes, Scales and Geoms for 'Ggplot2'*. <https://CRAN.R-project.org/package=ggthemes>.
- Arranz-López, Aldo, Julio A. Soria-Lara, Frank Witlox, and Antonio Páez. 2019. “Measuring Relative Non-Motorized Accessibility to Retail Activities.” Journal Article. *International Journal of Sustainable Transportation* 13 (9): 639–51. <https://doi.org/10.1080/15568318.2018.1498563>.
- Assembly, General. 2010. “The Human Right to Water and Sanitation (a/Res/64/292).” *United Nations (28 July)*.
- Auguie, Baptiste. 2017. *GridExtra: Miscellaneous Functions for "Grid" Graphics*. <https://CRAN.R-project.org/package=gridExtra>.
- Barber, Hilary, Sarah E Dickson-Anderson, Corinne J Schuster-Wallace, Susan J Elliott, and Saaya Tema. 2018. “Designing a Mixed-Methods Approach for Collaborative Local Water Security: Findings from a Kenyan Case Study.” *Exposure and Health*, 1–9.
- Basu, Debasis, and John Douglas Hunt. 2014. “Value of Travel Time for Home-Based School Tours in California.” *Transportation Planning and Technology* 37 (3): 287–306.
- Bivand, R. S., E. J. Pebesma, and V. Gómez-Rubio. 2013. *Applied Spatial Data Analysis with R*. Book. Second Edition. New York: Springer Science+Business Media. <http://www.asdar-book.org/>.
- Bobbert, AC. 1960. “Energy Expenditure in Level and Grade Walking.” *Journal of Applied Physiology* 15 (6): 1015–21.
- Bocarejo, S. J. P., and H. D. R. Oviedo. 2012. “Transport Accessibility and Social Inequities: A Tool for Identification of Mobility Needs and Evaluation of Transport Investments.” Journal Article. *Journal of Transport Geography* 24: 142–54. <https://doi.org/10.1016/j.jtrangeo.2011.12.004>.
- Campbell, Michael J, Philip E Dennison, and Bret W Butler. 2017. “A Lidar-Based Analysis of the Effects of Slope, Vegetation Density, and Ground Surface Roughness on Travel Rates for Wildland Firefighter Escape Route Mapping.” *International Journal of Wildland Fire* 26 (10): 884–95.
- Chen, Y. N., M. M. Schmitz, F. Serbanescu, M. M. Dynes, G. Maro, and M. R. Kramer. 2017. “Geographic Access Modeling of Emergency Obstetric and Neonatal Care in Kigoma Region, Tanzania: Transportation Schemes and

- Programmatic Implications.” Journal Article. *Global Health-Science and Practice* 5 (3): 430–45. <https://doi.org/10.9745/ghsp-d-17-00110>.
- Cherkassky, B. V., A. V. Goldberg, and T. Radzik. 1996. “Shortest Paths Algorithms: Theory and Experimental Evaluation.” Journal Article. *Mathematical Programming* 73 (2): 129–74. <https://doi.org/10.1007/bf02592101>.
- Dangisso, M. H., D. G. Datiko, and B. Lindtjorn. 2015. “Accessibility to Tuberculosis Control Services and Tuberculosis Programme Performance in Southern Ethiopia.” Journal Article. *Global Health Action* 8: 10. <https://doi.org/10.3402/gha.v8.29443>.
- Doherty, P. J., Q. H. Guo, J. Doke, and D. Ferguson. 2014. “An Analysis of Probability of Area Techniques for Missing Persons in Yosemite National Park.” Journal Article. *Applied Geography* 47: 99–110. <https://doi.org/10.1016/j.apgeog.2013.11.001>.
- Ebener, Steeve, Zine El Morjani, Nicolas Ray, and Michael Black. 2005. “Physical Accessibility to Health Care: From Isotropy to Anisotropy.” Journal Article 9 (6).
- Erath, Alexander, Michael AB van Eggermond, Sergio A Ordóñez, and Kay W Axhausen. 2017. “Introducing the Pedestrian Accessibility Tool: Walkability Analysis for a Geographic Information System.” Journal Article. *Transportation Research Record* 2661 (1): 51–61.
- ESRI. 2016. “How the Path Distance Tools Work (Arcmap 10.3).” Web Page. <http://desktop.arcgis.com/en/arcmap/10.3/tools/spatial-analyst-toolbox/how-the-path-distance-tools-work.htm>.
- Etten, J. van. 2017. “R Package Gdistance: Distances and Routes on Geographical Grids.” Journal Article. *Journal of Statistical Software* 76 (13): 1–21. <https://doi.org/10.18637/jss.v076.i13>.
- Fonte, J., C. Parcero-Oubina, and J. M. Costa-Garcia. 2017. “A Gis-Based Analysis of the Rationale Behind Roman Roads. THE Case of the so-Called via Xvii (Nw Iberian Peninsula).” Journal Article. *Mediterranean Archaeology & Archaeometry* 17 (3): 163–89. <https://doi.org/10.5281/zenodo.1005562>.
- Geere, J. A. L., M. Cortobius, J. H. Geere, C. C. Hammer, and P. R. Hunter. 2018. “Is Water Carriage Associated with the Water Carrier’s Health? A Systematic Review of Quantitative and Qualitative Evidence.” Journal Article. *Bmj Global Health* 3 (3): 24. <https://doi.org/10.1136/bmjjh-2018-000764>.
- Geurs, K., W. Boon, and B. Van Wee. 2009. “Social Impacts of Transport: Literature Review and the State of the Practice of Transport Appraisal in the Netherlands and the United Kingdom.” Journal Article. *Transport Reviews* 29 (1): 69–90. ISI:000261193500004%0AC:/Papers/Transport%20Reviews/Transport%20Reviews%20(2009)%2029%20(1)%2069-90.pdf.
- Gutierrez, Javier, Juan Carlos J Environment Garcia-Palomares, Planning B: Planning, and Design. 2008. “Distance-Measure Impacts on the Calculation of Transport Service Areas Using Gis.” Journal Article 35 (3): 480–503.
- Gutierrez, J., and P. Urbano. 1996. “Accessibility in the Eu: The Impact of Trans-European Network.” Journal Article. *Journal of Transport Geography* 4 (1): 15–25.

- Gutiérrez, Javier, and Gabriel Gómez. 1999. "The Impact of Orbital Motorways on Intra-Metropolitan Accessibility: The Case of Madrid's M-40." Journal Article. *Journal of Transport Geography* 7 (1): 1–15. [https://doi.org/10.1016/s0966-6923\(98\)00029-5](https://doi.org/10.1016/s0966-6923(98)00029-5).
- Herzog, Irmela. 2010. "Theory and Practice of Cost Functions." In *Fusion of Cultures. Abstracts of the Xxxviii Conference on Computer Applications and Quantitative Methods in Archaeology*, edited by Javier Melero, Pedro Cano, and Jorge Revelles, 431–34.
- Hijmans, Robert J. 2018. *Raster: Geographic Data Analysis and Modeling*. <https://CRAN.R-project.org/package=raster>.
- Ho, J. C., K. C. Russel, and J. Davis. 2014. "The Challenge of Global Water Access Monitoring: Evaluating Straight-Line Distance Versus Self-Reported Travel Time Among Rural Households in Mozambique." Journal Article. *Journal of Water and Health* 12 (1): 173–83. <https://doi.org/10.2166/wh.2013.042>.
- Hou, Q., and S. M. Li. 2011. "Transport Infrastructure Development and Changing Spatial Accessibility in the Greater Pearl River Delta, China, 1990–2020." Journal Article. *Journal of Transport Geography* 19 (6): 1350–60. <https://doi.org/10.1016/j.jtrangeo.2011.07.003>.
- Hsu, C. I., and Y. C. Tsai. 2014. "An Energy Expenditure Approach for Estimating Walking Distance." Journal Article. *Environment and Planning B-Planning & Design* 41 (2): 289–306. <https://doi.org/10.1068/b37169>.
- Iacono, Michael, Kevin J Krizek, and Ahmed El-Geneidy. 2010. "Measuring Non-Motorized Accessibility: Issues, Alternatives, and Execution." *Journal of Transport Geography* 18 (1): 133–40.
- Iseki, H., and M. Tingstrom. 2014. "A New Approach for Bikeshed Analysis with Consideration of Topography, Street Connectivity, and Energy Consumption." Journal Article. *Computers Environment and Urban Systems* 48: 166–77. <https://doi.org/10.1016/j.compenvurbsys.2014.07.008>.
- Jobe, R. T., and P. S. White. 2009. "A New Cost-Distance Model for Human Accessibility and an Evaluation of Accessibility Bias in Permanent Vegetation Plots in Great Smoky Mountains National Park, Usa." Journal Article. *Journal of Vegetation Science* 20 (6): 1099–1109. <https://doi.org/10.1111/j.1654-1103.2009.01108.x>.
- Kunitz, J. K., J. D. Lagree, and D. L. Weinig. 2017. "A Gis Examination of the Chacoan Great North Road." Journal Article. *Kiva-Journal of Southwestern Anthropology and History* 83 (1): 86–113. <https://doi.org/10.1080/00231940.2016.1199936>.
- Larouche, Richard, Adewale L Oyeyemi, Antonio Prista, Vincent Onywera, Kingsley K Akinroye, and Mark S Tremblay. 2014. "A Systematic Review of Active Transportation Research in Africa and the Psychometric Properties of Measurement Tools for Children and Youth." *International Journal of Behavioral Nutrition and Physical Activity* 11 (1): 129.
- Linneker, B. J., and N. A. Spence. 1992. "An Accessibility Analysis of the Impact of the M25 London Orbital Motorway on Britain." Journal Article. *Regional Studies* 26 (1): 31–47. ISI:A1992HJ27600003.

- Llobera, M., and T. J. Sluckin. 2007. "Zigzagging: Theoretical Insights on Climbing Strategies." Journal Article. *Journal of Theoretical Biology* 249 (2): 206–17. <https://doi.org/10.1016/j.jtbi.2007.07.020>.
- Looney, D. P., A. W. Potter, J. L. Pryor, P. E. Bremner, C. R. Chalmers, H. L. McClung, A. P. Welles, and W. R. Santee. 2019. "Metabolic Costs of Standing and Walking in Healthy Military-Age Adults: A Meta-Regression." Journal Article. *Medicine and Science in Sports and Exercise* 51 (2): 346–51. <https://doi.org/10.1249/mss.0000000000001779>.
- Looney, D. P., W. R. Santee, A. J. Karis, L. A. Blanchard, M. N. Rome, A. J. Carter, and A. W. Potter. 2018. "Metabolic Costs of Military Load Carriage over Complex Terrain." Journal Article. *Military Medicine* 183 (9-10): E357–E362. <https://doi.org/10.1093/milmed/usx099>.
- Lopez, E., J. Gutierrez, and G. Gomez. 2008. "Measuring Regional Cohesion Effects of Large-Scale Transport Infrastructure Investments: An Accessibility Approach." Journal Article. *European Planning Studies* 16 (2): 277–301. ISI:000252717200006%0AC:/Papers/European%20Planning%20Studies/European%20Planning%20Studies%20(2008)%2016%20(2)%20277-301.pdf.
- Macharia, P. M., P. A. Odera, R. W. Snow, and A. M. Noor. 2017. "Spatial Models for the Rational Allocation of Routinely Distributed Bed Nets to Public Health Facilities in Western Kenya." Journal Article. *Malaria Journal* 16 (367): 11. <https://doi.org/10.1186/s12936-017-2009-3>.
- Macharia, P. M., P. O. Ouma, E. G. Gogo, R. W. Snow, and A. M. Noor. 2017. "Spatial Accessibility to Basic Public Health Services in South Sudan." Journal Article. *Geospatial Health* 12 (1): 106–13. <https://doi.org/10.4081/gh.2017.510>.
- Macias, K. 2016. "Alternative Methods for the Calculation of Pedestrian Catchment Areas for Public Transit." Journal Article. *Transportation Research Record*, no. 2540: 138–44. <https://doi.org/10.3141/2540-15>.
- Marcaria, R. 1938. "Sulla Fisiologia E Specialmente Sul Consumo Energetico Della Marcia E Della Corsa a Varie Velocita Ed Inclinazioni Del Terreno." *Atti Accad. Naz. Lincei Mem. Classe Sci. Fis. Mat. Nat. Sez 3* (7): 299–368.
- Matous, P., Y. Todo, and D. Mojo. 2013. "Boots Are Made for Walking: Interactions Across Physical and Social Space in Infrastructure-Poor Regions." Journal Article. *Journal of Transport Geography* 31: 226–35. <https://doi.org/10.1016/j.jtrangeo.2013.04.001>.
- Minetti, A. E., C. Moia, G. S. Roi, D. Susta, and G. Ferretti. 2002. "Energy Cost of Walking and Running at Extreme Uphill and Downhill Slopes." Journal Article. *Journal of Applied Physiology* 93 (3): 1039–46. <https://doi.org/10.1152/japplphysiol.01177.2001>.
- Mlekuz, D. 2014. "Exploring the Topography of Movement." Book Section. In *Computational Approaches to the Study of Movement in Archaeology: Theory, Practice and Interpretation of Factors and Effects of Long Term Landscape Formation and Transformation*, edited by S. Polla and P. Verhagen, 23:5–+. Topoi-Berlin Studies of the Ancient World. Berlin: Walter De Gruyter GmbH. %3C%20to%20ISI%3E:/WOS:000346069400002.
- Moser, Caroline ON. 1993. *Gender Planning and Development: Theory, Practice and Training*. London: Routledge.

- Ojiambo, Robert M, Chris Easton, Jose A Casajús, Kenn Konstabel, John J Reilly, and Yannis Pitsiladis. 2012. "Effect of Urbanization on Objectively Measured Physical Activity Levels, Sedentary Time, and Indices of Adiposity in Kenyan Adolescents." *Journal of Physical Activity and Health* 9 (1): 115–23.
- Ortega, E., E. Lopez, and A. Monzon. 2012. "Territorial Cohesion Impacts of High-Speed Rail at Different Planning Levels." Journal Article. *Journal of Transport Geography* 24: 130–41. <https://doi.org/10.1016/j.jtrangeo.2011.10.008>.
- Ortega, Emilio, Elena Lopez, and Andres Monzon. 2014. "Territorial Cohesion Impacts of High-Speed Rail Under Different Zoning Systems." *Journal of Transport Geography* 34: 16–24.
- Paez, A., D. M. Scott, and C. Morency. 2012. "Measuring Accessibility: Positive and Normative Implementations of Various Accessibility Indicators." Journal Article. *Journal of Transport Geography* 25: 141–53. <https://doi.org/10.1016/j.jtrangeo.2012.03.016>.
- Pommells, Morgan, Corinne Schuster-Wallace, Susan Watt, and Zachariah Mulawa. 2018. "Gender Violence as a Water, Sanitation, and Hygiene Risk: Uncovering Violence Against Women and Girls as It Pertains to Poor Wash Access." *Violence Against Women* 24 (15): 1851–62.
- Porter, Gina. 2002. "Living in a Walking World: Rural Mobility and Social Equity Issues in Sub-Saharan Africa." *World Development* 30 (2): 285–300.
- Rabl, A., and A. de Nazelle. 2012. "Benefits of Shift from Car to Active Transport." Journal Article. *Transport Policy* 19 (1): 121–31. <https://doi.org/10.1016/j.tranpol.2011.09.008>.
- Ray, N., and S. Ebener. 2008. "AccessMod 3.0: Computing Geographic Coverage and Accessibility to Health Care Services Using Anisotropic Movement of Patients." Journal Article. *International Journal of Health Geographics* 7 (63): 1–17. ISI:000264449700001%0AC:/Papers/International%20Journal%20of%20Health%20Geographics/International%20Journal%20of%20Health%20Geographics%20(2008)%207%20(63)%201-17.pdf.
- Richmond, P. W., A. W. Potter, D. P. Looney, and W. R. Santee. 2019. "Terrain Coefficients for Predicting Energy Costs of Walking over Snow." Journal Article. *Applied Ergonomics* 74: 48–54. <https://doi.org/10.1016/j.apergo.2018.08.017>.
- Schamel, J., and H. Job. 2017. "National Parks and Demographic Change - Modelling the Effects of Ageing Hikers on Mountain Landscape Intra-Area Accessibility." Journal Article. *Landscape and Urban Planning* 163: 32–43. <https://doi.org/10.1016/j.landurbplan.2017.03.001>.
- Soetaert, Karline. 2017. *Plot3D: Plotting Multi-Dimensional Data*. <https://CRAN.R-project.org/package=plot3D>.
- Sorenson, S. B., C. Morssink, and P. A. Campos. 2011. "Safe Access to Safe Water in Low Income Countries: Water Fetching in Current Times." Journal Article. *Social Science & Medicine* 72 (9): 1522–6. <https://doi.org/10.1016/j.socscimed.2011.03.010>.
- Sælensminde, Kjartan. 2004. "Cost-Benefit Analyses of Walking and Cycling Track Networks Taking into Account Insecurity, Health Effects and External

- Costs of Motorized Traffic.” *Transportation Research Part A: Policy and Practice* 38 (8): 593–606.
- Tobler, Waldo. 1993. *Three Presentations on Geographical Analysis and Modeling*. Technical Report, National Center for Geographic Information; Analysis. <https://escholarship.org/uc/item/05r820mz>.
- UNICEF-WHO. 2019. “Progress on Household Drinking Water, Sanitation and Hygiene 2000–2017. Special Focus on Inequalities.”
- Vale, David S, Miguel Saraiva, and Mauro Pereira. 2015. “Active Accessibility: A Review of Operational Measures of Walking and Cycling Accessibility.” *Journal of Transport and Land Use* 9 (1).
- Vickerman, R., K. Spiekermann, and M. Wegener. 1999. “Accessibility and Economic Development in Europe.” Journal Article. *Regional Studies* 33 (1): 1–15. ISI:000078687200001.
- Whalen, Kate E, Antonio Páez, and Juan A Carrasco. 2013. “Mode Choice of University Students Commuting to School and the Role of Active Travel.” *Journal of Transport Geography* 31: 132–42.
- WHO. 2006. Computer Program. <https://www.accessmod.org/>.
- Wickham, Hadley. 2017. *Tidyverse: Easily Install and Load the 'Tidyverse'*. <https://CRAN.R-project.org/package=tidyverse>.
- Wood, B. M., and Z. J. Wood. 2006. “Energetically Optimal Travel Across Terrain: Visualizations and a New Metric of Geographic Distance with Anthropological Applications.” Book Section. In *Visualization and Data Analysis 2006*, edited by R. F. Erbacher, J. C. Roberts, M. T. Grohn, and K. Borner. Vol. 6060. Proceedings of Spie. Bellingham: Spie-Int Soc Optical Engineering. <https://doi.org/10.1117/12.644376>.
- Wood, N., J. Jones, J. Peters, and K. Richards. 2018. “Pedestrian Evacuation Modeling to Reduce Vehicle Use for Distant Tsunami Evacuations in Hawai’i.” Journal Article. *International Journal of Disaster Risk Reduction* 28: 271–83. <https://doi.org/10.1016/j.ijdrr.2018.03.009>.
- Xie, Yihui. 2015. *Dynamic Documents with R and Knitr*. 2nd ed. Boca Raton, Florida: Chapman; Hall/CRC. <https://yihui.name/knitr/>.
- . 2018. *Knitr: A General-Purpose Package for Dynamic Report Generation in R*. <https://yihui.name/knitr/>.
- Zhu, Hao. 2018. *KableExtra: Construct Complex Table with 'Kable' and Pipe Syntax*. <https://CRAN.R-project.org/package=kableExtra>.