

BS EN 16983:2016



BSI Standards Publication

Disc springs — Quality specifications — Dimensions

National foreword

This British Standard is the UK implementation of EN 16983:2016.

The UK participation in its preparation was entrusted to Technical Committee FME/9/3, Springs.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016.
Published by BSI Standards Limited 2016

ISBN 978 0 580 93172 7

ICS 21.160

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 November 2016.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 16983

November 2016

ICS 21.160

English Version

Disc springs - Quality specifications - Dimensions

Rondelles ressorts - Spécification de qualité -
Dimensions

Tellerfedern - Qualitätsanforderungen - Maße

This European Standard was approved by CEN on 15 August 2016.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

European foreword.....	3
1 Scope	4
2 Normative references	4
3 Terms, definitions, symbols, units and abbreviated terms	4
3.1 Terms and definitions	4
3.2 Symbols, units and abbreviated terms	5
4 Dimensions and designation.....	6
4.1 General.....	6
4.2 Disc spring groups	6
4.3 Dimensional series	7
5 Spring material	7
6 Spring dimensions, nominal sizes, design values.....	7
6.1 Dimensional series A	7
6.2 Dimensional series B	8
6.3 Dimensional series C.....	9
7 Manufacture	10
7.1 Manufacturing process and surface quality	10
7.2 Heat treatment.....	11
7.3 Shot peening.....	11
7.4 Presetting.....	11
7.5 Surface treatment and corrosion protection	11
8 Tolerances	12
8.1 Tolerances on diameter.....	12
8.2 Tolerances on thickness	12
8.3 Tolerances on free overall height, l_0	12
8.4 Tolerances on spring load.....	13
8.4.1 Single disc springs.....	13
8.4.2 Springs stacked in series	13
8.5 Clearance between disc spring and guiding element.....	14
9 Creep and relaxation.....	14
10 Permissible stresses.....	16
10.1 Static and rarely alternating loading	16
10.2 Dynamic loading.....	16
10.2.1 General.....	16
10.2.2 Permissible loading.....	17
11 Testing.....	19
11.1 General.....	19
11.2 Check of dimensions and other spring characteristics	19
11.3 Hardness testing.....	20
12 Other relevant requirements.....	20
Bibliography.....	21

European foreword

This document (EN 16983:2016) has been prepared by Technical Committee CEN/TC 407 “Cylindrical helical springs made from round wire and bar - Calculation and design”, the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2017, and conflicting national standards shall be withdrawn at the latest by May 2017.

This European Standard has been prepared by the initiative of the Association of the European Spring Federation ESF and is based on the German Standard DIN 2093 “Disc springs – Quality specifications – Dimensions”, which is known and used in many European countries.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

According to the CEN-CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

1 Scope

This standard specifies the set of requirements that ensure the correct functioning of disc spring. These include requirements relating to the materials and manufacturing process, tolerances on dimensions and spring forces, and also the permissible relaxation and fatigue life of such springs as a function of stress.

All requirements specified here are minimum requirements.

This standard covers three dimensional series of disc springs.

NOTE In this standard, disc springs are divided into three groups and three dimensional series. Classification into groups is based on the manufacturing process, which is a function of the material thickness. The assignment of disc springs to dimensional series is governed by the h_0/t ratio.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 1654, *Copper and copper alloys - Strip for springs and connectors*

EN 10083 (all parts), *Steels for quenching and tempering*

EN 10089, *Hot-rolled steels for quenched and tempered springs - Technical delivery conditions*

EN 10132-4, *Cold rolled narrow steel strip for heat treatment - Technical delivery conditions - Part 4: Spring steels and other applications*

EN 10151, *Stainless steel strip for springs - Technical delivery conditions*

EN ISO 3269, *Fasteners - Acceptance inspection (ISO 3269)*

EN ISO 6507 (all parts), *Metallic materials - Vickers hardness test (ISO 6507)*

EN ISO 6508 (all parts), *Metallic materials - Rockwell hardness test (ISO 6508)*

3 Terms, definitions, symbols, units and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definition given in EN ISO 26909 apply.

NOTE Disc springs are annular coned elements that offer resistance to a compressive load applied axially. They may be designed as single disc springs or as disc springs stacked in parallel or in series, either singly or in multiples. They may be subjected to both static and fatigue loading, and may have flat bearings.

3.2 Symbols, units and abbreviated terms

For the purposes of this document, the following symbols, units and abbreviated terms apply.

Table 1 — Symbols, units and abbreviated terms

Symbol	Unit	Description
D_e	mm	Outer diameter of spring
D_i	mm	Inner diameter of spring
D_0	mm	Diameter of centre of rotation
E	MPa	Modulus of elasticity
F	N	Spring load
F_c	N	Design spring load when spring is in the flattened position
F_t	N	Test load for length L_t or l_t
ΔF	N	Relaxation
L_0	mm	Length of springs stacked in series or in parallel, in the initial position
L_c	mm	Design length of springs stacked in series or in parallel, in the flattened position
N		Number of cycles to failure
R	N/mm	Spring rate
W	N mm	Energy capacity of spring
h_0	mm	Initial cone height of springs without flat bearings, $h_0 = l_0 - t$
h'_0	mm	Initial cone height of springs with flat bearings, $h'_0 = l_0 - t'$
i		Number of disc springs or packets stacked in series
l_0	mm	Free overall height of spring in its initial position
l_t	mm	Test length of disc spring, $l_t = l_0 - 0,75 h_0$
s	mm	Deflection of single disc spring
$s_1, s_2, s_3 \dots$	mm	Spring deflections related to spring loads $F_1, F_2, F_3 \dots$
t	mm	Thickness of single disc spring
t'	mm	Reduced thickness of single disc spring with flat bearings (group 3)
μ		Poisson's ratio
σ	MPa	Design stress
$\sigma_{II}, \sigma_{III}, \sigma_{OM}$	MPa	Design stresses at the points designated II, III, OM (see Figure 1)
σ_h	MPa	Fatigue stress related to the deflection of springs subject to fatigue loading
σ_O	MPa	Maximum fatigue stress
σ_U	MPa	Minimum fatigue stress
$\sigma_H = \sigma_O - \sigma_U$	MPa	Permanent range of fatigue stress
P		Theoretical centre of rotation of disc spring cross section (see Figure 1)
V, V'		Lever arms

Symbol	Unit	Description
R_a		Mean surface roughness

4 Dimensions and designation

4.1 General

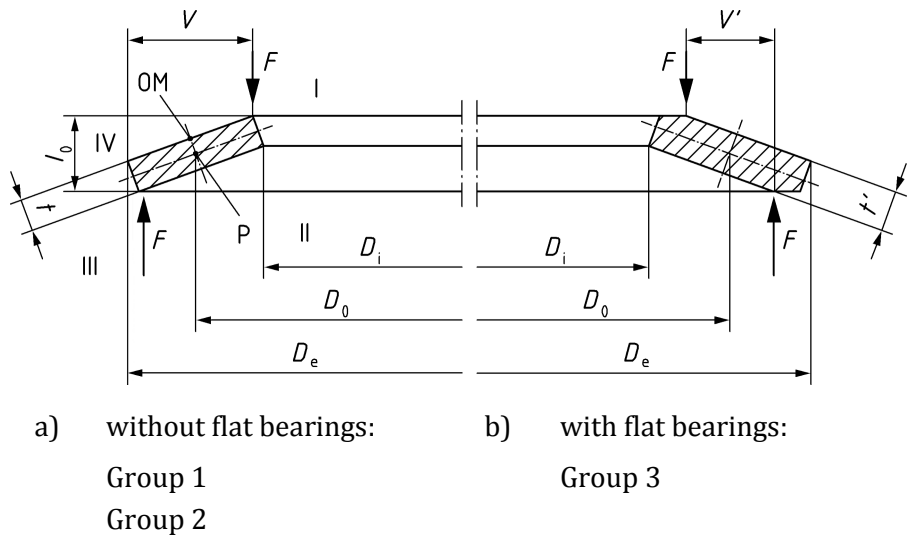


Figure 1 — Single disc spring of group 1, 2 or 3 (sectional view), including the relevant points of loading

Designation of a disc spring of dimensional series A with an outer diameter, D_e of 40 mm:
Disc spring EN 16983 — A 40

4.2 Disc spring groups

Table 2 — Disc spring groups

Group	t	With flat bearings and reduced thickness
1	$< 1,25$	No
2	$1,25 \leq t \leq 6$	No
3	$6 < t \leq 14$	Yes

4.3 Dimensional series

Table 3 — Dimensional series

series	h_0/t
A	approximately 0,40
B	approximately 0,75
C	~1,30

5 Spring material

Springs complying with this standard shall be made from steel as specified in the EN 10083 series, EN 10089 or EN 10132-4. Carbon steel shall only be used for the manufacture of Group 1 springs (see also Table 7).

The design of disc springs made from steel as above shall be based on a modulus of elasticity, E , of 206 000 MPa.

The modulus of elasticity and strength property of other materials (e.g. stainless steel for springs in accordance with EN 10151, copper alloys (spring bronze) in accordance with EN 1654) will likely be different. The values given for F and σ in Tables 4 to 6 then cease to apply. In such cases, it is recommended to consult the spring manufacturer.

6 Spring dimensions, nominal sizes, design values

6.1 Dimensional series A

Table 4 — Disc springs with $\frac{D_e}{t} \approx 18$; $\frac{h_0}{t} \approx 0,4$; $E = 206\,000\text{ MPa}$; $\mu = 0,3$

Group	D_e	D_i	t or $(t')^a$	h_0	l_0	F_t	l_t	σ_{III}^b	σ_{OM}
	h12	H12				s approximately 0,75 h_0		$s = h_0$	
1	8	4,2	0,4	0,2	0,6	210	0,45	1 218	-1 605
	10	5,2	0,5	0,25	0,75	325	0,56	1 218	-1 595
	12,5	6,2	0,7	0,3	1	660	0,77	1 382	-1 666
	14	7,2	0,8	0,3	1,1	797	0,87	1 308	-1 551
	16	8,2	0,9	0,35	1,25	1 013	0,99	1 301	-1 555
	18	9,2	1	0,4	1,4	1 254	1,1	1 295	-1 558
	20	10,2	1,1	0,45	1,55	1 521	1,21	1 290	-1 560
	22,5	11,2	1,25	0,5	1,75	1 929	1,37	1 296	-1 534
2	25	12,2	1,5	0,55	2,05	2 926	1,64	1091	-1 622
	28	14,2	1,5	0,65	2,15	2 841	1,66	1 274	-1 562
	31,5	16,3	1,75	0,7	2,45	3 871	1,92	1 296	-1 570
	35,5	18,3	2	0,8	2,8	5 187	2,2	1 332	-1 611
	40	20,4	2,25	0,9	3,15	6 500	2,47	1 328	-1 595
	45	22,4	2,5	1	3,5	7 716	2,75	1 296	-1 534
	50	25,4	3	1,1	4,1	11 976	3,27	1 418	-1 659
	56	28,5	3	1,3	4,3	11 388	3,32	1 274	-1 565

Group	D_e	D_i	t or $(t')^a$	h_0	l_0	F_t	l_t	σ_{III}^b	σ_{OM}
	h12	H12				s approximately $0,75 h_0$			$s = h_0$
3	63	31	3,5	1,4	4,9	15 025	3,85	1 296	-1 524
	71	36	4	1,6	5,6	20 535	4,4	1 332	-1 594
	80	41	5	1,7	6,7	33 559	5,42	1 453	-1 679
	90	46	5	2	7	31 354	5,5	1 295	-1 558
	100	51	6	2,2	8,2	48 022	6,55	1 418	-1 663
	112	57	6	2,5	8,5	43 707	6,62	1 239	-1 505
	125	64	8 (7,5)	2,6	10,6	85 926	8,65	1 326	-1 708
	140	72	8 (7,5)	3,2	11,2	85 251	8,8	1 284 ^c	-1 675
	160	82	10 (9,4)	3,5	13,5	138 331	10,87	1 338	-1 753
	180	92	10 (9,4)	4	14	125 417	11	1 201 ^c	-1 576
	200	102	12 (11,25)	4,2	16,2	183 020	13,05	1 227	-1 611
	225	112	12 (11,25)	5	17	171 016	13,25	1 137 ^c	-1 489
	250	127	14 (13,1)	5,6	19,6	248 828	15,4	1 221 ^c	-1 596
	^a The values specified for t are nominal values. In the case of springs with flat bearings (cf. Group 3 in Clause 4), the desired spring load, F (where s approximately $0,75 h_0$), is to be obtained by reducing the thickness of single disc springs, t , which then gives the value t' . In the case of dimensional series A and B, t' approximately $0,94 \times t$, and in the case of dimensional series C, t' approximately $0,96 \times t$. ^b The values specified apply for the largest calculated tensile stress on the lower edges of the spring. ^c The values specified apply for the largest calculated tensile stress at the point designated III.								

6.2 Dimensional series B

Table 5 — Disc springs with $\frac{D_e}{t} \approx 28$; $\frac{h_0}{t} \approx 0,75$; $E = 206\,000\text{ MPa}$; $\mu = 0,3$

Group	D_e	D_i	t or $(t')^a$	h_0	l_0	F_t	l_t	σ_{III}	σ_{OM}
	h12	H12				s approximately $0,75 h_0$			$s = h_0$
1	8	4,2	0,3	0,25	0,55	118	0,36	1 312	-1 505
	10	5,2	0,4	0,3	0,7	209	0,47	1 281	-1 531
	12,5	6,2	0,5	0,35	0,85	294	0,59	1 114	-1 388
	14	7,2	0,5	0,4	0,9	279	0,6	1 101	-1 293
	16	8,2	0,6	0,45	1,05	410	0,71	1 109	-1 333
	18	9,2	0,7	0,5	1,2	566	0,82	1 114	-1 363
	20	10,2	0,8	0,55	1,35	748	0,94	1 118	-1 386
	22,5	11,2	0,8	0,65	1,45	707	0,96	1 079	-1 276
	25	12,2	0,9	0,7	1,6	862	1,07	1 023	-1 238
	28	14,2	1	0,8	1,8	1 107	1,2	1 086	-1 282
2	31,5	16,3	1,25	0,9	2,15	1 913	1,47	1 187	-1 442
	35,5	18,3	1,25	1	2,25	1 699	1,5	1 073	-1 258
	40	20,4	1,5	1,15	2,65	2 622	1,79	1 136	-1 359
	45	22,4	1,75	1,3	3,05	3 646	2,07	1 144	-1 396

Group	D_e	D_i	t or $(t')^a$	h_0	l_0	F_t	l_t	σ_{III}	σ_{OM}
	h12	H12				s approximately $0,75 h_0$			$s = h_0$
	50	25,4	2	1,4	3,4	4 762	2,35	1 140	-1 408
	56	28,5	2	1,6	3,6	4 438	2,4	1 092	-1 284
	63	31	2,5	1,75	4,25	7 189	2,94	1 088	-1 360
	71	36	2,5	2	4,5	6 725	3	1 055	-1 246
	80	41	3	2,3	5,3	10 518	3,57	1 142	-1 363
	90	46	3,5	2,5	6	14 161	4,12	1 114	-1 363
	100	51	3,5	2,8	6,3	13 070	4,2	1 049	-1 235
	112	57	4	3,2	7,2	17 752	4,8	1 090	-1 284
	125	64	5	3,5	8,5	29 908	5,87	1 149	-1 415
	140	72	5	4	9	27 920	6	1 101	-1 293
	160	82	6	4,5	10,5	41 008	7,12	1 109	-1 333
	180	92	6	5,1	11,1	37 502	7,27	1 035	-1 192
3	200	102	8 (7,5)	5,6	13,6	76 378	9,4	1 254	-1 409
	225	112	8 (7,5)	6,5	14,5	70 749	9,62	1 176	-1 267
	250	127	10 (9,4)	7	17	119 050	11,75	1 244	-1 406

^a The values specified for t are nominal values. In the case of disc springs with flat bearings (cf. Group 3 in Clause 4), the desired spring load, F (where s approximately $0,75 h_0$), is to be obtained by reducing the thickness of single disc springs, t , which then gives the value t' . In the case of dimensional series A and B, t' approximately $0,94 \times t$, and in the case of dimensional series C, t' approximately $0,96 \times t$.

6.3 Dimensional series C

Table 6 — Disc springs with $\frac{D_e}{t} \approx 40$; $\frac{h_0}{t} \approx 1,3$; $E = 206\,000$ MPa; $\mu = 0,3$

Group	D_e	D_i	t or $(t')^a$	h_0	l_0	F_t	l_t	σ_{III}	σ_{OM}
	h12	H12				s approximately $0,75 h_0$			$s = h_0$
1	8	4,2	0,2	0,25	0,45	39	0,26	1 034	-1 003
	10	5,2	0,25	0,3	0,55	58	0,32	965	-957
	12,5	6,2	0,35	0,45	0,8	151	0,46	1 278	-1 250
	14	7,2	0,35	0,45	0,8	123	0,46	1 055	-1 018
	16	8,2	0,4	0,5	0,9	154	0,52	1 009	-988
	18	9,2	0,45	0,6	1,05	214	0,6	1 106	-1 052
	20	10,2	0,5	0,65	1,15	254	0,66	1 063	-1 024
	22,5	11,2	0,6	0,8	1,4	426	0,8	1 227	-1 178
	25	12,2	0,7	0,9	1,6	600	0,92	1 259	-1 238
	28	14,2	0,8	1	1,8	801	1,05	1 304	-1 282
	31,5	16,3	0,8	1,05	1,85	687	1,06	1 130	-1 077
	35,5	18,3	0,9	1,15	2,05	832	1,19	1 078	-1 042

Group	D_e	D_i	t or $(t')^a$	h_0	l_0	F_t	l_t	σ_{III}	σ_{OM}
	h12	H12				s approximately $0,75 h_0$			$s = h_0$
	40	20,4				1 017	1,32	1 063	-1 024
2	45	22,4	1,25	1,6	2,85	1 891	1,65	1 253	-1 227
	50	25,4	1,25	1,6	2,85	1 550	1,65	1 035	-1 006
	56	28,5	1,5	1,95	3,45	2 622	1,99	1 218	-1 174
	63	31	1,8	2,35	4,15	4 238	2,39	1 351	-1 315
	71	36	2	2,6	4,6	5 144	2,65	1 342	-1 295
	80	41	2,25	2,95	5,2	6 613	2,99	1 370	-1 311
	90	46	2,5	3,2	5,7	7 684	3,3	1 286	-1 246
	100	51	2,7	3,5	6,2	8 609	3,57	1 235	-1 191
	112	57	3	3,9	6,9	10 489	3,97	1 218	-1 174
	125	64	3,5	4,5	8	15 416	4,62	1 318	-1 273
	140	72	3,8	4,9	8,7	17 195	5,02	1 249	-1 203
	160	82	4,3	5,6	9,9	21 843	5,7	1 238	-1 189
	180	92	4,8	6,2	11	26 442	6,35	1 201	-1 159
	200	102	5,5	7	12,5	36 111	7,25	1 247	-1 213
3	225	112	6,5 (6,2)	7,1	13,6	44 580	8,27	1 137	-1 119
	250	127	7 (6,7)	7,8	14,8	50 466	8,95	1 116	-1 086

^a The values specified for t are nominal values. In the case of disc springs with flat bearings (cf. Group 3 in Clause 4), the desired spring load, F (where s approximately $0,75 h_0$), is to be obtained by reducing the thickness of single disc springs, t , which then gives the value t' . In the case of dimensional series A and B, t' approximately $0,94 \times t$, and in the case of dimensional series C, t' approximately $0,96 \times t$.

7 Manufacture

7.1 Manufacturing process and surface quality

Disc springs shall be manufactured as specified in Table 7.

Table 7 — Prescribed manufacturing processes and surface quality

Group	Manufacturing process	Surface roughness ^a on upper and bottom surfaces μm	Surface roughness ^a on outer and inner edges μm	Material as in
1	Stamping, cold forming, edge rounding	$R_a < 3,2$	$R_a < 12,5$	EN 10132-4
2	Stamping ^b , cold forming, D_e and D_i	$R_a < 6,3$	$R_a < 6,3$	EN 10132-4
	turning, edge rounding or fine blanking ^c , cold forming, edge rounding	$R_a < 6,3$	$R_a < 3,2$	EN 10132-4

Group	Manufacturing process	Surface roughness ^a on upper and bottom surfaces μm	Surface roughness ^a on outer and inner edges μm	Material as in
3	Cold or hot forming, turning on all sides, edge rounding or stamping ^b , cold forming, D_e and D_i turning, edge rounding or fine blanking ^c , cold forming, edge rounding	$R_a < 12,5$	$R_a < 12,5$	EN 10083 series EN 10089
		$R_a < 12,5$	$R_a < 12,5$	EN 10132-4
		$R_a < 12,5$	$R_a < 12,5$	EN 10132-4

^a The values specified do not apply to shot peened springs.

^b Stamping without D_e and D_i turning is not permitted.

^c Fine blanking in accordance with VDI/Guideline 2906 Part 5: Clean cut min. 75 %, scar category 2, tear off max. 25 %.

7.2 Heat treatment

To ensure satisfactory fatigue life with minimum relaxation, the hardness of disc springs shall lie within the range of 42 HRC to 52 HRC.

For Group 1 disc springs, the hardness shall be determined according to Vickers (425 HV10 to 510 HV10).

After heat treatment, the disc spring shall not exhibit a depth of decarburization exceeding 3 % of its thickness.

7.3 Shot peening

In order to increase the values given in Figures 5 to 7, shot peening according to ISO 26910-1 is recommended.

This procedure shall be the subject of agreement between customer and manufacturer.

7.4 Presetting

After heat treatment, each disc spring shall be loaded until it is in the flat position.

After loading the disc spring with twice of its test load F_t , the tolerances for the spring load as specified in Table 10 shall be met.

7.5 Surface treatment and corrosion protection

The surface shall be free from defects such as scars, cracks and corrosion.

Whether and which corrosion protection is to be provided shall be a function of the particular spring application. Suitable corrosion protections includes phosphating, black finishing, and the application of protective metallic coatings such as zinc or nickel. This shall be agreed between customer and manufacturer.

Galvanizing processes using aqueous solutions that are currently available may not preclude the risk of hydrogen embrittlement. Disc springs with a hardness exceeding 40 HRC are more prone to the risk of hydrogen embrittlement than softer springs. Particular care shall therefore be taken when selecting the material, manufacturing process, heat treatment and surface treatment (e.g. DIN 50969). When ordering disc springs with galvanic surface protection it is advisable to consult the spring manufacturer.

For disc springs with dynamic loading galvanic surface protection should be avoided and process in which inclement effects occur should be avoided.

Phosphating and oiling is the standard corrosion protection for disc springs.

8 Tolerances

8.1 Tolerances on diameter

D_e : tolerance class h12;

Coaxiality tolerance for $D_e \leq 50$: $2 \times IT11$;

Coaxiality tolerance for $D_e > 50$: $2 \times IT12$;

D_i : tolerance class H12.

8.2 Tolerances on thickness

Table 8 — Tolerances on thickness

Group	t	Tolerances
1	$0,2 \leq t \leq 0,6$	+ 0,02 – 0,06
	$0,6 < t < 1,25$	+ 0,03 – 0,09
2	$1,25 \leq t \leq 3,8$	+ 0,04 – 0,12
	$3,8 < t \leq 6,0$	+ 0,05 – 0,15
3	$6,0 < t \leq 14,0$	$\pm 0,10$

8.3 Tolerances on free overall height, l_0

Table 9 — Tolerances on free overall height, l_0

Group	t	Tolerances
1	$t < 1,25$	+ 0,10 – 0,05
2	$1,25 \leq t \leq 2,0$	+ 0,15 – 0,08
	$2,0 < t \leq 3,0$	+ 0,20 – 0,10
	$3,0 < t \leq 6,0$	+ 0,30 – 0,15
3	$6,0 < t \leq 14,0$	$\pm 0,30$

8.4 Tolerances on spring load

8.4.1 Single disc springs

The spring load F_t shall be determined at test length $l_t = l_0 - 0,75 h_0$. The measurement is taken while loading between flat plates, using a suitable lubricant. The flat plates shall be hardened, ground, and polished.

Table 10 — Tolerances on spring load

Group	t	Tolerances for F_t at $l_t = l_0 - 0,75 h_0$, %
1	$t < 1,25$	+ 25 - 7,5
2	$1,25 \leq t \leq 3,0$	+ 15 - 7,5
	$3,0 < t \leq 6,0$	+ 10 - 5
3	$6,0 < t \leq 14,0$	± 5

To comply with the specified load tolerances, it may be necessary to exceed the tolerance values specified for l_0 and t .

8.4.2 Springs stacked in series

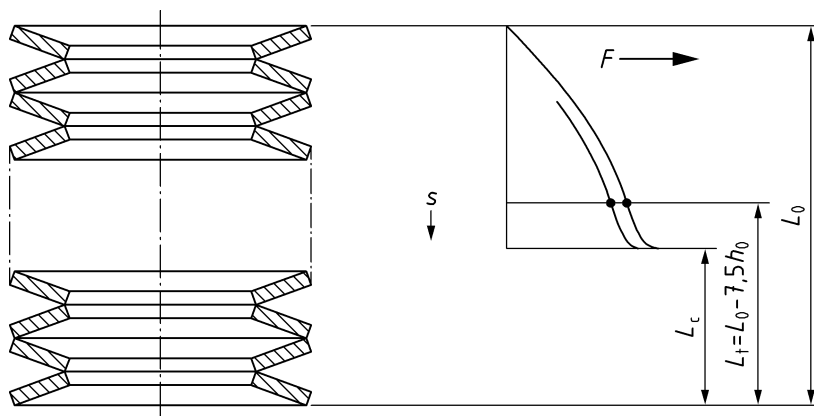


Figure 2 — Loading and unloading curves obtained from testing springs stacked in series

Ten single disc springs stacked in series shall be used to determine the deviation in load between the loading curve and the unloading curve.

Prior to testing, the disc spring shall be compressed to twice its test load, F_t . The individual disc springs shall be centred by a mandrel in compliance with Clause 12. The clearance between disc springs and mandrel shall be as specified in Table 12. The flat plates shall meet the requirements specified in 8.4.1.

At $L_t = L_0 - 7,5 h_0$, the spring load determined for the unloading curve shall make up at least the minimum percentages specified in Table 11 of the spring load determined for the loading curve (see also Figure 2).

Table 11 — Minimum spring load at unloading, as a percentage of the spring load at loading at L_t

Group	Series		
	A	B	C
1	90		85
2	92,5		87,5
3	95		90

8.5 Clearance between disc spring and guiding element

A guiding element is necessary to keep the disc spring in position. This should be preferably a mandrel. In the case of external positioning, a sleeve is preferred.

Table 12 — Recommended clearance between disc spring and guiding element


D_i or D_e		Total clearance
Up to 16		0,2
Over 16	up to 20	0,3
Over 20	up to 26	0,4
Over 26	up to 31,5	0,5
Over 31,5	up to 50	0,6
Over 50	up to 80	0,8
Over 80	up to 140	1,0
Over 140	up to 250	1,6

9 Creep and relaxation

All disc springs lose load during usage. Depending on the application, this is expressed by creep or relaxation. Both creep and relaxation are largely a result of the stress distribution over the cross section of the disc spring. Its influence can be estimated on the basis of the design stress σ_{OM} (see EN 16984:2016, Clause 9).

Creep is defined as the further decrease in length of the disc spring with time, Δl , when subjected to a constant load. Relaxation is defined as the decrease in load with time, ΔF , when the disc spring is compressed to a constant length.

For disc springs under static load, the guideline values for relaxation illustrated in Figures 3 and 4 should not be exceeded.

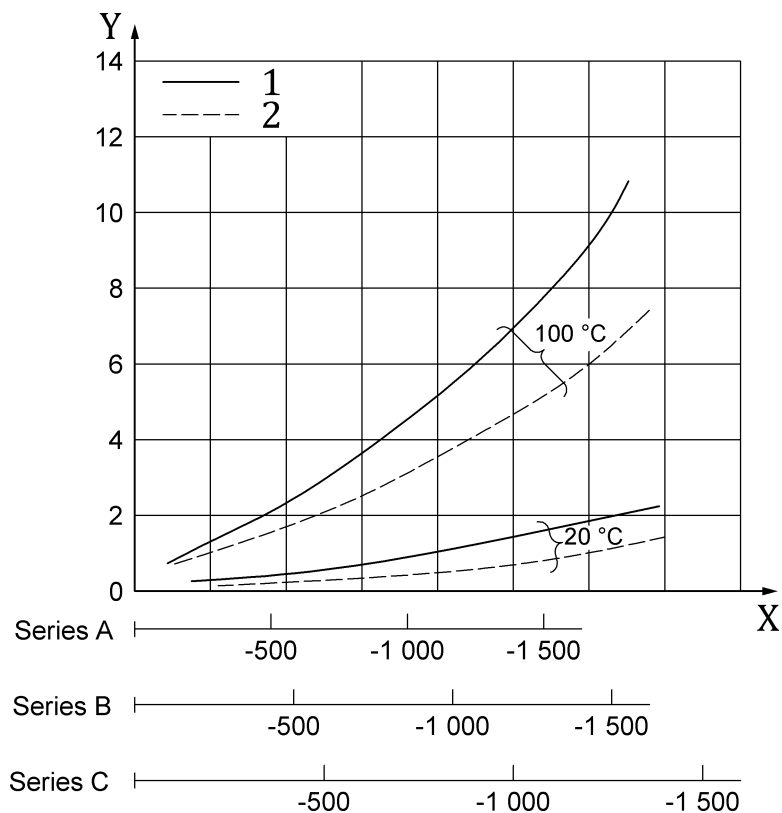

Key


Y relaxation $\Delta F/F \cdot 100\%$

X σ_{OM} in MPa

1 after 1 000 h

2 after 48 h

**Figure 3 — Permissible relaxation for disc springs made of carbon steel
in accordance with EN 10132-4**

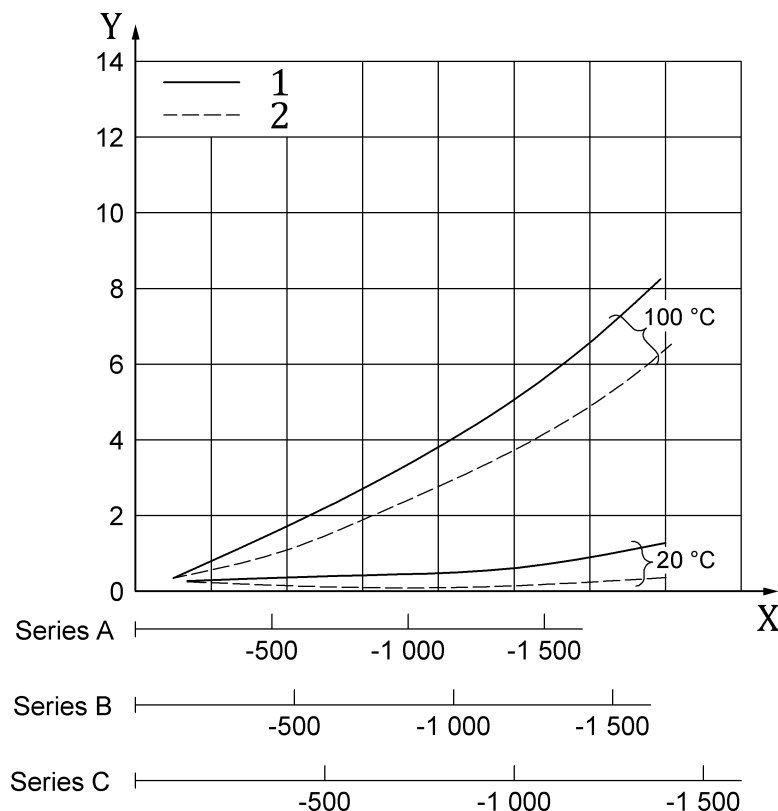

Key

Y relaxation $\Delta F/F \cdot 100$ %

X σ_{OM} in MPa

1 after 1 000 h

2 after 48 h

Figure 4 — Permissible relaxation for disc springs made of alloy steel in accordance with EN 10089 and EN 10132-4

If the ambient temperature exceeds 100 °C, the spring manufacturer should be consulted.

10 Permissible stresses

10.1 Static and rarely alternating loading

For disc springs made of steels according to EN 10089 or EN 10132-4, which are subject to static loading or to moderate fatigue conditions, the design stress, σ_{OM} , at maximum deflection shall not exceed 1 600 MPa.

Higher stresses may cause a higher loss of spring load (see Clause 9).

10.2 Dynamic loading

10.2.1 General

Minimum initial deflection to avoid cracking:

Disc springs subject to fatigue loading shall be designed and installed in such a way that the initial deflection is s_1 approximately 0,15 h_0 to s_1 approximately 0,20 h_0 in order to avoid cracking at the upper inner edge, point I (see Figure 1) as a result of residual stresses from the presetting process.


10.2.2 Permissible loading

Figures 5 to 7 illustrate the fatigue life of disc springs subject to dynamic loading that have not been shot peened. They specify guideline values for the permanent range of stress, σ_H , as a function of the minimum stress, σ_U , at three different numbers of stress cycles namely where $N \leq 2 \cdot 10^6$, $N = 10^5$, and $N = 5 \cdot 10^5$.

Intermediate values for other numbers of stress cycles may be estimated based on this information.

The information given in Figures 5 to 7 represents the results of laboratory testing using fatigue testing equipment capable of producing sinusoidal loading cycles and the statistical results obtained for a 99 % probability of fatigue life. The figures are valid for single disc springs and stacks with $l \leq 10$ disc springs stacked in series. Test conditions are: room temperature, disc springs preloaded from s_1 approximately $0,15 h_0$ to s_1 approximately $0,20 h_0$, surface hardened and perfectly processed inner and outer guidance.


To ensure the expected fatigue life of disc springs, they shall be protected from mechanical damage and other adverse conditions.

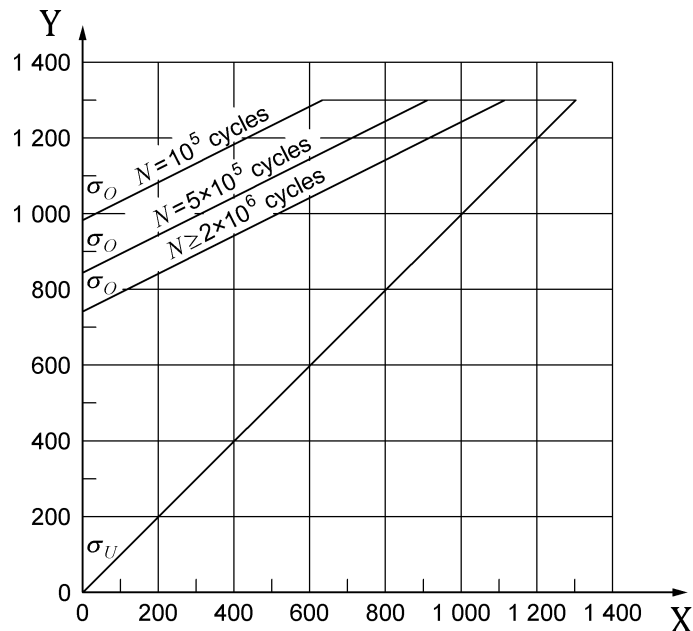

Key

- Y minimum stress σ_u / maximum stress σ_o in MPa
- X minimum stress σ_u in MPa

Figure 5 — Fatigue life of not shot peened disc springs with $t < 1,25$ mm

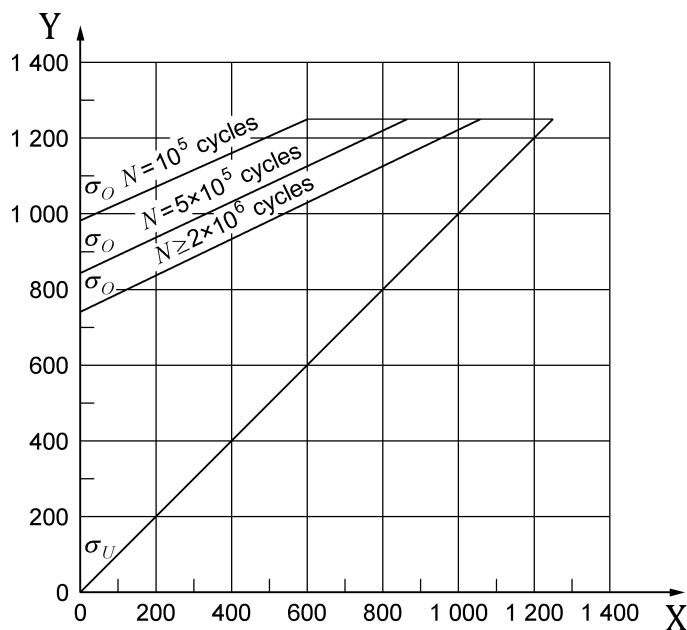


Key

Y minimum stress σ_u / maximum stress σ_o in MPa

X minimum stress σ_u in MPa

Figure 6 — Fatigue life of not shot peened disc springs with $1,25 \text{ mm} \leq t \leq 6 \text{ mm}$

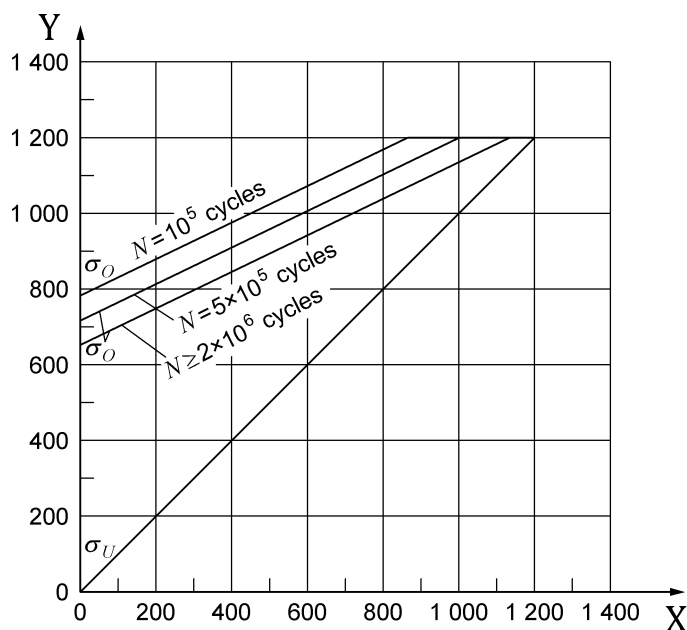

Key

Y minimum stress σ_u / maximum stress σ_o in MPa

X minimum stress σ_u in MPa

Figure 7 — Fatigue life of not shot peened disc springs with $6 \text{ mm} < t \leq 14 \text{ mm}$

It should be noted that stress cycles in practice are generally not sinusoidal in form. Any additional type of loads (e.g. sudden dynamic loading, shock loads and resonance) will shorten the fatigue life.

In this case, the values given in the above figures shall be converted by appropriate factors of safety; the spring manufacturer should be consulted where necessary.

NOTE Reliable information regarding the fatigue life is not available for disc springs made from materials other than those specified here, for disc springs consisting of more than 10 single disc springs stacked in series, for other unfavourable arrangements of stacks of springs, nor for springs subjected to chemical or thermal effects, although some relevant information is usually obtainable from the spring manufacturer.

In the case of stacks with a highly degressive load/deflection curve (dimensional series C) and a large number of single disc springs stacked in series, an uneven deflection of the single disc springs can be expected. This effect is caused by friction between the disc springs and the guiding element and dimensional tolerances.

Disc springs at the moving end of the stack deflect more than the others. This will result in a shorter fatigue life than shown in Figures 5 to 7.

The fatigue life of disc springs can be prolonged considerably by additional shot peening.

11 Testing

11.1 General

Determination of the properties covered in 11.2 and 11.3 shall be the subject of agreement between customer and manufacturer.

11.2 Check of dimensions and other spring characteristics

The specifications given in EN ISO 3269 shall be applied in addition to the characteristics and quality levels specified in Table 13.

Table 13 — characteristics and quality levels of springs

Spring characteristics	AQL value
Major characteristics Spring load, F (s approximately 0,75 h_0) Outer diameter, D_e Inner diameter, D_i	1
Minor characteristics Free overall height in initial position, l_0 Spring thickness, t or t' Surface roughness, R_a	1,5

11.3 Hardness testing

Vickers hardness testing shall be carried out according to the EN ISO 6507- series, and Rockwell hardness testing shall be carried out according to the EN ISO 6508- series.

The indentation shall be made on the upper surface of the disc spring, at a point that lies centrally between the inner and outer edges.

12 Other relevant requirements

Where possible, the guiding element and the support plate shall be made from case-hardened materials, with a case depth of approximately 0,8 mm, and have a minimum hardness of 60 HRC. The surface of the guiding element should be smooth and perfectly finished. It shall be permitted to use unhardened guiding elements where the disc spring is subject to static loading.

Bibliography

- [1] EN 10048, *Hot rolled narrow steel strip - Tolerances on dimensions and shape*
- [2] EN 10051, *Continuously hot-rolled strip and plate/sheet cut from wide strip of non-alloy and alloy steels - Tolerances on dimensions and shape*
- [3] EN 10140, *Cold rolled narrow steel strip - Tolerances on dimensions and shape*
- [4] EN ISO 9717, *Metallic and other inorganic coatings - Phosphate conversion coating of metals (ISO 9717)*
- [5] EN ISO 11124-1, *Preparation of steel substrates before application of paints and related products - Specifications for metallic blast-cleaning abrasives - Part 1: General introduction and classification (ISO 11124-1)*
- [6] EN ISO 26909, *Springs - Vocabulary (ISO 26909)*
- [7] EN ISO 2162-1, *Technical product documentation — Springs — Part 1: Simplified representation (ISO 2162-1)*
- [8] ISO 26910-1, *Springs — Shot peening — Part 1: General procedures*
- [9] DIN 4000-11, *Tabular layouts of article characteristics for springs*
- [10] DIN 50969, *Testing of high-strength steel building elements for resistance to hydrogen-induced brittle fracture and advice on the prevention of such fracture*
- [11] DIN 59200, *Flat products of steel — Hot rolled wide flats — Dimensions, mass, tolerances on dimensions, shape and mass*
- [12] EN 16984, *Disc springs — Calculation*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Copyright in BSI publications

All the content in BSI publications, including British Standards, is the property of and copyrighted by BSI or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use.

Save for the provisions below, you may not transfer, share or disseminate any portion of the standard to any other person. You may not adapt, distribute, commercially exploit, or publicly display the standard or any portion thereof in any manner whatsoever without BSI's prior written consent.

Storing and using standards

Standards purchased in soft copy format:

- A British Standard purchased in soft copy format is licensed to a sole named user for personal or internal company use only.
- The standard may be stored on more than 1 device provided that it is accessible by the sole named user only and that only 1 copy is accessed at any one time.
- A single paper copy may be printed for personal or internal company use only.

Standards purchased in hard copy format:

- A British Standard purchased in hard copy format is for personal or internal company use only.
- It may not be further reproduced – in any format – to create an additional copy. This includes scanning of the document.

If you need more than 1 copy of the document, or if you wish to share the document on an internal network, you can save money by choosing a subscription product (see 'Subscriptions').

Reproducing extracts

For permission to reproduce content from BSI publications contact the BSI Copyright & Licensing team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email subscriptions@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Useful Contacts

Customer Services

Tel: +44 345 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 345 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK