




PLATINUM WOODS®

THERMALLY ENHANCED AYOUS

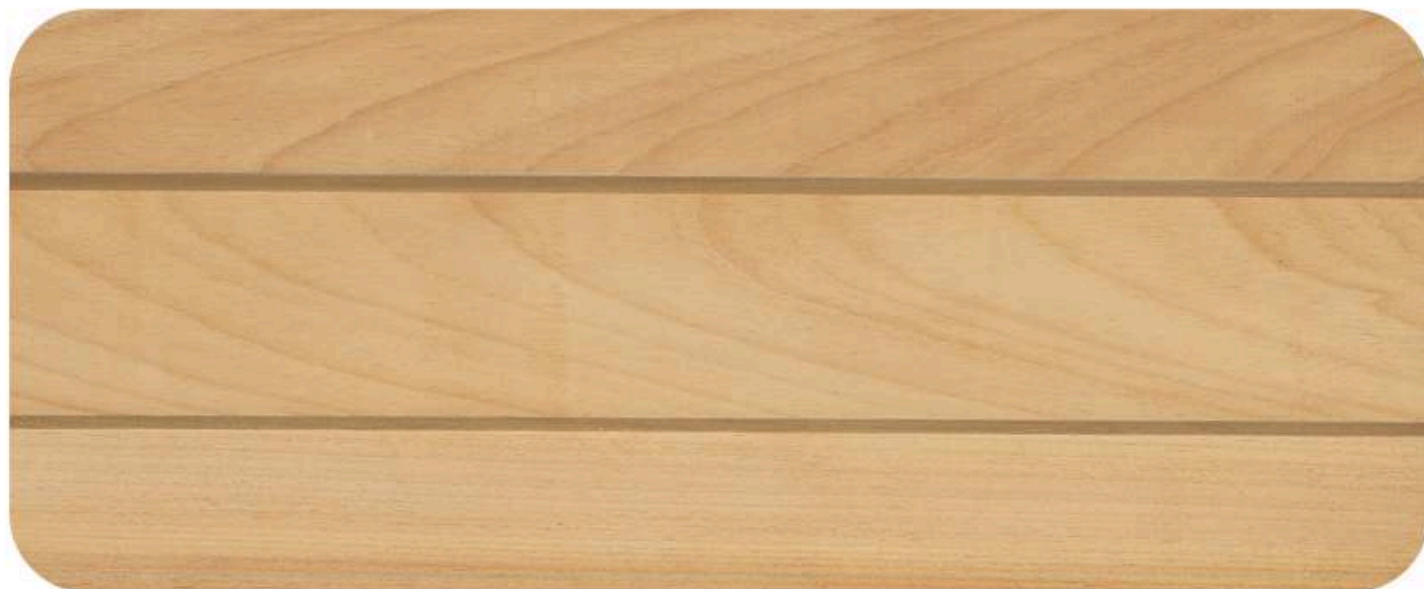

Mechanical Properties, Strength values		Ayous, Kiln-dried	Thermally Enhanced Ayous
Modules of elasticity (MOE), flatwise (MPa-N/mm ²) DIN EN 408, TS 2478		5.800	5200
Modules of rupture (MOR), flatwise (MPa) DIN EN 408, TS 2474		64	40
Impact bending strength (IBS), flatwise (MPa) TS 2477		*	*
Compressive strength (CS),(MPa) TS 2595		*	*

Dimensional Stability 65%Rh 20°C (Increased Stability) (Minimized deformations) (Minimized Expansion and Shrinkage)		Ayous, Kiln-dried	Thermally Enhanced Ayous
Change in Length swelling (mm/m) TS 4083, 4084		0,65	0,38
Change in Length shrinkage (mm/m) TS 4083, 4084		0,30	0,25
Change in Thickness swelling (mm/m) TS 4083, 4084		0,90	0,26
Change in Thickness shrinkage (mm/m) TS 4083, 4084		0,80	0,20

Physical Properties, Moisture content		Ayous, Kiln-dried	Thermally Enhanced Ayous
Equilibrium moisture content at 20/65 (%) EN 13183-1		11 (9-12)	4.6 (4-7)
Raw density at 20/65 (kg/m ³) DIN 52182		490	430

Biological durability against wood-decaying basidiomycetes
(Increased durability to decay)
(Resins and sugars removed)
(Low moisture content prevents decay and fungi growth)


Ayous, Kiln-dried

Thermally Enhanced Ayous

Preliminary durability classification

Median mass loss (< 5 %)

CEN/TS 15083-1

-
| | | Class 2 |
Nail and screw holding strength
(screw withdrawal strength)


Ayous, Kiln-dried

Thermally Enhanced Ayous

a. Stainless steel or galvanised screws and plastics clips are recommended.

Hidden and face fixing systems

EN 1383, NEN 6562

b. Steel material standard 10088-3

1.800 N

907 N

Glueing


Ayous, Kiln-dried

Thermally Enhanced Ayous

Fingerjoints

Laminations

Panel production

-
| | | MUF, Polyurethane |
Brinell Hardness


Ayous, Kiln-dried

Thermally Enhanced Ayous

HB10/100

1,3

0,95

Emissions


Ayous, Kiln-dried

Thermally Enhanced Ayous

The emissions are not harmful in fresh air.

-
| | | OK |
| The smell of thermowood products may disappear within a few days but with the surface treatment or rain it may raise up again. | - | Short Time |
Thermal conductivity, Insulation
(Decreased Thermal Conductivity)


Ayous, Kiln-dried

Thermally Enhanced Ayous

Heat conductivity W/mK

TS EN 12667

1,2

0,099

Colour


Ayous, Kiln-dried

Thermally Enhanced Ayous

Colour of the wood changes

(Ayous colour is dark brown)

-
| | | OK |
| Oil and water based coatings | - | OK |

Environment (100 % naturel) (recyclable) (from renewable forests)		Ayous, Kiln-dried	Thermally Enhanced Ayous
100 % naturel		-	OK
100 % recyclable and biodegradable		OK	OK
Low processing energy demand		OK	OK
Sustainable development and a low carbon future		OK	OK

Healthy and safety		Ayous, Kiln-dried	Thermally Enhanced Ayous
Definitely naturel and harmless. Free of chemicals.		OK	OK
Completely healthy.		OK	OK
Improving the stability and durability of wood without using any persistent toxic chemicals		OK	OK