Demo: Three doors - two controls each

The frontpage is IGNored - anything you place here is ignored in parts and components lists

PCSCHEMATIC Automation

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**		**Page** **1**
Customer:		DCC:			Scale: 1:1
Page title:	Front page	Dwg. no.:	Page rev.:		Previous page:
File name:	PCSmotordemo3	Eng. (proj/page):	Last print:	29.10.2026	Next page: 2
Page ref.:		Appr. (date/init):	Last edit:	18.02.2022	Total no. of pages: 52

Demo: Three doors - two controls each

Diagrams	1		11
	Pages 5 - 14		
Layout	2		12
	Pages 15 - 16		
Lists	3		13
	Pages 17 - 44		
Graphical plans	4		14
	Pages 45 - 47		
	5		15
	6		16
	7		17
	8		18
	9		19
	10		20

The index here i a TOC - Table of Contents - set up to show divider pages only

Title	Page size	Engineer	Created	Last edit	Page
Front page	A3		11/02/2022 08.40.48	17/02/2022 12.47.20	1
Index - A3	A3		11/02/2022 08.40.48	17/02/2022 12.47.14	2
Table of Contents	A3		11/02/2022 08.40.48	17/02/2022 12.47.20	3
Diagrams					
Diagram	A3		11/02/2022 08.40.52	17/02/2022 10.20.38	5
Diagram	A3		11/02/2022 08.40.52	17/02/2022 10.08.36	6
Control circuit diagram	A3		11/02/2022 08.40.52	17/02/2022 10.08.52	7
Control circuit diagram	A3		11/02/2022 08.40.52	17/02/2022 10.08.52	8
Diagram	A3		11/02/2022 08.40.52	17/02/2022 12.46.02	9
Control circuit diagram	A3		11/02/2022 08.40.52	17/02/2022 10.09.26	10
Control circuit diagram	A3		11/02/2022 08.40.52	17/02/2022 10.09.26	11
Diagram	A3		11/02/2022 08.40.52	17/02/2022 12.46.30	12
Control circuit diagram	A3		11/02/2022 08.40.52	17/02/2022 10.10.06	13
Control circuit diagram	A3		11/02/2022 08.40.52	17/02/2022 10.10.06	14
Layout					
Arrangement - A4 - 1:4 - CompList	A4		11/02/2022 08.40.48	17/02/2022 11.18.28	15
Arrangement - A3 - 1:4 - CompList	A3		11/02/2022 08.40.48	17/02/2022 11.16.52	16
Lists					
Parts list	A3		11/02/2022 08.40.48	17/02/2022 12.47.12	17
Parts list	A3		11/02/2022 08.40.48	17/02/2022 12.47.14	19
Components list	A3		11/02/2022 08.40.48	17/02/2022 11.19.24	20
Terminal list - External connections	A3		11/02/2022 08.40.48	17/02/2022 12.47.14	25
Cable list	A3		11/02/2022 08.40.48	17/02/2022 11.16.52	29
Connection list	A3		11/02/2022 08.40.48	17/02/2022 12.47.14	33
Graphical plans					
Terminal plan	A3	kh	11/02/2022 08.40.48	17/02/2022 12.47.04	45
Cable plan	A3	kh	11/02/2022 08.40.48	17/02/2022 12.47.04	46
Connection plan	A3		11/02/2022 08.40.48	17/02/2022 12.47.04	47


The TOC - Table of Contents - is set up to show all pages.
A list can be designed in many ways depending on the selected drawing headers, and the list can be sorted and setup in many ways; see List settings.

The DIVidersets up chapters in the prooject.
You can open and close the chapters by clicking on the icon on the page tab.

Pages 4 - 13

Diagrams


All potentials have line datafields that can be used to control routing of wires when using the Panelrouter

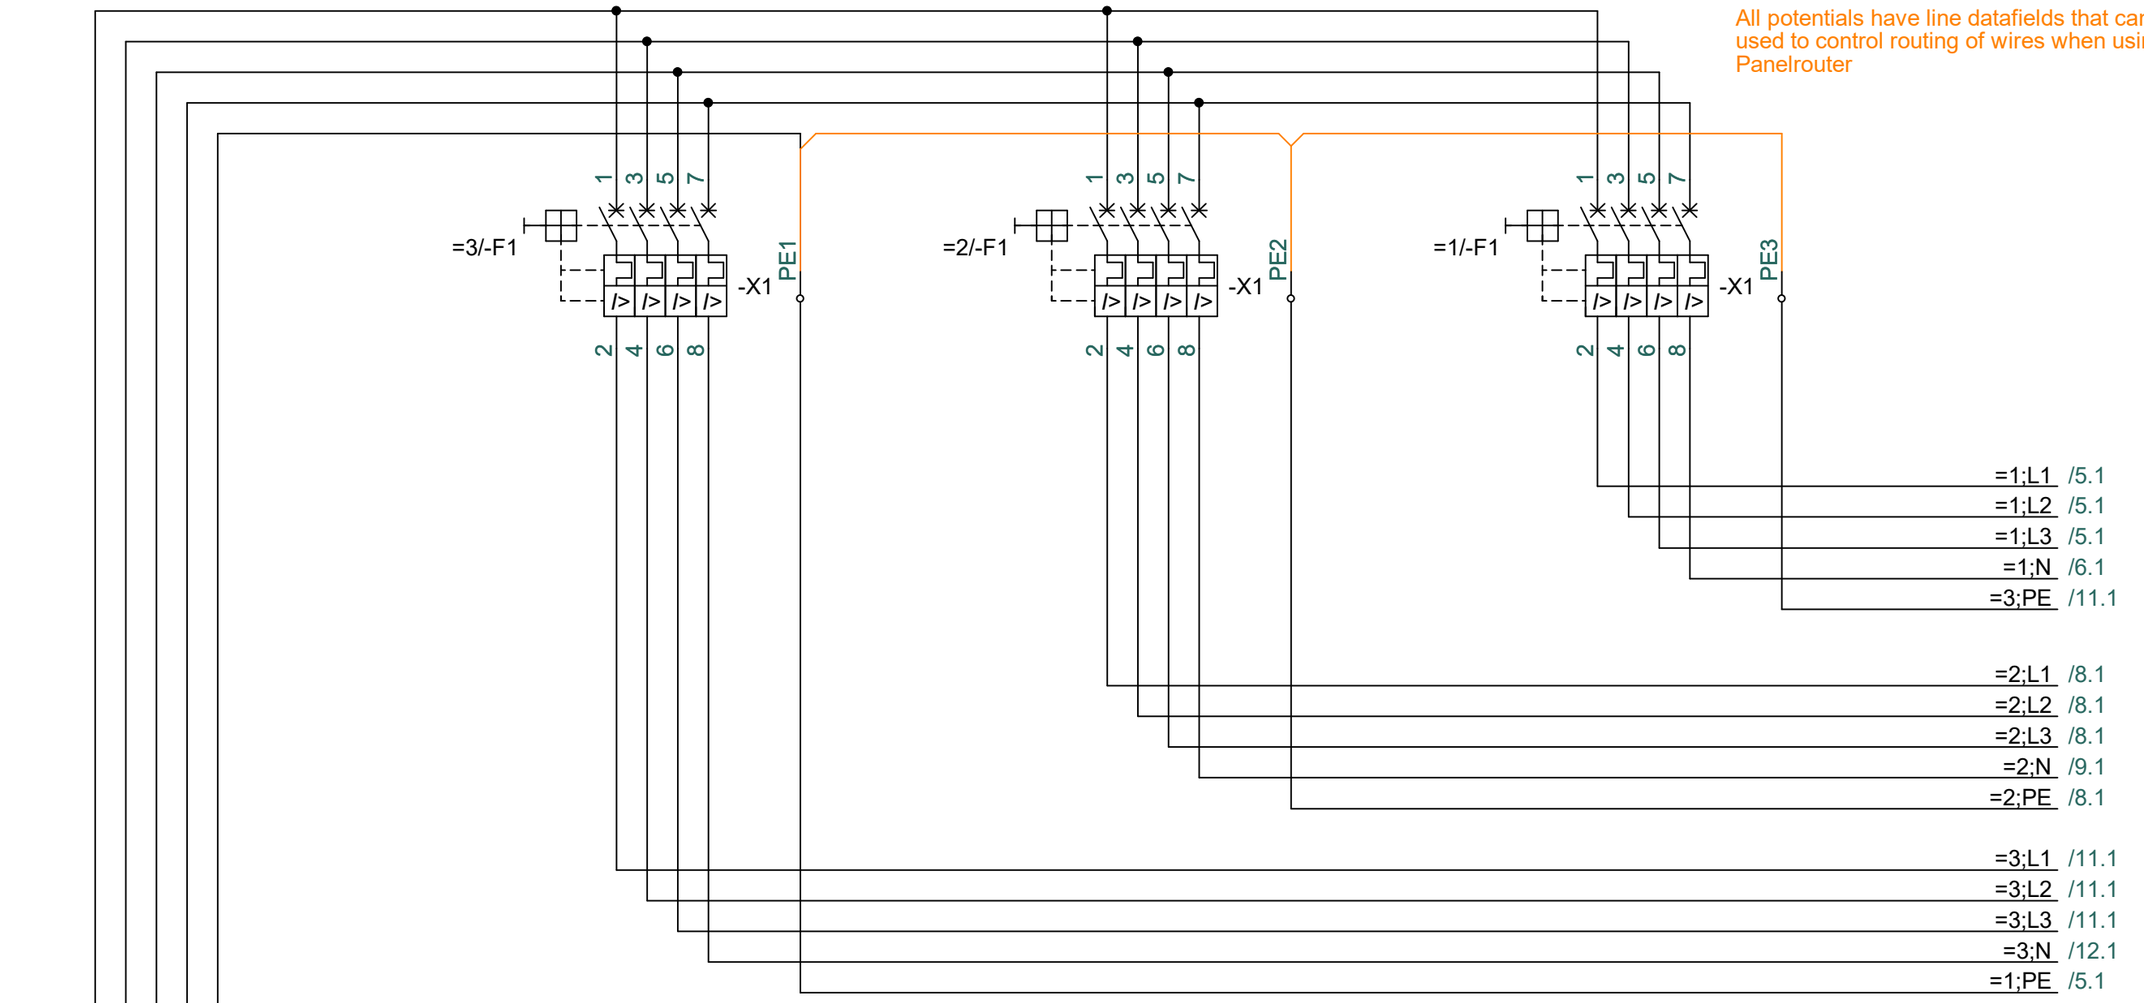

The door system has an external supply, which is connected to T1.
From T1 the power is dstributed to three MCB's / groups. Each group's outgoing wires have their own RDS codes. In this way, all potentials are easy to follow throughout the project.
Try to use the Netnavigator to see each potential. On the PE-terminals, you can follow the full PE-net throughout the system, as the Netnavigator can 'see' through terminals.

The DIAgram is where all schematics are made. The default DIAgram page uses default diagram symbols from as defined in the database.

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**4**
Customer:		DCC:		Scale:	1:1
Page title:	Diagram	Dwg. no.:	Page rev.:	Previous page:	3
File name:	PCSmotordemo3	Eng. (proj/page):	Last print: 29.10.2026	Next page:	5
Page ref.:	Multi door system, Inside building - Control panel position, Main panel	Appr. (date/init):	Last edit: 22.02.2022	Total no. of pages:	52

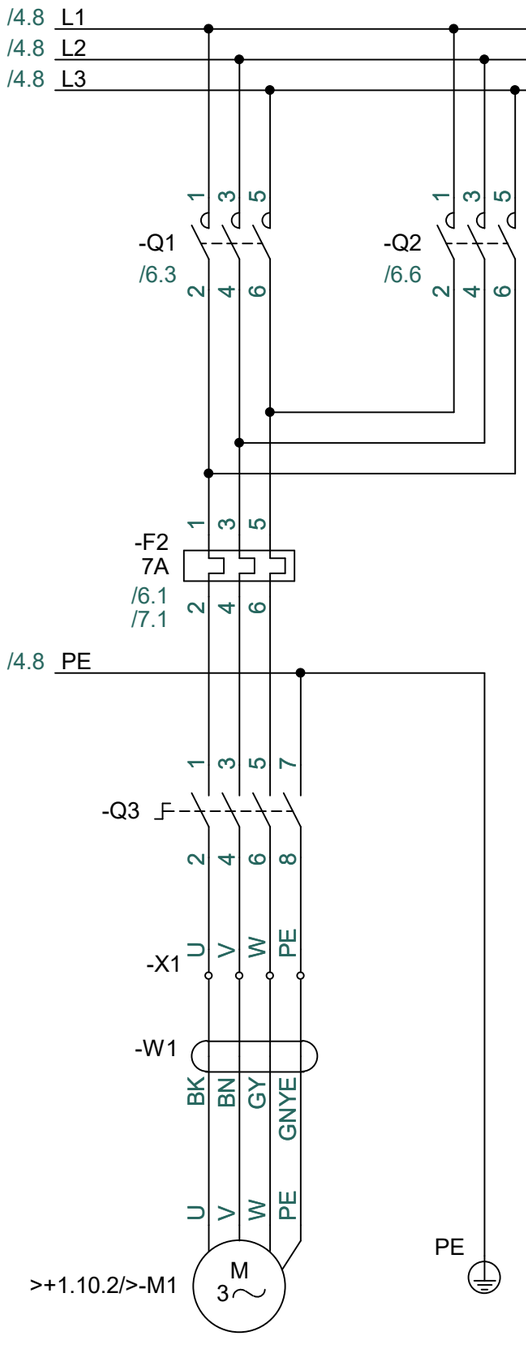

System 1 is made with 'dot'-drawing - the dot connects all wires in a net, but it is not clear how the net is connected.
Wire numbers are not added to the diagrams, as the are to be named according to IEC 62491 method CL - ie terminal marking.
All terminal names can be exported with the list file function and then imported into a label printer.

All potentials have line datafields that can be used to control routing of wires when using the Panelrouter


The F2 has a symbol datafield showing the component setting, here to 7A.
It is recommended to use extra datafields for extra data, in order to be able to control where to this data in lists and more.

4

The DIAgram is where all schematics are made.
This page shows the power circuit of the project.
Some components have symbols also on the following pages, and if so, you can see cross references to those beside the symbols on this page.

PCSCHEMATIC Automation


Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**5**
Customer:		DCC:		Scale:	1:1
Page title:	Diagram	Dwg. no.:	Page rev.:	Previous page:	4
File name:	PCSmotordemo3	Eng. (proj/page):	Last print: 29.10.2026	Next page:	6
Page ref.:	System 1, Inside building - Control panel position, Main panel	Appr. (date/init):	Last edit: 25.05.2026	Total no. of pages:	52

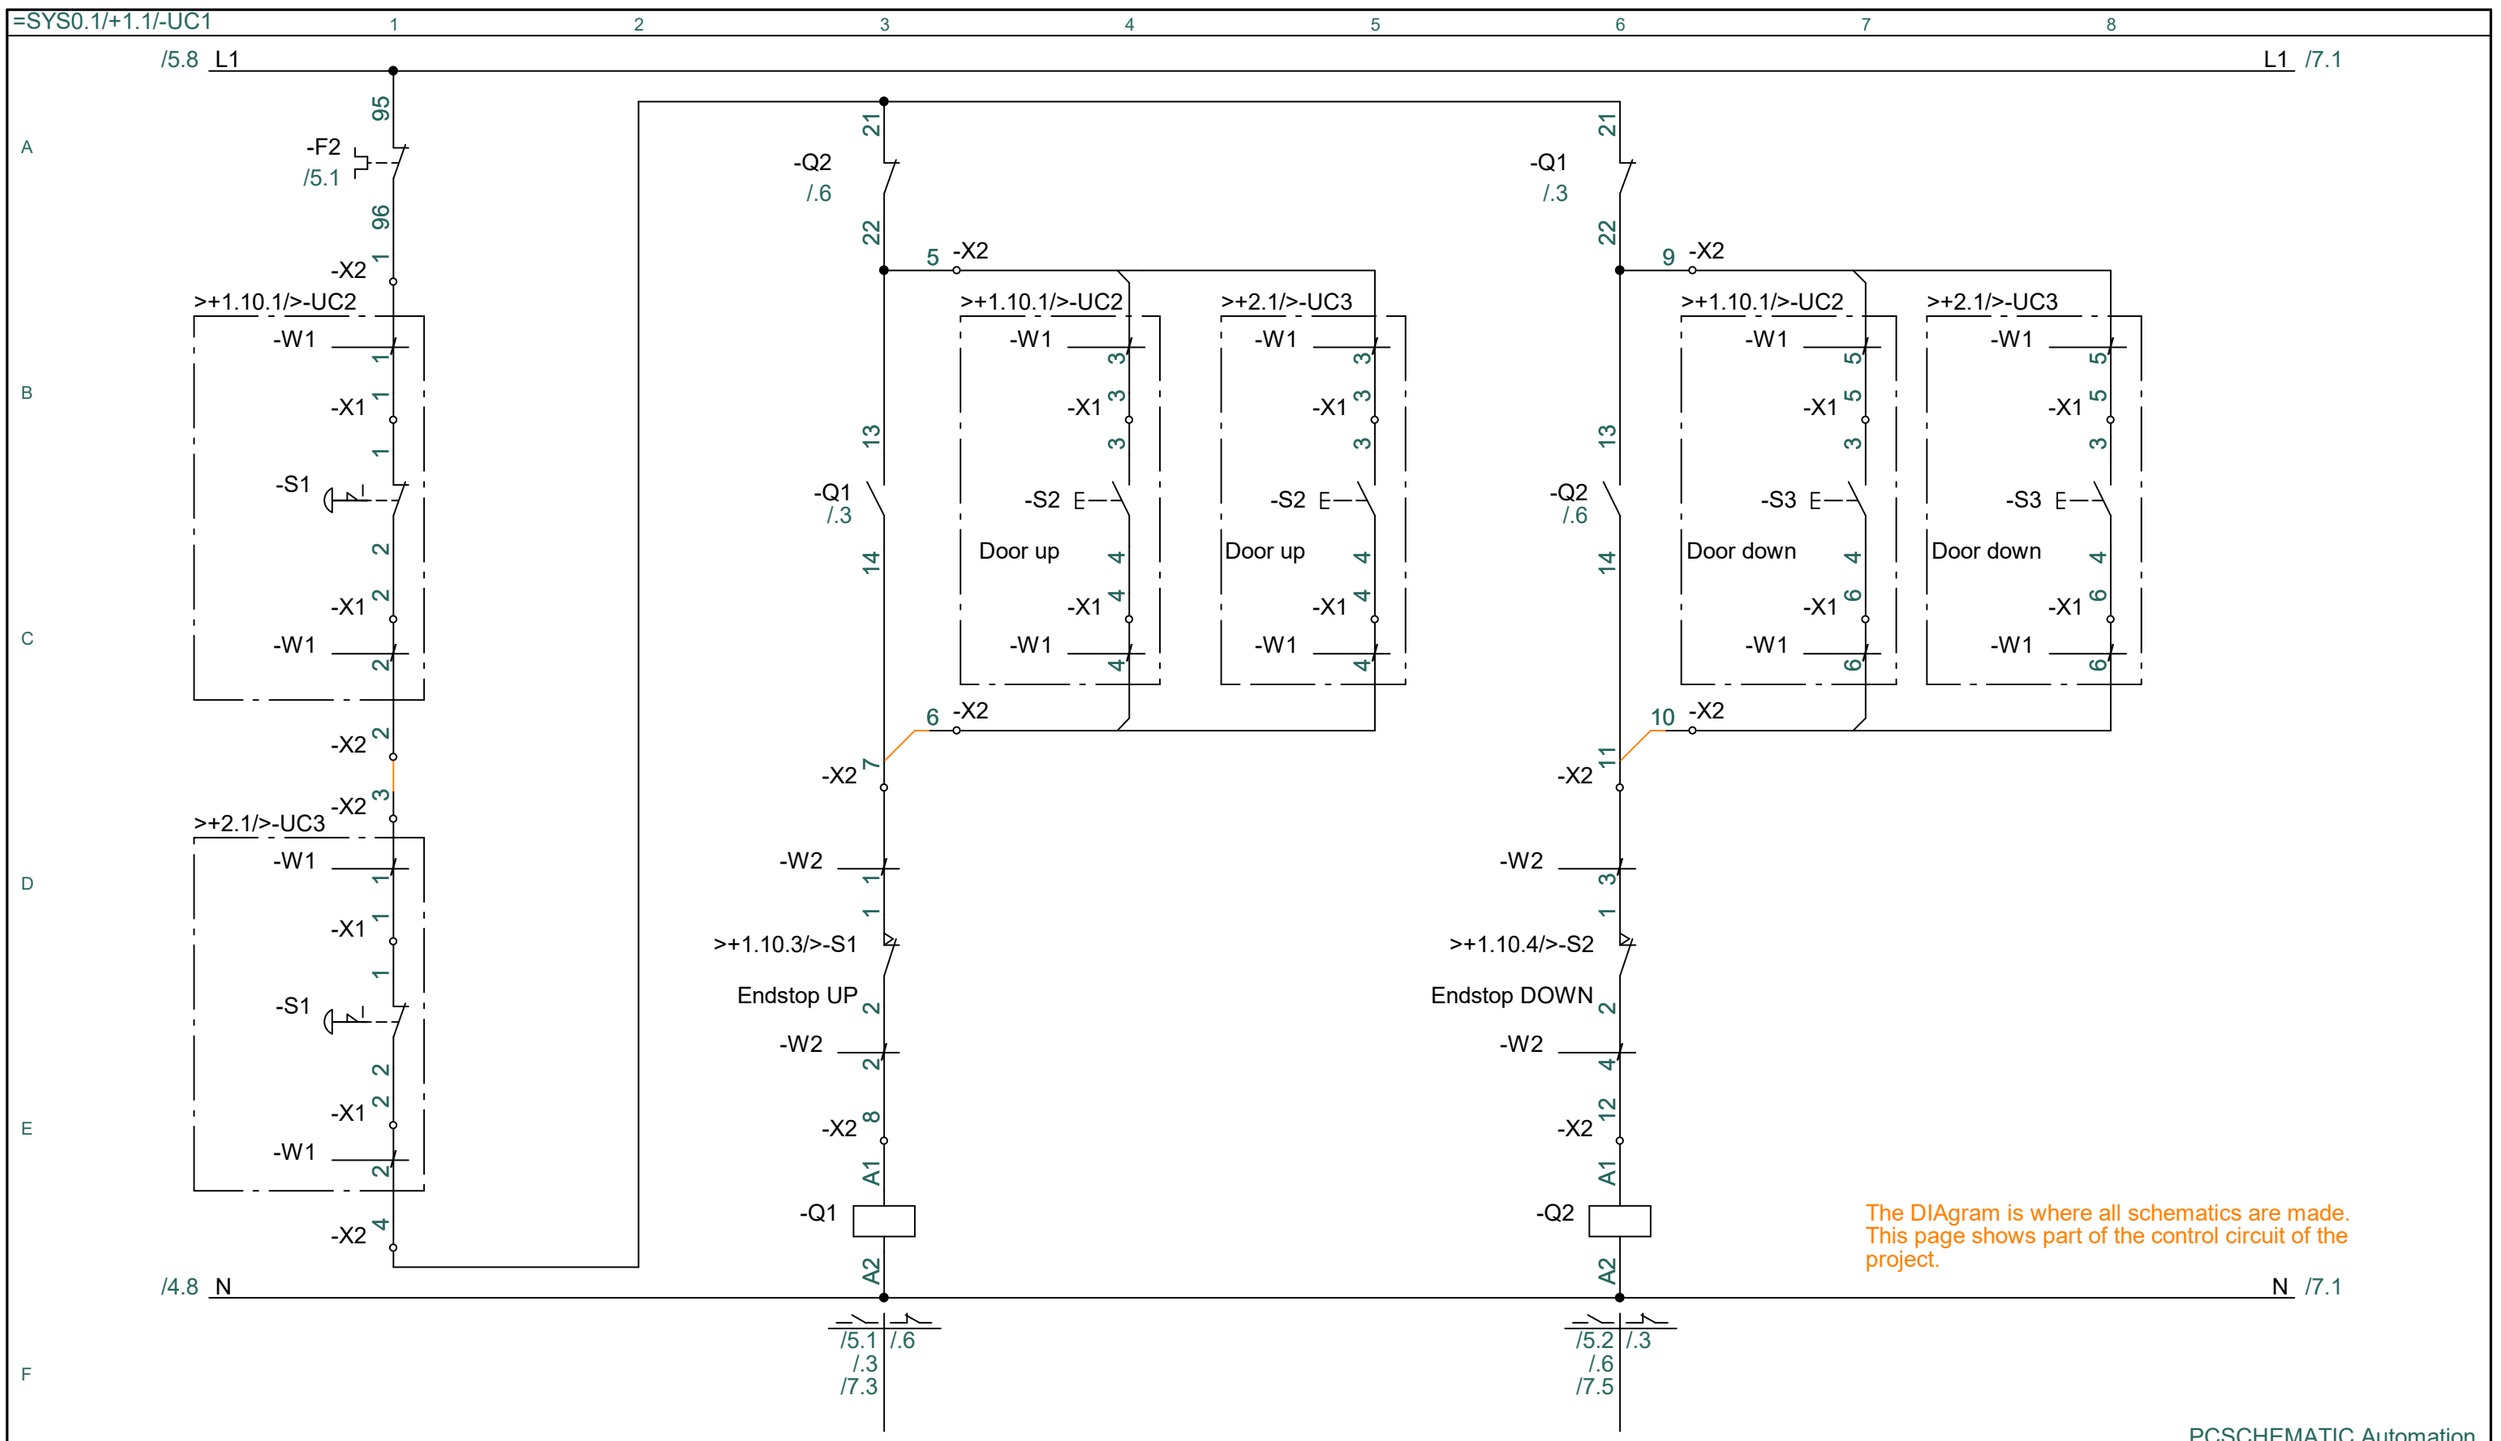

The DIAgram is where all schematics are made. This page shows part of the control circuit of the project.

PCSCHEMATIC Automation

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**6**
Customer:		DCC:		Scale:	1:1
Page title:	Control circuit diagram	Dwg. no.:	Page rev.:	Previous page:	5
File name:	PCSmotordemo3	Eng. (proj/page):	Last print: 29.10.2026	Next page:	7
Page ref.:	System 1, Inside building - Control panel position, Main panel	Appr. (date/init):	Last edit: 22.02.2022	Total no. of pages:	52

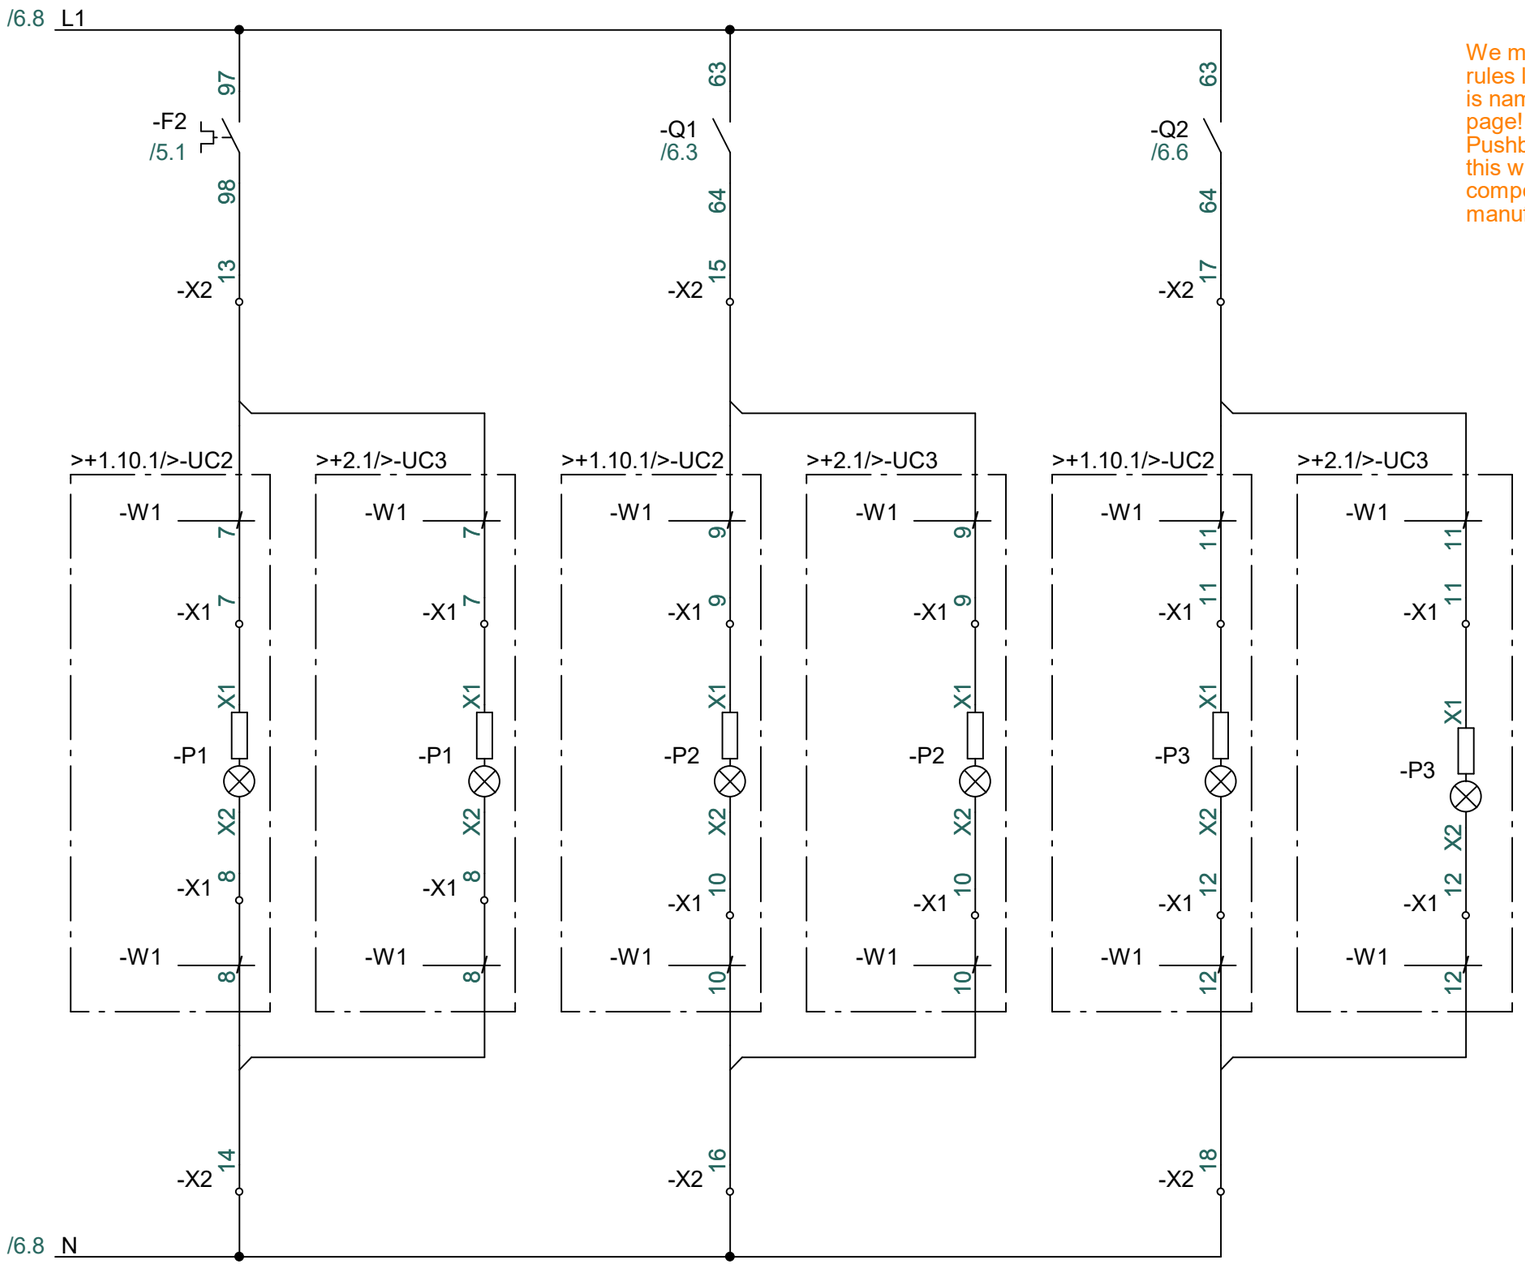


We make the schematics according to the rules: naming follows the rules laid down in the ISO/IEC 81346-series. That means that an object is named after the object it is a consituent of- and that is not the page!
Pushbuttons are named after the external control they are in, and in this way we get identical controls: all six controls have the components S1-S3, P1-P3. And this makes it easy to copy, to manufacture, to think 'modules', to maintain manuals etc.

The DIAgram is where all schematics are made. This page shows part of the control circuit of the project.

All connections are shown with dots, meaning that you can't see HOW the connections are made, only that the components ARE connected.


PCSCHEMATIC Automation

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**7**
Customer:		DCC:		Scale:	1:1
Page title:	Control circuit diagram	Dwg. no.:	Page rev.:	Previous page:	6
File name:	PCSmotordemo3	Eng. (proj/page):	Last print: 29.10.2026	Next page:	8
Page ref.:	System 1, Inside building - Control panel position, Main panel	Appr. (date/init):	Last edit: 22.02.2022	Total no. of pages:	52

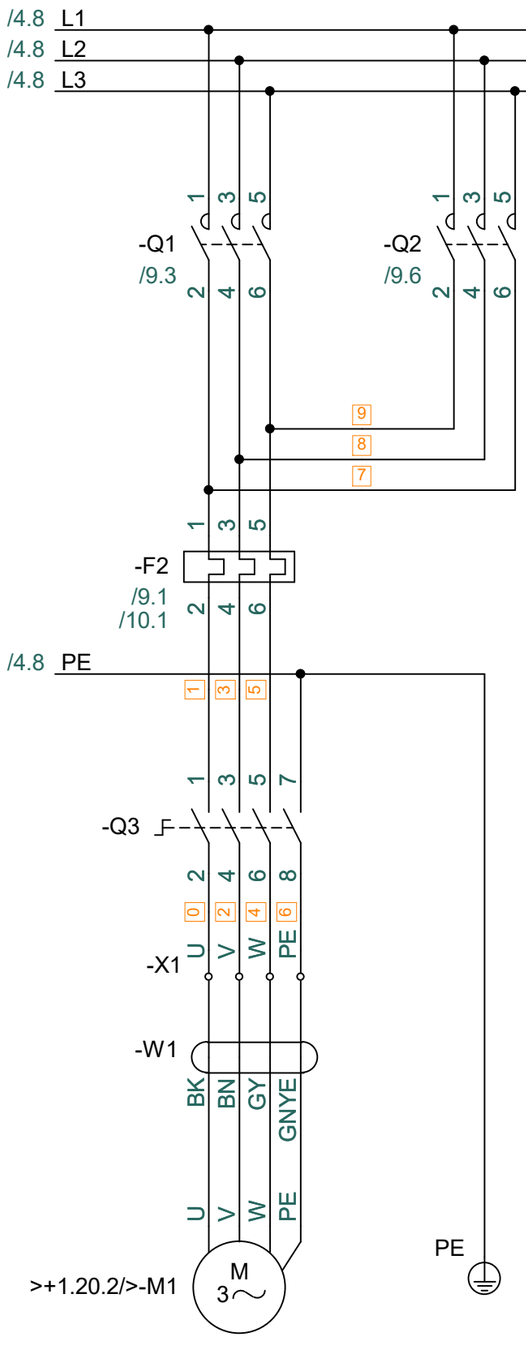


System 2 is made with 'dot'-drawing, too.
Wire numbers are added to each net - potential numbers. According to IEC 62491 method S - signal marking (a kind of).
All wire numbers can be exported with the list file function and then imported into a label printer. And I would use the Connection list file.

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**8**
Customer:		DCC:		Scale:	1:1
Page title:	Diagram	Dwg. no.:	Page rev.:	Previous page:	7
File name:	PCSmotordemo3	Eng. (proj/page):	Last print: 29.10.2026	Next page:	9
Page ref.:	System 2, Inside building - Control panel position, Main panel	Appr. (date/init):	Last edit: 18.02.2022	Total no. of pages:	52

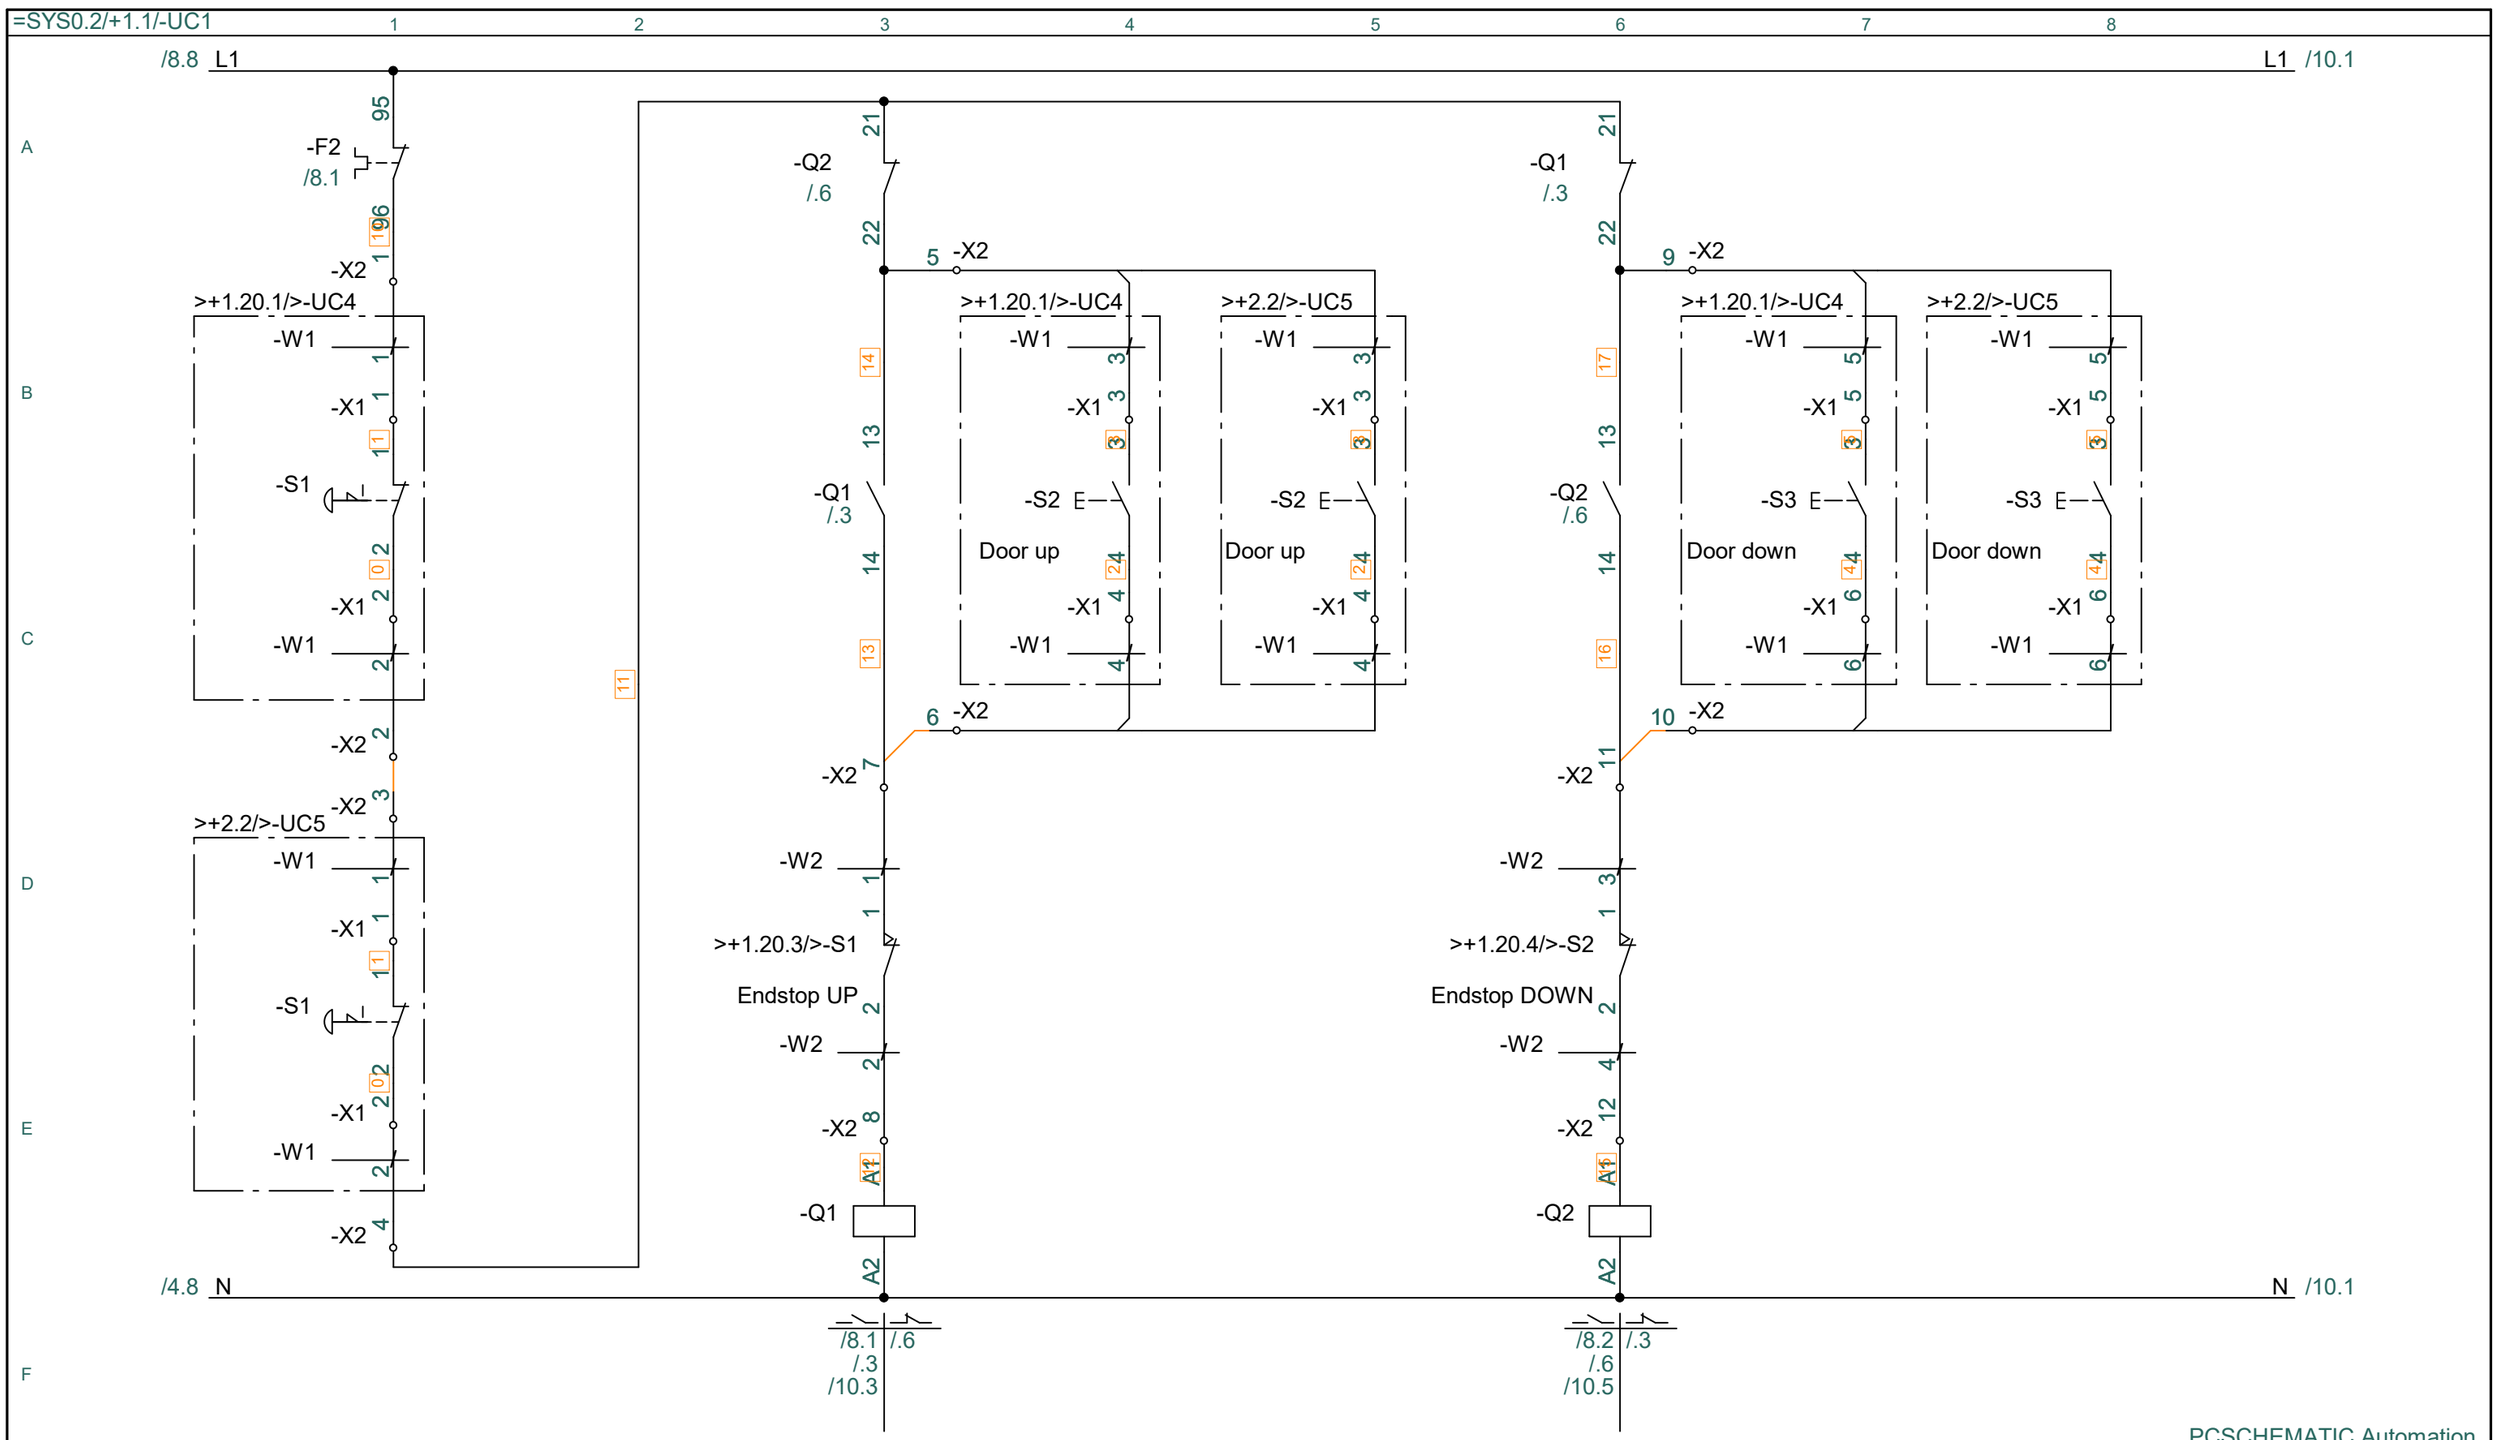


PCSCHEMATIC Automation

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**9**
Customer:		DCC:		Scale:	1:1
Page title:	Control circuit diagram	Dwg. no.:	Page rev.:	Previous page:	8
File name:	PCSmotordemo3	Eng. (proj/page):	Last print: 29.10.2026	Next page:	10
Page ref.:	System 2, Inside building - Control panel position, Main panel	Appr. (date/init):	Last edit: 18.02.2022	Total no. of pages:	52

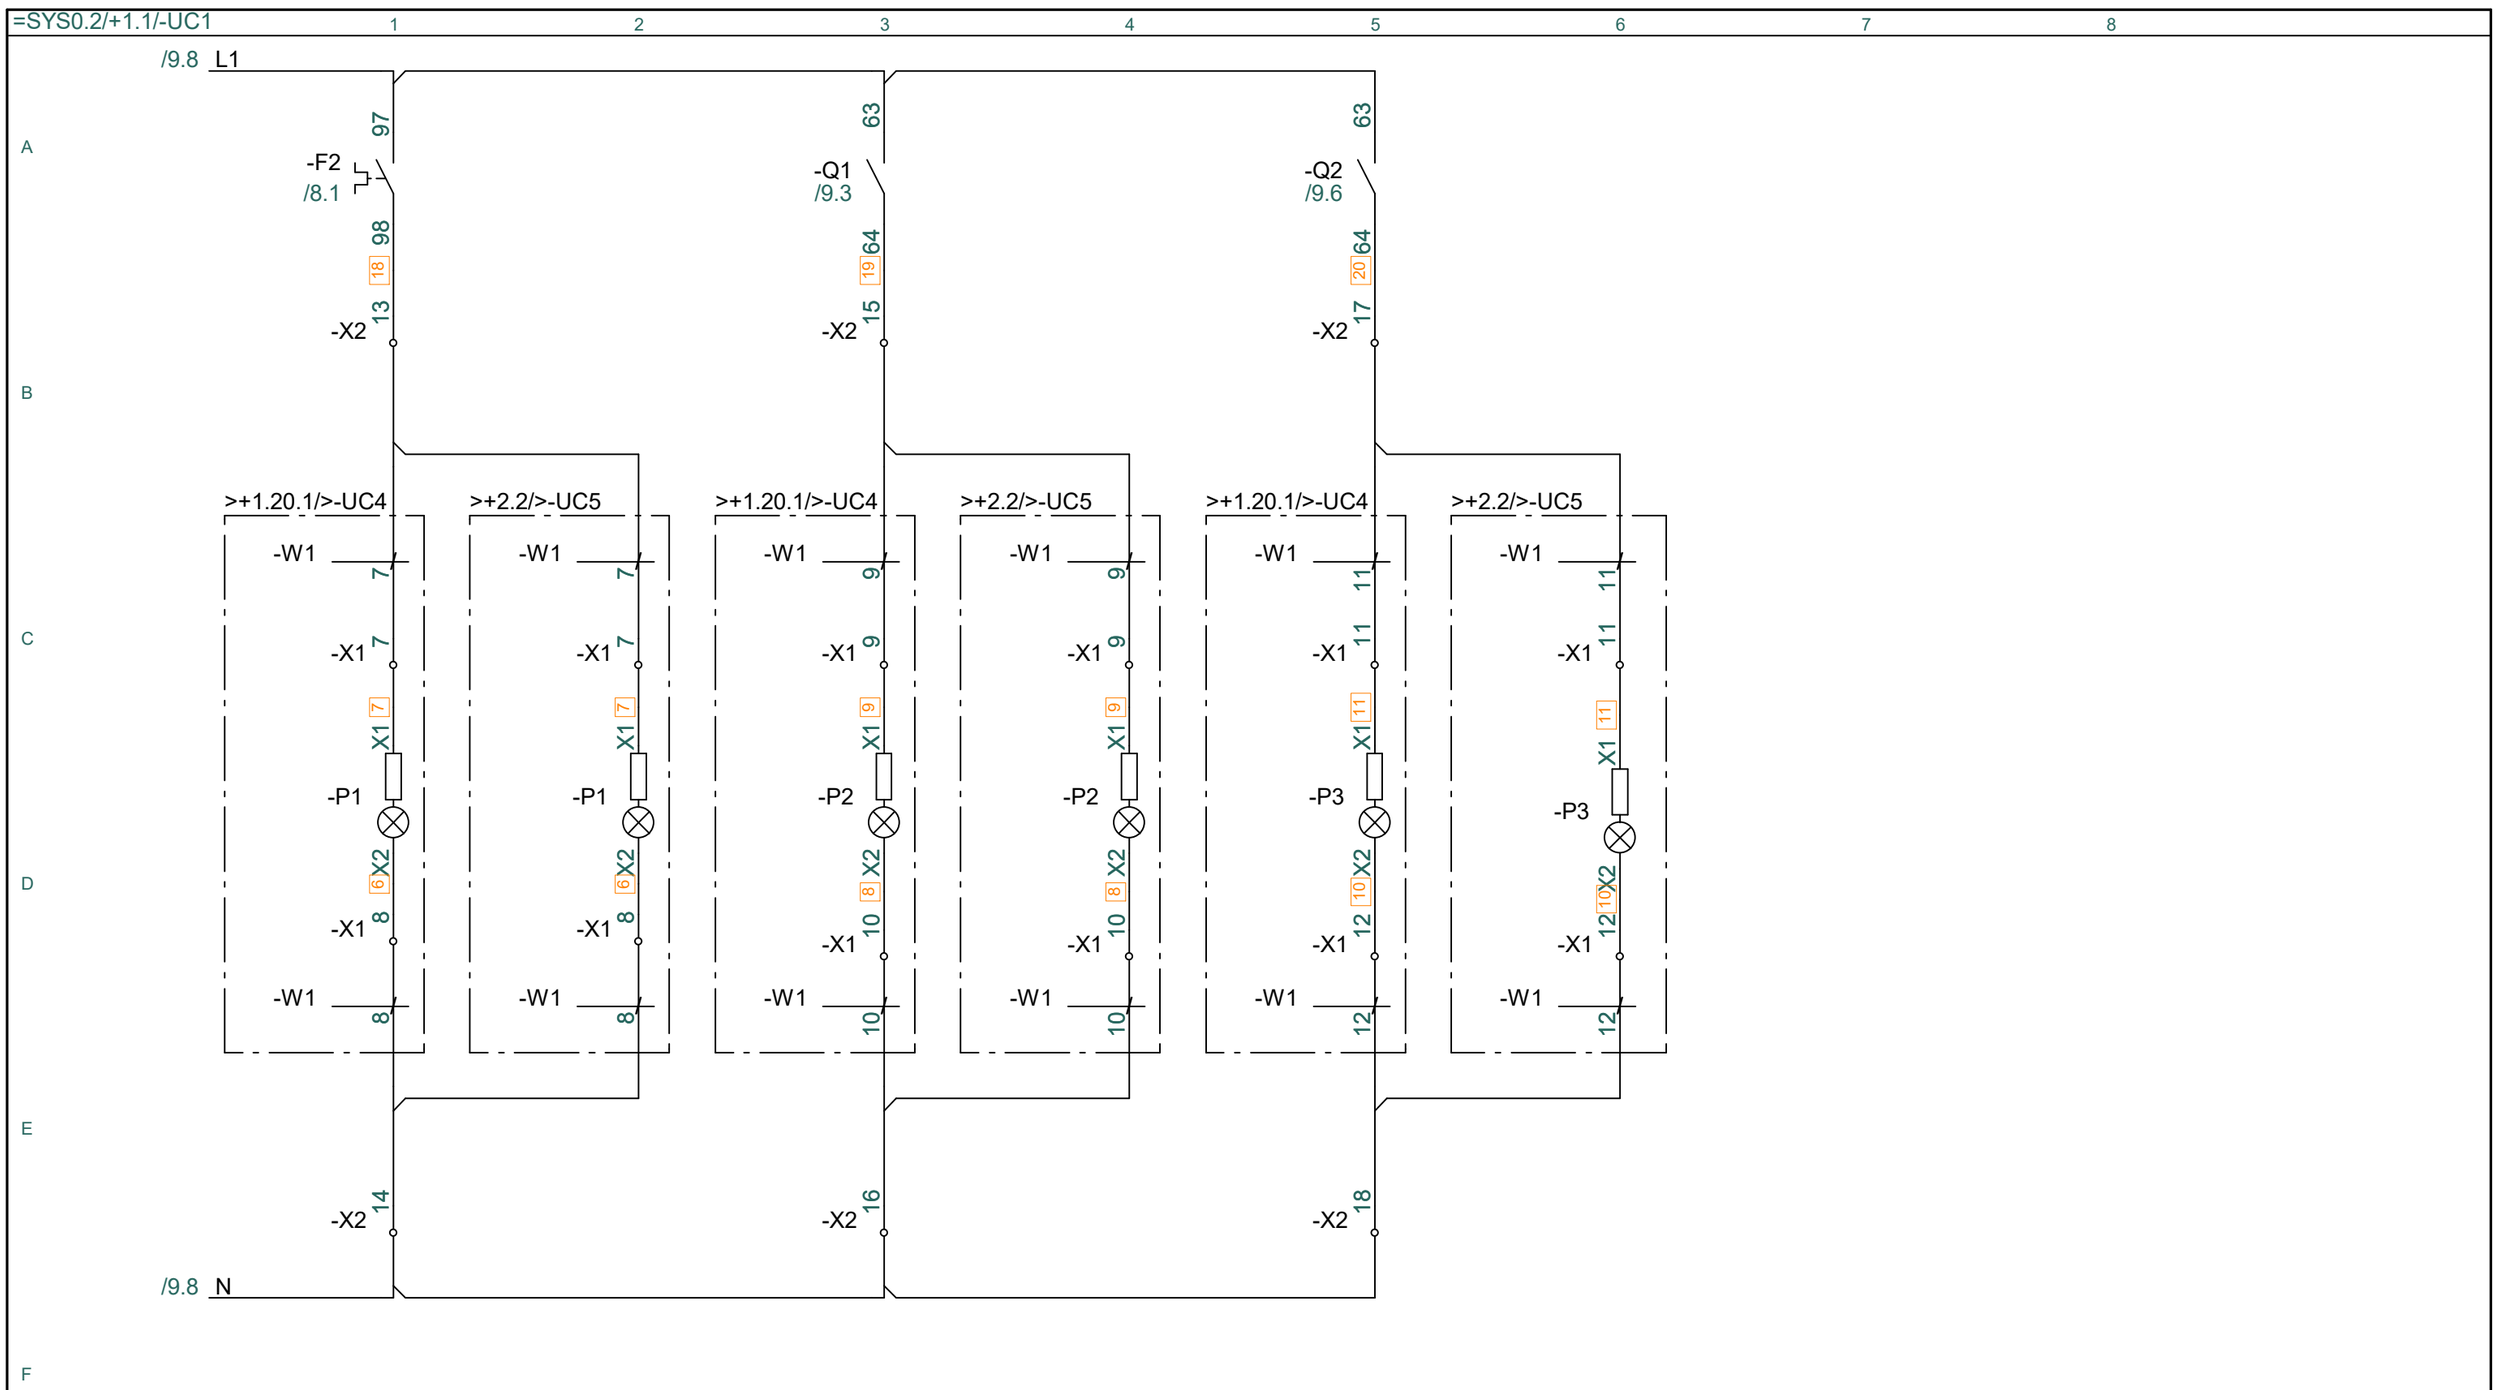


PCSCHEMATIC Automation

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**10**
Customer:		DCC:		Scale:	1:1
Page title:	Control circuit diagram	Dwg. no.:	Page rev.:	Previous page:	9
File name:	PCSmotordemo3	Eng. (proj/page):	Last print: 29.10.2026	Next page:	11
Page ref.:	System 2, Inside building - Control panel position, Main panel	Appr. (date/init):	Last edit: 18.02.2022	Total no. of pages:	52

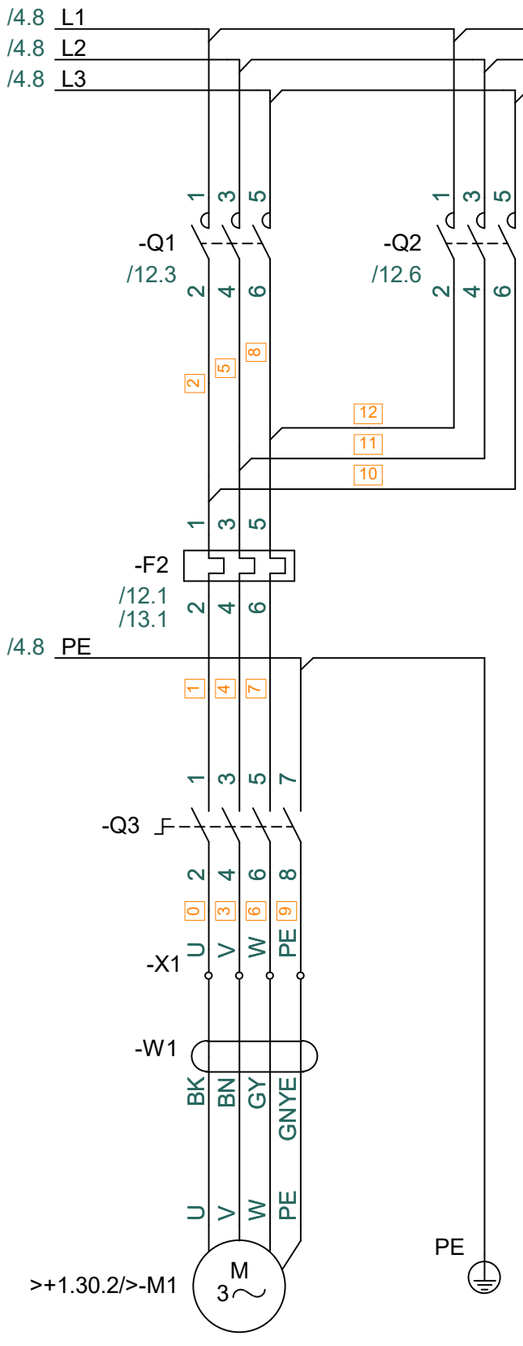


System 3 is made with 'directional bends'-drawing. In this way the diagram shows how to connect the wires.
Wire numbers are added to each wire - wire numbers. According to IEC 62491 method R - Identification method. The number doesn't contain or show information as such, it is only a number. Since bends show the right connections, it might be useful to show connections at both ends (method CB) maybe in conjunction with the number.
All wire numbers can be exported with the list file function and then imported into a label printer. And I would use the Connection list file.

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**11**
Customer:		DCC:		Scale:	1:1
Page title:	Diagram	Dwg. no.:	Page rev.:	Previous page:	10
File name:	PCSmotordemo3	Eng. (proj/page):	Last print: 29.10.2026	Next page:	12
Page ref.:	System 3, Inside building - Control panel position, Main panel	Appr. (date/init):	Last edit: 18.02.2022	Total no. of pages:	52

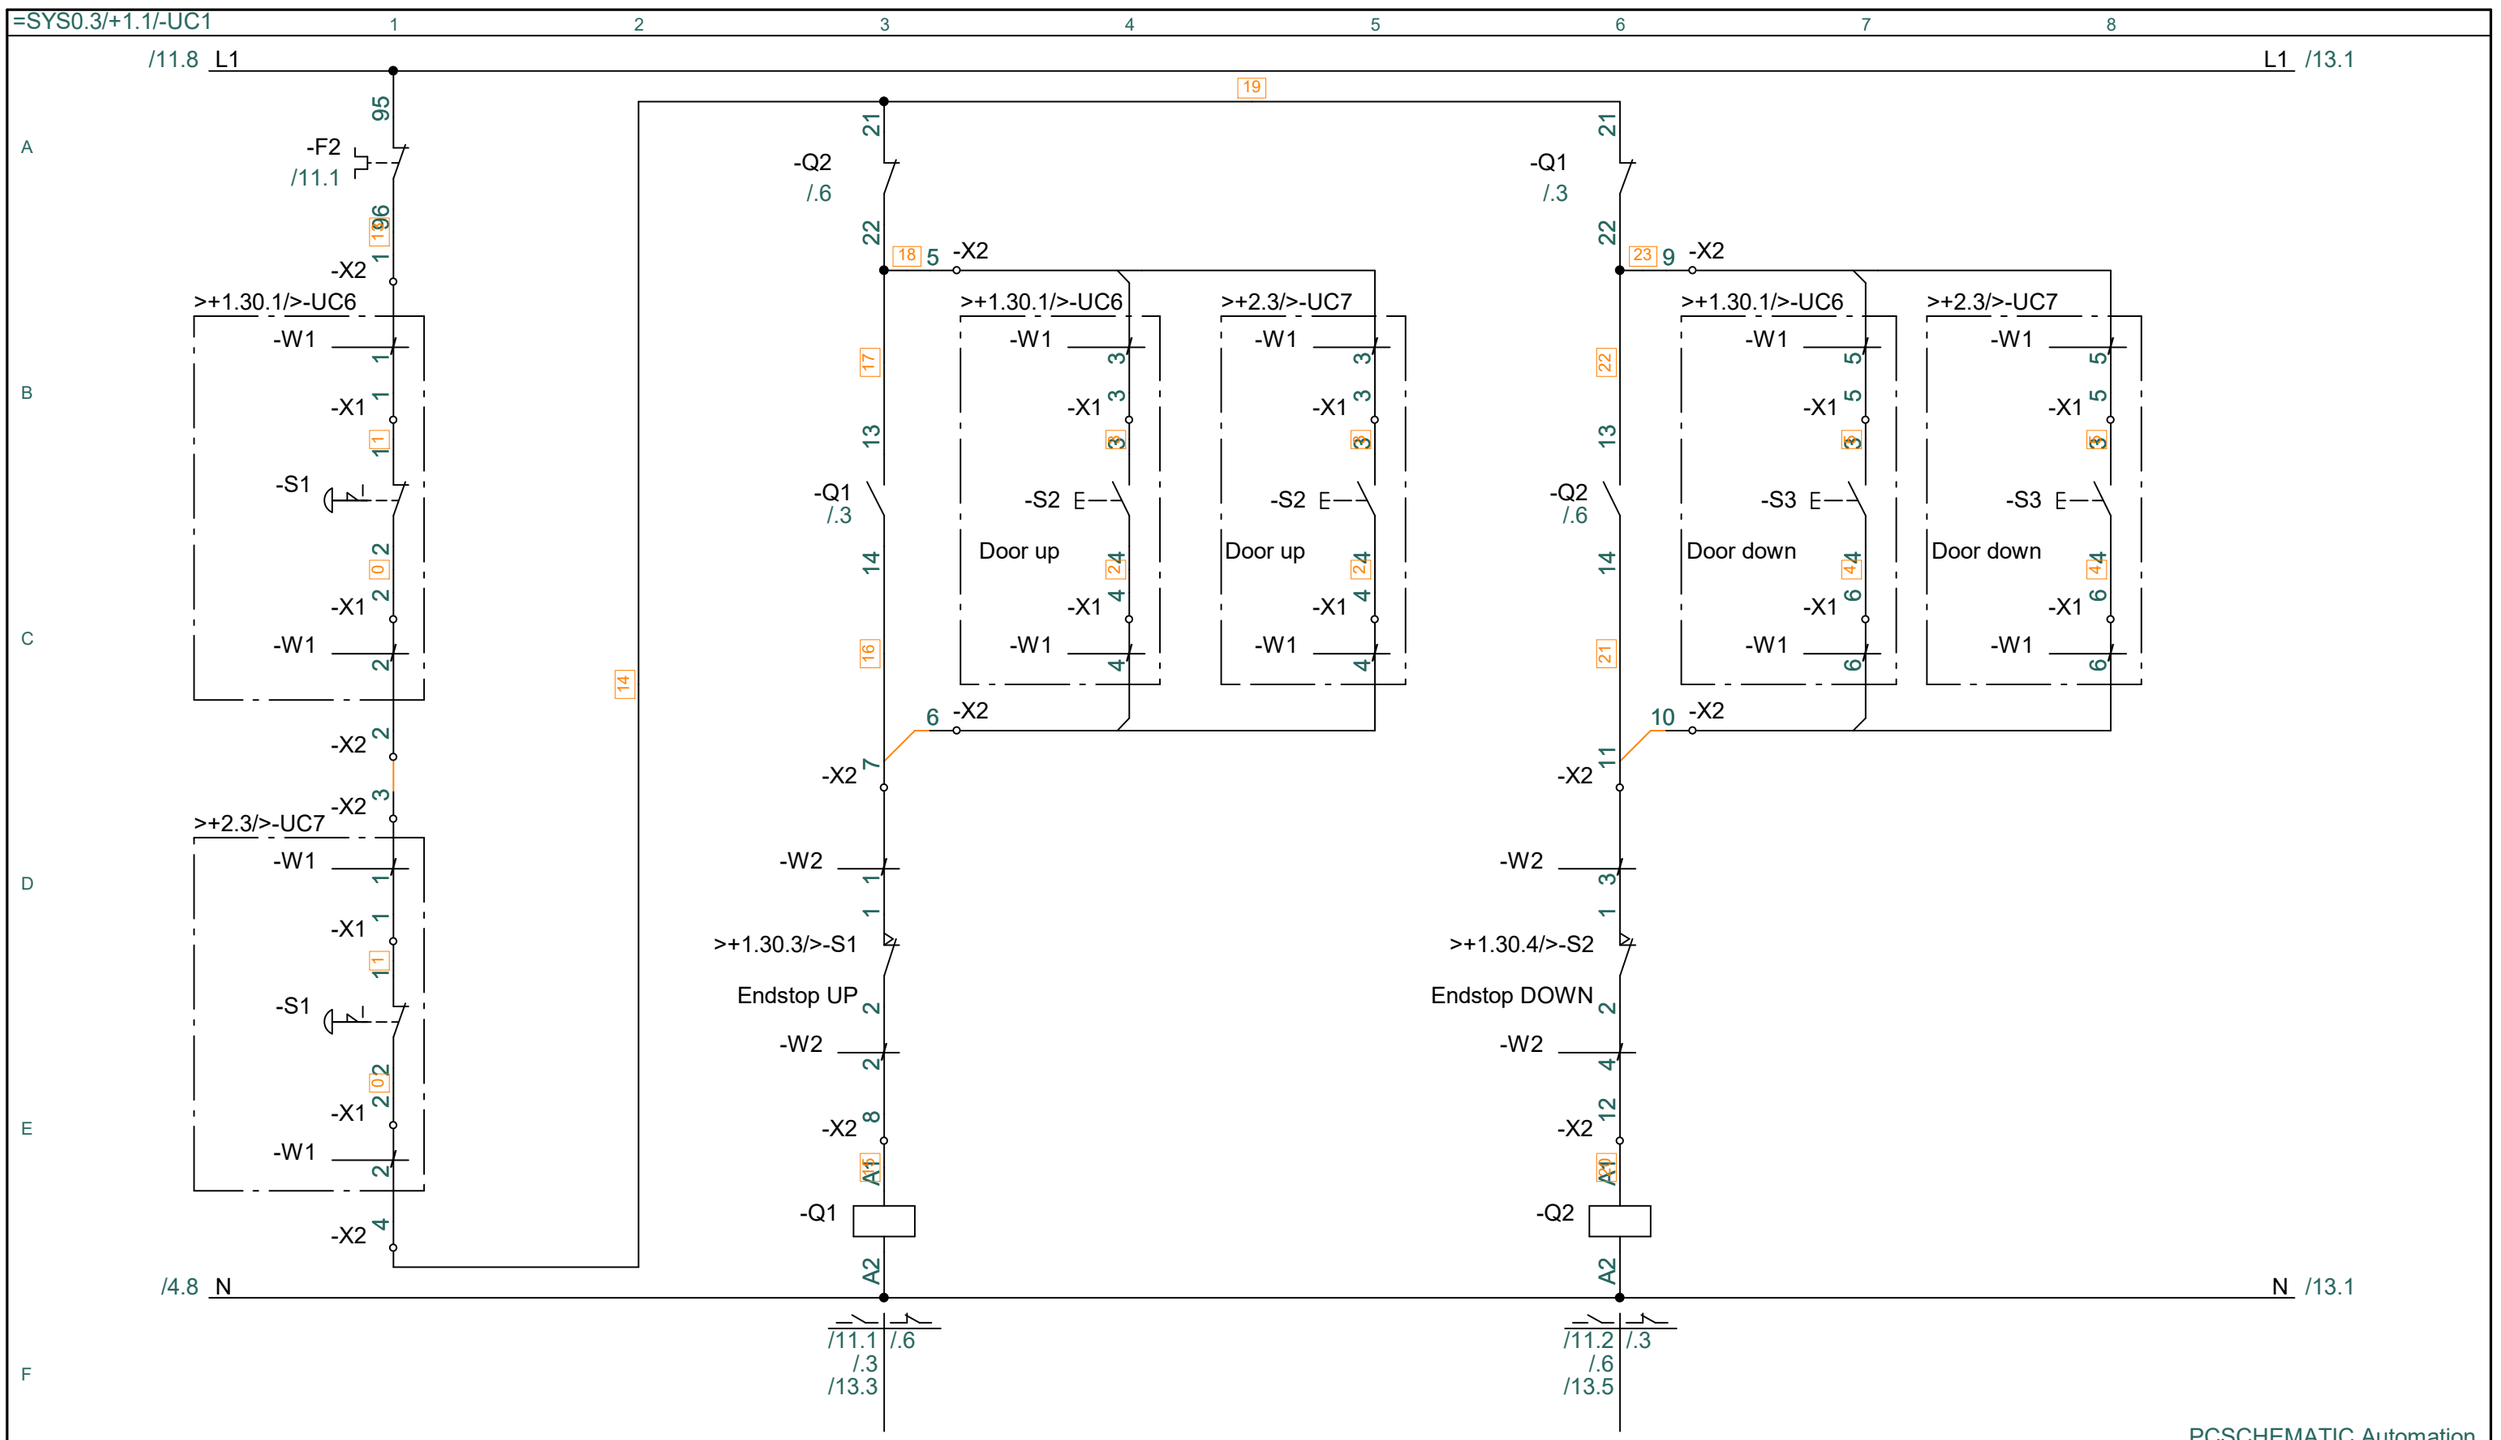

PCSCHEMATIC Automation

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**12**
Customer:		DCC:		Scale:	1:1
Page title:	Control circuit diagram	Dwg. no.:	Page rev.:	Previous page:	11
File name:	PCSmotordemo3	Eng. (proj/page):	Last print: 29.10.2026	Next page:	13
Page ref.:	System 3, Inside building - Control panel position, Main panel	Appr. (date/init):	Last edit: 22.02.2022	Total no. of pages:	52

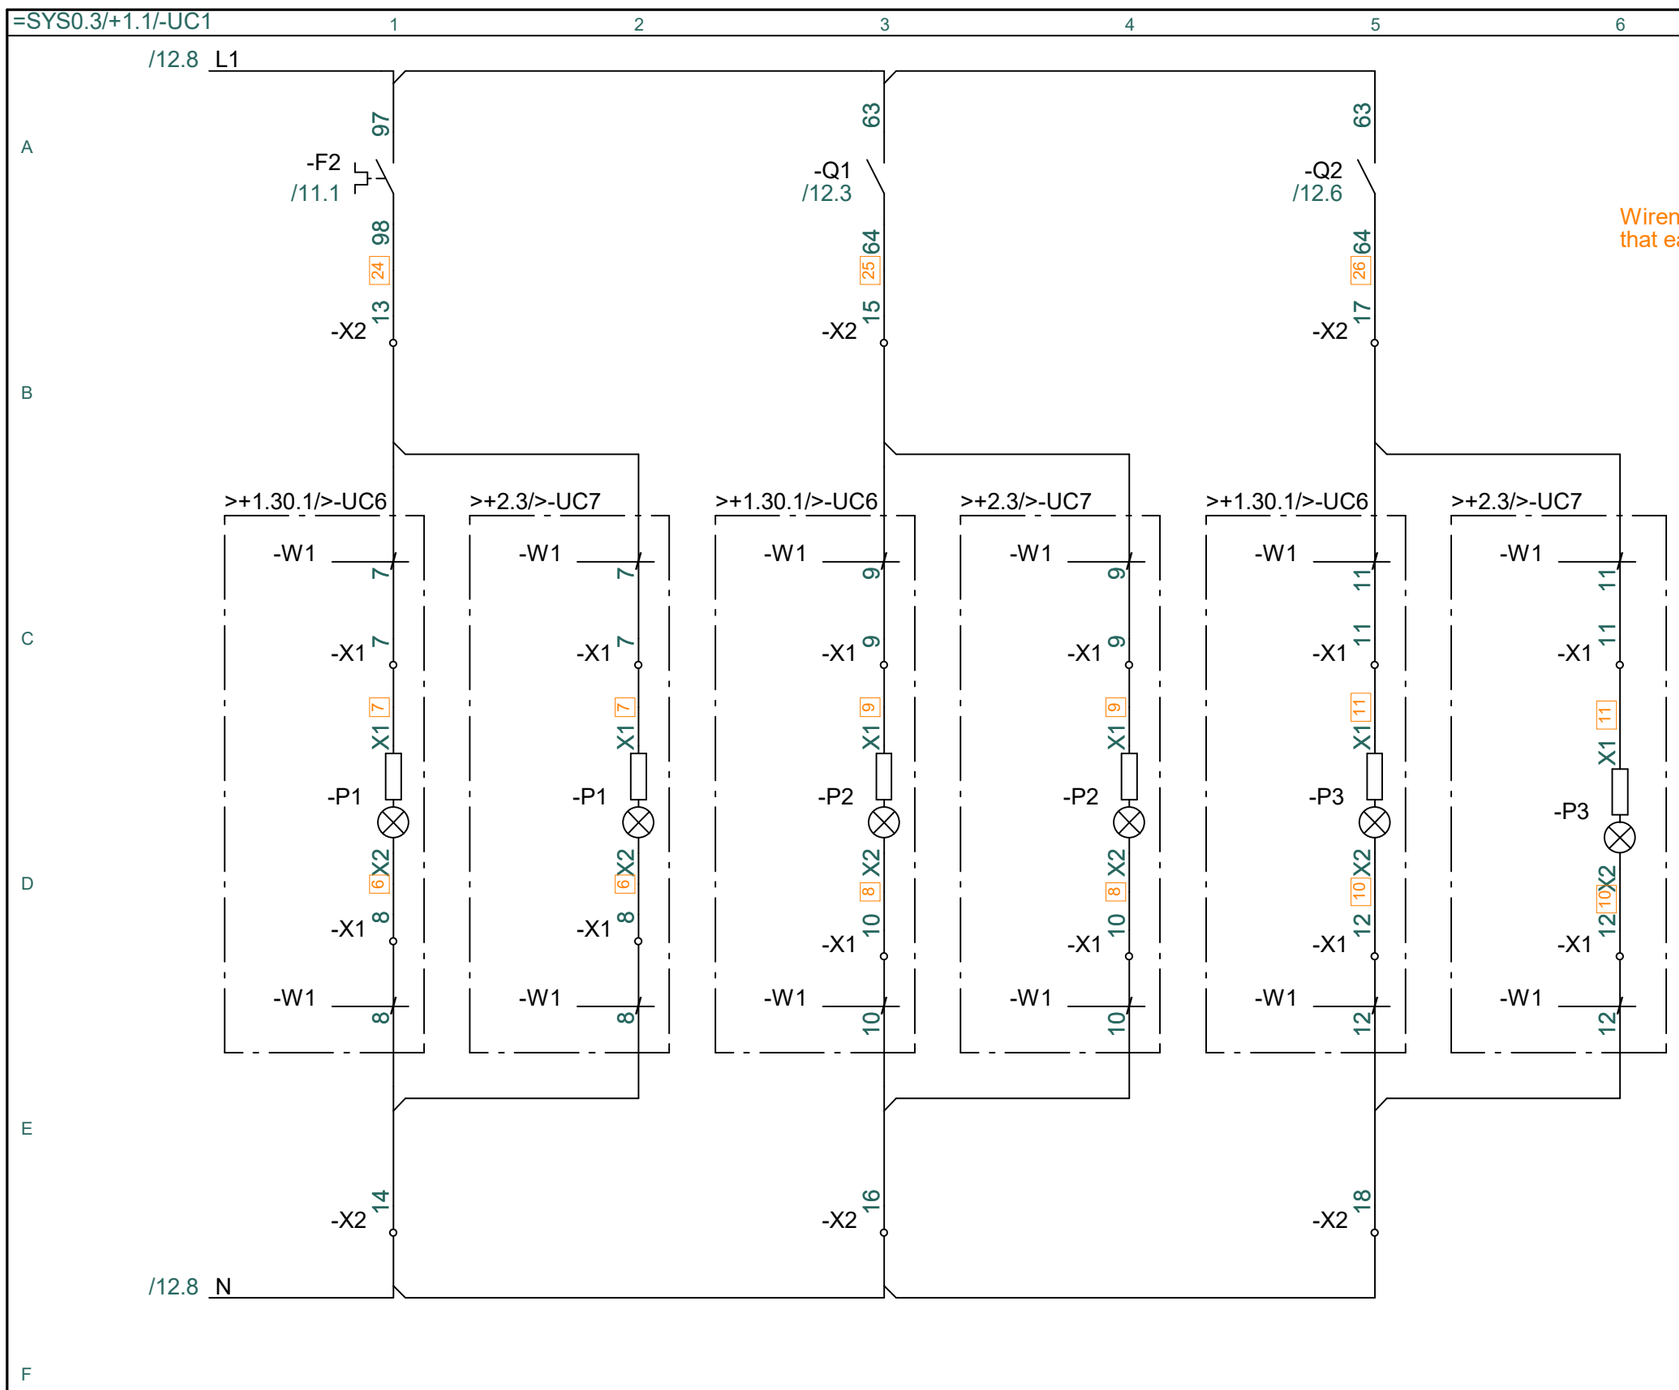


Wirenumbering is set up to restart in each new product designation. This means that each external control unit contains the same wirenumbers.

PCSCHEMATIC Automation


Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**13**
Customer:		DCC:		Scale:	1:1
Page title:	Control circuit diagram	Dwg. no.:	Page rev.:	Previous page:	12
File name:	PCSmotordemo3	Eng. (proj/page):	Last print: 29.10.2026	Next page:	14
Page ref.:	System 3, Inside building - Control panel position, Main panel	Appr. (date/init):	Last edit: 18.02.2022	Total no. of pages:	52

Layout

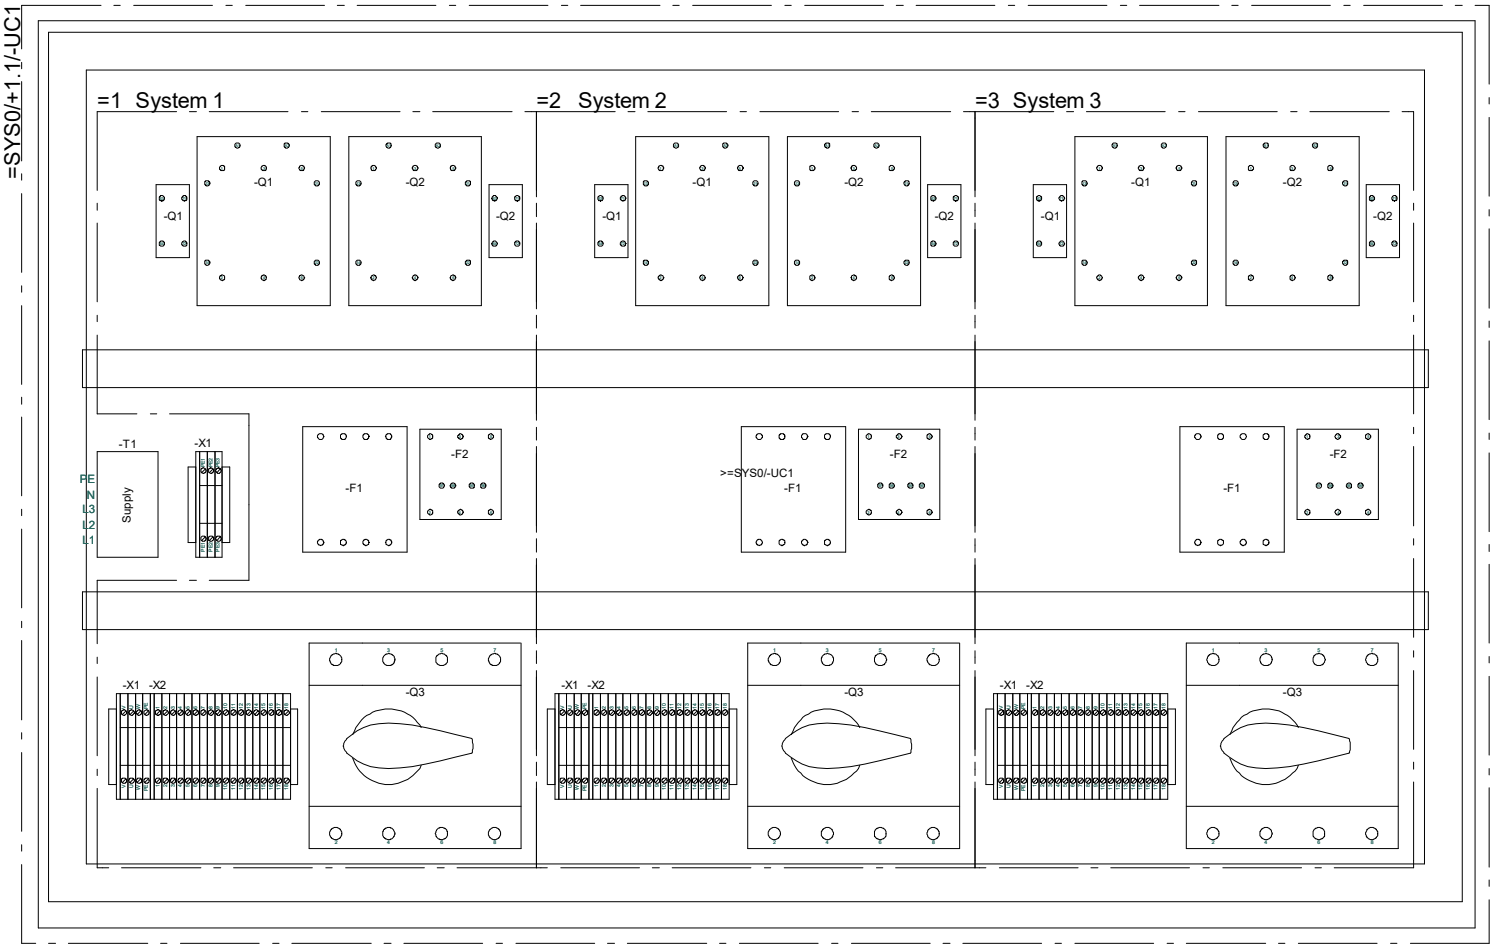

The GRP page is a mechanical page where all components are placed as symbols with the right size. In order to make everything fit on the paper, we use a scale, here 1:5. All measurements will remain true if the scale is changed.

In order to make overview easier, reference frames have been used to exclude function designations per group.

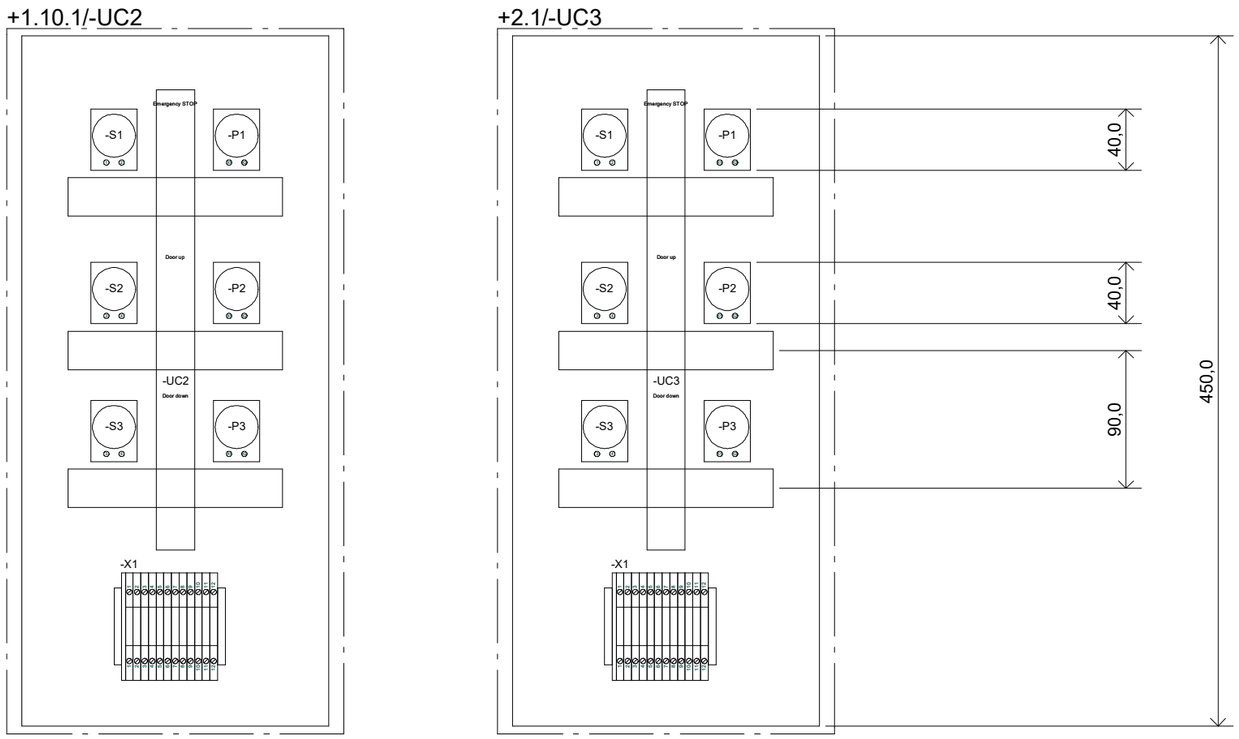


Component	Position	Type	Function
-P1	5B	PCS-RDLAMP1	Emergency STOP
-P2	5D	PCS-GNLAMP1	Door up
-P3	5E	PCS-GNLAMP1	Door down
-S1	3B	PCS-EMRPB-NC01	Emergency STOP
-S2	3D	PCS-PB01	Door up
-S3	3E	PCS-PB01	Door down
-UC2	4E	Panel2	
-X1	4G	PCS-XX1GY	
-X1	3G	PCS-XXSK1	
-X1	3G	PCS-XXEN1	
-P1	10B	PCS-RDLAMP1	Emergency STOP
-P2	10D	PCS-GNLAMP1	Door up
-P3	10E	PCS-GNLAMP1	Door down
-S1	9B	PCS-EMRPB-NC01	Emergency STOP
-S2	9D	PCS-PB01	Door up
-S3	9E	PCS-PB01	Door down
-UC3	9E	Panel2	
-X1	10G	PCS-XX1GY	
-X1	9G	PCS-XXSK1	
-X1	9G	PCS-XXEN1	

This page contains the two controls for system 1.
The following two pages are for systems 2 and 3, respectively.


The page contains a Component list for the actual page. The list symbol is scaled with the same numberto make it fit on the page, ie on this page it is scaled with a factor 4.

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**15**
Customer:		DCC:		Scale:	1:4
Page title:	Arrangement - A3 - 1:4 - CompList	Dwg. no.:	Page rev.:	Previous page:	14
File name:	PCSmotordemo3	Eng. (proj/page):	Last print: 29.10.2026	Next page:	16
Page ref.:	System 1	Appr. (date/init):	Last edit: 21.02.2022	Total no. of pages:	52

+1.20.1/-UC4

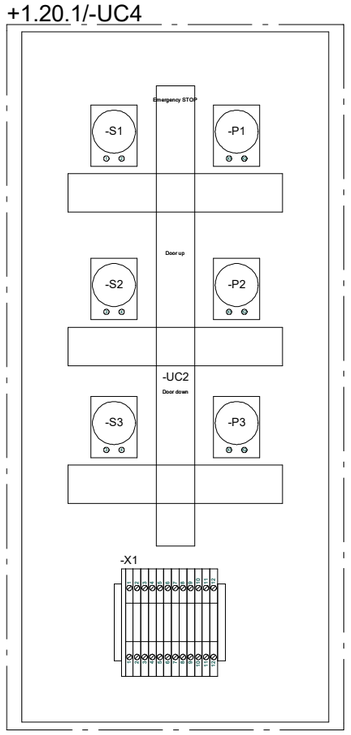


+2.2/-UC5

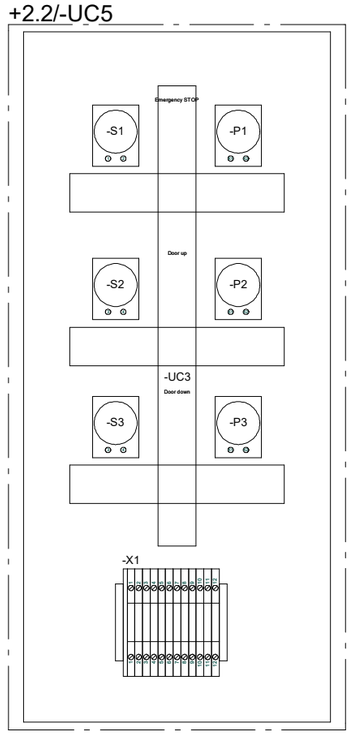


This page contains the two controls for system 2.

Component	Position	Type	Function
-P1	5B	PCS-RDLAMP1	Emergency STOP
-P2	5D	PCS-GNLAMP1	Door up
-P3	5E	PCS-GNLAMP1	Door down
-S1	3B	PCS-EMRPB-NC01	Emergency STOP
-S2	3D	PCS-PB01	Door up
-S3	3E	PCS-PB01	Door down
-UC2	4E	Panel2	
-X1	4G	PCS-XX1GY	
-X1	3G	PCS-XXSK1	
-X1	3G	PCS-XXEN1	
-P1	10B	PCS-RDLAMP1	Emergency STOP
-P2	10D	PCS-GNLAMP1	Door up
-P3	10E	PCS-GNLAMP1	Door down
-S1	9B	PCS-EMRPB-NC01	Emergency STOP
-S2	9D	PCS-PB01	Door up
-S3	9E	PCS-PB01	Door down
-UC3	9E	Panel2	
-X1	10G	PCS-XX1GY	
-X1	9G	PCS-XXSK1	
-X1	10G	PCS-XXEN1	

+1.30.1/-UC6

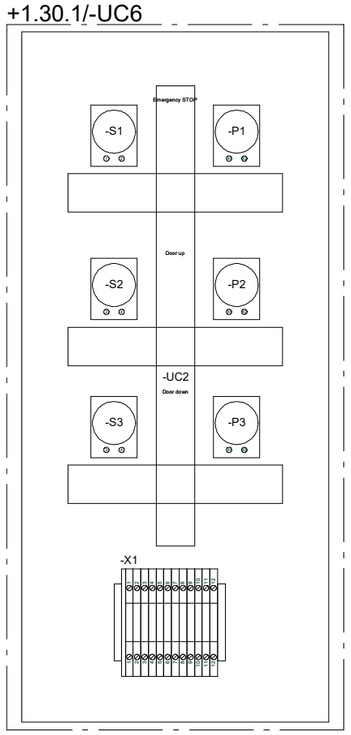

+2.3/-UC7

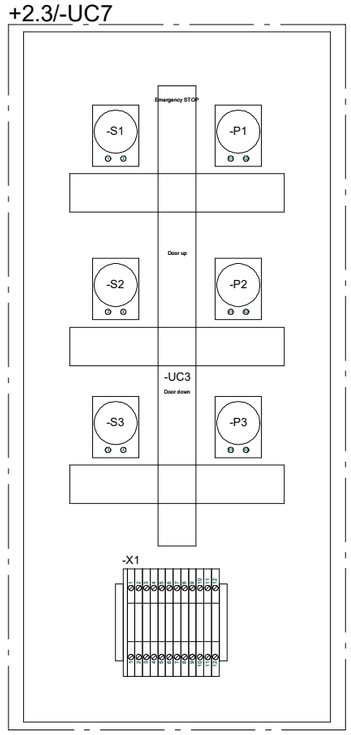

This page contains the two controls for system 3.

Component	Position	Type	Function
-P1	5B	PCS-RDLAMP1	Emergency STOP
-P2	5D	PCS-GNLAMP1	Door up
-P3	5E	PCS-GNLAMP1	Door down
-S1	3B	PCS-EMRPB-NC01	Emergency STOP
-S2	3D	PCS-PB01	Door up
-S3	3E	PCS-PB01	Door down
-UC2	4E	Panel2	
-X1	4G	PCS-XX1GY	
-X1	3G	PCS-XXSK1	
-X1	5G	PCS-XXEN1	
-P1	10B	PCS-RDLAMP1	Emergency STOP
-P2	10D	PCS-GNLAMP1	Door up
-P3	10E	PCS-GNLAMP1	Door down
-S1	9B	PCS-EMRPB-NC01	Emergency STOP
-S2	9D	PCS-PB01	Door up
-S3	9E	PCS-PB01	Door down
-UC3	9E	Panel2	
-X1	10G	PCS-XX1GY	
-X1	9G	PCS-XXSK1	
-X1	9G	PCS-XXEN1	

Lists

Components used in the project

PCS212001
PCS-XX1GY

PCSCHEMATIC

1 layer Through terminal - 1 x 1 in 1 out GY

PCS212003
PCS-XX1GNYE

PCSCHEMATIC

1 layer Through terminal - 1 x 1 in 1 out GNYE

PCS217001
PCS-XXSK1

PCSCHEMATIC

Divider for PCSXX1

PCS217002
PCS-XXEN1

PCSCHEMATIC

Endplate for PCSXx

PCS330002
PCS-CBL02

PCSCHEMATIC

4 conductors without screen

PCS500001
PCS-RDLAMP1

PCSCHEMATIC

Red lamp with built-in resistor

PCS500003
PCS-GNLAMP1

PCSCHEMATIC

Green lamp with built-in resistor

PCS600005
PCS-MOTOR2A

PCSCHEMATIC

3 phases + PE motor 1.1 kW

PCS2220017
PCS-MCB-017

PCSCHEMATIC

Circuit Breaker (MCB) 4P 10A

PCS2250001
PCS-MV001A

PCSCHEMATIC

Thermal overload type 1a

PCS2250101
PCS-CON01

PCSCHEMATIC

Contactor 3POL 1NO 1NC type1

PCS2250121
PCS-CON-AUX01

PCSCHEMATIC

Aux contacts 1NO 1NC type1

PCS2250301
PCS-SERDISCON01

PCSCHEMATIC

PCS service disconnect type 1

PCS2250401
PCS-PB01

PCSCHEMATIC

Push button NO, type1

Components used in the project

PCS02250411

PCS-EMRPB-NC01

PCSCHEMATIC

Emergency stop, NC, type1

Endstop

Panel1

Panel1

Panel2

Panel2

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**19**
Customer:		DCC:		Scale:	1:1
Page title:	Parts list	Dwg. no.:	Page rev.:	Previous page:	18
File name:	PCSmotordemo3	Eng. (proj/page):	Last print: 29.10.2026	Next page:	20
Page ref.:		Appr. (date/init):	Last edit: 17.02.2022	Total no. of pages:	52

Article no.	Type	Manufacturer	Quantity
PCS212001	PCS-XX1GY	PCSCHEMATIC	138
PCS212003	PCS-XX1GNYE	--	3
PCS217001	PCS-XXSK1	--	7
PCS217002	PCS-XXEN1	--	8
PCS330002	PCS-CBL02	--	-
PCS500001	PCS-RDLAMP1	--	6
PCS500003	PCS-GNLAMP1	--	12
PCS600005	PCS-MOTOR2A	--	3
PCS2220017	PCS-MCB-017	--	3
PCS2250001	PCS-MV001A	--	3
PCS2250101	PCS-CON01	--	6
PCS2250121	PCS-CON-AUX01	--	6
PCS2250301	PCS-SERDISCON01	--	3
PCS2250401	PCS-PB01	--	12
PCS02250411	PCS-EMRPB-NC01	--	6
			1
Endstop			6
Panel1	Panel1		1
Panel2	Panel2		2

Article no.	Type	Manufacturer	Quantity

PCSCHEMATIC Automation

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**20**
Customer:		DCC:		Scale:	1:1
Page title:	Parts list	Dwg. no.:	Page rev.:	Previous page:	19
File name:	PCSmotordemo3	Eng. (proj/page):	Last print: 29.10.2026	Next page:	21
Page ref.:		Appr. (date/init):	Last edit: 17.02.2022	Total no. of pages:	52

Component	Article no.	Type	Function	Description	Manufacturer	Position
=SYS0.1/+1.1/-UC1.F1	PCS2250001	PCS-MV001A		Thermal overload type 1a	PCSCHEMATIC	/6.1
=SYS0.1/+1.1/-UC1.Q1	PCS2250101	PCS-CON01		Contactor 3POL 1NO 1NC type1	--	/7.3
=SYS0.1/+1.1/-UC1.Q1	PCS2250121	PCS-CON-AUX01		Aux contacts 1NO 1NC type1	--	/8.3
=SYS0.1/+1.1/-UC1.Q2	PCS2250101	PCS-CON01		Contactor 3POL 1NO 1NC type1	--	/7.6
=SYS0.1/+1.1/-UC1.Q2	PCS2250121	PCS-CON-AUX01		Aux contacts 1NO 1NC type1	--	/8.5
=SYS0.1/+1.1/-UC1.Q3	PCS2250301	PCS-SERDISCON01		PCS service disconnect type 1	--	/6.1
=SYS0.1/+1.1/-UC1.W1	PCS330002	PCS-CBL02		4 conductors without screen	--	/6.1
=SYS0.1/+1.1/-UC1.W2						/7.3
=SYS0.1/+1.1/-UC1.X1	PCS212001	PCS-XX1GY		1 layer Through terminal - 1 x 1 in 1 out GY	PCSCHEMATIC	/6.1
=SYS0.1/+1.1/-UC1.X1	PCS212003	PCS-XX1GNYE		1 layer Through terminal - 1 x 1 in 1 out GNYE	--	/6.1
=SYS0.1/+1.1/-UC1.X1	PCS217001	PCS-XXSK1		Divider for PCSXX1	--	/15.3
=SYS0.1/+1.1/-UC1.X1	PCS217002	PCS-XXEN1		Endplate for PCSXx	--	/15.3
=SYS0.1/+1.1/-UC1.X2	PCS212001	PCS-XX1GY		1 layer Through terminal - 1 x 1 in 1 out GY	--	/8.5
=SYS0.1/+1.1/-UC1.X2	PCS217001	PCS-XXSK1		Divider for PCSXX1	--	/15.4
=SYS0.1/+1.1/-UC1.X2	PCS217002	PCS-XXEN1		Endplate for PCSXx	--	/15.6
=SYS0.2/+1.1/-UC1.F1	PCS2250001	PCS-MV001A		Thermal overload type 1a	--	/9.1
=SYS0.2/+1.1/-UC1.Q1	PCS2250101	PCS-CON01		Contactor 3POL 1NO 1NC type1	--	/10.3
=SYS0.2/+1.1/-UC1.Q1	PCS2250121	PCS-CON-AUX01		Aux contacts 1NO 1NC type1	--	/11.3
=SYS0.2/+1.1/-UC1.Q2	PCS2250101	PCS-CON01		Contactor 3POL 1NO 1NC type1	--	/10.6
=SYS0.2/+1.1/-UC1.Q2	PCS2250121	PCS-CON-AUX01		Aux contacts 1NO 1NC type1	--	/11.5
=SYS0.2/+1.1/-UC1.Q3	PCS2250301	PCS-SERDISCON01		PCS service disconnect type 1	--	/9.1
=SYS0.2/+1.1/-UC1.W1	PCS330002	PCS-CBL02		4 conductors without screen	--	/9.1
=SYS0.2/+1.1/-UC1.W2						/10.3
=SYS0.2/+1.1/-UC1.X1	PCS212001	PCS-XX1GY		1 layer Through terminal - 1 x 1 in 1 out GY	PCSCHEMATIC	/9.1
=SYS0.2/+1.1/-UC1.X1	PCS212003	PCS-XX1GNYE		1 layer Through terminal - 1 x 1 in 1 out GNYE	--	/9.1
=SYS0.2/+1.1/-UC1.X1	PCS217001	PCS-XXSK1		Divider for PCSXX1	--	/15.11
=SYS0.2/+1.1/-UC1.X1	PCS217002	PCS-XXEN1		Endplate for PCSXx	--	/15.10
=SYS0.2/+1.1/-UC1.X2	PCS212001	PCS-XX1GY		1 layer Through terminal - 1 x 1 in 1 out GY	--	/11.5

Component	Article no.	Type	Function	Description	Manufacturer	Position
=SYS0.2/+1.1/-UC1.X2	PCS217001	PCS-XXSK1		Divider for PCSXX1	PCSCHEMATIC	/15.11
=SYS0.2/+1.1/-UC1.X2	PCS217002	PCS-XXEN1		Endplate for PCSXx	--	/15.14
=SYS0.3/+1.1/-UC1.E						/13.5
=SYS0.3/+1.1/-UC1.F1	PCS2250001	PCS-MV001A		Thermal overload type 1a	PCSCHEMATIC	/12.1
=SYS0.3/+1.1/-UC1.Q1	PCS2250101	PCS-CON01		Contactor 3POL 1NO 1NC type1	--	/13.3
=SYS0.3/+1.1/-UC1.Q1	PCS2250121	PCS-CON-AUX01		Aux contacts 1NO 1NC type1	--	/14.3
=SYS0.3/+1.1/-UC1.Q2	PCS2250101	PCS-CON01		Contactor 3POL 1NO 1NC type1	--	/13.6
=SYS0.3/+1.1/-UC1.Q2	PCS2250121	PCS-CON-AUX01		Aux contacts 1NO 1NC type1	--	/14.5
=SYS0.3/+1.1/-UC1.Q3	PCS2250301	PCS-SERDISCON01		PCS service disconnect type 1	--	/12.1
=SYS0.3/+1.1/-UC1.W1	PCS330002	PCS-CBL02		4 conductors without screen	--	/12.1
=SYS0.3/+1.1/-UC1.W2						/13.3
=SYS0.3/+1.1/-UC1.X1	PCS212001	PCS-XX1GY		1 layer Through terminal - 1 x 1 in 1 out GY	PCSCHEMATIC	/12.1
=SYS0.3/+1.1/-UC1.X1	PCS212003	PCS-XX1GNYE		1 layer Through terminal - 1 x 1 in 1 out GNYE	--	/12.1
=SYS0.3/+1.1/-UC1.X1	PCS217001	PCS-XXSK1		Divider for PCSXX1	--	/15.18
=SYS0.3/+1.1/-UC1.X1	PCS217002	PCS-XXEN1		Endplate for PCSXx	--	/15.18
=SYS0.3/+1.1/-UC1.X2	PCS212001	PCS-XX1GY		1 layer Through terminal - 1 x 1 in 1 out GY	--	/14.5
=SYS0.3/+1.1/-UC1.X2	PCS217001	PCS-XXSK1		Divider for PCSXX1	--	/15.18
=SYS0.3/+1.1/-UC1.X2	PCS217002	PCS-XXEN1		Endplate for PCSXx	--	/15.20
=SYS0/+1.1/-UC1.F1	PCS2220017	PCS-MCB-017		Circuit Breaker (MCB) 4P 10A	--	/5.3
=SYS0/+1.1/-UC1.F2	PCS2220017	--		Circuit Breaker (MCB) 4P 10A	--	/5.5
=SYS0/+1.1/-UC1.F3	PCS2220017	--		Circuit Breaker (MCB) 4P 10A	--	/5.7
=SYS0/+1.1/-UC1.UC1	Panel1	Panel1				/15.14
=SYS0/+1.1/-UC1.X1	PCS212001	PCS-XX1GY		1 layer Through terminal - 1 x 1 in 1 out GY	PCSCHEMATIC	/5.6
=SYS0/+1.1/-UC1.X1	PCS217001	PCS-XXSK1		Divider for PCSXX1	--	/15.5
=SYS0/+1.1/-UC1.X1	PCS217002	PCS-XXEN1		Endplate for PCSXx	--	/15.5
=SYS0.1/+1.10.1/-UC2.PC1	PCS500001	PCS-RDLAMP1	Emergency STOP	Red lamp with built-in resistor	--	/8.1
=SYS0.1/+1.10.1/-UC2.PC2	PCS500003	PCS-GNLAMP1	Door up	Green lamp with built-in resistor	--	/8.3

Component	Article no.	Type	Function	Description	Manufacturer	Position
=SYS0.1/+1.10.1/-UC2.P3	PCS500003	PCS-GNLAMP1	Door down	Green lamp with built-in resistor	PCSCHEMATIC	/8.5
=SYS0.1/+1.10.1/-UC2.S1	PCS02250411	PCS-EMRPB-NC01	Emergency STOP	Emergency stop, NC, type1	--	/7.1
=SYS0.1/+1.10.1/-UC2.S2	PCS2250401	PCS-PB01	Door up	Push button NO, type1	--	/7.4
=SYS0.1/+1.10.1/-UC2.S3	PCS2250401	--	Door down	Push button NO, type1	--	/7.7
=SYS0.1/+1.10.1/-UC2.UC2	Panel2	Panel2				/16.4
=SYS0.1/+1.10.1/-UC2.W1						/7.1
=SYS0.1/+1.10.1/-UC2.X1	PCS212001	PCS-XX1GY		1 layer Through terminal - 1 x 1 in 1 out GY	PCSCHEMATIC	/8.5
=SYS0.1/+2.1/-UC3.P1	PCS500001	PCS-RDLAMP1	Emergency STOP	Red lamp with built-in resistor	--	/8.2
=SYS0.1/+2.1/-UC3.P2	PCS500003	PCS-GNLAMP1	Door up	Green lamp with built-in resistor	--	/8.4
=SYS0.1/+2.1/-UC3.P3	PCS500003	--	Door down	Green lamp with built-in resistor	--	/8.6
=SYS0.1/+2.1/-UC3.S1	PCS02250411	PCS-EMRPB-NC01	Emergency STOP	Emergency stop, NC, type1	--	/7.1
=SYS0.1/+2.1/-UC3.S2	PCS2250401	PCS-PB01	Door up	Push button NO, type1	--	/7.5
=SYS0.1/+2.1/-UC3.S3	PCS2250401	--	Door down	Push button NO, type1	--	/7.8
=SYS0.1/+2.1/-UC3.UC3	Panel2	Panel2				/16.9
=SYS0.1/+2.1/-UC3.W1						/7.5
=SYS0.1/+2.1/-UC3.X1	PCS212001	PCS-XX1GY		1 layer Through terminal - 1 x 1 in 1 out GY	PCSCHEMATIC	/8.6
=SYS0.2/+1.20.1/-UC4.P1	PCS500001	PCS-RDLAMP1		Red lamp with built-in resistor	--	/11.1
=SYS0.2/+1.20.1/-UC4.P2	PCS500003	PCS-GNLAMP1		Green lamp with built-in resistor	--	/11.3
=SYS0.2/+1.20.1/-UC4.P3	PCS500003	--		Green lamp with built-in resistor	--	/11.5
=SYS0.2/+1.20.1/-UC4.S1	PCS02250411	PCS-EMRPB-NC01		Emergency stop, NC, type1	--	/10.1
=SYS0.2/+1.20.1/-UC4.S2	PCS2250401	PCS-PB01	Door up	Push button NO, type1	--	/10.4
=SYS0.2/+1.20.1/-UC4.S3	PCS2250401	--	Door down	Push button NO, type1	--	/10.7
=SYS0.2/+1.20.1/-UC4.W1						/10.1
=SYS0.2/+1.20.1/-UC4.X1	PCS212001	PCS-XX1GY		1 layer Through terminal - 1 x 1 in 1 out GY	PCSCHEMATIC	/11.5
=SYS0.2/+2.2/-UC5.P1	PCS500001	PCS-RDLAMP1		Red lamp with built-in resistor	--	/11.2

Component	Article no.	Type	Function	Description	Manufacturer	Position
=SYS0.2/+2.2/-UC5.P2	PCS500003	PCS-GNLAMP1		Green lamp with built-in resistor	PCSCHEMATIC	/11.4
=SYS0.2/+2.2/-UC5.P3	PCS500003	--		Green lamp with built-in resistor	--	/11.6
=SYS0.2/+2.2/-UC5.S1	PCS02250411	PCS-EMRPB-NC01		Emergency stop, NC, type1	--	/10.1
=SYS0.2/+2.2/-UC5.S2	PCS2250401	PCS-PB01	Door up	Push button NO, type1	--	/10.5
=SYS0.2/+2.2/-UC5.S3	PCS2250401	--	Door down	Push button NO, type1	--	/10.8
=SYS0.2/+2.2/-UC5.W1						/10.5
=SYS0.2/+2.2/-UC5.X1	PCS212001	PCS-XX1GY		1 layer Through terminal - 1 x 1 in 1 out GY	PCSCHEMATIC	/11.6
=SYS0.3/+1.30.1/-UC6.P1	PCS500001	PCS-RDLAMP1		Red lamp with built-in resistor	--	/14.1
=SYS0.3/+1.30.1/-UC6.P2	PCS500003	PCS-GNLAMP1		Green lamp with built-in resistor	--	/14.3
=SYS0.3/+1.30.1/-UC6.P3	PCS500003	--		Green lamp with built-in resistor	--	/14.5
=SYS0.3/+1.30.1/-UC6.S1	PCS02250411	PCS-EMRPB-NC01		Emergency stop, NC, type1	--	/13.1
=SYS0.3/+1.30.1/-UC6.S2	PCS2250401	PCS-PB01	Door up	Push button NO, type1	--	/13.4
=SYS0.3/+1.30.1/-UC6.S3	PCS2250401	--	Door down	Push button NO, type1	--	/13.7
=SYS0.3/+1.30.1/-UC6.W1						/13.1
=SYS0.3/+1.30.1/-UC6.X1	PCS212001	PCS-XX1GY		1 layer Through terminal - 1 x 1 in 1 out GY	PCSCHEMATIC	/14.5
=SYS0.3/+2.3/-UC7.P1	PCS500001	PCS-RDLAMP1		Red lamp with built-in resistor	--	/14.2
=SYS0.3/+2.3/-UC7.P2	PCS500003	PCS-GNLAMP1		Green lamp with built-in resistor	--	/14.4
=SYS0.3/+2.3/-UC7.P3	PCS500003	--		Green lamp with built-in resistor	--	/14.6
=SYS0.3/+2.3/-UC7.S1	PCS02250411	PCS-EMRPB-NC01		Emergency stop, NC, type1	--	/13.1
=SYS0.3/+2.3/-UC7.S2	PCS2250401	PCS-PB01	Door up	Push button NO, type1	--	/13.5
=SYS0.3/+2.3/-UC7.S3	PCS2250401	--	Door down	Push button NO, type1	--	/13.8
=SYS0.3/+2.3/-UC7.W1						/13.5
=SYS0.3/+2.3/-UC7.X1	PCS212001	PCS-XX1GY		1 layer Through terminal - 1 x 1 in 1 out GY	PCSCHEMATIC	/14.6
=SYS0.1/+1.10.2/-M1	PCS600005	PCS-MOTOR2A		3 phases + PE motor 1.1 kW	--	/6.1
=SYS0.1/+1.10.3/-S1	Endstop		Endstop UP			/7.3

Component	Article no.	Type	Function	Description	Manufacturer	Position
=SYS0.1/+1.10.4/-S2	Endstop		Endstop DOWN			/7.6
=SYS0.2/+1.20.2/-M1	PCS600005	PCS-MOTOR2A		3 phases + PE motor 1.1 kW	PCSCHEMATIC	/9.1
=SYS0.2/+1.20.3/-S1	Endstop		Endstop UP			/10.3
=SYS0.2/+1.20.4/-S2	Endstop		Endstop DOWN			/10.6
=SYS0.3/+1.30.2/-M1	PCS600005	PCS-MOTOR2A		3 phases + PE motor 1.1 kW	PCSCHEMATIC	/12.1
=SYS0.3/+1.30.3/-S1	Endstop		Endstop UP			/13.3
=SYS0.3/+1.30.4/-S2	Endstop		Endstop DOWN			/13.6

Terminal	Cable	Conn. component (ext.)
=SYS0.1/+1.1/-UC1.X1:U	=SYS0.1/+1.1/-UC1.W1:BK	=SYS0.1/+1.10.2/-M1:U
=SYS0.1/+1.1/-UC1.X1:V	=SYS0.1/+1.1/-UC1.W1:BN	=SYS0.1/+1.10.2/-M1:V
=SYS0.1/+1.1/-UC1.X1:W	=SYS0.1/+1.1/-UC1.W1:GY	=SYS0.1/+1.10.2/-M1:W
=SYS0.1/+1.1/-UC1.X1:PE	=SYS0.1/+1.1/-UC1.W1:GNYE	=SYS0.1/+1.10.2/-M1:PE
=SYS0.1/+1.1/-UC1.X2:1	=SYS0.1/+1.10.1/-UC2.W1:1	=SYS0.1/+1.10.1/-UC2.X1:1
=SYS0.1/+1.1/-UC1.X2:2	=SYS0.1/+1.10.1/-UC2.W1:2	=SYS0.1/+1.10.1/-UC2.X1:2
=SYS0.1/+1.1/-UC1.X2:3	=SYS0.1/+2.1/-UC3.W1:1	=SYS0.1/+2.1/-UC3.X1:1
=SYS0.1/+1.1/-UC1.X2:4	=SYS0.1/+2.1/-UC3.W1:2	=SYS0.1/+2.1/-UC3.X1:2
=SYS0.1/+1.1/-UC1.X2:5	=SYS0.1/+2.1/-UC3.W1:3	=SYS0.1/+2.1/-UC3.X1:3
=SYS0.1/+1.1/-UC1.X2:5	=SYS0.1/+1.10.1/-UC2.W1:3	=SYS0.1/+1.10.1/-UC2.X1:3
=SYS0.1/+1.1/-UC1.X2:6	=SYS0.1/+2.1/-UC3.W1:4	=SYS0.1/+2.1/-UC3.X1:4
=SYS0.1/+1.1/-UC1.X2:6	=SYS0.1/+1.10.1/-UC2.W1:4	=SYS0.1/+1.10.1/-UC2.X1:4
=SYS0.1/+1.1/-UC1.X2:7	=SYS0.1/+1.1/-UC1.W2:1	=SYS0.1/+1.10.3/-S1:1
=SYS0.1/+1.1/-UC1.X2:8	=SYS0.1/+1.1/-UC1.W2:2	=SYS0.1/+1.10.3/-S1:2
=SYS0.1/+1.1/-UC1.X2:9	=SYS0.1/+2.1/-UC3.W1:5	=SYS0.1/+2.1/-UC3.X1:5
=SYS0.1/+1.1/-UC1.X2:9	=SYS0.1/+1.10.1/-UC2.W1:5	=SYS0.1/+1.10.1/-UC2.X1:5
=SYS0.1/+1.1/-UC1.X2:10	=SYS0.1/+2.1/-UC3.W1:6	=SYS0.1/+2.1/-UC3.X1:6
=SYS0.1/+1.1/-UC1.X2:10	=SYS0.1/+1.10.1/-UC2.W1:6	=SYS0.1/+1.10.1/-UC2.X1:6
=SYS0.1/+1.1/-UC1.X2:11	=SYS0.1/+1.1/-UC1.W2:3	=SYS0.1/+1.10.4/-S2:1
=SYS0.1/+1.1/-UC1.X2:12	=SYS0.1/+1.1/-UC1.W2:4	=SYS0.1/+1.10.4/-S2:2
=SYS0.1/+1.1/-UC1.X2:13	=SYS0.1/+2.1/-UC3.W1:7	=SYS0.1/+2.1/-UC3.X1:7
=SYS0.1/+1.1/-UC1.X2:13	=SYS0.1/+1.10.1/-UC2.W1:7	=SYS0.1/+1.10.1/-UC2.X1:7
=SYS0.1/+1.1/-UC1.X2:14	=SYS0.1/+2.1/-UC3.W1:8	=SYS0.1/+2.1/-UC3.X1:8
=SYS0.1/+1.1/-UC1.X2:14	=SYS0.1/+1.10.1/-UC2.W1:8	=SYS0.1/+1.10.1/-UC2.X1:8
=SYS0.1/+1.1/-UC1.X2:15	=SYS0.1/+2.1/-UC3.W1:9	=SYS0.1/+2.1/-UC3.X1:9
=SYS0.1/+1.1/-UC1.X2:15	=SYS0.1/+1.10.1/-UC2.W1:9	=SYS0.1/+1.10.1/-UC2.X1:9
=SYS0.1/+1.1/-UC1.X2:16	=SYS0.1/+2.1/-UC3.W1:10	=SYS0.1/+2.1/-UC3.X1:10

Terminal	Cable	Conn. component (ext.)
=SYS0.1/+1.1/-UC1.X2:16	=SYS0.1/+1.10.1/-UC2.W1:10	=SYS0.1/+1.10.1/-UC2.X1:10
=SYS0.1/+1.1/-UC1.X2:17	=SYS0.1/+2.1/-UC3.W1:11	=SYS0.1/+2.1/-UC3.X1:11
=SYS0.1/+1.1/-UC1.X2:17	=SYS0.1/+1.10.1/-UC2.W1:11	=SYS0.1/+1.10.1/-UC2.X1:11
=SYS0.1/+1.1/-UC1.X2:18	=SYS0.1/+2.1/-UC3.W1:12	=SYS0.1/+2.1/-UC3.X1:12
=SYS0.1/+1.1/-UC1.X2:18	=SYS0.1/+1.10.1/-UC2.W1:12	=SYS0.1/+1.10.1/-UC2.X1:12
=SYS0.1/+1.10.1/-UC2.X1:1	=SYS0.1/+1.10.1/-UC2.W1:1	=SYS0.1/+1.1/-UC1.X2:1
=SYS0.1/+1.10.1/-UC2.X1:2	=SYS0.1/+1.10.1/-UC2.W1:2	=SYS0.1/+1.1/-UC1.X2:2
=SYS0.1/+1.10.1/-UC2.X1:3	=SYS0.1/+1.10.1/-UC2.W1:3	=SYS0.1/+1.1/-UC1.X2:5
=SYS0.1/+1.10.1/-UC2.X1:4	=SYS0.1/+1.10.1/-UC2.W1:4	=SYS0.1/+1.1/-UC1.X2:6
=SYS0.1/+1.10.1/-UC2.X1:5	=SYS0.1/+1.10.1/-UC2.W1:5	=SYS0.1/+1.1/-UC1.X2:9
=SYS0.1/+1.10.1/-UC2.X1:6	=SYS0.1/+1.10.1/-UC2.W1:6	=SYS0.1/+1.1/-UC1.X2:10
=SYS0.1/+1.10.1/-UC2.X1:7	=SYS0.1/+1.10.1/-UC2.W1:7	=SYS0.1/+1.1/-UC1.X2:13
=SYS0.1/+1.10.1/-UC2.X1:8	=SYS0.1/+1.10.1/-UC2.W1:8	=SYS0.1/+1.1/-UC1.X2:14
=SYS0.1/+1.10.1/-UC2.X1:9	=SYS0.1/+1.10.1/-UC2.W1:9	=SYS0.1/+1.1/-UC1.X2:15
=SYS0.1/+1.10.1/-UC2.X1:10	=SYS0.1/+1.10.1/-UC2.W1:10	=SYS0.1/+1.1/-UC1.X2:16
=SYS0.1/+1.10.1/-UC2.X1:11	=SYS0.1/+1.10.1/-UC2.W1:11	=SYS0.1/+1.1/-UC1.X2:17
=SYS0.1/+1.10.1/-UC2.X1:12	=SYS0.1/+1.10.1/-UC2.W1:12	=SYS0.1/+1.1/-UC1.X2:18
=SYS0.1/+2.1/-UC3.X1:1	=SYS0.1/+2.1/-UC3.W1:1	=SYS0.1/+1.1/-UC1.X2:3
=SYS0.1/+2.1/-UC3.X1:2	=SYS0.1/+2.1/-UC3.W1:2	=SYS0.1/+1.1/-UC1.X2:4
=SYS0.1/+2.1/-UC3.X1:3	=SYS0.1/+2.1/-UC3.W1:3	=SYS0.1/+1.1/-UC1.X2:5
=SYS0.1/+2.1/-UC3.X1:4	=SYS0.1/+2.1/-UC3.W1:4	=SYS0.1/+1.1/-UC1.X2:6
=SYS0.1/+2.1/-UC3.X1:5	=SYS0.1/+2.1/-UC3.W1:5	=SYS0.1/+1.1/-UC1.X2:9
=SYS0.1/+2.1/-UC3.X1:6	=SYS0.1/+2.1/-UC3.W1:6	=SYS0.1/+1.1/-UC1.X2:10
=SYS0.1/+2.1/-UC3.X1:7	=SYS0.1/+2.1/-UC3.W1:7	=SYS0.1/+1.1/-UC1.X2:13
=SYS0.1/+2.1/-UC3.X1:8	=SYS0.1/+2.1/-UC3.W1:8	=SYS0.1/+1.1/-UC1.X2:14
=SYS0.1/+2.1/-UC3.X1:9	=SYS0.1/+2.1/-UC3.W1:9	=SYS0.1/+1.1/-UC1.X2:15

Terminal	Cable	Conn. component (ext.)
=SYS0.1/+2.1/-UC3.X1:10	=SYS0.1/+2.1/-UC3.W1:10	=SYS0.1/+1.1/-UC1.X2:16
=SYS0.1/+2.1/-UC3.X1:11	=SYS0.1/+2.1/-UC3.W1:11	=SYS0.1/+1.1/-UC1.X2:17
=SYS0.1/+2.1/-UC3.X1:12	=SYS0.1/+2.1/-UC3.W1:12	=SYS0.1/+1.1/-UC1.X2:18
=SYS0.2/+1.1/-UC1.X1:U	=SYS0.2/+1.1/-UC1.W1:BK	=SYS0.2/+1.20.2/-M1:U
=SYS0.2/+1.1/-UC1.X1:V	=SYS0.2/+1.1/-UC1.W1:BN	=SYS0.2/+1.20.2/-M1:V
=SYS0.2/+1.1/-UC1.X1:W	=SYS0.2/+1.1/-UC1.W1:GY	=SYS0.2/+1.20.2/-M1:W
=SYS0.2/+1.1/-UC1.X1:PE	=SYS0.2/+1.1/-UC1.W1:GNYE	=SYS0.2/+1.20.2/-M1:PE
=SYS0.2/+1.1/-UC1.X2:1	=SYS0.2/+1.20.1/-UC4.W1:1	=SYS0.2/+1.20.1/-UC4.X1:1
=SYS0.2/+1.1/-UC1.X2:2	=SYS0.2/+1.20.1/-UC4.W1:2	=SYS0.2/+1.20.1/-UC4.X1:2
=SYS0.2/+1.1/-UC1.X2:3	=SYS0.2/+2.2/-UC5.W1:1	=SYS0.2/+2.2/-UC5.X1:1
=SYS0.2/+1.1/-UC1.X2:4	=SYS0.2/+2.2/-UC5.W1:2	=SYS0.2/+2.2/-UC5.X1:2
=SYS0.2/+1.1/-UC1.X2:5	=SYS0.2/+2.2/-UC5.W1:3	=SYS0.2/+2.2/-UC5.X1:3
=SYS0.2/+1.1/-UC1.X2:5	=SYS0.2/+1.20.1/-UC4.W1:3	=SYS0.2/+1.20.1/-UC4.X1:3
=SYS0.2/+1.1/-UC1.X2:6	=SYS0.2/+2.2/-UC5.W1:4	=SYS0.2/+2.2/-UC5.X1:4
=SYS0.2/+1.1/-UC1.X2:6	=SYS0.2/+1.20.1/-UC4.W1:4	=SYS0.2/+1.20.1/-UC4.X1:4
=SYS0.2/+1.1/-UC1.X2:7	=SYS0.2/+1.1/-UC1.W2:1	=SYS0.2/+1.20.3/-S1:1
=SYS0.2/+1.1/-UC1.X2:8		=SYS0.2/+1.1/-UC1.Q1:A1
=SYS0.2/+1.1/-UC1.X2:9	=SYS0.2/+2.2/-UC5.W1:5	=SYS0.2/+2.2/-UC5.X1:5
=SYS0.2/+1.1/-UC1.X2:9	=SYS0.2/+1.20.1/-UC4.W1:5	=SYS0.2/+1.20.1/-UC4.X1:5
=SYS0.2/+1.1/-UC1.X2:10	=SYS0.2/+2.2/-UC5.W1:6	=SYS0.2/+2.2/-UC5.X1:6
=SYS0.2/+1.1/-UC1.X2:10	=SYS0.2/+1.20.1/-UC4.W1:6	=SYS0.2/+1.20.1/-UC4.X1:6
=SYS0.2/+1.1/-UC1.X2:11	=SYS0.2/+1.1/-UC1.W2:3	=SYS0.2/+1.20.4/-S2:1
=SYS0.2/+1.1/-UC1.X2:12		=SYS0.2/+1.1/-UC1.Q2:A1
=SYS0.2/+1.1/-UC1.X2:13	=SYS0.2/+2.2/-UC5.W1:7	=SYS0.2/+2.2/-UC5.X1:7
=SYS0.2/+1.1/-UC1.X2:13	=SYS0.2/+1.20.1/-UC4.W1:7	=SYS0.2/+1.20.1/-UC4.X1:7
=SYS0.2/+1.1/-UC1.X2:14	=SYS0.2/+2.2/-UC5.W1:8	=SYS0.2/+2.2/-UC5.X1:8

Terminal	Cable	Conn. component (ext.)
=SYS0.2/+1.1/-UC1.X2:14	=SYS0.2/+1.20.1/-UC4.W1:8	=SYS0.2/+1.20.1/-UC4.X1:8
=SYS0.2/+1.1/-UC1.X2:15	=SYS0.2/+2.2/-UC5.W1:9	=SYS0.2/+2.2/-UC5.X1:9
=SYS0.2/+1.1/-UC1.X2:15	=SYS0.2/+1.20.1/-UC4.W1:9	=SYS0.2/+1.20.1/-UC4.X1:9
=SYS0.2/+1.1/-UC1.X2:16	=SYS0.2/+2.2/-UC5.W1:10	=SYS0.2/+2.2/-UC5.X1:10
=SYS0.2/+1.1/-UC1.X2:16	=SYS0.2/+1.20.1/-UC4.W1:10	=SYS0.2/+1.20.1/-UC4.X1:10
=SYS0.2/+1.1/-UC1.X2:17	=SYS0.2/+2.2/-UC5.W1:11	=SYS0.2/+2.2/-UC5.X1:11
=SYS0.2/+1.1/-UC1.X2:17	=SYS0.2/+1.20.1/-UC4.W1:11	=SYS0.2/+1.20.1/-UC4.X1:11
=SYS0.2/+1.1/-UC1.X2:18	=SYS0.2/+2.2/-UC5.W1:12	=SYS0.2/+2.2/-UC5.X1:12
=SYS0.2/+1.1/-UC1.X2:18	=SYS0.2/+1.20.1/-UC4.W1:12	=SYS0.2/+1.20.1/-UC4.X1:12
=SYS0.2/+1.20.1/-UC4.X1:1		=SYS0.2/+1.20.1/-UC4.S1:1
=SYS0.2/+1.20.1/-UC4.X1:2	=SYS0.2/+1.20.1/-UC4.W1:2	=SYS0.2/+1.1/-UC1.X2:2
=SYS0.2/+1.20.1/-UC4.X1:3		=SYS0.2/+1.20.1/-UC4.S2:3
=SYS0.2/+1.20.1/-UC4.X1:4	=SYS0.2/+1.20.1/-UC4.W1:4	=SYS0.2/+1.1/-UC1.X2:6
=SYS0.2/+1.20.1/-UC4.X1:5		=SYS0.2/+1.20.1/-UC4.S3:3
=SYS0.2/+1.20.1/-UC4.X1:6	=SYS0.2/+1.20.1/-UC4.W1:6	=SYS0.2/+1.1/-UC1.X2:10
=SYS0.2/+1.20.1/-UC4.X1:7	=SYS0.2/+1.20.1/-UC4.W1:7	=SYS0.2/+1.1/-UC1.X2:13
=SYS0.2/+1.20.1/-UC4.X1:8	=SYS0.2/+1.20.1/-UC4.W1:8	=SYS0.2/+1.1/-UC1.X2:14
=SYS0.2/+1.20.1/-UC4.X1:9	=SYS0.2/+1.20.1/-UC4.W1:9	=SYS0.2/+1.1/-UC1.X2:15
=SYS0.2/+1.20.1/-UC4.X1:10	=SYS0.2/+1.20.1/-UC4.W1:10	=SYS0.2/+1.1/-UC1.X2:16
=SYS0.2/+1.20.1/-UC4.X1:11	=SYS0.2/+1.20.1/-UC4.W1:11	=SYS0.2/+1.1/-UC1.X2:17
=SYS0.2/+1.20.1/-UC4.X1:12	=SYS0.2/+1.20.1/-UC4.W1:12	=SYS0.2/+1.1/-UC1.X2:18
=SYS0.2/+2.2/-UC5.X1:1	=SYS0.2/+2.2/-UC5.W1:1	=SYS0.2/+1.1/-UC1.X2:3
=SYS0.2/+2.2/-UC5.X1:2	=SYS0.2/+2.2/-UC5.W1:2	=SYS0.2/+1.1/-UC1.X2:4
=SYS0.2/+2.2/-UC5.X1:3		=SYS0.2/+2.2/-UC5.S2:3
=SYS0.2/+2.2/-UC5.X1:4	=SYS0.2/+2.2/-UC5.W1:4	=SYS0.2/+1.1/-UC1.X2:6
=SYS0.2/+2.2/-UC5.X1:5		=SYS0.2/+2.2/-UC5.S3:3

Terminal	Cable	Conn. component (ext.)
=SYS0.2/+2.2/-UC5.X1:6	=SYS0.2/+2.2/-UC5.W1:6	=SYS0.2/+1.1/-UC1.X2:10
=SYS0.2/+2.2/-UC5.X1:7	=SYS0.2/+2.2/-UC5.W1:7	=SYS0.2/+1.1/-UC1.X2:13
=SYS0.2/+2.2/-UC5.X1:8	=SYS0.2/+2.2/-UC5.W1:8	=SYS0.2/+1.1/-UC1.X2:14
=SYS0.2/+2.2/-UC5.X1:9	=SYS0.2/+2.2/-UC5.W1:9	=SYS0.2/+1.1/-UC1.X2:15
=SYS0.2/+2.2/-UC5.X1:10	=SYS0.2/+2.2/-UC5.W1:10	=SYS0.2/+1.1/-UC1.X2:16
=SYS0.2/+2.2/-UC5.X1:11	=SYS0.2/+2.2/-UC5.W1:11	=SYS0.2/+1.1/-UC1.X2:17
=SYS0.2/+2.2/-UC5.X1:12	=SYS0.2/+2.2/-UC5.W1:12	=SYS0.2/+1.1/-UC1.X2:18
=SYS0.3/+1.1/-UC1.X1:U	=SYS0.3/+1.1/-UC1.W1:BK	=SYS0.3/+1.30.2/-M1:U
=SYS0.3/+1.1/-UC1.X1:V	=SYS0.3/+1.1/-UC1.W1:BN	=SYS0.3/+1.30.2/-M1:V
=SYS0.3/+1.1/-UC1.X1:W	=SYS0.3/+1.1/-UC1.W1:GY	=SYS0.3/+1.30.2/-M1:W
=SYS0.3/+1.1/-UC1.X1:PE	=SYS0.3/+1.1/-UC1.W1:GNYE	=SYS0.3/+1.30.2/-M1:PE
=SYS0.3/+1.1/-UC1.X2:1	=SYS0.3/+1.30.1/-UC6.W1:1	=SYS0.3/+1.30.1/-UC6.X1:1
=SYS0.3/+1.1/-UC1.X2:2	=SYS0.3/+1.30.1/-UC6.W1:2	=SYS0.3/+1.30.1/-UC6.X1:2
=SYS0.3/+1.1/-UC1.X2:3	=SYS0.3/+2.3/-UC7.W1:1	=SYS0.3/+2.3/-UC7.X1:1
=SYS0.3/+1.1/-UC1.X2:4	=SYS0.3/+2.3/-UC7.W1:2	=SYS0.3/+2.3/-UC7.X1:2
=SYS0.3/+1.1/-UC1.X2:5	=SYS0.3/+2.3/-UC7.W1:3	=SYS0.3/+2.3/-UC7.X1:3
=SYS0.3/+1.1/-UC1.X2:5	=SYS0.3/+1.30.1/-UC6.W1:3	=SYS0.3/+1.30.1/-UC6.X1:3
=SYS0.3/+1.1/-UC1.X2:6	=SYS0.3/+2.3/-UC7.W1:4	=SYS0.3/+2.3/-UC7.X1:4
=SYS0.3/+1.1/-UC1.X2:6	=SYS0.3/+1.30.1/-UC6.W1:4	=SYS0.3/+1.30.1/-UC6.X1:4
=SYS0.3/+1.1/-UC1.X2:7	=SYS0.3/+1.1/-UC1.W2:1	=SYS0.3/+1.30.3/-S1:1
=SYS0.3/+1.1/-UC1.X2:8	=SYS0.3/+1.1/-UC1.W2:2	=SYS0.3/+1.30.3/-S1:2
=SYS0.3/+1.1/-UC1.X2:9	=SYS0.3/+2.3/-UC7.W1:5	=SYS0.3/+2.3/-UC7.X1:5
=SYS0.3/+1.1/-UC1.X2:9	=SYS0.3/+1.30.1/-UC6.W1:5	=SYS0.3/+1.30.1/-UC6.X1:5
=SYS0.3/+1.1/-UC1.X2:10	=SYS0.3/+2.3/-UC7.W1:6	=SYS0.3/+2.3/-UC7.X1:6
=SYS0.3/+1.1/-UC1.X2:10	=SYS0.3/+1.30.1/-UC6.W1:6	=SYS0.3/+1.30.1/-UC6.X1:6
=SYS0.3/+1.1/-UC1.X2:11	=SYS0.3/+1.1/-UC1.W2:3	=SYS0.3/+1.30.4/-S2:1

Terminal	Cable	Conn. component (ext.)
=SYS0.3/+1.1/-UC1.X2:12	=SYS0.3/+1.1/-UC1.W2:4	=SYS0.3/+1.30.4/-S2:2
=SYS0.3/+1.1/-UC1.X2:13	=SYS0.3/+2.3/-UC7.W1:7	=SYS0.3/+2.3/-UC7.X1:7
=SYS0.3/+1.1/-UC1.X2:13	=SYS0.3/+1.30.1/-UC6.W1:7	=SYS0.3/+1.30.1/-UC6.X1:7
=SYS0.3/+1.1/-UC1.X2:14	=SYS0.3/+2.3/-UC7.W1:8	=SYS0.3/+2.3/-UC7.X1:8
=SYS0.3/+1.1/-UC1.X2:14	=SYS0.3/+1.30.1/-UC6.W1:8	=SYS0.3/+1.30.1/-UC6.X1:8
=SYS0.3/+1.1/-UC1.X2:15	=SYS0.3/+2.3/-UC7.W1:9	=SYS0.3/+2.3/-UC7.X1:9
=SYS0.3/+1.1/-UC1.X2:15	=SYS0.3/+1.30.1/-UC6.W1:9	=SYS0.3/+1.30.1/-UC6.X1:9
=SYS0.3/+1.1/-UC1.X2:16	=SYS0.3/+2.3/-UC7.W1:10	=SYS0.3/+2.3/-UC7.X1:10
=SYS0.3/+1.1/-UC1.X2:16	=SYS0.3/+1.30.1/-UC6.W1:10	=SYS0.3/+1.30.1/-UC6.X1:10
=SYS0.3/+1.1/-UC1.X2:17	=SYS0.3/+2.3/-UC7.W1:11	=SYS0.3/+2.3/-UC7.X1:11
=SYS0.3/+1.1/-UC1.X2:17	=SYS0.3/+1.30.1/-UC6.W1:11	=SYS0.3/+1.30.1/-UC6.X1:11
=SYS0.3/+1.1/-UC1.X2:18	=SYS0.3/+2.3/-UC7.W1:12	=SYS0.3/+2.3/-UC7.X1:12
=SYS0.3/+1.1/-UC1.X2:18	=SYS0.3/+1.30.1/-UC6.W1:12	=SYS0.3/+1.30.1/-UC6.X1:12
=SYS0.3/+1.30.1/-UC6.X1:1	=SYS0.3/+1.30.1/-UC6.W1:1	=SYS0.3/+1.1/-UC1.X2:1
=SYS0.3/+1.30.1/-UC6.X1:2	=SYS0.3/+1.30.1/-UC6.W1:2	=SYS0.3/+1.1/-UC1.X2:2
=SYS0.3/+1.30.1/-UC6.X1:3	=SYS0.3/+1.30.1/-UC6.W1:3	=SYS0.3/+1.1/-UC1.X2:5
=SYS0.3/+1.30.1/-UC6.X1:4	=SYS0.3/+1.30.1/-UC6.W1:4	=SYS0.3/+1.1/-UC1.X2:6
=SYS0.3/+1.30.1/-UC6.X1:5	=SYS0.3/+1.30.1/-UC6.W1:5	=SYS0.3/+1.1/-UC1.X2:9
=SYS0.3/+1.30.1/-UC6.X1:6	=SYS0.3/+1.30.1/-UC6.W1:6	=SYS0.3/+1.1/-UC1.X2:10
=SYS0.3/+1.30.1/-UC6.X1:7	=SYS0.3/+1.30.1/-UC6.W1:7	=SYS0.3/+1.1/-UC1.X2:13
=SYS0.3/+1.30.1/-UC6.X1:8	=SYS0.3/+1.30.1/-UC6.W1:8	=SYS0.3/+1.1/-UC1.X2:14
=SYS0.3/+1.30.1/-UC6.X1:9	=SYS0.3/+1.30.1/-UC6.W1:9	=SYS0.3/+1.1/-UC1.X2:15
=SYS0.3/+1.30.1/-UC6.X1:10	=SYS0.3/+1.30.1/-UC6.W1:10	=SYS0.3/+1.1/-UC1.X2:16
=SYS0.3/+1.30.1/-UC6.X1:11	=SYS0.3/+1.30.1/-UC6.W1:11	=SYS0.3/+1.1/-UC1.X2:17
=SYS0.3/+1.30.1/-UC6.X1:12	=SYS0.3/+1.30.1/-UC6.W1:12	=SYS0.3/+1.1/-UC1.X2:18
=SYS0.3/+2.3/-UC7.X1:1	=SYS0.3/+2.3/-UC7.W1:1	=SYS0.3/+1.1/-UC1.X2:3

Terminal	Cable	Conn. component (ext.)	Terminal	Cable	Conn. component (ext.)
=SYS0.3/+2.3/-UC7.X1:2	=SYS0.3/+2.3/-UC7.W1:2	=SYS0.3/+1.1/-UC1.X2:4			
=SYS0.3/+2.3/-UC7.X1:3	=SYS0.3/+2.3/-UC7.W1:3	=SYS0.3/+1.1/-UC1.X2:5			
=SYS0.3/+2.3/-UC7.X1:4	=SYS0.3/+2.3/-UC7.W1:4	=SYS0.3/+1.1/-UC1.X2:6			
=SYS0.3/+2.3/-UC7.X1:5	=SYS0.3/+2.3/-UC7.W1:5	=SYS0.3/+1.1/-UC1.X2:9			
=SYS0.3/+2.3/-UC7.X1:6	=SYS0.3/+2.3/-UC7.W1:6	=SYS0.3/+1.1/-UC1.X2:10			
=SYS0.3/+2.3/-UC7.X1:7	=SYS0.3/+2.3/-UC7.W1:7	=SYS0.3/+1.1/-UC1.X2:13			
=SYS0.3/+2.3/-UC7.X1:8	=SYS0.3/+2.3/-UC7.W1:8	=SYS0.3/+1.1/-UC1.X2:14			
=SYS0.3/+2.3/-UC7.X1:9	=SYS0.3/+2.3/-UC7.W1:9	=SYS0.3/+1.1/-UC1.X2:15			
=SYS0.3/+2.3/-UC7.X1:10	=SYS0.3/+2.3/-UC7.W1:10	=SYS0.3/+1.1/-UC1.X2:16			
=SYS0.3/+2.3/-UC7.X1:11	=SYS0.3/+2.3/-UC7.W1:11	=SYS0.3/+1.1/-UC1.X2:17			
=SYS0.3/+2.3/-UC7.X1:12	=SYS0.3/+2.3/-UC7.W1:12	=SYS0.3/+1.1/-UC1.X2:18			
=SYS0/+1.1/-UC1.X1:PE1		+1.1/-UC1.T1:PE			
=SYS0/+1.1/-UC1.X1:PE2					
=SYS0/+1.1/-UC1.X1:PE3					

PCSCHEMATIC Automation

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**29**
Customer:		DCC:		Scale:	1:1
Page title:	Terminal list - External connections	Dwg. no.:	Page rev.:	Previous page:	28
File name:	PCSmotordemo3	Eng. (proj/page):	Last print: 29.10.2026	Next page:	30
Page ref.:		Appr. (date/init):	Last edit: 17.02.2022	Total no. of pages:	52

Cable			From				To				Type	Description
=SYS0.1/+1.1/-UC1	**-W1**	BK	=SYS0.1/+1.1/-UC1	-X1	U	/6.1	=SYS0.1/+1.10.2	-M1	U	/6.1	PCS-CBL02	4 conductors without screen
=SYS0.1/+1.1/-UC1	**-W1**	BN	=SYS0.1/+1.1/-UC1	-X1	V	/6.1	=SYS0.1/+1.10.2	-M1	V	/6.1	PCS-CBL02	4 conductors without screen
=SYS0.1/+1.1/-UC1	**-W1**	GNYE	=SYS0.1/+1.1/-UC1	-X1	PE	/6.1	=SYS0.1/+1.10.2	-M1	PE	/6.1	PCS-CBL02	4 conductors without screen
=SYS0.1/+1.1/-UC1	**-W1**	GY	=SYS0.1/+1.1/-UC1	-X1	W	/6.1	=SYS0.1/+1.10.2	-M1	W	/6.1	PCS-CBL02	4 conductors without screen
=SYS0.1/+1.1/-UC1	**-W2**	1	=SYS0.1/+1.1/-UC1	-X2	7	/7.3	=SYS0.1/+1.10.3	-S1	1	/7.3		
=SYS0.1/+1.1/-UC1	**-W2**	2	=SYS0.1/+1.1/-UC1	-X2	8	/7.3	=SYS0.1/+1.10.3	-S1	2	/7.3		
=SYS0.1/+1.1/-UC1	**-W2**	3	=SYS0.1/+1.1/-UC1	-X2	11	/7.6	=SYS0.1/+1.10.4	-S2	1	/7.6		
=SYS0.1/+1.1/-UC1	**-W2**	4	=SYS0.1/+1.1/-UC1	-X2	12	/7.6	=SYS0.1/+1.10.4	-S2	2	/7.6		
=SYS0.1/+1.10.1/-UC2	**-W1**	1	=SYS0.1/+1.1/-UC1	-X2	1	/7.1	=SYS0.1/+1.10.1/-UC2	-X1	1	/7.1		
=SYS0.1/+1.10.1/-UC2	**-W1**	2	=SYS0.1/+1.1/-UC1	-X2	2	/7.1	=SYS0.1/+1.10.1/-UC2	-X1	2	/7.1		
=SYS0.1/+1.10.1/-UC2	**-W1**	3	=SYS0.1/+1.1/-UC1	-X2	5	/7.3	=SYS0.1/+1.10.1/-UC2	-X1	3	/7.4		
=SYS0.1/+1.10.1/-UC2	**-W1**	4	=SYS0.1/+1.1/-UC1	-X2	6	/7.3	=SYS0.1/+1.10.1/-UC2	-X1	4	/7.4		
=SYS0.1/+1.10.1/-UC2	**-W1**	5	=SYS0.1/+1.1/-UC1	-X2	9	/7.6	=SYS0.1/+1.10.1/-UC2	-X1	5	/7.7		
=SYS0.1/+1.10.1/-UC2	**-W1**	6	=SYS0.1/+1.1/-UC1	-X2	10	/7.6	=SYS0.1/+1.10.1/-UC2	-X1	6	/7.7		
=SYS0.1/+1.10.1/-UC2	**-W1**	7	=SYS0.1/+1.1/-UC1	-X2	13	/8.1	=SYS0.1/+1.10.1/-UC2	-X1	7	/8.1		
=SYS0.1/+1.10.1/-UC2	**-W1**	8	=SYS0.1/+1.1/-UC1	-X2	14	/8.1	=SYS0.1/+1.10.1/-UC2	-X1	8	/8.1		
=SYS0.1/+1.10.1/-UC2	**-W1**	9	=SYS0.1/+1.1/-UC1	-X2	15	/8.3	=SYS0.1/+1.10.1/-UC2	-X1	9	/8.3		
=SYS0.1/+1.10.1/-UC2	**-W1**	10	=SYS0.1/+1.1/-UC1	-X2	16	/8.3	=SYS0.1/+1.10.1/-UC2	-X1	10	/8.3		
=SYS0.1/+1.10.1/-UC2	**-W1**	11	=SYS0.1/+1.1/-UC1	-X2	17	/8.5	=SYS0.1/+1.10.1/-UC2	-X1	11	/8.5		
=SYS0.1/+1.10.1/-UC2	**-W1**	12	=SYS0.1/+1.1/-UC1	-X2	18	/8.5	=SYS0.1/+1.10.1/-UC2	-X1	12	/8.5		
=SYS0.1/+2.1/-UC3	**-W1**	1	=SYS0.1/+1.1/-UC1	-X2	3	/7.1	=SYS0.1/+2.1/-UC3	-X1	1	/7.1		
=SYS0.1/+2.1/-UC3	**-W1**	2	=SYS0.1/+1.1/-UC1	-X2	4	/7.1	=SYS0.1/+2.1/-UC3	-X1	2	/7.1		
=SYS0.1/+2.1/-UC3	**-W1**	3	=SYS0.1/+1.1/-UC1	-X2	5	/7.3	=SYS0.1/+2.1/-UC3	-X1	3	/7.5		
=SYS0.1/+2.1/-UC3	**-W1**	4	=SYS0.1/+1.1/-UC1	-X2	6	/7.3	=SYS0.1/+2.1/-UC3	-X1	4	/7.5		
=SYS0.1/+2.1/-UC3	**-W1**	5	=SYS0.1/+1.1/-UC1	-X2	9	/7.6	=SYS0.1/+2.1/-UC3	-X1	5	/7.8		

Cable			From				To				Type	Description
=SYS0.1/+2.1/-UC3	**-W1**	6	=SYS0.1/+1.1/-UC1	-X2	10	/7.6	=SYS0.1/+2.1/-UC3	-X1	6	/7.8		
=SYS0.1/+2.1/-UC3	**-W1**	7	=SYS0.1/+1.1/-UC1	-X2	13	/8.1	=SYS0.1/+2.1/-UC3	-X1	7	/8.2		
=SYS0.1/+2.1/-UC3	**-W1**	8	=SYS0.1/+1.1/-UC1	-X2	14	/8.1	=SYS0.1/+2.1/-UC3	-X1	8	/8.2		
=SYS0.1/+2.1/-UC3	**-W1**	9	=SYS0.1/+1.1/-UC1	-X2	15	/8.3	=SYS0.1/+2.1/-UC3	-X1	9	/8.4		
=SYS0.1/+2.1/-UC3	**-W1**	10	=SYS0.1/+1.1/-UC1	-X2	16	/8.3	=SYS0.1/+2.1/-UC3	-X1	10	/8.4		
=SYS0.1/+2.1/-UC3	**-W1**	11	=SYS0.1/+1.1/-UC1	-X2	17	/8.5	=SYS0.1/+2.1/-UC3	-X1	11	/8.6		
=SYS0.1/+2.1/-UC3	**-W1**	12	=SYS0.1/+1.1/-UC1	-X2	18	/8.5	=SYS0.1/+2.1/-UC3	-X1	12	/8.6		
=SYS0.2/+1.1/-UC1	**-W1**	BK	=SYS0.2/+1.1/-UC1	-X1	U	/9.1	=SYS0.2/+1.20.2	-M1	U	/9.1	PCS-CBL02	4 conductors without screen
=SYS0.2/+1.1/-UC1	**-W1**	BN	=SYS0.2/+1.1/-UC1	-X1	V	/9.1	=SYS0.2/+1.20.2	-M1	V	/9.1	PCS-CBL02	4 conductors without screen
=SYS0.2/+1.1/-UC1	**-W1**	GNYE	=SYS0.2/+1.1/-UC1	-X1	PE	/9.1	=SYS0.2/+1.20.2	-M1	PE	/9.1	PCS-CBL02	4 conductors without screen
=SYS0.2/+1.1/-UC1	**-W1**	GY	=SYS0.2/+1.1/-UC1	-X1	W	/9.1	=SYS0.2/+1.20.2	-M1	W	/9.1	PCS-CBL02	4 conductors without screen
=SYS0.2/+1.1/-UC1	**-W2**	1	=SYS0.2/+1.1/-UC1	-X2	7	/10.3	=SYS0.2/+1.20.3	-S1	1	/10.3		
=SYS0.2/+1.1/-UC1	**-W2**	2	=SYS0.2/+1.1/-UC1	-X2	8	/10.3	=SYS0.2/+1.20.3	-S1	2	/10.3		
=SYS0.2/+1.1/-UC1	**-W2**	3	=SYS0.2/+1.1/-UC1	-X2	11	/10.6	=SYS0.2/+1.20.4	-S2	1	/10.6		
=SYS0.2/+1.1/-UC1	**-W2**	4	=SYS0.2/+1.1/-UC1	-X2	12	/10.6	=SYS0.2/+1.20.4	-S2	2	/10.6		
=SYS0.2/+1.20.1/-UC4	**-W1**	1	=SYS0.2/+1.1/-UC1	-X2	1	/10.1	=SYS0.2/+1.20.1/-UC4	-X1	1	/10.1		
=SYS0.2/+1.20.1/-UC4	**-W1**	2	=SYS0.2/+1.1/-UC1	-X2	2	/10.1	=SYS0.2/+1.20.1/-UC4	-X1	2	/10.1		
=SYS0.2/+1.20.1/-UC4	**-W1**	3	=SYS0.2/+1.1/-UC1	-X2	5	/10.3	=SYS0.2/+1.20.1/-UC4	-X1	3	/10.4		
=SYS0.2/+1.20.1/-UC4	**-W1**	4	=SYS0.2/+1.1/-UC1	-X2	6	/10.3	=SYS0.2/+1.20.1/-UC4	-X1	4	/10.4		
=SYS0.2/+1.20.1/-UC4	**-W1**	5	=SYS0.2/+1.1/-UC1	-X2	9	/10.6	=SYS0.2/+1.20.1/-UC4	-X1	5	/10.7		
=SYS0.2/+1.20.1/-UC4	**-W1**	6	=SYS0.2/+1.1/-UC1	-X2	10	/10.6	=SYS0.2/+1.20.1/-UC4	-X1	6	/10.7		
=SYS0.2/+1.20.1/-UC4	**-W1**	7	=SYS0.2/+1.1/-UC1	-X2	13	/11.1	=SYS0.2/+1.20.1/-UC4	-X1	7	/11.1		
=SYS0.2/+1.20.1/-UC4	**-W1**	8	=SYS0.2/+1.1/-UC1	-X2	14	/11.1	=SYS0.2/+1.20.1/-UC4	-X1	8	/11.1		
=SYS0.2/+1.20.1/-UC4	**-W1**	9	=SYS0.2/+1.1/-UC1	-X2	15	/11.3	=SYS0.2/+1.20.1/-UC4	-X1	9	/11.3		
=SYS0.2/+1.20.1/-UC4	**-W1**	10	=SYS0.2/+1.1/-UC1	-X2	16	/11.3	=SYS0.2/+1.20.1/-UC4	-X1	10	/11.3		

Cable			From				To				Type	Description
=SYS0.2/+1.20.1/-UC4	**-W1**	11	=SYS0.2/+1.1/-UC1	-X2	17	/11.5	=SYS0.2/+1.20.1/-UC4	-X1	11	/11.5		
=SYS0.2/+1.20.1/-UC4	**-W1**	12	=SYS0.2/+1.1/-UC1	-X2	18	/11.5	=SYS0.2/+1.20.1/-UC4	-X1	12	/11.5		
=SYS0.2/+2.2/-UC5	**-W1**	1	=SYS0.2/+1.1/-UC1	-X2	3	/10.1	=SYS0.2/+2.2/-UC5	-X1	1	/10.1		
=SYS0.2/+2.2/-UC5	**-W1**	2	=SYS0.2/+1.1/-UC1	-X2	4	/10.1	=SYS0.2/+2.2/-UC5	-X1	2	/10.1		
=SYS0.2/+2.2/-UC5	**-W1**	3	=SYS0.2/+1.1/-UC1	-X2	5	/10.3	=SYS0.2/+2.2/-UC5	-X1	3	/10.5		
=SYS0.2/+2.2/-UC5	**-W1**	4	=SYS0.2/+1.1/-UC1	-X2	6	/10.3	=SYS0.2/+2.2/-UC5	-X1	4	/10.5		
=SYS0.2/+2.2/-UC5	**-W1**	5	=SYS0.2/+1.1/-UC1	-X2	9	/10.6	=SYS0.2/+2.2/-UC5	-X1	5	/10.8		
=SYS0.2/+2.2/-UC5	**-W1**	6	=SYS0.2/+1.1/-UC1	-X2	10	/10.6	=SYS0.2/+2.2/-UC5	-X1	6	/10.8		
=SYS0.2/+2.2/-UC5	**-W1**	7	=SYS0.2/+1.1/-UC1	-X2	13	/11.1	=SYS0.2/+2.2/-UC5	-X1	7	/11.2		
=SYS0.2/+2.2/-UC5	**-W1**	8	=SYS0.2/+1.1/-UC1	-X2	14	/11.1	=SYS0.2/+2.2/-UC5	-X1	8	/11.2		
=SYS0.2/+2.2/-UC5	**-W1**	9	=SYS0.2/+1.1/-UC1	-X2	15	/11.3	=SYS0.2/+2.2/-UC5	-X1	9	/11.4		
=SYS0.2/+2.2/-UC5	**-W1**	10	=SYS0.2/+1.1/-UC1	-X2	16	/11.3	=SYS0.2/+2.2/-UC5	-X1	10	/11.4		
=SYS0.2/+2.2/-UC5	**-W1**	11	=SYS0.2/+1.1/-UC1	-X2	17	/11.5	=SYS0.2/+2.2/-UC5	-X1	11	/11.6		
=SYS0.2/+2.2/-UC5	**-W1**	12	=SYS0.2/+1.1/-UC1	-X2	18	/11.5	=SYS0.2/+2.2/-UC5	-X1	12	/11.6		
=SYS0.3/+1.1/-UC1	**-W1**	BK	=SYS0.3/+1.1/-UC1	-X1	U	/12.1	=SYS0.3/+1.30.2	-M1	U	/12.1	PCS-CBL02	4 conductors without screen
=SYS0.3/+1.1/-UC1	**-W1**	BN	=SYS0.3/+1.1/-UC1	-X1	V	/12.1	=SYS0.3/+1.30.2	-M1	V	/12.1	PCS-CBL02	4 conductors without screen
=SYS0.3/+1.1/-UC1	**-W1**	GNYE	=SYS0.3/+1.1/-UC1	-X1	PE	/12.1	=SYS0.3/+1.30.2	-M1	PE	/12.1	PCS-CBL02	4 conductors without screen
=SYS0.3/+1.1/-UC1	**-W1**	GY	=SYS0.3/+1.1/-UC1	-X1	W	/12.1	=SYS0.3/+1.30.2	-M1	W	/12.1	PCS-CBL02	4 conductors without screen
=SYS0.3/+1.1/-UC1	**-W2**	1	=SYS0.3/+1.1/-UC1	-X2	7	/13.3	=SYS0.3/+1.30.3	-S1	1	/13.3		
=SYS0.3/+1.1/-UC1	**-W2**	2	=SYS0.3/+1.1/-UC1	-X2	8	/13.3	=SYS0.3/+1.30.3	-S1	2	/13.3		
=SYS0.3/+1.1/-UC1	**-W2**	3	=SYS0.3/+1.1/-UC1	-X2	11	/13.6	=SYS0.3/+1.30.4	-S2	1	/13.6		
=SYS0.3/+1.1/-UC1	**-W2**	4	=SYS0.3/+1.1/-UC1	-X2	12	/13.6	=SYS0.3/+1.30.4	-S2	2	/13.6		
=SYS0.3/+1.30.1/-UC6	**-W1**	1	=SYS0.3/+1.1/-UC1	-X2	1	/13.1	=SYS0.3/+1.30.1/-UC6	-X1	1	/13.1		
=SYS0.3/+1.30.1/-UC6	**-W1**	2	=SYS0.3/+1.1/-UC1	-X2	2	/13.1	=SYS0.3/+1.30.1/-UC6	-X1	2	/13.1		

Cable			From				To				Type	Description
=SYS0.3/+1.30.1/-UC6	**-W1**	3	=SYS0.3/+1.1/-UC1	-X2	5	/13.3	=SYS0.3/+1.30.1/-UC6	-X1	3	/13.4		
=SYS0.3/+1.30.1/-UC6	**-W1**	4	=SYS0.3/+1.1/-UC1	-X2	6	/13.3	=SYS0.3/+1.30.1/-UC6	-X1	4	/13.4		
=SYS0.3/+1.30.1/-UC6	**-W1**	5	=SYS0.3/+1.1/-UC1	-X2	9	/13.6	=SYS0.3/+1.30.1/-UC6	-X1	5	/13.7		
=SYS0.3/+1.30.1/-UC6	**-W1**	6	=SYS0.3/+1.1/-UC1	-X2	10	/13.6	=SYS0.3/+1.30.1/-UC6	-X1	6	/13.7		
=SYS0.3/+1.30.1/-UC6	**-W1**	7	=SYS0.3/+1.1/-UC1	-X2	13	/14.1	=SYS0.3/+1.30.1/-UC6	-X1	7	/14.1		
=SYS0.3/+1.30.1/-UC6	**-W1**	8	=SYS0.3/+1.1/-UC1	-X2	14	/14.1	=SYS0.3/+1.30.1/-UC6	-X1	8	/14.1		
=SYS0.3/+1.30.1/-UC6	**-W1**	9	=SYS0.3/+1.1/-UC1	-X2	15	/14.3	=SYS0.3/+1.30.1/-UC6	-X1	9	/14.3		
=SYS0.3/+1.30.1/-UC6	**-W1**	10	=SYS0.3/+1.1/-UC1	-X2	16	/14.3	=SYS0.3/+1.30.1/-UC6	-X1	10	/14.3		
=SYS0.3/+1.30.1/-UC6	**-W1**	11	=SYS0.3/+1.1/-UC1	-X2	17	/14.5	=SYS0.3/+1.30.1/-UC6	-X1	11	/14.5		
=SYS0.3/+1.30.1/-UC6	**-W1**	12	=SYS0.3/+1.1/-UC1	-X2	18	/14.5	=SYS0.3/+1.30.1/-UC6	-X1	12	/14.5		
=SYS0.3/+2.3/-UC7	**-W1**	1	=SYS0.3/+1.1/-UC1	-X2	3	/13.1	=SYS0.3/+2.3/-UC7	-X1	1	/13.1		
=SYS0.3/+2.3/-UC7	**-W1**	2	=SYS0.3/+1.1/-UC1	-X2	4	/13.1	=SYS0.3/+2.3/-UC7	-X1	2	/13.1		
=SYS0.3/+2.3/-UC7	**-W1**	3	=SYS0.3/+1.1/-UC1	-X2	5	/13.3	=SYS0.3/+2.3/-UC7	-X1	3	/13.5		
=SYS0.3/+2.3/-UC7	**-W1**	4	=SYS0.3/+1.1/-UC1	-X2	6	/13.3	=SYS0.3/+2.3/-UC7	-X1	4	/13.5		
=SYS0.3/+2.3/-UC7	**-W1**	5	=SYS0.3/+1.1/-UC1	-X2	9	/13.6	=SYS0.3/+2.3/-UC7	-X1	5	/13.8		
=SYS0.3/+2.3/-UC7	**-W1**	6	=SYS0.3/+1.1/-UC1	-X2	10	/13.6	=SYS0.3/+2.3/-UC7	-X1	6	/13.8		
=SYS0.3/+2.3/-UC7	**-W1**	7	=SYS0.3/+1.1/-UC1	-X2	13	/14.1	=SYS0.3/+2.3/-UC7	-X1	7	/14.2		
=SYS0.3/+2.3/-UC7	**-W1**	8	=SYS0.3/+1.1/-UC1	-X2	14	/14.1	=SYS0.3/+2.3/-UC7	-X1	8	/14.2		
=SYS0.3/+2.3/-UC7	**-W1**	9	=SYS0.3/+1.1/-UC1	-X2	15	/14.3	=SYS0.3/+2.3/-UC7	-X1	9	/14.4		
=SYS0.3/+2.3/-UC7	**-W1**	10	=SYS0.3/+1.1/-UC1	-X2	16	/14.3	=SYS0.3/+2.3/-UC7	-X1	10	/14.4		
=SYS0.3/+2.3/-UC7	**-W1**	11	=SYS0.3/+1.1/-UC1	-X2	17	/14.5	=SYS0.3/+2.3/-UC7	-X1	11	/14.6		
=SYS0.3/+2.3/-UC7	**-W1**	12	=SYS0.3/+1.1/-UC1	-X2	18	/14.5	=SYS0.3/+2.3/-UC7	-X1	12	/14.6		

FROM	TO	Wire no	Signal	Cable	Jumper	Line name	Line type	Routing class
+1.1/-UC1.T1:L1	=SYS0/+1.1/-UC1.F1:1							Power
=SYS0/+1.1/-UC1.F1:1	=SYS0/+1.1/-UC1.F2:1							Power
=SYS0/+1.1/-UC1.F2:1	=SYS0/+1.1/-UC1.F3:1							Power
=SYS0.3/+1.1/-UC1.Q1:1	=SYS0.3/+1.1/-UC1.Q2:1		L1					
=SYS0.3/+1.1/-UC1.F1:95	=SYS0.3/+1.1/-UC1.F1:97		L1					
=SYS0.3/+1.1/-UC1.F1:97	=SYS0.3/+1.1/-UC1.Q1:63		L1					
=SYS0.3/+1.1/-UC1.Q2:1	=SYS0.3/+1.1/-UC1.F1:95		L1					
=SYS0/+1.1/-UC1.F1:2	=SYS0.3/+1.1/-UC1.Q1:1		L1					
=SYS0.3/+1.1/-UC1.Q1:63	=SYS0.3/+1.1/-UC1.Q2:63		L1					
=SYS0.2/+1.1/-UC1.Q1:1	=SYS0.2/+1.1/-UC1.Q2:1		L1					power
=SYS0.2/+1.1/-UC1.F1:95	=SYS0.2/+1.1/-UC1.F1:97		L1					
=SYS0.2/+1.1/-UC1.F1:97	=SYS0.2/+1.1/-UC1.Q1:63		L1					
=SYS0.2/+1.1/-UC1.Q2:1	=SYS0.2/+1.1/-UC1.F1:95		L1					power
=SYS0.2/+1.1/-UC1.Q1:63	=SYS0.2/+1.1/-UC1.Q2:63		L1					
=SYS0/+1.1/-UC1.F2:2	=SYS0.2/+1.1/-UC1.Q1:1		L1					Power
=SYS0.1/+1.1/-UC1.Q1:1	=SYS0.1/+1.1/-UC1.Q2:1		L1					power
=SYS0.1/+1.1/-UC1.F1:95	=SYS0.1/+1.1/-UC1.F1:97		L1					
=SYS0.1/+1.1/-UC1.F1:97	=SYS0.1/+1.1/-UC1.Q1:63		L1					power
=SYS0.1/+1.1/-UC1.Q2:1	=SYS0.1/+1.1/-UC1.F1:95		L1					power
=SYS0.1/+1.1/-UC1.Q1:63	=SYS0.1/+1.1/-UC1.Q2:63		L1					power
=SYS0/+1.1/-UC1.F3:2	=SYS0.1/+1.1/-UC1.Q1:1		L1					Power
=SYS0.1/+1.1/-UC1.F1:1	=SYS0.1/+1.1/-UC1.Q1:2							xx
=SYS0.1/+1.1/-UC1.F1:1	=SYS0.1/+1.1/-UC1.Q2:6							xx
=SYS0.2/+1.1/-UC1.F1:1	=SYS0.2/+1.1/-UC1.Q1:2							xx
=SYS0.2/+1.1/-UC1.F1:1	=SYS0.2/+1.1/-UC1.Q2:6	7						xx
=SYS0.3/+1.1/-UC1.F1:1	=SYS0.3/+1.1/-UC1.Q1:2	47						
=SYS0.3/+1.1/-UC1.F1:1	=SYS0.3/+1.1/-UC1.Q2:6	55						
=SYS0.1/+1.1/-UC1.Q3:1	=SYS0.1/+1.1/-UC1.F1:2							

FROM	TO	Wire no	Signal	Cable	Jumper	Line name	Line type	Routing class
=SYS0.2/+1.1/-UC1.Q3:1	=SYS0.2/+1.1/-UC1.F1:2	1						
=SYS0.3/+1.1/-UC1.Q3:1	=SYS0.3/+1.1/-UC1.F1:2	46						
=SYS0.1/+1.1/-UC1.X1:U	=SYS0.1/+1.1/-UC1.Q3:2							
=SYS0.2/+1.1/-UC1.X1:U	=SYS0.2/+1.1/-UC1.Q3:2	0						
=SYS0.3/+1.1/-UC1.X1:U	=SYS0.3/+1.1/-UC1.Q3:2	45						
+1.1/-UC1.T1:L2	=SYS0/+1.1/-UC1.F1:3							Power
=SYS0/+1.1/-UC1.F1:3	=SYS0/+1.1/-UC1.F2:3							Power
=SYS0/+1.1/-UC1.F2:3	=SYS0/+1.1/-UC1.F3:3							Power
=SYS0.1/+1.10.2/-M1:U	=SYS0.1/+1.1/-UC1.X1:U			-W1:BK				
=SYS0.2/+1.20.2/-M1:U	=SYS0.2/+1.1/-UC1.X1:U			-W1:BK				
=SYS0.3/+1.30.2/-M1:U	=SYS0.3/+1.1/-UC1.X1:U			-W1:BK				
=SYS0.3/+1.1/-UC1.Q1:3	=SYS0.3/+1.1/-UC1.Q2:3		L2					
=SYS0/+1.1/-UC1.F1:4	=SYS0.3/+1.1/-UC1.Q1:3		L2					
=SYS0.2/+1.1/-UC1.Q1:3	=SYS0.2/+1.1/-UC1.Q2:3		L2					power
=SYS0/+1.1/-UC1.F2:4	=SYS0.2/+1.1/-UC1.Q1:3		L2					Power
=SYS0.1/+1.1/-UC1.Q1:3	=SYS0.1/+1.1/-UC1.Q2:3		L2					power
=SYS0/+1.1/-UC1.F3:4	=SYS0.1/+1.1/-UC1.Q1:3		L2					Power
=SYS0.1/+1.1/-UC1.X2:1	=SYS0.1/+1.1/-UC1.F1:96							
=SYS0.2/+1.1/-UC1.X2:1	=SYS0.2/+1.1/-UC1.F1:96	14						
=SYS0.3/+1.1/-UC1.X2:1	=SYS0.3/+1.1/-UC1.F1:96	62						
=SYS0.1/+1.1/-UC1.X2:13	=SYS0.1/+1.1/-UC1.F1:98							
=SYS0.2/+1.1/-UC1.X2:13	=SYS0.2/+1.1/-UC1.F1:98	32						
=SYS0.3/+1.1/-UC1.X2:13	=SYS0.3/+1.1/-UC1.F1:98	83						
=SYS0.1/+1.1/-UC1.X2:13	=SYS0.1/+2.1/-UC3.X1:7			-W1:7				
=SYS0.1/+1.10.1/-UC2.X1:7	=SYS0.1/+1.1/-UC1.X2:13			-W1:7				
=SYS0.2/+1.1/-UC1.X2:13	=SYS0.2/+2.2/-UC5.X1:7			-W1:7				
=SYS0.2/+1.20.1/-UC4.X1:7	=SYS0.2/+1.1/-UC1.X2:13			-W1:7				
=SYS0.3/+1.1/-UC1.X2:13	=SYS0.3/+2.3/-UC7.X1:7			-W1:7				

FROM	TO	Wire no	Signal	Cable	Jumper	Line name	Line type	Routing class
=SYS0.3/+1.30.1/-UC6.X1:7	=SYS0.3/+1.1/-UC1.X2:13			-W1:7				
=SYS0.1/+1.10.1/-UC2.X1:1	=SYS0.1/+1.1/-UC1.X2:1			-W1:1				
=SYS0.2/+1.20.1/-UC4.X1:1	=SYS0.2/+1.1/-UC1.X2:1			-W1:1				
=SYS0.3/+1.30.1/-UC6.X1:1	=SYS0.3/+1.1/-UC1.X2:1			-W1:1				
=SYS0.1/+1.10.1/-UC2.S1:1	=SYS0.1/+1.10.1/-UC2.X1:1							
=SYS0.2/+1.20.1/-UC4.S1:1	=SYS0.2/+1.20.1/-UC4.X1:1	13						
=SYS0.3/+1.30.1/-UC6.S1:1	=SYS0.3/+1.30.1/-UC6.X1:1	61						
=SYS0.1/+1.1/-UC1.F1:3	=SYS0.1/+1.1/-UC1.Q1:4							xx
=SYS0.1/+1.1/-UC1.F1:3	=SYS0.1/+1.1/-UC1.Q2:4							xx
=SYS0.2/+1.1/-UC1.F1:3	=SYS0.2/+1.1/-UC1.Q1:4							xx
=SYS0.2/+1.1/-UC1.F1:3	=SYS0.2/+1.1/-UC1.Q2:4	8						xx
=SYS0.3/+1.1/-UC1.F1:3	=SYS0.3/+1.1/-UC1.Q1:4	50						
=SYS0.3/+1.1/-UC1.F1:3	=SYS0.3/+1.1/-UC1.Q2:4	56						
=SYS0.1/+1.10.1/-UC2.X1:2	=SYS0.1/+1.10.1/-UC2.S1:2							
=SYS0.2/+1.20.1/-UC4.X1:2	=SYS0.2/+1.20.1/-UC4.S1:2	12						
=SYS0.3/+1.30.1/-UC6.X1:2	=SYS0.3/+1.30.1/-UC6.S1:2	60						
=SYS0.1/+1.1/-UC1.X2:2	=SYS0.1/+1.10.1/-UC2.X1:2			-W1:2				
=SYS0.2/+1.1/-UC1.X2:2	=SYS0.2/+1.20.1/-UC4.X1:2			-W1:2				
=SYS0.3/+1.1/-UC1.X2:2	=SYS0.3/+1.30.1/-UC6.X1:2			-W1:2				
=SYS0.1/+1.10.1/-UC2.P1:X1	=SYS0.1/+1.10.1/-UC2.X1:7							
=SYS0.2/+1.20.1/-UC4.P1:X1	=SYS0.2/+1.20.1/-UC4.X1:7	31						
=SYS0.3/+1.30.1/-UC6.P1:X1	=SYS0.3/+1.30.1/-UC6.X1:7	82						
=SYS0.1/+1.1/-UC1.X2:3	=SYS0.1/+1.1/-UC1.X2:2				Laske			
=SYS0.2/+1.1/-UC1.X2:3	=SYS0.2/+1.1/-UC1.X2:2				Laske			
=SYS0.3/+1.1/-UC1.X2:3	=SYS0.3/+1.1/-UC1.X2:2				Laske			
=SYS0.1/+1.1/-UC1.Q3:3	=SYS0.1/+1.1/-UC1.F1:4							
=SYS0.2/+1.1/-UC1.Q3:3	=SYS0.2/+1.1/-UC1.F1:4	3						
=SYS0.3/+1.1/-UC1.Q3:3	=SYS0.3/+1.1/-UC1.F1:4	49						

FROM	TO	Wire no	Signal	Cable	Jumper	Line name	Line type	Routing class
=SYS0.1/+2.1/-UC3.X1:1	=SYS0.1/+1.1/-UC1.X2:3			-W1:1				
=SYS0.1/+1.10.1/-UC2.X1:8	=SYS0.1/+1.10.1/-UC2.P1:X2							
=SYS0.2/+2.2/-UC5.X1:1	=SYS0.2/+1.1/-UC1.X2:3			-W1:1				
=SYS0.2/+1.20.1/-UC4.X1:8	=SYS0.2/+1.20.1/-UC4.P1:X2	30						
=SYS0.3/+2.3/-UC7.X1:1	=SYS0.3/+1.1/-UC1.X2:3			-W1:1				
=SYS0.3/+1.30.1/-UC6.X1:8	=SYS0.3/+1.30.1/-UC6.P1:X2	81						
=SYS0.1/+2.1/-UC3.S1:1	=SYS0.1/+2.1/-UC3.X1:1							
=SYS0.2/+2.2/-UC5.S1:1	=SYS0.2/+2.2/-UC5.X1:1	11						
=SYS0.3/+2.3/-UC7.S1:1	=SYS0.3/+2.3/-UC7.X1:1	59						
=SYS0.1/+1.1/-UC1.X1:V	=SYS0.1/+1.1/-UC1.Q3:4							
=SYS0.2/+1.1/-UC1.X1:V	=SYS0.2/+1.1/-UC1.Q3:4	2						
=SYS0.3/+1.1/-UC1.X1:V	=SYS0.3/+1.1/-UC1.Q3:4	48						
=SYS0.1/+2.1/-UC3.X1:2	=SYS0.1/+2.1/-UC3.S1:2							
=SYS0.2/+2.2/-UC5.X1:2	=SYS0.2/+2.2/-UC5.S1:2	10						
=SYS0.3/+2.3/-UC7.X1:2	=SYS0.3/+2.3/-UC7.S1:2	58						
+1.1/-UC1.T1:L3	=SYS0/+1.1/-UC1.F1:5							Power
=SYS0/+1.1/-UC1.F1:5	=SYS0/+1.1/-UC1.F2:5							Power
=SYS0/+1.1/-UC1.F2:5	=SYS0/+1.1/-UC1.F3:5							Power
=SYS0.1/+1.1/-UC1.X2:14	=SYS0.1/+1.10.1/-UC2.X1:8			-W1:8				
=SYS0.1/+1.1/-UC1.X2:14	=SYS0.1/+2.1/-UC3.X1:8			-W1:8				
=SYS0.2/+1.1/-UC1.X2:14	=SYS0.2/+1.20.1/-UC4.X1:8			-W1:8				
=SYS0.2/+1.1/-UC1.X2:14	=SYS0.2/+2.2/-UC5.X1:8			-W1:8				
=SYS0.3/+1.1/-UC1.X2:14	=SYS0.3/+1.30.1/-UC6.X1:8			-W1:8				
=SYS0.3/+1.1/-UC1.X2:14	=SYS0.3/+2.3/-UC7.X1:8			-W1:8				
=SYS0.1/+1.1/-UC1.X2:4	=SYS0.1/+2.1/-UC3.X1:2			-W1:2				
=SYS0.2/+1.1/-UC1.X2:4	=SYS0.2/+2.2/-UC5.X1:2			-W1:2				
=SYS0.3/+1.1/-UC1.X2:4	=SYS0.3/+2.3/-UC7.X1:2			-W1:2				
=SYS0.3/+1.1/-UC1.X2:14	=SYS0.3/+1.1/-UC1.X2:16		N					

FROM	TO	Wire no	Signal	Cable	Jumper	Line name	Line type	Routing class
=SYS0.3/+1.1/-UC1.X2:16	=SYS0.3/+1.1/-UC1.X2:18		N					
=SYS0.3/+1.1/-UC1.Q1:A2	=SYS0.3/+1.1/-UC1.Q2:A2		N					
=SYS0/+1.1/-UC1.F1:8	=SYS0.3/+1.1/-UC1.Q1:A2		N					
=SYS0.3/+1.1/-UC1.Q2:A2	=SYS0.3/+1.1/-UC1.X2:14		N					
=SYS0.2/+1.1/-UC1.X2:14	=SYS0.2/+1.1/-UC1.X2:16		N					
=SYS0.2/+1.1/-UC1.X2:16	=SYS0.2/+1.1/-UC1.X2:18		N					
=SYS0.2/+1.1/-UC1.Q1:A2	=SYS0.2/+1.1/-UC1.Q2:A2		N					
=SYS0/+1.1/-UC1.F2:8	=SYS0.2/+1.1/-UC1.Q1:A2		N					Power
=SYS0.2/+1.1/-UC1.Q2:A2	=SYS0.2/+1.1/-UC1.X2:14		N					
=SYS0.1/+1.1/-UC1.X2:14	=SYS0.1/+1.1/-UC1.X2:16		N					power
=SYS0.1/+1.1/-UC1.X2:16	=SYS0.1/+1.1/-UC1.X2:18		N					power
=SYS0.1/+1.1/-UC1.Q1:A2	=SYS0.1/+1.1/-UC1.Q2:A2		N					power
=SYS0.1/+1.1/-UC1.Q2:A2	=SYS0.1/+1.1/-UC1.X2:14		N					power
=SYS0/+1.1/-UC1.F3:8	=SYS0.1/+1.1/-UC1.Q1:A2		N					Power
=SYS0.1/+1.1/-UC1.X2:4	=SYS0.1/+1.1/-UC1.Q2:21							
=SYS0.1/+1.1/-UC1.Q2:21	=SYS0.1/+1.1/-UC1.Q1:21							
=SYS0.2/+1.1/-UC1.X2:4	=SYS0.2/+1.1/-UC1.Q2:21	15						
=SYS0.2/+1.1/-UC1.Q2:21	=SYS0.2/+1.1/-UC1.Q1:21							
=SYS0.3/+1.1/-UC1.X2:4	=SYS0.3/+1.1/-UC1.Q2:21	63						
=SYS0.3/+1.1/-UC1.Q2:21	=SYS0.3/+1.1/-UC1.Q1:21	70						
=SYS0.1/+1.10.2/-M1:V	=SYS0.1/+1.1/-UC1.X1:V				-W1:BN			
=SYS0.2/+1.20.2/-M1:V	=SYS0.2/+1.1/-UC1.X1:V				-W1:BN			
=SYS0.3/+1.30.2/-M1:V	=SYS0.3/+1.1/-UC1.X1:V				-W1:BN			
=SYS0.3/+1.1/-UC1.Q1:5	=SYS0.3/+1.1/-UC1.Q2:5		L3					
=SYS0/+1.1/-UC1.F1:6	=SYS0.3/+1.1/-UC1.Q1:5		L3					
=SYS0.2/+1.1/-UC1.Q1:5	=SYS0.2/+1.1/-UC1.Q2:5		L3					power
=SYS0/+1.1/-UC1.F2:6	=SYS0.2/+1.1/-UC1.Q1:5		L3					Power
=SYS0.1/+1.1/-UC1.Q1:5	=SYS0.1/+1.1/-UC1.Q2:5		L3					power

FROM	TO	Wire no	Signal	Cable	Jumper	Line name	Line type	Routing class
=SYS0/+1.1/-UC1.F3:6	=SYS0.1/+1.1/-UC1.Q1:5		L3					Power
=SYS0.1/+1.1/-UC1.F1:5	=SYS0.1/+1.1/-UC1.Q1:6							xx
=SYS0.1/+1.1/-UC1.F1:5	=SYS0.1/+1.1/-UC1.Q2:2							xx
=SYS0.2/+1.1/-UC1.F1:5	=SYS0.2/+1.1/-UC1.Q1:6							xx
=SYS0.2/+1.1/-UC1.F1:5	=SYS0.2/+1.1/-UC1.Q2:2	9						xx
=SYS0.3/+1.1/-UC1.F1:5	=SYS0.3/+1.1/-UC1.Q1:6	53						
=SYS0.3/+1.1/-UC1.F1:5	=SYS0.3/+1.1/-UC1.Q2:2	57						
=SYS0.1/+1.1/-UC1.Q3:5	=SYS0.1/+1.1/-UC1.F1:6							
=SYS0.2/+1.1/-UC1.Q3:5	=SYS0.2/+1.1/-UC1.F1:6	5						
=SYS0.3/+1.1/-UC1.Q3:5	=SYS0.3/+1.1/-UC1.F1:6	52						
=SYS0.1/+1.1/-UC1.X1:W	=SYS0.1/+1.1/-UC1.Q3:6							
=SYS0.2/+1.1/-UC1.X1:W	=SYS0.2/+1.1/-UC1.Q3:6	4						
=SYS0.3/+1.1/-UC1.X1:W	=SYS0.3/+1.1/-UC1.Q3:6	51						
+1.1/-UC1.T1:N	=SYS0/+1.1/-UC1.F1:7							Power
=SYS0/+1.1/-UC1.F1:7	=SYS0/+1.1/-UC1.F2:7							Power
=SYS0/+1.1/-UC1.F2:7	=SYS0/+1.1/-UC1.F3:7							Power
=SYS0.1/+1.10.2/-M1:W	=SYS0.1/+1.1/-UC1.X1:W			-W1:GY				
=SYS0.2/+1.20.2/-M1:W	=SYS0.2/+1.1/-UC1.X1:W			-W1:GY				
=SYS0.3/+1.30.2/-M1:W	=SYS0.3/+1.1/-UC1.X1:W			-W1:GY				
=SYS0.1/+1.1/-UC1.X1:PE	=SYS0.1/+1.1/-UC1.Q3:8							
=SYS0.2/+1.1/-UC1.X1:PE	=SYS0.2/+1.1/-UC1.Q3:8	6						
=SYS0.3/+1.1/-UC1.X1:PE	=SYS0.3/+1.1/-UC1.Q3:8	54						
+1.1/-UC1.T1:PE	=SYS0/+1.1/-UC1.X1:PE1							
=SYS0/+1.1/-UC1.X1:PE1	=SYS0/+1.1/-UC1.X1:PE2				Laske			
=SYS0/+1.1/-UC1.X1:PE2	=SYS0/+1.1/-UC1.X1:PE3				Laske			
=SYS0.1/+1.10.2/-M1:PE	=SYS0.1/+1.1/-UC1.X1:PE			-W1:GNYE				
=SYS0.2/+1.20.2/-M1:PE	=SYS0.2/+1.1/-UC1.X1:PE			-W1:GNYE				
=SYS0.3/+1.30.2/-M1:PE	=SYS0.3/+1.1/-UC1.X1:PE			-W1:GNYE				

FROM	TO	Wire no	Signal	Cable	Jumper	Line name	Line type	Routing class
=SYS0.1/+2.1/-UC3.P1:X1	=SYS0.1/+2.1/-UC3.X1:7							
=SYS0.2/+2.2/-UC5.P1:X1	=SYS0.2/+2.2/-UC5.X1:7	34						
=SYS0.3/+2.3/-UC7.P1:X1	=SYS0.3/+2.3/-UC7.X1:7	85						
=SYS0.1/+2.1/-UC3.X1:8	=SYS0.1/+2.1/-UC3.P1:X2							
=SYS0.2/+2.2/-UC5.X1:8	=SYS0.2/+2.2/-UC5.P1:X2	33						
=SYS0.3/+2.3/-UC7.X1:8	=SYS0.3/+2.3/-UC7.P1:X2	84						
=SYS0.1/+1.1/-UC1.Q2:22	=SYS0.1/+1.1/-UC1.X2:5							
=SYS0.1/+1.1/-UC1.Q1:13	=SYS0.1/+1.1/-UC1.Q2:22							
=SYS0.2/+1.1/-UC1.Q2:22	=SYS0.2/+1.1/-UC1.X2:5							
=SYS0.2/+1.1/-UC1.Q1:13	=SYS0.2/+1.1/-UC1.Q2:22	18						
=SYS0.3/+1.1/-UC1.Q2:22	=SYS0.3/+1.1/-UC1.X2:5	67						
=SYS0.3/+1.1/-UC1.Q1:13	=SYS0.3/+1.1/-UC1.Q2:22	66						
=SYS0.1/+1.1/-UC1.X2:15	=SYS0.1/+1.1/-UC1.Q1:64							
=SYS0.2/+1.1/-UC1.X2:15	=SYS0.2/+1.1/-UC1.Q1:64	37						
=SYS0.3/+1.1/-UC1.X2:15	=SYS0.3/+1.1/-UC1.Q1:64	88						
=SYS0.1/+1.1/-UC1.X2:15	=SYS0.1/+2.1/-UC3.X1:9			-W1:9				
=SYS0.1/+1.10.1/-UC2.X1:9	=SYS0.1/+1.1/-UC1.X2:15			-W1:9				
=SYS0.2/+1.1/-UC1.X2:15	=SYS0.2/+2.2/-UC5.X1:9			-W1:9				
=SYS0.2/+1.20.1/-UC4.X1:9	=SYS0.2/+1.1/-UC1.X2:15			-W1:9				
=SYS0.3/+1.1/-UC1.X2:15	=SYS0.3/+2.3/-UC7.X1:9			-W1:9				
=SYS0.3/+1.30.1/-UC6.X1:9	=SYS0.3/+1.1/-UC1.X2:15			-W1:9				
=SYS0.1/+1.10.1/-UC2.P2:X1	=SYS0.1/+1.10.1/-UC2.X1:9							
=SYS0.2/+1.20.1/-UC4.P2:X1	=SYS0.2/+1.20.1/-UC4.X1:9	36						
=SYS0.3/+1.30.1/-UC6.P2:X1	=SYS0.3/+1.30.1/-UC6.X1:9	87						
=SYS0.1/+1.1/-UC1.X2:7	=SYS0.1/+1.1/-UC1.Q1:14							
=SYS0.1/+1.1/-UC1.X2:7	=SYS0.1/+1.1/-UC1.X2:6				Laske			
=SYS0.2/+1.1/-UC1.X2:7	=SYS0.2/+1.1/-UC1.Q1:14	17						
=SYS0.2/+1.1/-UC1.X2:7	=SYS0.2/+1.1/-UC1.X2:6				Laske			

FROM	TO	Wire no	Signal	Cable	Jumper	Line name	Line type	Routing class
=SYS0.3/+1.1/-UC1.X2:7	=SYS0.3/+1.1/-UC1.Q1:14	65						
=SYS0.3/+1.1/-UC1.X2:7	=SYS0.3/+1.1/-UC1.X2:6				Laske			
=SYS0.1/+1.10.3/-S1:1	=SYS0.1/+1.1/-UC1.X2:7			-W2:1				
=SYS0.2/+1.20.3/-S1:1	=SYS0.2/+1.1/-UC1.X2:7			-W2:1				
=SYS0.3/+1.30.3/-S1:1	=SYS0.3/+1.1/-UC1.X2:7			-W2:1				
=SYS0.1/+1.10.1/-UC2.X1:10	=SYS0.1/+1.10.1/-UC2.P2:X2							
=SYS0.2/+1.20.1/-UC4.X1:10	=SYS0.2/+1.20.1/-UC4.P2:X2	35						
=SYS0.3/+1.30.1/-UC6.X1:10	=SYS0.3/+1.30.1/-UC6.P2:X2	86						
=SYS0.1/+1.1/-UC1.X2:8	=SYS0.1/+1.10.3/-S1:2			-W2:2				
=SYS0.2/+1.1/-UC1.X2:8	=SYS0.2/+1.20.3/-S1:2			-W2:2				
=SYS0.3/+1.1/-UC1.X2:8	=SYS0.3/+1.30.3/-S1:2			-W2:2				
=SYS0.1/+1.1/-UC1.Q1:A1	=SYS0.1/+1.1/-UC1.X2:8							
=SYS0.2/+1.1/-UC1.Q1:A1	=SYS0.2/+1.1/-UC1.X2:8	16						
=SYS0.3/+1.1/-UC1.Q1:A1	=SYS0.3/+1.1/-UC1.X2:8	64						
=SYS0.1/+1.1/-UC1.X2:16	=SYS0.1/+1.10.1/-UC2.X1:10			-W1:10				
=SYS0.1/+1.1/-UC1.X2:16	=SYS0.1/+2.1/-UC3.X1:10			-W1:10				
=SYS0.2/+1.1/-UC1.X2:16	=SYS0.2/+1.20.1/-UC4.X1:10			-W1:10				
=SYS0.2/+1.1/-UC1.X2:16	=SYS0.2/+2.2/-UC5.X1:10			-W1:10				
=SYS0.3/+1.1/-UC1.X2:16	=SYS0.3/+1.30.1/-UC6.X1:10			-W1:10				
=SYS0.3/+1.1/-UC1.X2:16	=SYS0.3/+2.3/-UC7.X1:10			-W1:10				
=SYS0.1/+1.1/-UC1.X2:5	=SYS0.1/+1.10.1/-UC2.X1:3			-W1:3				
=SYS0.1/+1.1/-UC1.X2:5	=SYS0.1/+2.1/-UC3.X1:3			-W1:3				
=SYS0.2/+1.1/-UC1.X2:5	=SYS0.2/+1.20.1/-UC4.X1:3			-W1:3				
=SYS0.2/+1.1/-UC1.X2:5	=SYS0.2/+2.2/-UC5.X1:3			-W1:3				
=SYS0.3/+1.1/-UC1.X2:5	=SYS0.3/+1.30.1/-UC6.X1:3			-W1:3				
=SYS0.3/+1.1/-UC1.X2:5	=SYS0.3/+2.3/-UC7.X1:3			-W1:3				
=SYS0.1/+1.1/-UC1.X2:6	=SYS0.1/+1.10.1/-UC2.X1:4			-W1:4				
=SYS0.1/+1.1/-UC1.X2:6	=SYS0.1/+2.1/-UC3.X1:4			-W1:4				

FROM	TO	Wire no	Signal	Cable	Jumper	Line name	Line type	Routing class
=SYS0.2/+1.1/-UC1.X2:6	=SYS0.2/+1.20.1/-UC4.X1:4			-W1:4				
=SYS0.2/+1.1/-UC1.X2:6	=SYS0.2/+2.2/-UC5.X1:4			-W1:4				
=SYS0.3/+1.1/-UC1.X2:6	=SYS0.3/+1.30.1/-UC6.X1:4			-W1:4				
=SYS0.3/+1.1/-UC1.X2:6	=SYS0.3/+2.3/-UC7.X1:4			-W1:4				
=SYS0/+1.1/-UC1.X1:PE1	=SYS0.1/+1.1/-UC1.Q3:7		PE					
=SYS0.1/+1.10.1/-UC2.S2:3	=SYS0.1/+1.10.1/-UC2.X1:3							
=SYS0.2/+1.20.1/-UC4.S2:3	=SYS0.2/+1.20.1/-UC4.X1:3	20						
=SYS0.3/+1.30.1/-UC6.S2:3	=SYS0.3/+1.30.1/-UC6.X1:3	69						
=SYS0.1/+1.10.1/-UC2.X1:4	=SYS0.1/+1.10.1/-UC2.S2:4							
=SYS0.2/+1.20.1/-UC4.X1:4	=SYS0.2/+1.20.1/-UC4.S2:4	19						
=SYS0.3/+1.30.1/-UC6.X1:4	=SYS0.3/+1.30.1/-UC6.S2:4	68						
=SYS0.1/+2.1/-UC3.P2:X1	=SYS0.1/+2.1/-UC3.X1:9							
=SYS0.2/+2.2/-UC5.P2:X1	=SYS0.2/+2.2/-UC5.X1:9	39						
=SYS0.3/+2.3/-UC7.P2:X1	=SYS0.3/+2.3/-UC7.X1:9	90						
=SYS0.1/+2.1/-UC3.X1:10	=SYS0.1/+2.1/-UC3.P2:X2							
=SYS0.2/+2.2/-UC5.X1:10	=SYS0.2/+2.2/-UC5.P2:X2	38						
=SYS0.3/+2.3/-UC7.X1:10	=SYS0.3/+2.3/-UC7.P2:X2	89						
=SYS0.1/+1.1/-UC1.X2:17	=SYS0.1/+1.1/-UC1.Q2:64							
=SYS0.2/+1.1/-UC1.X2:17	=SYS0.2/+1.1/-UC1.Q2:64	42						
=SYS0.3/+1.1/-UC1.X2:17	=SYS0.3/+1.1/-UC1.Q2:64	93						
=SYS0.1/+1.1/-UC1.X2:17	=SYS0.1/+2.1/-UC3.X1:11			-W1:11				
=SYS0.1/+1.10.1/-UC2.X1:11	=SYS0.1/+1.1/-UC1.X2:17			-W1:11				
=SYS0.2/+1.1/-UC1.X2:17	=SYS0.2/+2.2/-UC5.X1:11			-W1:11				
=SYS0.2/+1.20.1/-UC4.X1:11	=SYS0.2/+1.1/-UC1.X2:17			-W1:11				
=SYS0.3/+1.1/-UC1.X2:17	=SYS0.3/+2.3/-UC7.X1:11			-W1:11				
=SYS0.3/+1.30.1/-UC6.X1:11	=SYS0.3/+1.1/-UC1.X2:17			-W1:11				
=SYS0.1/+2.1/-UC3.S2:3	=SYS0.1/+2.1/-UC3.X1:3							
=SYS0.2/+2.2/-UC5.S2:3	=SYS0.2/+2.2/-UC5.X1:3	22						

FROM	TO	Wire no	Signal	Cable	Jumper	Line name	Line type	Routing class
=SYS0.3/+2.3/-UC7.S2:3	=SYS0.3/+2.3/-UC7.X1:3	72						
=SYS0.1/+2.1/-UC3.X1:4	=SYS0.1/+2.1/-UC3.S2:4							
=SYS0.2/+2.2/-UC5.X1:4	=SYS0.2/+2.2/-UC5.S2:4	21						
=SYS0.3/+2.3/-UC7.X1:4	=SYS0.3/+2.3/-UC7.S2:4	71						
=SYS0.1/+1.10.1/-UC2.P3:X1	=SYS0.1/+1.10.1/-UC2.X1:11							
=SYS0.2/+1.20.1/-UC4.P3:X1	=SYS0.2/+1.20.1/-UC4.X1:11	41						
=SYS0.3/+1.30.1/-UC6.P3:X1	=SYS0.3/+1.30.1/-UC6.X1:11	92						
=SYS0.1/+1.10.1/-UC2.X1:12	=SYS0.1/+1.10.1/-UC2.P3:X2							
=SYS0.2/+1.20.1/-UC4.X1:12	=SYS0.2/+1.20.1/-UC4.P3:X2	40						
=SYS0.3/+1.30.1/-UC6.X1:12	=SYS0.3/+1.30.1/-UC6.P3:X2	91						
=SYS0.1/+1.1/-UC1.X2:18	=SYS0.1/+1.10.1/-UC2.X1:12			-W1:12				
=SYS0.1/+1.1/-UC1.X2:18	=SYS0.1/+2.1/-UC3.X1:12			-W1:12				
=SYS0.2/+1.1/-UC1.X2:18	=SYS0.2/+1.20.1/-UC4.X1:12			-W1:12				
=SYS0.2/+1.1/-UC1.X2:18	=SYS0.2/+2.2/-UC5.X1:12			-W1:12				
=SYS0.3/+1.1/-UC1.X2:18	=SYS0.3/+1.30.1/-UC6.X1:12			-W1:12				
=SYS0.3/+1.1/-UC1.X2:18	=SYS0.3/+2.3/-UC7.X1:12			-W1:12				
=SYS0/+1.1/-UC1.X1:PE2	=SYS0.2/+1.1/-UC1.Q3:7		PE					
=SYS0.1/+1.1/-UC1.Q1:22	=SYS0.1/+1.1/-UC1.X2:9							
=SYS0.1/+1.1/-UC1.Q2:13	=SYS0.1/+1.1/-UC1.Q1:22							
=SYS0.2/+1.1/-UC1.Q1:22	=SYS0.2/+1.1/-UC1.X2:9							
=SYS0.2/+1.1/-UC1.Q2:13	=SYS0.2/+1.1/-UC1.Q1:22	25						
=SYS0.3/+1.1/-UC1.Q1:22	=SYS0.3/+1.1/-UC1.X2:9	76						
=SYS0.3/+1.1/-UC1.Q2:13	=SYS0.3/+1.1/-UC1.Q1:22	75						
=SYS0.1/+1.1/-UC1.X2:11	=SYS0.1/+1.1/-UC1.Q2:14							
=SYS0.1/+1.1/-UC1.X2:11	=SYS0.1/+1.1/-UC1.X2:10				Laske			
=SYS0.1/+2.1/-UC3.P3:X1	=SYS0.1/+2.1/-UC3.X1:11							
=SYS0.2/+1.1/-UC1.X2:11	=SYS0.2/+1.1/-UC1.Q2:14	24						
=SYS0.2/+1.1/-UC1.X2:11	=SYS0.2/+1.1/-UC1.X2:10				Laske			

FROM	TO	Wire no	Signal	Cable	Jumper	Line name	Line type	Routing class
=SYS0.2/+2.2/-UC5.P3:X1	=SYS0.2/+2.2/-UC5.X1:11	44						
=SYS0.3/+1.1/-UC1.X2:11	=SYS0.3/+1.1/-UC1.Q2:14	74						
=SYS0.3/+1.1/-UC1.X2:11	=SYS0.3/+1.1/-UC1.X2:10				Laske			
=SYS0.3/+2.3/-UC7.P3:X1	=SYS0.3/+2.3/-UC7.X1:11	95						
=SYS0.1/+1.10.4/-S2:1	=SYS0.1/+1.1/-UC1.X2:11			-W2:3				
=SYS0.2/+1.20.4/-S2:1	=SYS0.2/+1.1/-UC1.X2:11			-W2:3				
=SYS0.3/+1.30.4/-S2:1	=SYS0.3/+1.1/-UC1.X2:11			-W2:3				
=SYS0.1/+2.1/-UC3.X1:12	=SYS0.1/+2.1/-UC3.P3:X2							
=SYS0.2/+2.2/-UC5.X1:12	=SYS0.2/+2.2/-UC5.P3:X2	43						
=SYS0.3/+2.3/-UC7.X1:12	=SYS0.3/+2.3/-UC7.P3:X2	94						
=SYS0.1/+1.1/-UC1.X2:12	=SYS0.1/+1.10.4/-S2:2			-W2:4				
=SYS0.2/+1.1/-UC1.X2:12	=SYS0.2/+1.20.4/-S2:2			-W2:4				
=SYS0.3/+1.1/-UC1.X2:12	=SYS0.3/+1.30.4/-S2:2			-W2:4				
=SYS0.1/+1.1/-UC1.Q2:A1	=SYS0.1/+1.1/-UC1.X2:12							
=SYS0.2/+1.1/-UC1.Q2:A1	=SYS0.2/+1.1/-UC1.X2:12	23						
=SYS0.3/+1.1/-UC1.Q2:A1	=SYS0.3/+1.1/-UC1.X2:12	73						
=SYS0.1/+1.1/-UC1.X2:9	=SYS0.1/+1.10.1/-UC2.X1:5			-W1:5				
=SYS0.1/+1.1/-UC1.X2:9	=SYS0.1/+2.1/-UC3.X1:5			-W1:5				
=SYS0.2/+1.1/-UC1.X2:9	=SYS0.2/+1.20.1/-UC4.X1:5			-W1:5				
=SYS0.2/+1.1/-UC1.X2:9	=SYS0.2/+2.2/-UC5.X1:5			-W1:5				
=SYS0.3/+1.1/-UC1.X2:9	=SYS0.3/+1.30.1/-UC6.X1:5			-W1:5				
=SYS0.3/+1.1/-UC1.X2:9	=SYS0.3/+2.3/-UC7.X1:5			-W1:5				
=SYS0.1/+1.1/-UC1.X2:10	=SYS0.1/+1.10.1/-UC2.X1:6			-W1:6				
=SYS0.1/+1.1/-UC1.X2:10	=SYS0.1/+2.1/-UC3.X1:6			-W1:6				
=SYS0.2/+1.1/-UC1.X2:10	=SYS0.2/+1.20.1/-UC4.X1:6			-W1:6				
=SYS0.2/+1.1/-UC1.X2:10	=SYS0.2/+2.2/-UC5.X1:6			-W1:6				
=SYS0.3/+1.1/-UC1.X2:10	=SYS0.3/+1.30.1/-UC6.X1:6			-W1:6				
=SYS0.3/+1.1/-UC1.X2:10	=SYS0.3/+2.3/-UC7.X1:6			-W1:6				

FROM	TO	Wire no	Signal	Cable	Jumper	Line name	Line type	Routing class
=SYS0.1/+1.10.1/-UC2.S3:3	=SYS0.1/+1.10.1/-UC2.X1:5							
=SYS0.2/+1.20.1/-UC4.S3:3	=SYS0.2/+1.20.1/-UC4.X1:5	27						
=SYS0.3/+1.30.1/-UC6.S3:3	=SYS0.3/+1.30.1/-UC6.X1:5	78						
=SYS0.1/+1.10.1/-UC2.X1:6	=SYS0.1/+1.10.1/-UC2.S3:4							
=SYS0.2/+1.20.1/-UC4.X1:6	=SYS0.2/+1.20.1/-UC4.S3:4	26						
=SYS0.3/+1.30.1/-UC6.X1:6	=SYS0.3/+1.30.1/-UC6.S3:4	77						
=SYS0/+1.1/-UC1.X1:PE3	=SYS0.3/+1.1/-UC1.Q3:7		PE					
=SYS0.1/+2.1/-UC3.S3:3	=SYS0.1/+2.1/-UC3.X1:5							
=SYS0.2/+2.2/-UC5.S3:3	=SYS0.2/+2.2/-UC5.X1:5	29						
=SYS0.3/+2.3/-UC7.S3:3	=SYS0.3/+2.3/-UC7.X1:5	80						
=SYS0.1/+2.1/-UC3.X1:6	=SYS0.1/+2.1/-UC3.S3:4							
=SYS0.2/+2.2/-UC5.X1:6	=SYS0.2/+2.2/-UC5.S3:4	28						
=SYS0.3/+2.3/-UC7.X1:6	=SYS0.3/+2.3/-UC7.S3:4	79						

Graphical plans

This page is a TERMINAL plan.
To update it, go to the Tools menu,
select the Terminal plan and Update.

PC | SCHEMATIC

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**46**
Customer:		DCC:		Scale:	1:1
Page title:	Terminal plan	Dwg. no.:	Page rev.:	Previous page:	45
File name:	PCSmotordemo3	Eng. (proj/page): / kh	Last print: 29.10.2026	Next page:	47
Page ref.:		Appr. (date/init):	Last edit: 17.02.2022	Total no. of pages:	52

This page is a CABLE plan.
To update it, go to the Tools menu,
select the Cable plan and Update.

PC | SCHEMATIC

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**47**
Customer:		DCC:		Scale:	1:1
Page title:	Cable plan	Dwg. no.:	Page rev.:	Previous page:	46
File name:	PCSmotordemo3	Eng. (proj/page): / kh	Last print: 29.10.2026	Next page:	48
Page ref.:		Appr. (date/init):	Last edit: 17.02.2022	Total no. of pages:	52

This page is a CONNECTION plan.
To update it, go to the Tools menu,
select the Connection plan and Update.

PC | SCHEMATIC

Project title:	**Demo: Three doors - two controls each**	**Project no.:**	**Project rev.:**	**Page**	**48**
Customer:		DCC:		Scale:	1:1
Page title:	Connection plan	Dwg. no.:	Page rev.:	Previous page:	47
File name:	PCSmotordemo3	Eng. (proj/page):	Last print: 29.10.2026	Next page:	
Page ref.:		Appr. (date/init):	Last edit: 17.02.2022	Total no. of pages:	52