



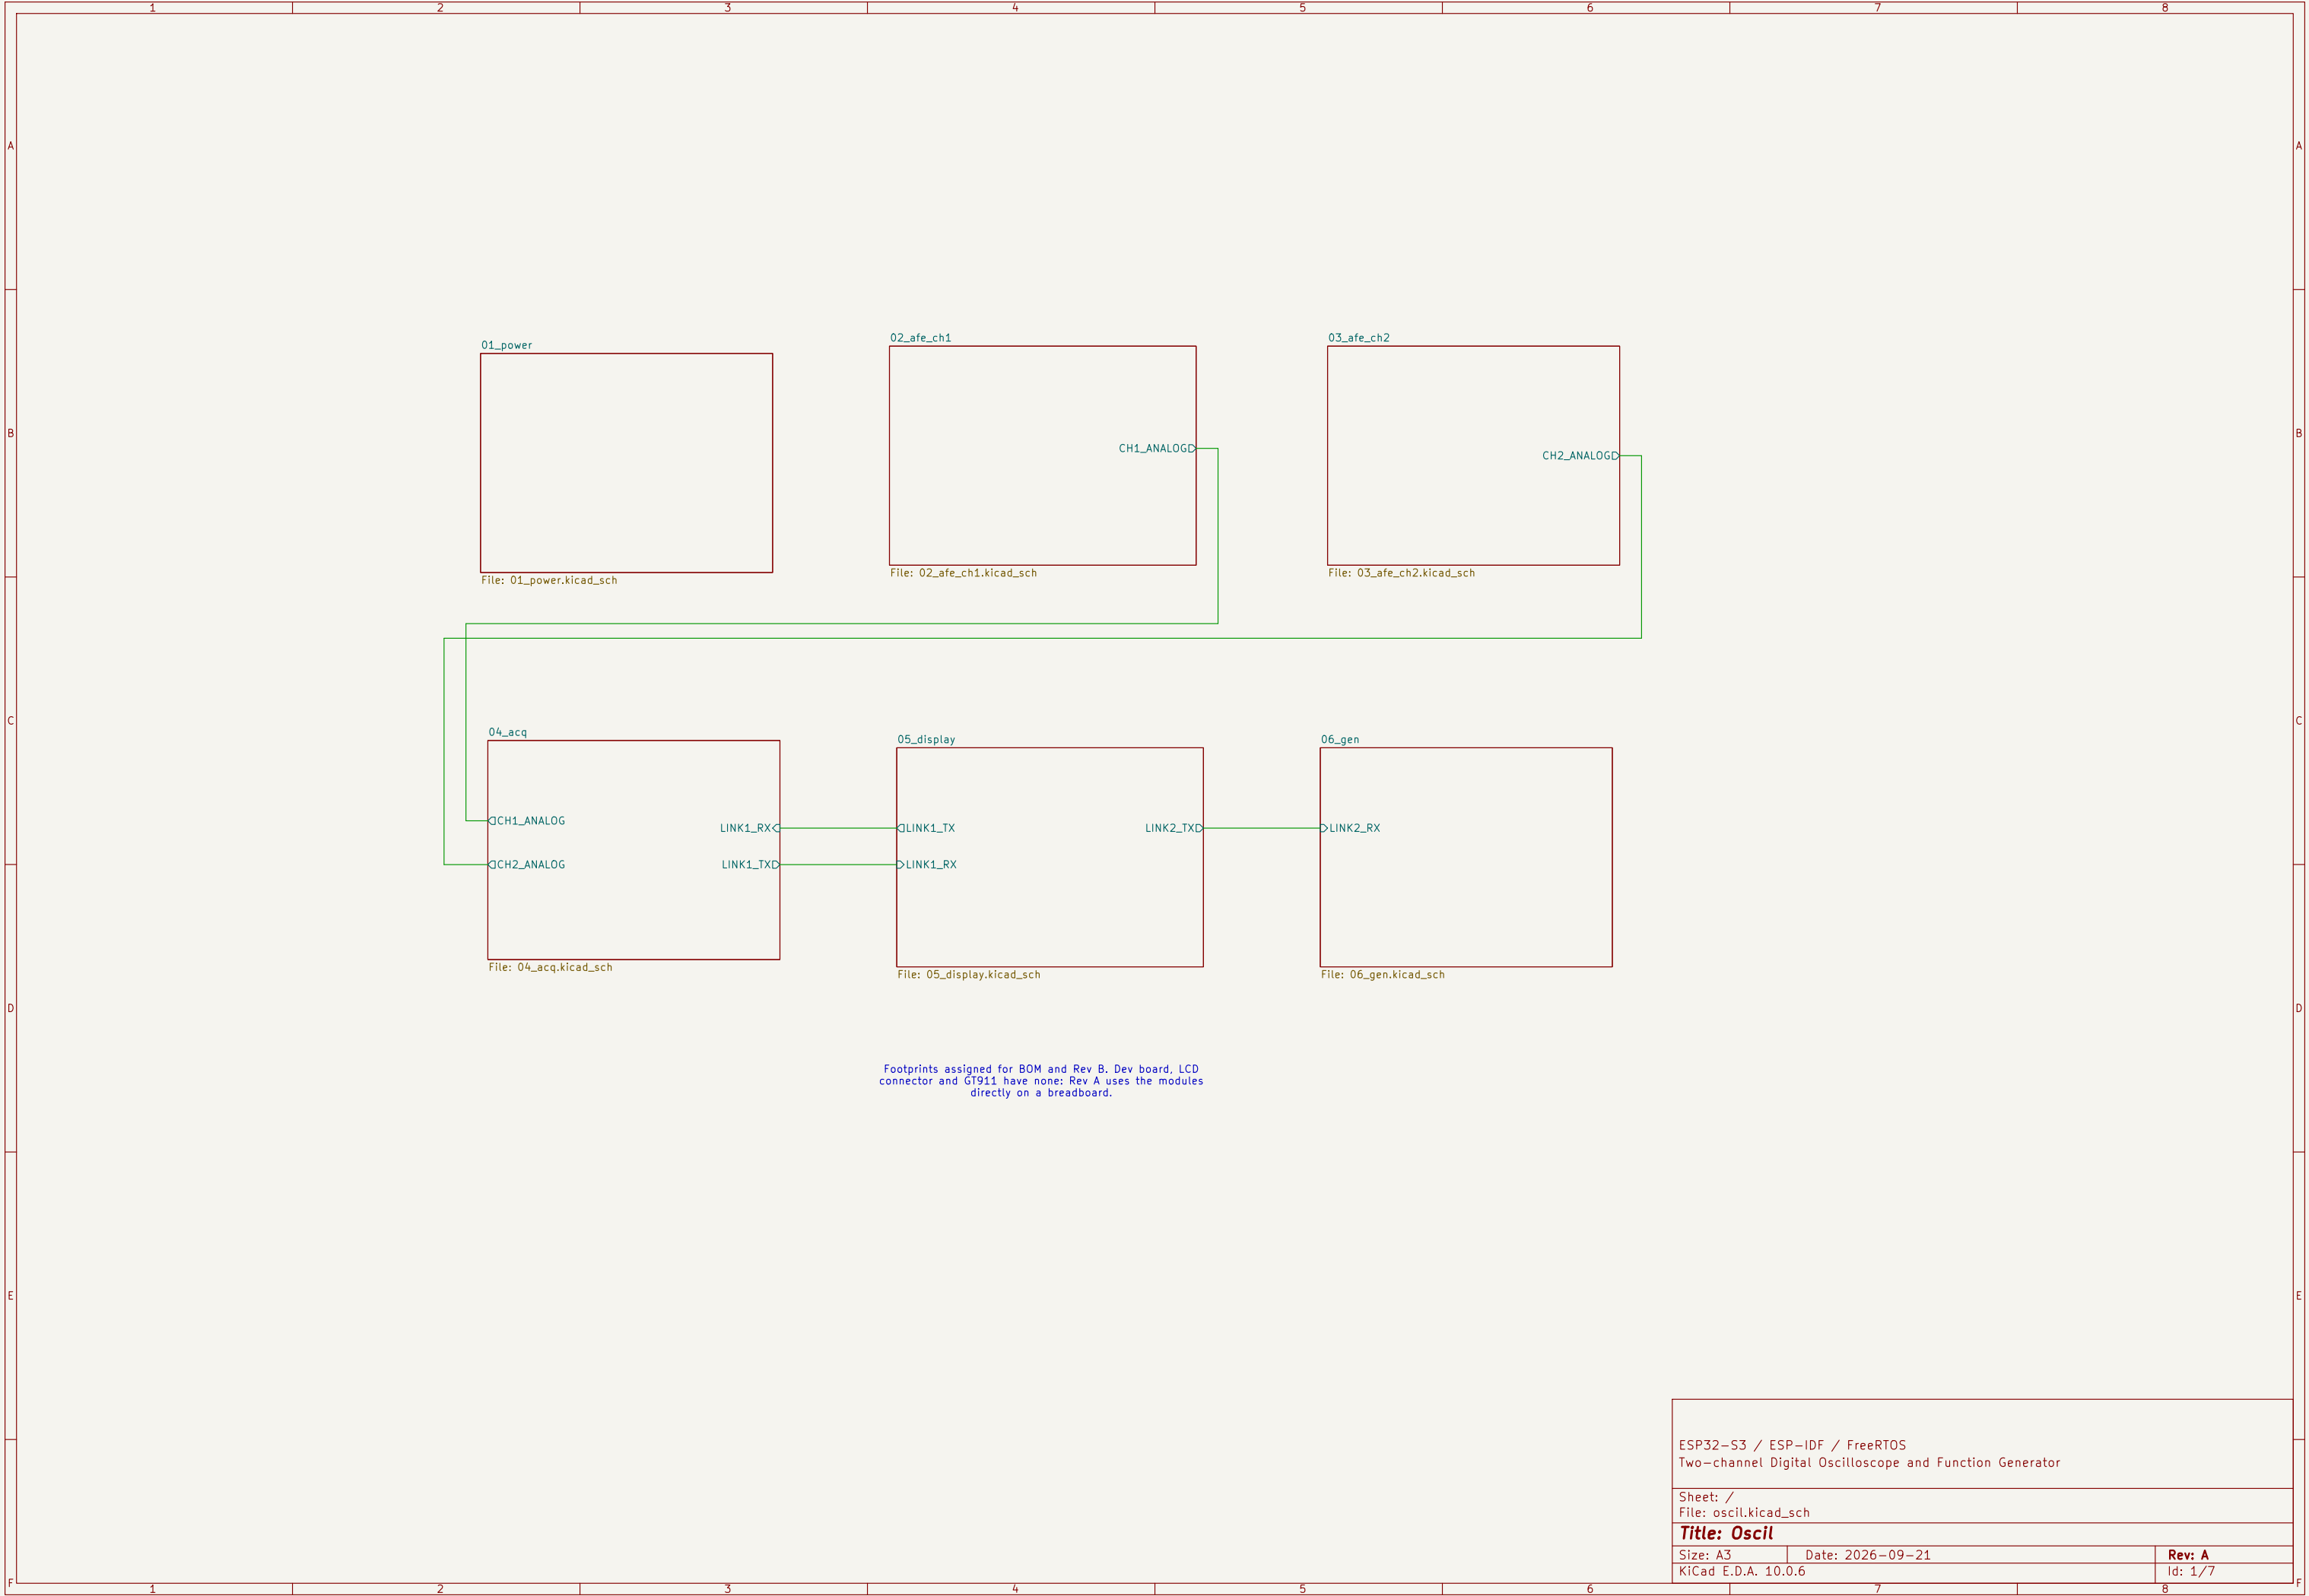

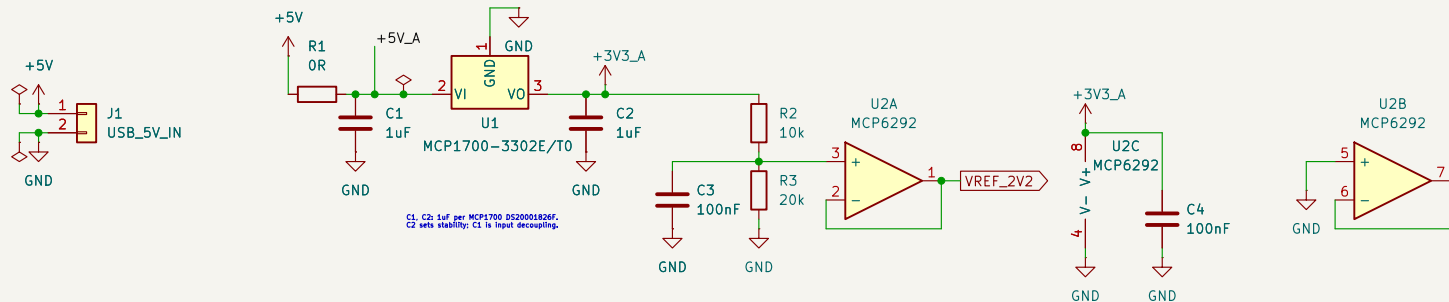

C1, C2: 1uF per MCP1700 0520001820F.
C2 sets stability. C1 is input decoupling.

Rev A: breadboard build on ESP32-S3 dev boards
ESP32-S3 / ESP-IDF / FreeRTOS
Two-channel Digital Oscilloscope and Function Generator

Paul Simbulan

Sheet: /01_power/
File: 01_power.kicad_sch


Title: Oscil

Size: A4 Date: 2026-09-21

KiCad E.D.A. 10.0.6

Rev: A

Id: 2/7

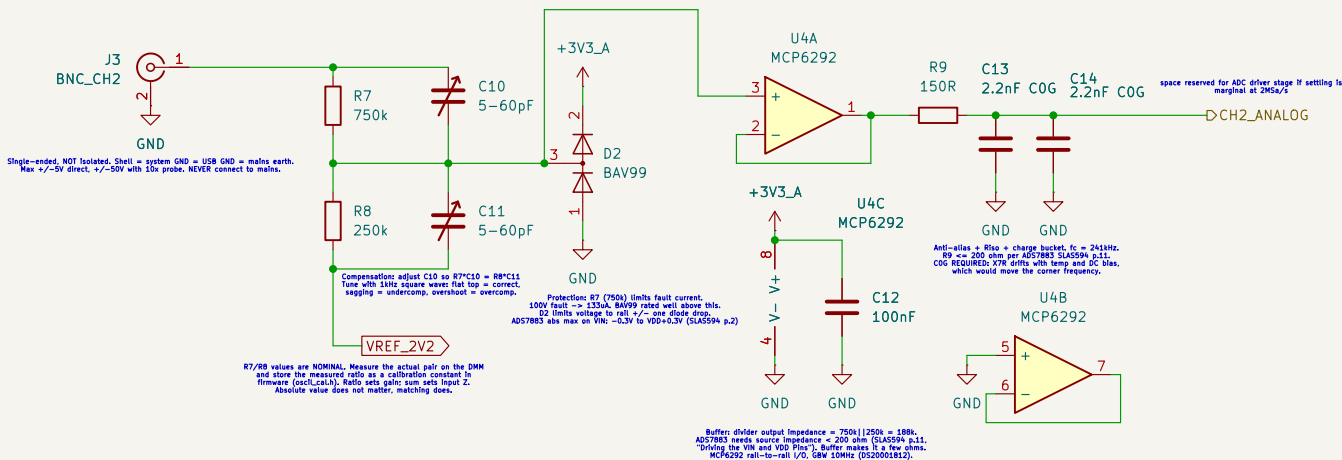

ESP32-S3 / ESP-IDF / FreeRTOS
Two-channel Digital Oscilloscope and Function Generator

Sheet: /03_afe_ch2/
File: 03_afe_ch2.kicad_sch


Title: Oscil

Size: A4 Date: 2026-09-21

KiCad E.D.A. 10.0.6

Rev: A

Id: 4/7

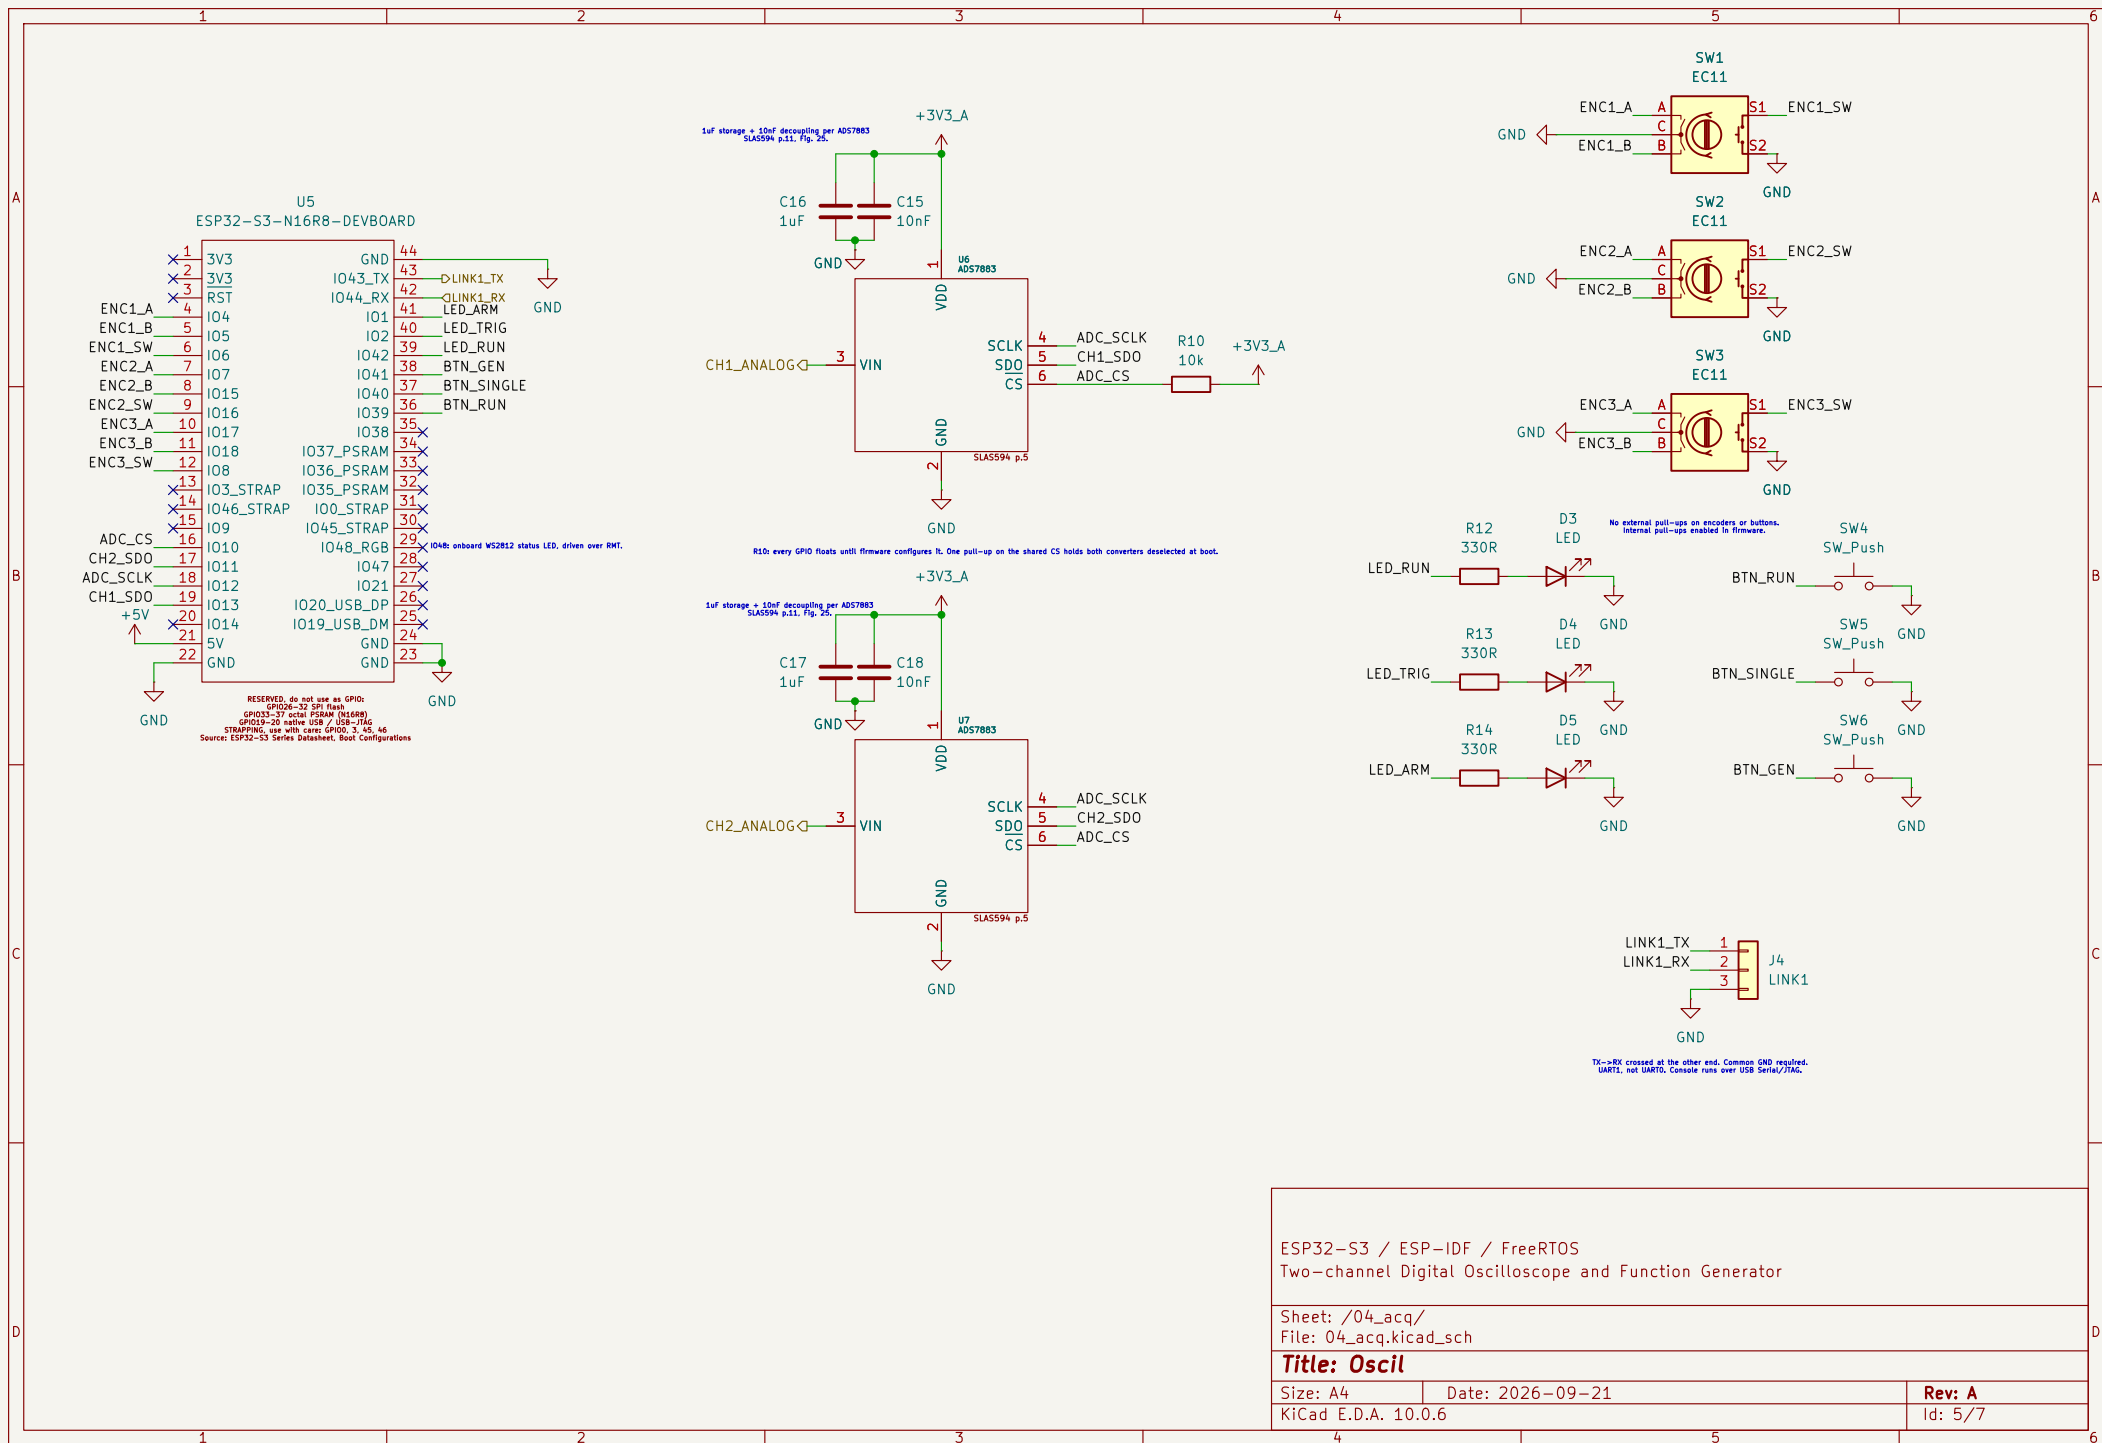

ESP32-S3 / ESP-IDF / FreeRTOS
Two-channel Digital Oscilloscope and Function Generator

Sheet: /04_acq/
File: 04_acq.kicad_sch

Title: Oscil

Size: A4
KiCad E.D.A. 10.0.6

Date: 2026-09-21

Rev: A
Id: 5/7

