



MP3-37

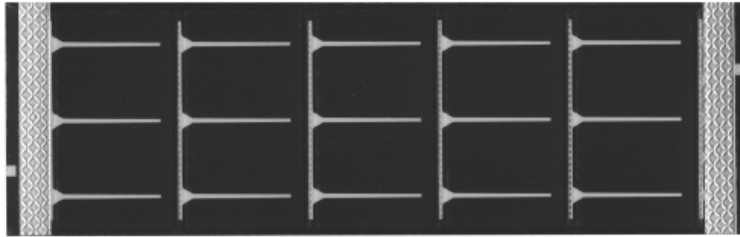

© 2013 FlexSolarCells

MP3-37

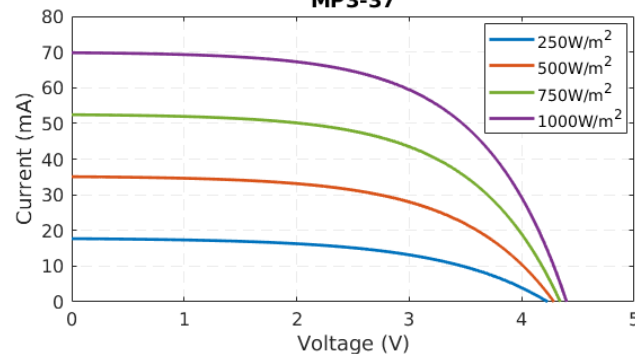

ELECTRICAL

PARAMETER	VALUE	UNIT
Wattage	0.15	W
Voltage	3.0	V
Voltage (oc)	4.1	V
Current	50	mA
Current (sc)	60	mA

MECHANICAL

PARAMETER	VALUE	UNIT
Height	0.2 (8)	mm (mils)
Length x Width	37 x 114 (1.5 x 4.5)	mm (inches)
Aperture Size	37 x 100 (1.5 x 3.9)	mm (inches)
Weight	1.2 (0.04)	g (oz)

Encapsulation	Polyester
Average Lifetime Flexions	3,000
*Average Outdoor Lifespan	6-12 Months

OPERATIONAL

**STC - (Standard Test Conditions) 1,000W/m², AM 1.5, 25°C Cell Temperature	
Temperature Departure of Isc	0.07%/K (3.6 mA/K)
Temperature Departure of Voc	-0.26%/K (-57 mV/K)
Temperature Departure of Pmax	-0.19%/K (-110.4 mW/K)
Temperature Departure of Imp	0.07%/K (2.4 mA/K)
Temperature Departure of Vmp	-0.24%/K (-41 mV/K)

NOTES

- *Average Outdoor Lifespan based on the absence of additional shielding or protection.
- During first 8-10 weeks of operation, electrical output may exceed specified ratings.
- Electrical specifications are based on measurements performed at **STC after stabilization.
- Performance may vary from rated power due to temperature and/or spectral fluctuations.

Part Name	MP3-37	中国语文	http://www.rourentaiyangneng.com
		Deutsch	http://www.flexiblesolarzellen.com
Part Number	F103	Español	http://www.celdassolaresflexibles.com
		Française	http://www.panneauxsolairesflexibles.com
		WWW.FLEXSOLARCELLS.COM General Inquires: info@flexsolarcells.com Sales Inquires: sales@flexsolarcells.com	

REV.	MODIF.	DATE	DRAW	APPROVE	ECN. No.
V1.0	FIRST ISSUE	9/12/2013	F. Meitzen	R. Anastasi	