


ICA200-72M

Monocrystalline 200W

Powered by high-efficiency MONOCRYSTALLINE cells, this series of high performance modules provides the most cost-effective solution for lowering the LCOE of any PV systems large or small

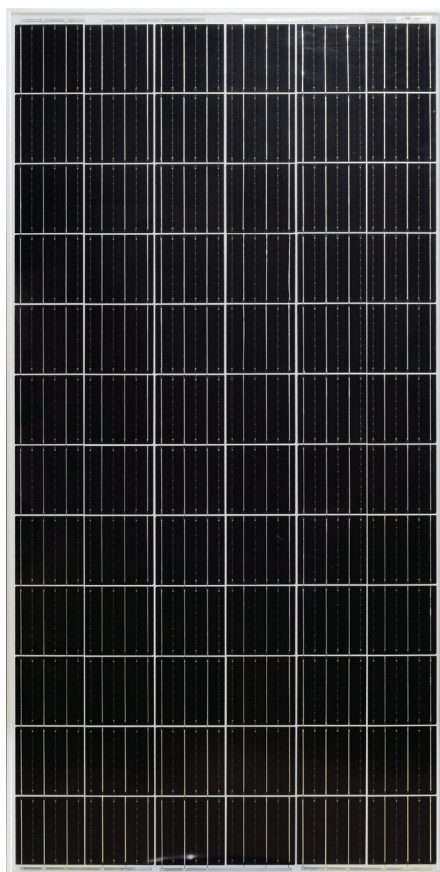

ELECTRICAL CHARACTERISTICS

Max. Power (W)	200
Power Tolerance (%)	±5%
Efficiency (%)	22.44
Max. Power Voltage, Vmp (V)	41.31
Max. Power Current, Imp (A)	4.84
Open Circuit Voltage, Voc (V)	50.53
Short Circuit Current, Isc (A)	5.13
Weight (kg)	9.90
Dimension of module (mm)	1330 x 670 x 28
Pmax Temperature Coefficient (%/°C)	-0.45
Voc Temperature Coefficient (%/°C)	-0.32
Isc Temperature Coefficient (%/°C)	+0.06
Maximum System Voltage(VDC)	700
Maximum Series Fuse Rating (A)	10
Operating Temperature (°C)	-45~+80
NOCT (°C)	45±2

STC:1000W/m2.AM1.5 and 25°C cell temperature

Specifications subject to change without prior notice

SNI

LPB-273-026
SNI BC 8126-5-1-2016
SNI BC 8126-5-2-2016
SNI BC 8126-5-3-2016
SNI 116-2008-6



(IEC 61730)

