





25 . 6 V 50 Ah



NEW GENERATION RV BATTERY



Dimension:

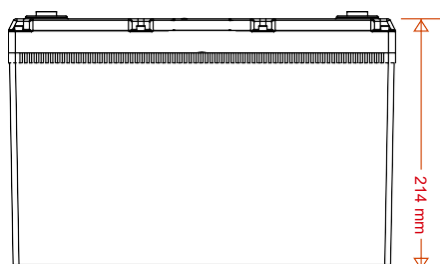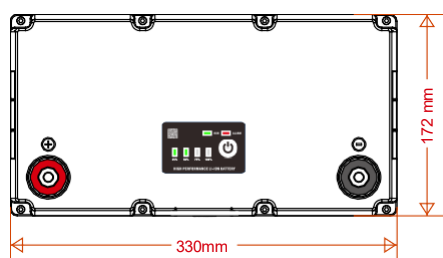

Unit: mm

SAFETY

- + Long life type prismatic LiFePO4 cells (3.2V50Ah).
- + Cell certification: UN38.3, ROHS, UL1973(for 4000 cycles)
- + Battery certification: UN38.3, MSDS, CE
- + The cycle life 2000 and 4000 cycles is available.

DESIGN

- + Detachable ABS case, better than traditional case.
- + ON/OFF Button, LED indicators for SOC, RUN and ALM.
- + IP 65 Class (Without COM port).
- + Maintenance free.

BATTERY MANAGEMENT SYSTEM

- + Integrated Software BMS inside.
- + Independent protection for charge and discharge.
- + OVP, LVP, OTP, LTP, Short circuit protection.
- + Optional Parts: Heater, Bluetooth Module (Built-in),

25.6V50Ah

SPECIFICATION

Model	LFP25.6V50AH G1	LFP25.6V50AH G2	LFP25.6V50AH G3
Cell and Connection	3.2V50Ah, 1P8S	3.2V50Ah, 1P8S	3.2V50Ah, 1P8S
Nominal Voltage [V]	25.6	25.6	25.6
Nominal Capacity [Ah]	50	50	50
Total Energy [Wh]	1280	1280	1280
Max. Charging Current [A]	50	50	50
Recommended Charging Current [A]	25	25	25
Charging Voltage [V]	28.4~29.2	28.4~29.2	28.4~29.2
Max. Discharging Current [A]	50	50	50
End of Discharge Voltage [V]	22.4	22.4	22.4
Operating Temperature Range	Charge: 0 ~ +50°C Discharge: -20 ~ +55°C	Charge: 0 ~ +50°C Discharge: -20 ~ +55°C With Heater: Charge/Discharge -20~+55°C	Charge: 0 ~ +50°C Discharge: -20 ~ +55°C With Heater: Charge/Discharge -20~+55°C
Protection	Over charge, Over discharge, Over temperature, Low Temperature, Over Current, Short circuit	Over charge, Over discharge, Over temperature, Low Temperature, Over Current, Short circuit	Over charge, Over discharge, Over temperature, Low Temperature, Over Current, Short circuit
Cycle Life ¹	>2000 cycles >4000 cycles	>2000 cycles >4000 cycles	>2000 cycles >4000 cycles
Designed Calendar Life	10 Years	10 Years	10 Years
Communication Port	/	/	RS485; CAN
LED Indicator and Button	/	SOC, ALM, RUN, ON/OFF	SOC, ALM, RUN, ON/OFF
Dimension (W*D*H, mm)	330*172*214	330*172*214	330*172*214
Weight [Kg]	11	11	11
Operation Humidity	0~95% RH (No condensing)	0~95% RH (No condensing)	0~95% RH (No condensing)
IP Class	IP65	IP65	IP30
Parallel Support ²	Yes, Max, 4Sets	Yes, Max, 4Sets	Yes, Max, 4Sets
Series Support	Yes, Max. 2 Sets	Yes, Max. 2 Sets	Yes, Max. 2 Sets
Certification-Cell	2000 cycles life cell: UN38.3; 4000 cycles life cell: UN38.3; UL1973		
Certification-Battery	UN38.3; MSDS; CE		
Optional Parts	Internal Bluetooth Module	Internal Bluetooth Module Heater	Internal Bluetooth Module Heater External Bluetooth Module External Display Module RS485-USB Device

Note:

1. 0.5C /0.5C ,25°C, 80%DOD to 80% of initial capacity.

2. For parallel and series connection, refer to user manual.

BMS Detail Information

Over-Charge Alarm & Protection

Over-Charge Alarm	3.55V (For cell) 28.0V (For pack)
Over-Charge Protection	3.7V (For cell) 29.6V (For pack)
Over-Charge Protection Delay	1000 ms
Over-Charge Release	3.45V (For cell) 27.6V (For pack)

Over-Discharge Alarm & Protection

Over-Discharge Alarm	2.8V (For cell) 22.4V (For pack)
Over-Discharge Protection	2.5V (For cell) 20V (For pack)
Over-Discharge Protection Delay	1000 ms
Over-Discharge Release	2.8V (For cell) 22.4V (For pack)

Over Current Alarm & Protection

Charge Over Current Alarm	27.5A
Charge Over Current Protection	55A
Charge Over-Current Protection Delay	15S
Charge Over Current Protection Release	Automatic release after 1min and up to 3 times or Discharge
Discharge Over Current Alarm	55A
Discharge Over Current Protection-1	60A
Discharge Over Current Protection-1 Delay	15S
Discharge Over Current Protection-2	65A
Discharge Over Current Protection-2 Delay	200ms
Discharge Over Current Protection Release	Automatic release after 1min and up to 3 times or Charge

Over Temperature Alarm & Protection

Charge Low Temperature Alarm	7°C
Charge Low Temperature Protection	0°C
Charge Low Temperature Protection Release	5°C
Charge High Temperature Alarm	50°C
Charge High Temperature Protection	55°C
Charge High Temperature Protection Release	45°C
Discharge Low Temperature Alarm	-10°C
Discharge Low Temperature Protection	-20°C
Discharge Low Temperature Protection Release	-17°C
Discharge High Temperature Alarm	55°C
Discharge High Temperature Protection	60°C
Discharge High Temperature Protection Release	50°C

Short Circuit Protection


Short Current Protection Delay Time	1500 uS
Short Current Release Method	Release load

Heater Control (Optional)

Heater ON	Cell temperatures ≤ 0°C and charger is connected
Heater OFF	Cell temperature >10°C

25.6V 50Ah

INTERNAL STRUCTURE

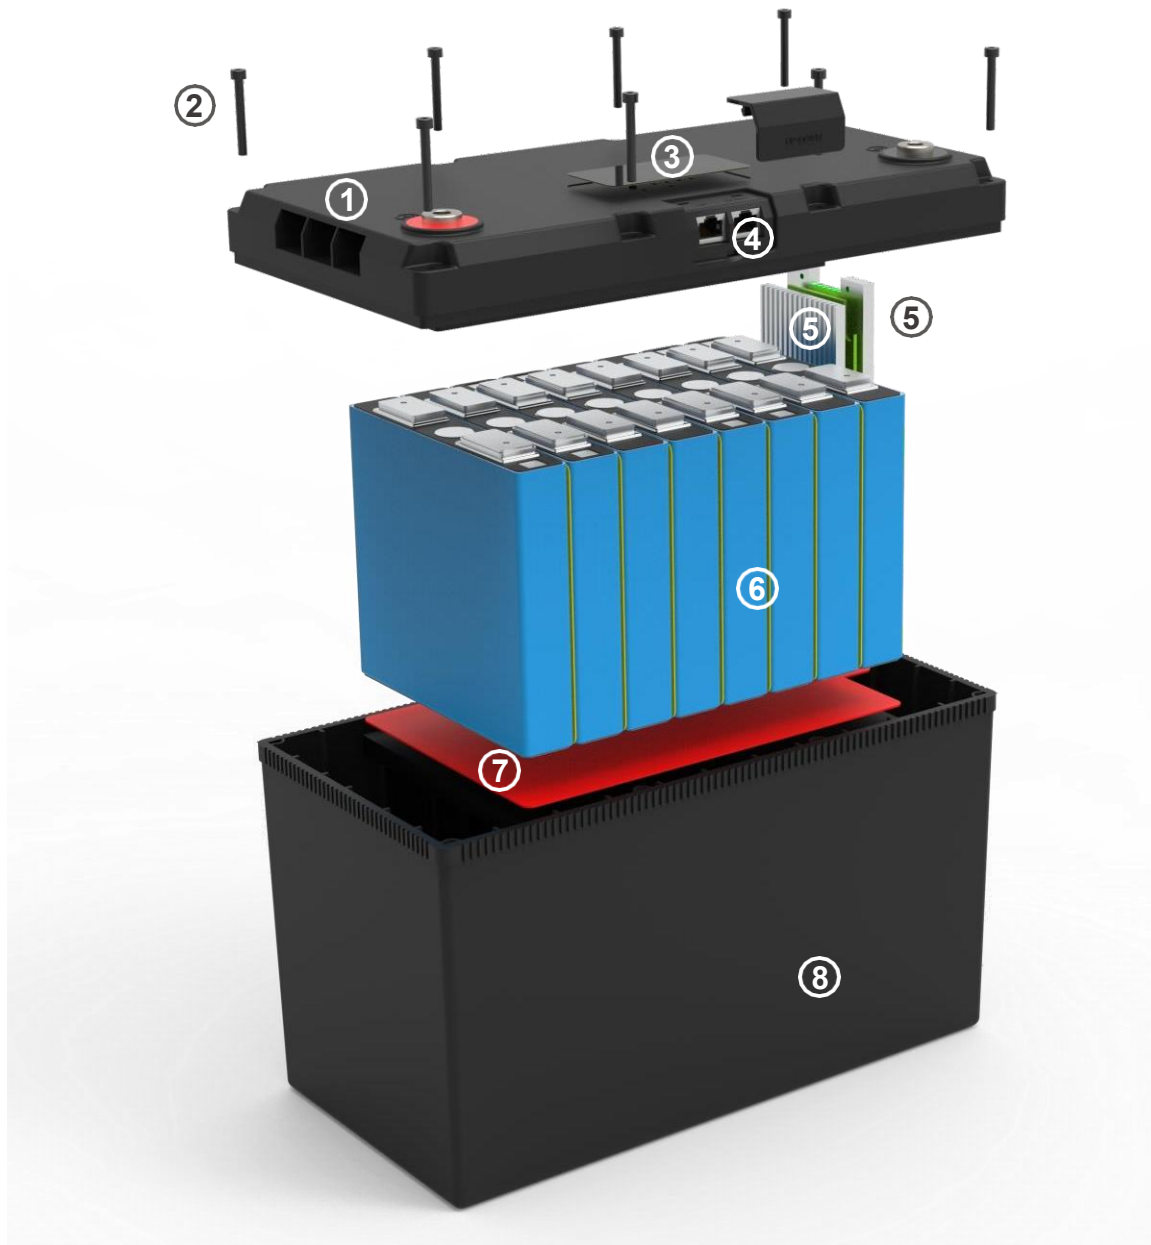

- | | | |
|--------------------------|--------------------------------|---------------------------|
| ① Detachable cover-ABS | ④ Communication Port- Optional | ⑦ Heater - Optional |
| ② Stainless steel screws | ⑤ BMS (4S100A) | ⑧ Case -ABS |
| ③ ON/OFF button and LEDs | ⑥ Cell Module (3.2V50Ah,1P8S) | ⑨ EVA Insulation Material |

