U146 Digi Xbee firmware update

1. Download the Digi Module firmware update software

Links:

XCTU v. 6.5.13 Windows x86:x64

Other link

2. Connecting the U146 controller to the PC

Step 1

- Connect the controller via USB cable to the computer (no external power required)
- Click 3 times on the controller logo icon

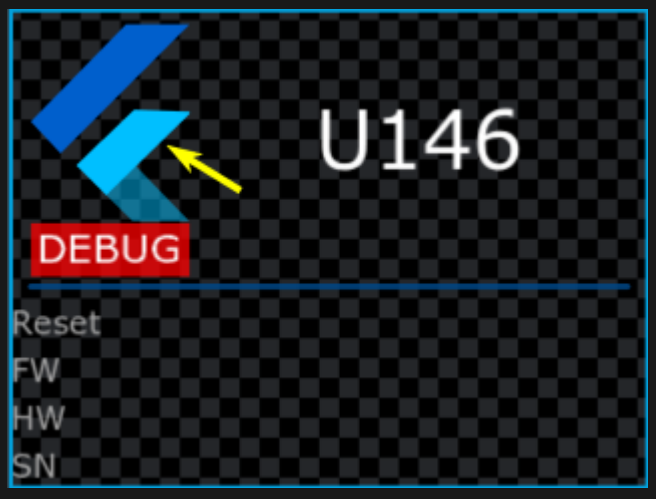

The controller enters configuration mode.

Step 2

- Select `USB Mode` from the configuration menu.

- After the `USB mode` screen appears, the computer must find the USB port.

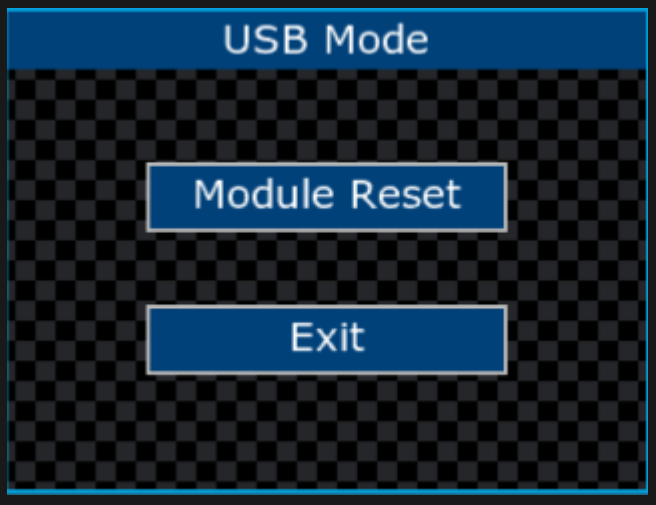

- A new Com Port will appear in the Windows `Control Panel`/`Device Manager` with the name: `STMicroelectronics Virtual COM Port`

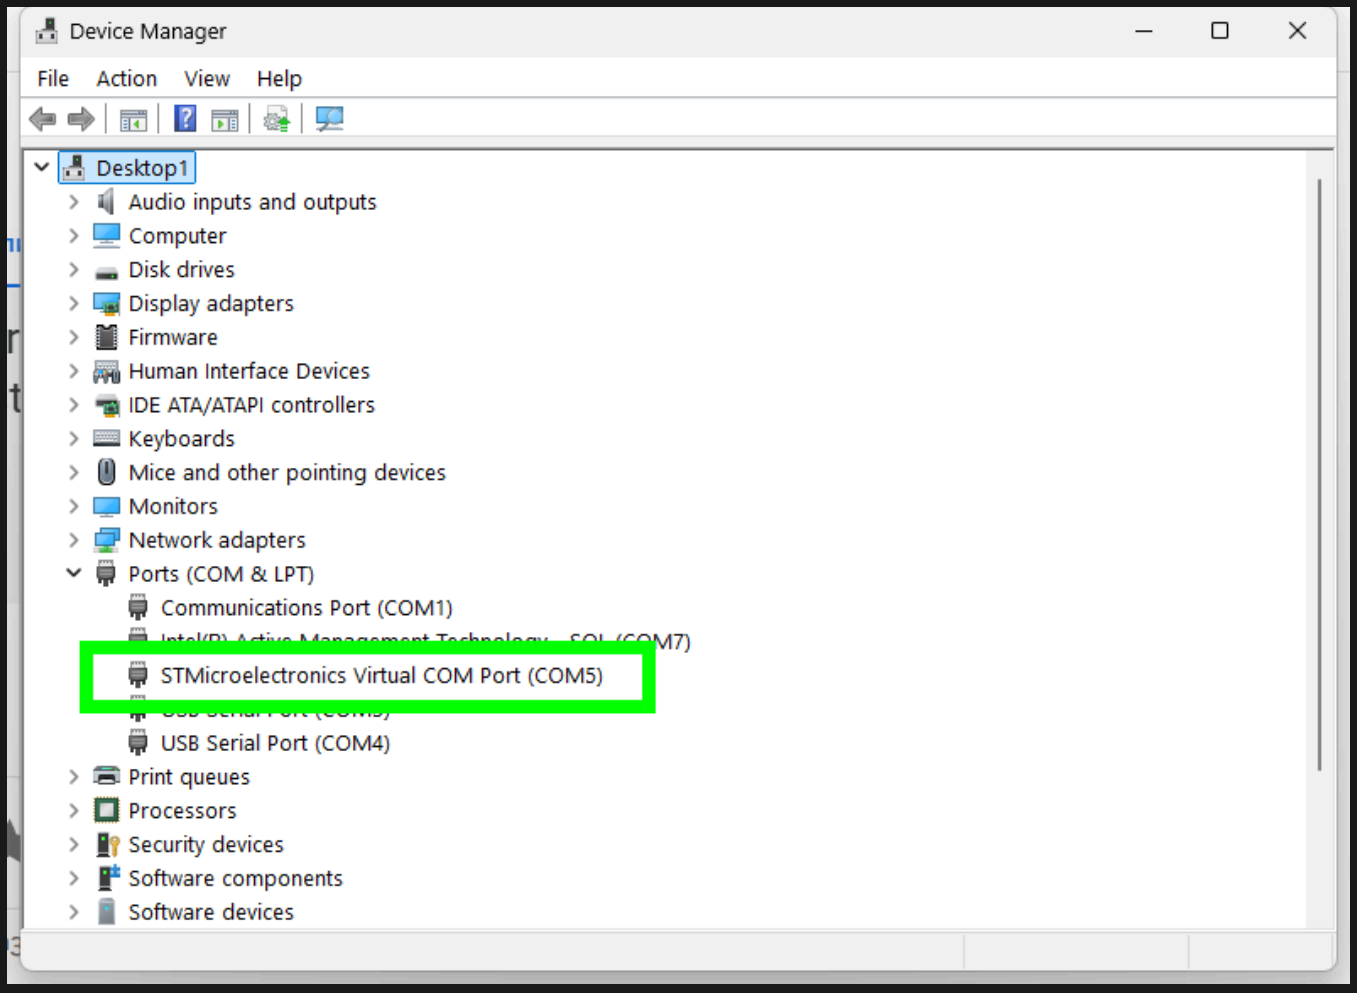
Device Manager
File
Action
View
Help
Desktop1
Audio inputs and outputs
Computer
Disk drives
Display adapters
Firmware
Human Interface Devices
IDE ATA/ATAPI controllers
Keyboards
Mice and other pointing devices
Monitors
Network adapters
Ports (COM & LPT)
Communications Port (COM1)
STMicroelectronics Virtual COM Port (COM5)
USB Serial Port (COM4)
Print queues
Processors
Security devices
Software components
Software devices