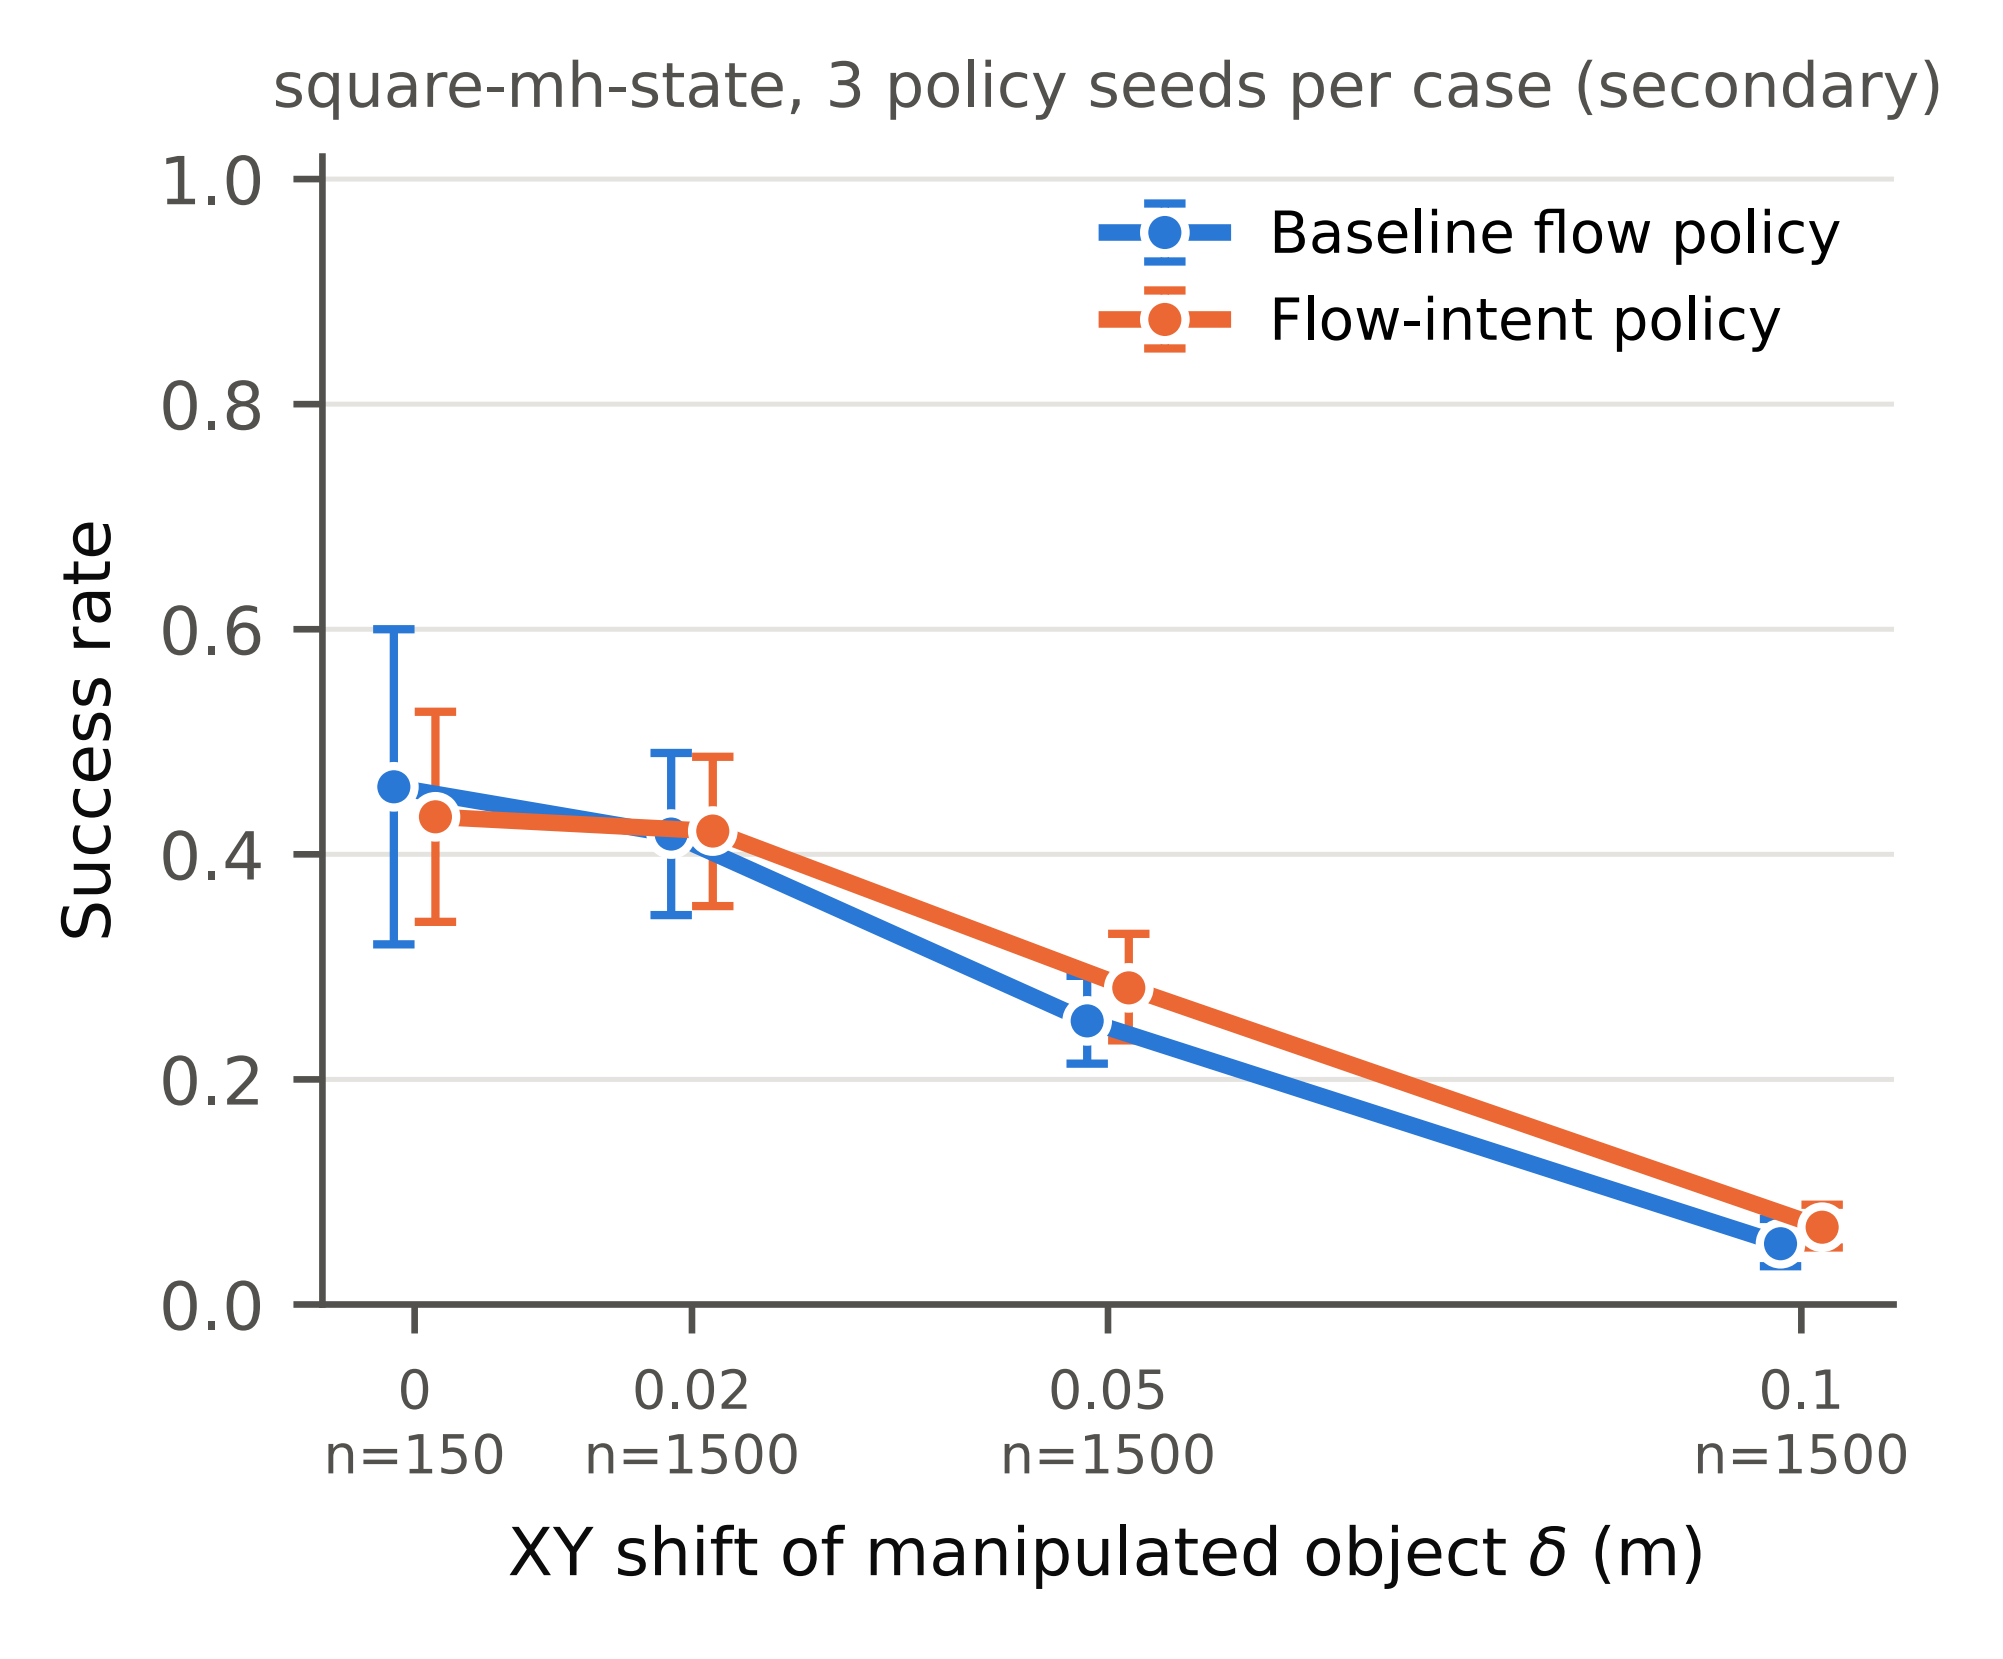
square-mh-state, 3 policy seeds per case (secondary)
Baseline flow policy
Flow-intent policy
Success rate
1.0
0.8
0.6
0.4
0.2
0.0
0
n=150
0.02
n=1500
0.05
n=1500
0.1
n=1500
XY shift of manipulated object δ (m)