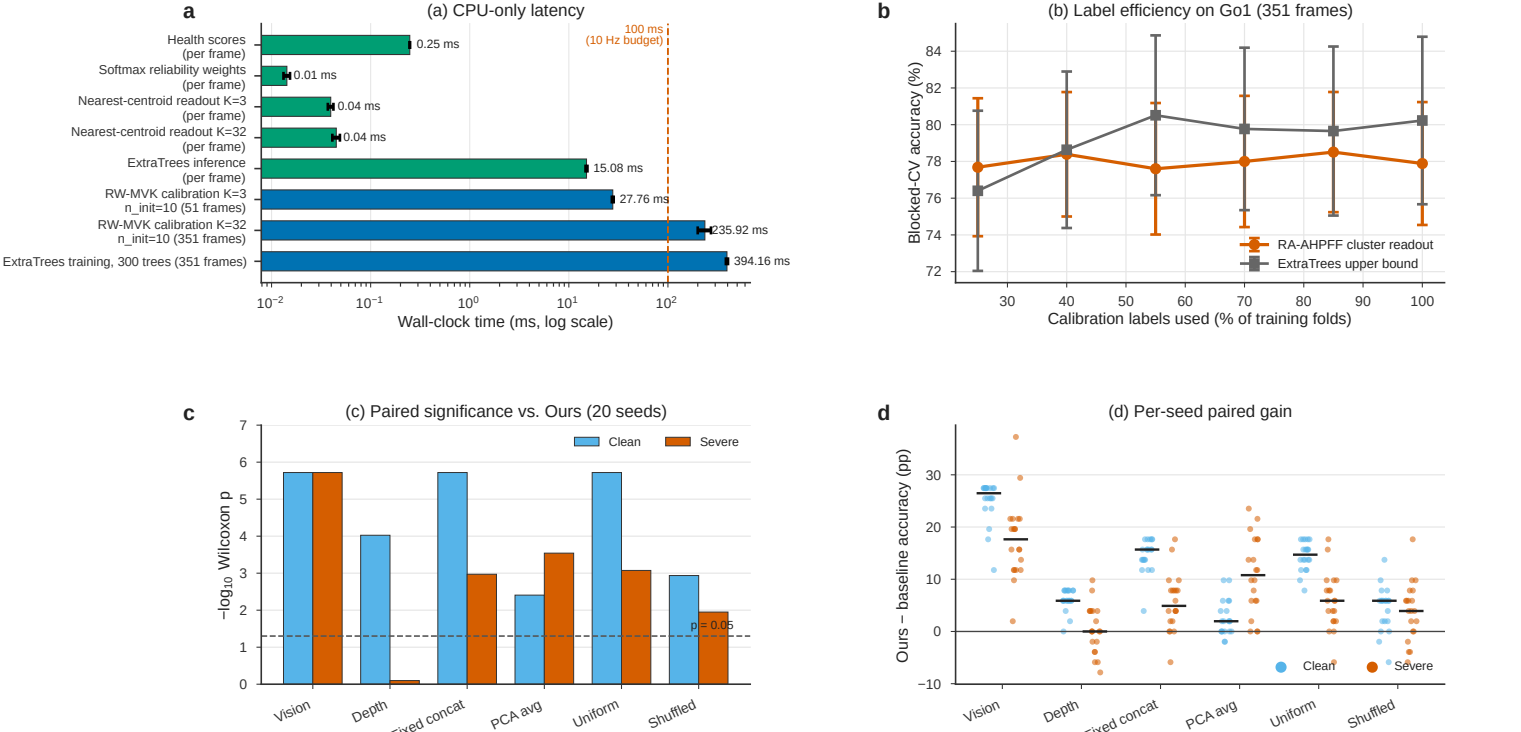


All timings are single-thread CPU measurements (Python 3.8, 2.4 GHz class x86-64). The 10 Hz perception budget is 100 ms per RGB-D frame; calibration is an offline in-scene step. Panel (b) error bars are s.e.m. over 25 blocked evaluations.