

Zhoubao Pang

Midterm Project

Applied Linear Control

Spring 2019

```
clc;clear;  
close all
```

Section 1

Sample rate from the midterm assignment sheet.

```
Fs = 20; % (Hz)  
Fnyq = Fs/2;
```

Calculate the sample period.

```
Ts = 1/Fs; % (s)
```

Select the maximum 2^N number of sample allowed by the .p function.

```
N = 2^16;
```

Calculate frequency resolution

```
F = Fs / N; % (Hz)
```

Calculate the total time period of the data

```
T = N * Ts; % (s)
```

Inform how long it will take to collect the number of samples

```
fprintf("The data would take %d minutes to collect\n\r",T/60)
```

The data would take 5.461333e+01 minutes to collect

Create time vector.

```
t = Ts * [0:N-1]; % (s)
```

Create bandpass filter with cutoff frequency of 0.03 Hz and 8 Hz.

```
[b1,a1] = butter(2,[0.03 8]/(Fs/2));
```

Create filtered white noise input as the input signals.

```
u1 = filter(b1,a1,2.6*randn(1,N));  
u2 = filter(b1,a1,2.6*randn(1,N));
```





Create zero input

```
u0 = zeros(1,N);
```

Plot frequency spectrum and time domain plots for the input signal. The excitation does not saturate the DAC more than 0.1%

```
figure
set(gca,'fontsize',14)
set(gcf,'Position',[0 0 800 600])
subplot(2,2,1)
nfft = 2^10;
wndo = nfft;
ovlp = nfft/2;
[Pxx,FR] = cpsd(u1,u1,wndo,ovlp,nfft,Fs);
semilogx(FR,10*log10(Pxx*Fs/2),'r')
xlim([0.01 Fs/2])
xlabel('Frequency (Hz)')
ylabel('Magnitude (dB)')
legend('Channel 1 Freqeuncy Response')
grid on
subplot(2,2,3)
plot(t,u1)
xlabel('Time (s)')
ylabel('Input Voltage (v)')
legend('Channel 1 Time Response')
grid on

subplot(2,2,2)
nfft = 2^10;
wndo = nfft;
ovlp = nfft/2;
[Pxx,FR] = cpsd(u2,u2,wndo,ovlp,nfft,Fs);
semilogx(FR,10*log10(Pxx*Fs/2),'r')
xlim([0.01 Fs/2])
xlabel('Frequency (Hz)')
ylabel('Magnitude (dB)')
legend('Channel 2 Freqeuncy Response')
grid on
subplot(2,2,4)
plot(t,u2)
xlabel('Time (s)')
ylabel('Input Voltage (v)')
legend('Channel 2 Time Response')
grid on
```

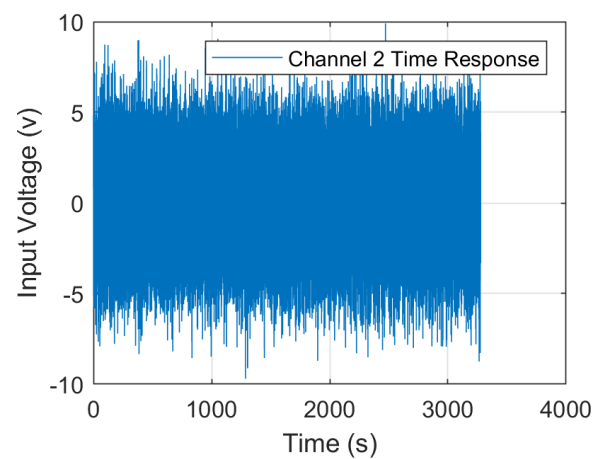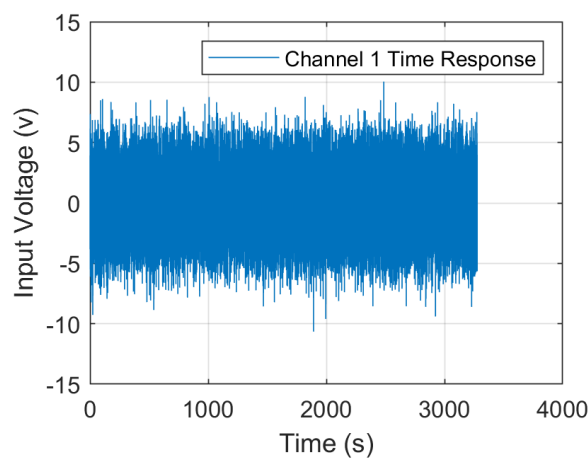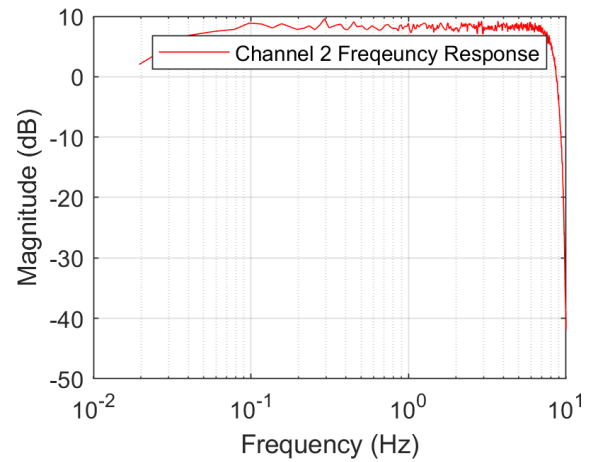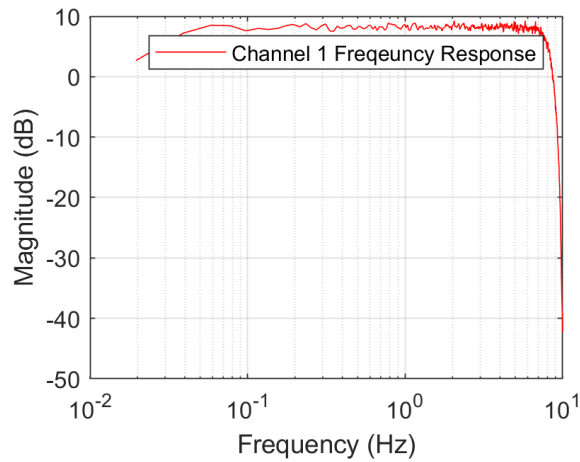

Section 2

u10 only excite the first channel and gives zero input to the other channel.

```
u10= [u1;u0];
y1 = s19_plant(u10);
```

```
*** Warning *** s19_plant.p has only been tested on:
    R2017a, R2017b, R2018a, and R2018b
*** Warning:  Excitation saturated 2/65536 samples (0.003%)
```

u01 only excite the second channel and gives zero input to the other channel.

```
u01= [u0;u2];
y2 = s19_plant(u01);
```

```
*** Warning *** s19_plant.p has only been tested on:
    R2017a, R2017b, R2018a, and R2018b
```

u01 provides zero input to both channels.

```
u00= [u0;u0];
yn = s19_plant(u00);
```

```
*** Warning *** s19_plant.p has only been tested on:
    R2017a, R2017b, R2018a, and R2018b
```

Calculate signal to noise ratio(SNR) of 4 paths in dB

```
SNR_dB(1,1) = 10*log10((std(y1(1,:))^2 - std(yn(1,:))^2) / std(yn(1,:))^2); %dB
SNR_dB(1,2) = 10*log10((std(y2(1,:))^2 - std(yn(1,:))^2) / std(yn(1,:))^2); %dB
SNR_dB(2,1) = 10*log10((std(y1(2,:))^2 - std(yn(2,:))^2) / std(yn(2,:))^2); %dB
SNR_dB(2,2) = 10*log10((std(y2(2,:))^2 - std(yn(2,:))^2) / std(yn(2,:))^2); %dB

display(SNR_dB)
```

```
SNR_dB = 2x2
    43.2573    38.5896
    32.7015    36.7915
```

Section 3

Power Spectrum of noise.

```
[Pxxn1,FR] = pwelch(yn(1,:),wndo,ovlp,nfft,Fs);
[Pxxn2,~] = pwelch(yn(2,:),wndo,ovlp,nfft,Fs);
```

Power Spectrum of the 4-path outputs.

```
[Pxx11,~] = pwelch(y1(1,:),wndo,ovlp,nfft,Fs);
[Pxx12,~] = pwelch(y2(1,:),wndo,ovlp,nfft,Fs);
[Pxx21,~] = pwelch(y1(2,:),wndo,ovlp,nfft,Fs);
[Pxx22,~] = pwelch(y2(2,:),wndo,ovlp,nfft,Fs);
```

Plot power spectrum and respective time domain outputs.

```
figure
set(gca,'fontsize',14)
set(gcf,'Position',[0 0 800 600])
subplot(2,2,1)
semilogx(FR,10*log10(Pxx11*Fs/2))
hold on
semilogx(FR,10*log10(Pxx21*Fs/2))
semilogx(FR,10*log10(Pxxn1*Fs/2))
xlim([0.01 Fs/2])
xlabel('Frequency')
ylabel('Magnitude (dB)')
grid on
legend('spectrum_1_1','spectrum_2_1','noise_1','Location','southwest')
hold off





subplot(2,2,2)
semilogx(FR,10*log10(Pxx12*Fs/2))
hold on
semilogx(FR,10*log10(Pxx22*Fs/2))
semilogx(FR,10*log10(Pxxn2*Fs/2))
xlim([0.01 Fs/2])
xlabel('Frequency')
ylabel('Magnitude (dB)')
grid on
legend('spectrum_1_2','spectrum_2_2','noise_2','Location','southwest')
hold off

subplot(2,2,3)
plot(t,y1(1,:),t,y1(2,:),t,yn(1,:))
legend('y_1_1','y_2_1','n_1','Location','southwest')
ylabel('Output Voltage (V)')
xlabel('Time (s)')
grid on
```

```

subplot(2,2,4)
plot(t,y2(1,:),t,y2(2,:),t,yn(2,:))
legend('y_1_2','y_2_2','n_2','Location','southwest')
ylabel('Output Voltage (V)')
xlabel('Time (s)')
grid on

```

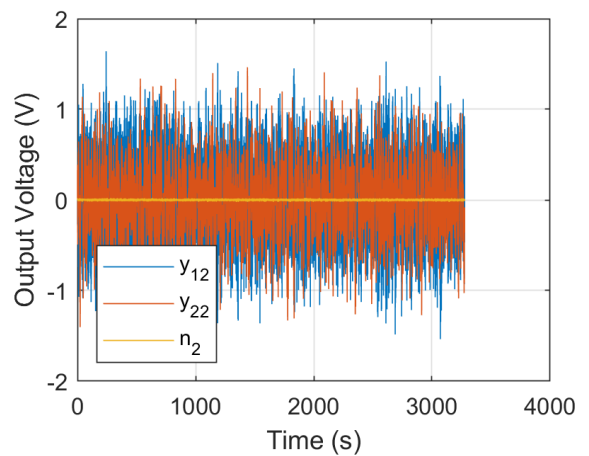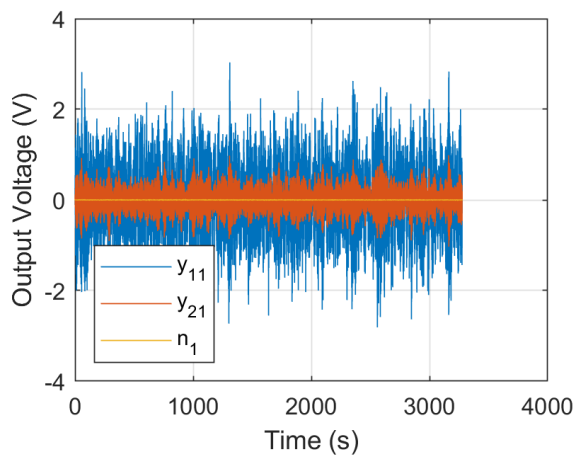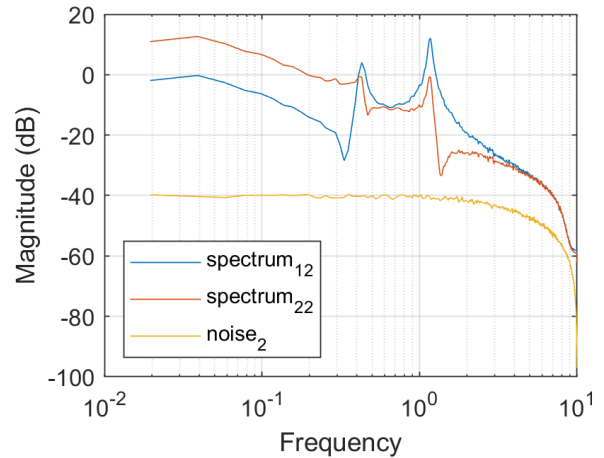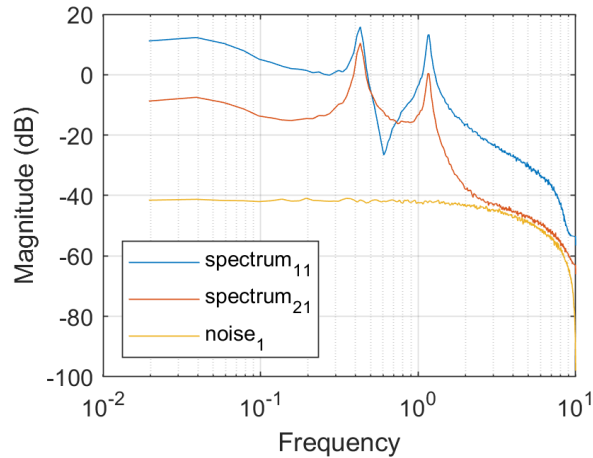

Section 4

Calculate H1 of 4 signal paths.

```

[H1(1,1,:),fr] = tfestimate(u1,y1(1,:),wndo,ovlp,nfft,Fs);
[H1(1,2,:),~) = tfestimate(u2,y2(1,:),wndo,ovlp,nfft,Fs);
[H1(2,1,:),~) = tfestimate(u1,y1(2,:),wndo,ovlp,nfft,Fs);
[H1(2,2,:),~) = tfestimate(u2,y2(2,:),wndo,ovlp,nfft,Fs);

```

Calculate the coherence of the 4 paths.

```

gamma(1,1,:) = mscohere(u1,y1(1,:),wndo,ovlp,nfft,Fs);
gamma(1,2,:) = mscohere(u2,y2(1,:),wndo,ovlp,nfft,Fs);
gamma(2,1,:) = mscohere(u1,y1(2,:),wndo,ovlp,nfft,Fs);
gamma(2,2,:) = mscohere(u2,y2(2,:),wndo,ovlp,nfft,Fs);

```

Section 5

Select the number of zeros.

```
Nb = [4 5;...  
      5 5];
```

Select the number of poles.

```
Na = 5;
```

Select weighting vector for invfreqz to be one from 0.1 Hz to 3 Hz.

```
wt = zeros(length(fr),1);  
wt(7:155) = 1;
```

select infreqz iteration number

```
iter = 1E6;
```

Calculate the transfer function of each signal path.

```
for m = 1:2  
    for p = 1:2  
        [num, den] = invfreqz(squeeze(H1(p,m,:)),(pi*fr)/(Fs/2),Nb(p,m),Na,wt,iter);  
        NUM{p,m,:} = num;  
        DEN{p,m,:} = den;  
    end  
end
```

Create transfer function model

```
Htf = tf(NUM,DEN,Ts);
```

Apply minimal realization transformation or pole zero cancellation.

```
Hmr = minreal(Htf);
```

Section 6

Form state-space realization

```
Hss = ss(Hmr);
```

Acquire Balanced realization model and get the hankel singular value


```
[Hbr, Hsv] = balreal(Hss); % [balance realization, hankel singular values]
```

Get the number of states from the balanced realization model

```
NFIT = size(Hbr.A,1); % extract number of rows of A matrix
```

Plot the states' hankel singular values in bar chart.

```
figure  
set(gca,'fontsize',14)  
set(gcf,'Position',[0 0 800 600])  
bar([1:NFIT],Hsv)  
grid on  
set(gca,'yscale','log')  
ylabel('Hankel Singular Value')  
xlabel('State Index')
```

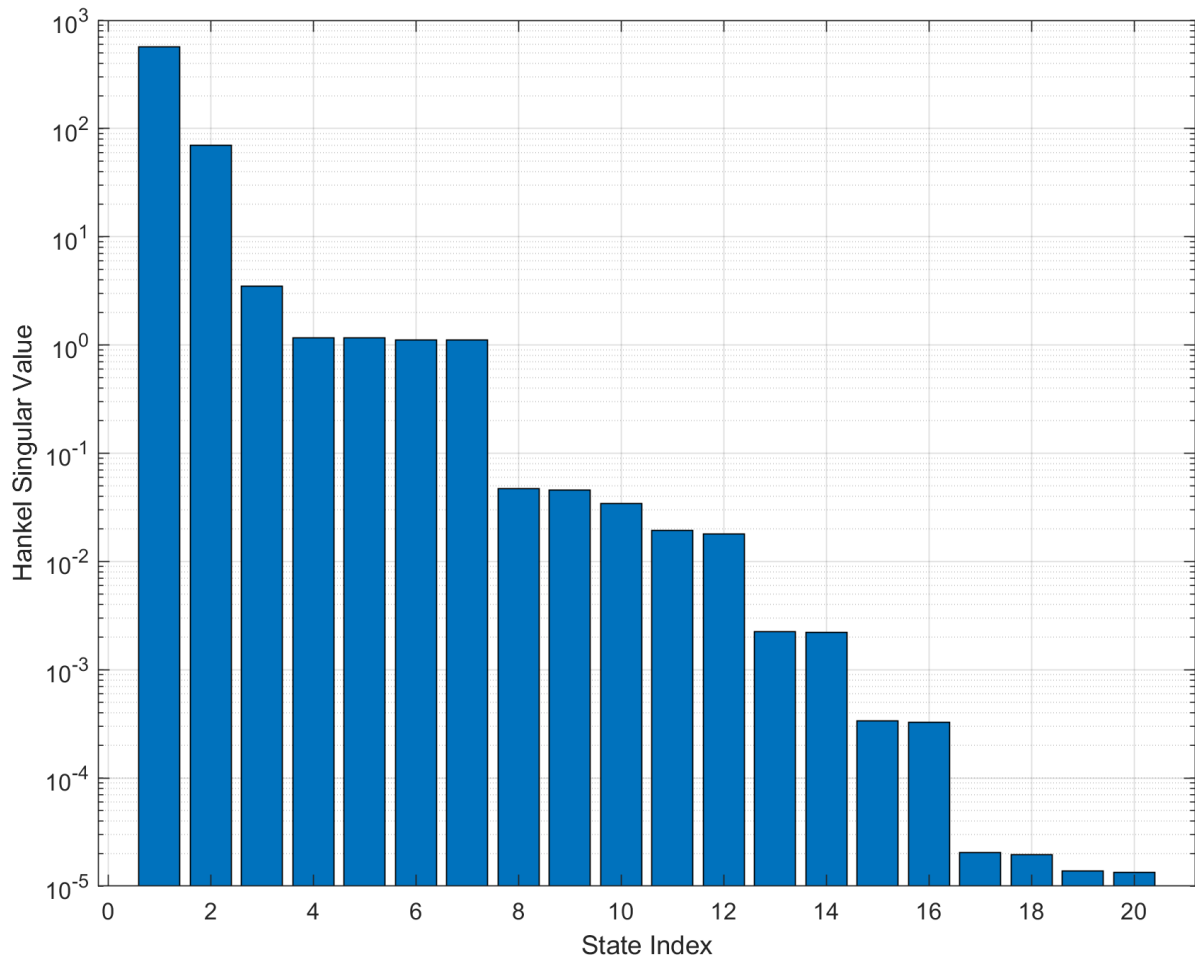

From the bar chart, we can see a huge difference between state 7 and state 7. Therefore, the cutoff threshold is chosen to be 0.1.

```
HSV_cutoff = 0.1; % based on visual inspection of the bar chart
elim = (Hsv < HSV_cutoff); % Boolean vector (true=eliminate)
```

Applied state model reduction from the balanced realization state space model.

```
Hss_red = modred(Hbr, elim, 'Truncate');
```

Section 7

```
Poles = pole(Hss_red);
[Wn, Zeta] = damp(Hss_red);
Natural_Frequency_Hz = Wn / (2*pi);
T = table(Poles,Natural_Frequency_Hz,Zeta);
```

Show the remaining poles and its natural frequency and damping coefficient after the model reduction

```
disp(T)
```


Poles	Natural_Frequency_Hz	Zeta
0.92591+0.35522i	1.5229e-05	1
0.92591-0.35522i	0.00050895	1
0.98636+0.13323i	0.010197	1

0.98636-0.13323i	0.42762	0.034969
1+0i	0.42762	0.034969
0.99984+0i	1.1664	0.022723
0.9968+0i	1.1664	0.022723

Section 8

```
figure
set(gca,'fontsize',14)
set(gcf,'Position',[0 0 800 600])
hold on
plot(pole(Htf(1,1)), 'x', 'Color', 'r')
plot(pole(Htf(1,2)), 'd', 'Color', 'g')
plot(pole(Htf(2,1)), '^', 'Color', 'c')
plot(pole(Htf(2,2)), 's', 'Color', 'b')

plot(pole(Hss_red), 'o', 'Color', 'k')
hold off
legend('u1 to y1 poles', 'u2 to y1 poles', 'u1 to y2 poles', 'u2 to y2 poles', ...
       'Final state-space poles', 'AutoUpdate', 'off')
zgrid
axis equal
xlabel('RE (z)')
ylabel('IM (z)')
```

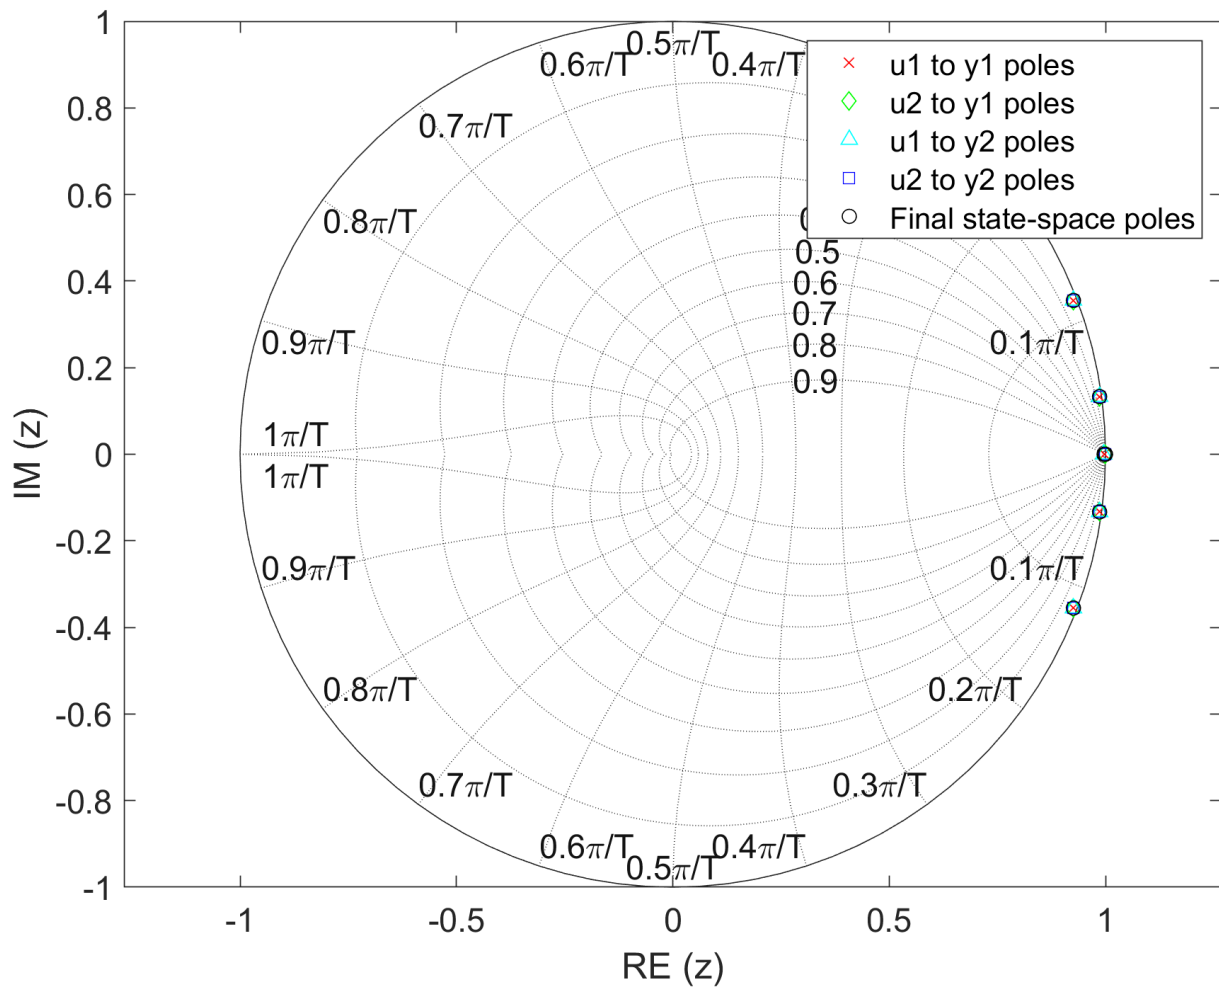

Section 9

Calculate the phase and magnitude of the original transfer function.

```
FreqResp_tf = squeeze(freqresp(Htf,2*pi*fr));  
Ph_tf = (180/pi)*angle(FreqResp_tf);  
Mag_tf = 20*log10(abs(FreqResp_tf));
```

Calculate the phase and magnitude of the final state space model.

```
FreqResp_red = squeeze(freqresp(Hss_red,2*pi*fr));  
Ph_red = (180/pi)*angle(FreqResp_red);  
Mag_red = 20*log10(abs(FreqResp_red));
```

Section 10

Create 4-path bode plot with coherence.

```
for m = 1:2  
    for p = 1:2  
        Name_str = sprintf('p=%d,m=%d',p,m);  
  
        Ph_H1(p,m,:) = (180/pi)*angle(H1(p,m,:));  
        Mag_H1(p,m,:) = 20*log10(abs(H1(p,m,:)));  
  
        figure  
  
        set(gca,'fontsize',14)  
        set(gcf,'Position',[0 0 800 600])  
        subplot(3,1,1)  
        semilogx(fr,squeeze(gamma(p,m,:)))  
        grid on  
        ylabel('Coherence')  
        title(Name_str,'FontSize',30)  
        subplot(3,1,2)  
        semilogx(fr,squeeze(Ph_H1(p,m,:)),fr,squeeze(Ph_tf(p,m,:)),fr,squeeze(Ph_red(p,m,:)),'-.');  
        legend('H1','Htf','Hss red','Location','northwest')  
        ylabel('Phase (deg)')  
        ylim([-180 180])  
        grid on  
        subplot(3,1,3)  
        semilogx(fr,squeeze(Mag_H1(p,m,:)),fr,squeeze(Mag_tf(p,m,:)),fr,squeeze(Mag_red(p,m,:)),'-.');  
        ylabel('Mag (dB)')  
        xlabel('Frequency (Hz)')  
        legend('H1','Htf','Hss red','Location','northeast')  
        grid on  
    end  
end
```

