

REQUEST FOR QUOTATION

Stepper Motor Bracket, SB-1042 Rev A

6061-T6 aluminum · Type II clear anodize · 3 quantity breaks

RFQ number	RFQ-2026-6DEBB8	Issue date	27 Sep 2026
Buyer	Northwind Robotics	Quote due	09 Oct 2026
Contact	A. Rivera procurement@northwind.example	Validity	Quote valid 60 days
Incoterms	Supplier to state	Payment	Net 30

Line items

Line	Part no.	Description	Material / finish	Qty	Target delivery
1	SB-1042 Rev A	Stepper Motor Bracket	6061-T6 aluminum / Type II clear anodize	25	06 Nov 2026
2	SB-1042 Rev A	Stepper Motor Bracket	6061-T6 aluminum / Type II clear anodize	100	06 Nov 2026
3	SB-1042 Rev A	Stepper Motor Bracket	6061-T6 aluminum / Type II clear anodize	500	06 Nov 2026

Scope of work

[AI] Supply finished, inspected parts per the enclosed specification sheet and 3D model, in 6061-T6 aluminum, finished Type II clear anodize. Quote each quantity break (25, 100, 500) separately. Show any one-time tooling, fixturing or programming (NRE) on its own line.

Package contents

Doc	Title	Format
A	RFQ cover (this page)	PDF, p.1
B	Part specification sheet and drawing views	PDF, p.2
C	Quality, finish and packaging requirements	PDF, p.3
D	Supplier quote response form	PDF, p.4
E	3D model, SB-1042_RevA.step	STEP (attached separately)
F	Data provenance and open items (internal)	PDF, p.5


How to respond

Complete the quote response form (Doc D) and return it with any exceptions to procurement@northwind.example by 09 Oct 2026. If a requirement drives cost, say so and offer an alternative. We review price, lead time, quality record and responsiveness, not price alone.

Field sources: [CAD] from STEP geometry · [ENG] entered by the engineer · [AI] drafted by AI, reviewed by engineer. Set options.show_tags=false for the supplier copy.

DOC B

Part Specification Sheet

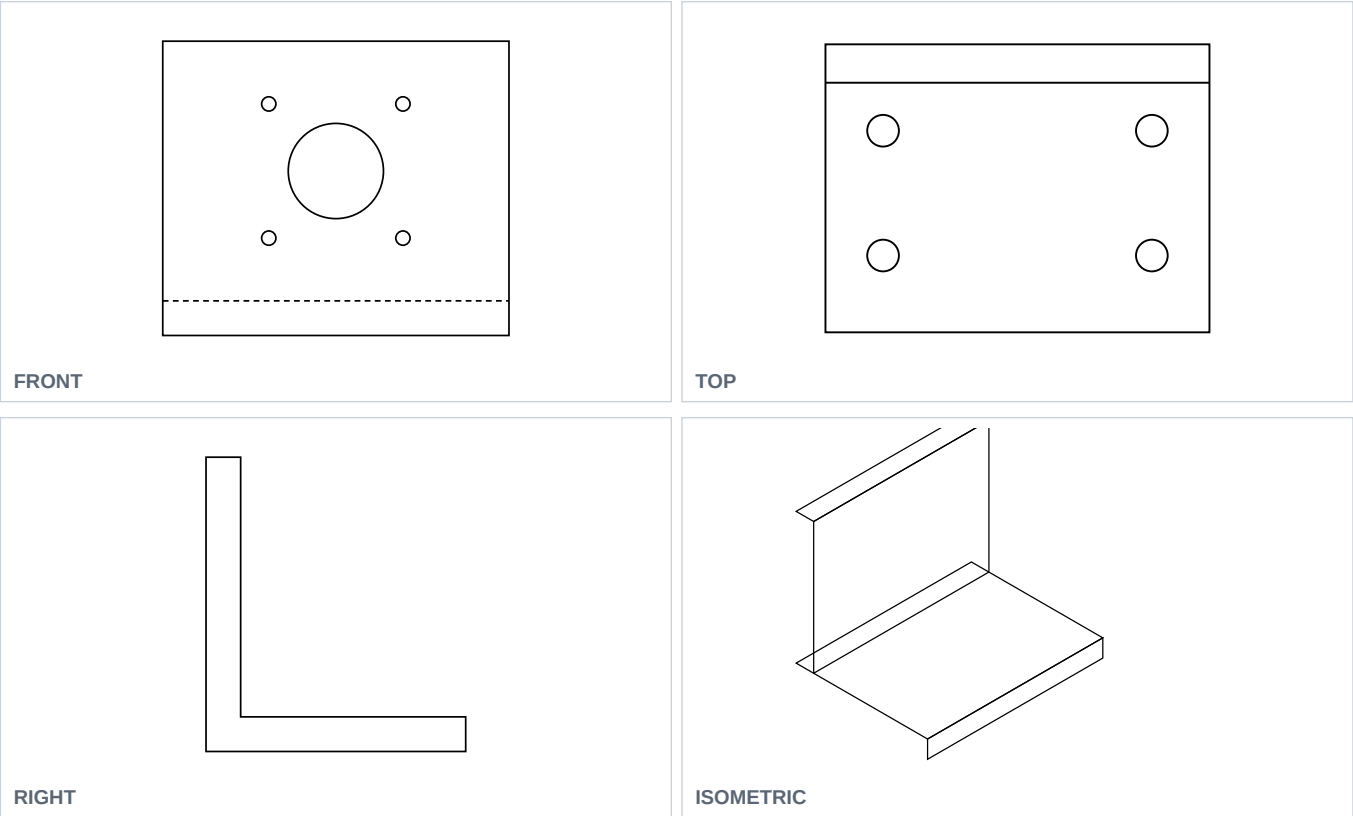

Views generated from STEP geometry, not to scale. The 3D model governs geometry; requirements below govern tolerances and finish.

Attribute	Value	Source
Part	Stepper Motor Bracket, SB-1042 Rev A	[ENG]
Overall envelope	80.0 x 60.0 x 68.0 mm	[CAD]
Volume	72.8 cm ³	[CAD]
Surface area	218.7 cm ²	[CAD]
Material	6061-T6 aluminum	[ENG]
Finish	Type II clear anodize	[ENG]
General tolerance	ISO 2768-m	[ENG]
Critical dimensions	Pilot bore: 22.00 +0.05/-0 mm	[ENG]
Likely process	Likely CNC milling from plate or bar. Supplier to confirm routing and number of setups. Finish after all machining: Type II clear anodize.	[AI]

DOC C

Quality, Finish and Packaging Requirements

Critical-to-function characteristics

#	Characteristic	Requirement	Unit
1	Pilot bore	22.00 +0.05/-0	mm

Inspection

[AI] Inspect critical dimensions: Pilot bore 22.00 +0.05/-0 mm. Ship with: CoC, material cert, FAI.

Quality documentation

[ENG] Ship the following with each lot:

- CoC
- material cert
- FAI

Process and finish

[AI] Likely CNC milling from plate or bar. Supplier to confirm routing and number of setups. Finish after all machining: Type II clear anodize.

[ENG] Finish: Type II clear anodize. Finish after all machining unless noted.

Workmanship

- Break all sharp edges unless noted. No burrs in holes or threads.
- General tolerance ISO 2768-m unless a tighter tolerance is stated.
- Non-conforming parts are not to be shipped without written deviation approval from the buyer.

Packaging and delivery

[AI] Individually bagged or separated so finished faces do not touch; boxes labelled with part number, revision, quantity and PO. Target delivery: 06 Nov 2026. Label each box with part number, revision, quantity and PO number.

Commercial terms

Drawings, models and this RFQ are confidential and remain the property of Northwind Robotics. They may be shared with sub-tier processors only as needed to quote or produce the part. Changes to material, process or sub-tier suppliers after award require written notice.

DOC D

Supplier Quote Response Form

Return by 09 Oct 2026.

Supplier name		Quote ref.	
Contact / email		Date	
Certifications	[] ISO 9001 [] AS9100 [] Other: _____		

Pricing

Line	Qty	Unit price	Extended	Lead time (days ARO)	Notes
1	25				
2	100				
3	500				
NRE	1				Programming, fixtures, gauges

[AI] Questions for the supplier

Unit price and lead time per quantity break	
NRE (programming, fixtures, gauges)	
Is finishing done in house or by a sub-tier supplier?	
Any DFM suggestions that reduce cost?	

Exceptions, DFM suggestions and cost drivers

Authorized signature	Name and title	Date

DOC F · INTERNAL, NOT SENT TO SUPPLIERS

Data Provenance and Open Items

Where every printed value came from. A plain STEP file carries geometry only; material, tolerances, finish and commercial terms come from the engineer, and text sections are drafted by AI and reviewed before export.

Flags raised during generation

Severity	Field	Message
WARN	packaging	Packaging not specified; proposed a default.
INFO	cad	STEP has no PMI; tolerances come only from the form.

Field sources

Field	Value	Source	Note
scope_of_work	Supply finished, inspected parts per the enclosed specification sheet and 3D model, in 6061-T6 aluminum, finished Type II clear anodize. Quote each quantity ...	[AI]	From material, finish, quantities (mock)
process_notes	Likely CNC milling from plate or bar. Supplier to confirm routing and number of setups. Finish after all machining: Type II clear anodize.	[AI]	Inferred from material (mock)
inspection_requirements	Inspect critical dimensions: Pilot bore 22.00 +0.05/-0 mm. Ship with: CoC, material cert, FAI.	[AI]	From critical dims and certs (mock)
packaging	Individually bagged or separated so finished faces do not touch; boxes labelled with part number, revision, quantity and PO.	[AI]	Not specified; default proposed
quote_form_questions	Unit price and lead time per quantity break NRE (programming, fixtures, gauges) Is finishing done in house or by a sub-tier supplier? Any DFM sug...	[AI]	
solid_count	1	[CAD]	
volume_mm3	72800.0	[CAD]	
bbox_mm	80.0 x 60.0 x 68.0 mm	[CAD]	
surface_area_mm2	21870.2	[CAD]	
source_filename	SB-1042_RevA.step	[CAD]	
part_name	Stepper Motor Bracket	[ENG]	
part_number	SB-1042	[ENG]	
revision	A	[ENG]	
material	6061-T6 aluminum	[ENG]	
general_tolerance	ISO 2768-m	[ENG]	
critical_dims	Pilot bore: 22.00 +0.05/-0 mm	[ENG]	
finish	Type II clear anodize	[ENG]	
qty_breaks	25, 100, 500	[ENG]	
target_delivery	2026-11-06	[ENG]	
certs	CoC, material cert, FAI	[ENG]	
buyer	Northwind Robotics, A. Rivera, procurement@northwind.example	[ENG]	
quote_due	2026-10-09	[ENG]	