
# 31 Optoelectronics

## **Light Emitters**


	Power Output		VF			λр		
Device	min.	@ IF	6HP	max. (	@ IF	typ	Key Features	
Type	mW	.mA	typ	V·	mA	μm		
TIL23	0.4	50	35*	1.5	50	0.93	Pill package for mounting on	
TIL24	1.0	50	35*	1.5	50	0.93	>double-sided printed circuit board	
TIL25	0.7	50	35°	1.5	50	0.94		
TIL31	3.3	100	10*	1.75	100	0.94	15	
TIL33	2.5	100	80.	1.75	100	0.94	Hermetically sealed TO18 package	
TIL34	1,6	100	10*	1.75	100	0.94		
TIL32	0.5	20	35*	1.6	20	0.94	Low cost 3 mm plastic package	
4 <b>41138</b> 11	6.0	100	60°	1.9	100	0.94	Low cost 5 mm plastic package	
3	1		ī			1	1	

## **Light Sensors**


			tht Current		Dark Current		Power	
Device	Type	min.	max. @	<b>₃</b> ∨ ∣	max.	@ V	Diss	Key Features
Type		m <b>A</b>	mA		nA		mW	
LS600	Phototransistor	0.8	_	5	25	30	50	Pill Package
LS602	Phototransistor	0.5		5	25	30	50	١ .
LS611	Phototransistor	0.5	2	5	25	30	50	
LS612	Phototransistor	1	3	5	25	30	50	
LS613	Phototransistor	2	4	5	25	30	50	
LS614	Phototransistor	3	5	5	25	30	50	Pill package designed for mounting on double-sided
LS615	Phototransistor	4	6	5	25	30	50	printed circuit board
LS616	Phototransistor	5	7	. 5	25	30	50	
LS617	Phototransistor	6	8	5	25	30	50	<b>                                     </b>
LS618	Phototransistor	7	9	5	25	30	50	
LS619	Phototransistor	8		5	25	30	50	
TIL63	Phototransistor	0.4		5	25	30	50	1
TIL64	Phototransistor	0.4	1.6	5	25	30	50	Low-cost header with epoxy lens. Operating
TIL65	Phototransistor	1	4	5	25	30	50	>temperature range—40°C to 80°C
TIL66	Phototransistor	2.5	10	5	25	30	50	
TIL67	Phototransistor	6	_	5	25	30	50	[ <del>]</del>
TIL78	Phototransistor	1	_	5	25	30	50	Low-cost plastic package
TIL81	As Phototransistor	5	_	5	100	10.	250	η ΄ ΄ ΄
<b> </b>	As Photodiode	170 * µA typ	_	050	10	30	250	TO-18 package with narrow field of view
TIL99	As Phototransistor	1	_	5	100	10	250	
	As Photodiode	40*μA typ	_	0–50	10	10	250	Similar to TIL81 except flat lens
TIL100	Photodiode	6 A/W	-	50	100	50	1	Low-cost "side looker" package
LS400	Phototransistor	1		. 5	25	30	50	ή
TIL401	Phototransistor	0.5	3	5	25	30	50	,
TIL402	Phototransistor	2	6	5	25	30	50	
TIL403	Phototransistor <sup>,</sup>	5	10	5	25	30	50	Glass, hermetically sealed
TIL404	Phototransistor	8	16	5	25	30	50	
TIL405	Phototransistor	10	20	5	25	30	50	J




### Pill Package

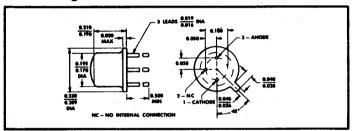

#### **TO-18 Hermetic Seal**



#### Low Cost Plastic Package



Hermetic Seal Glass Package

ALL DIMENSIONS IN INCHES WWW.DataSheet4U.com