
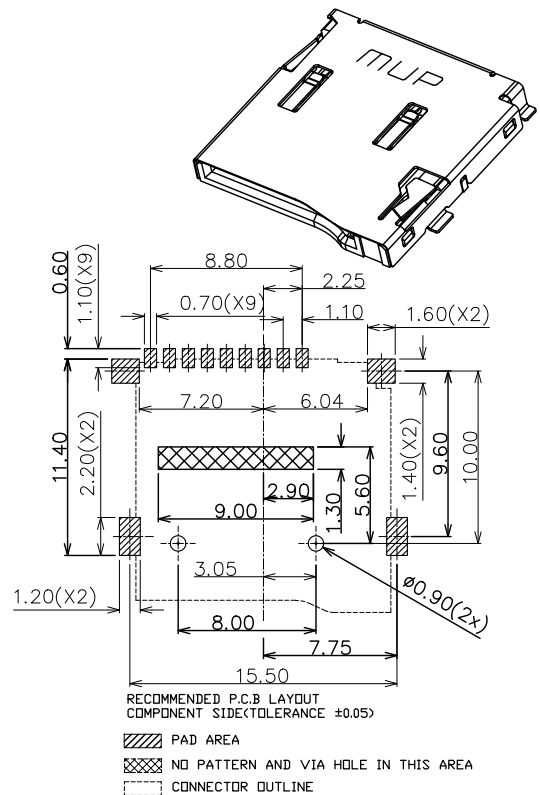
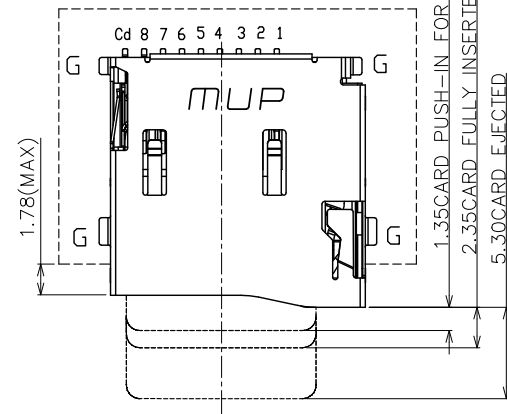
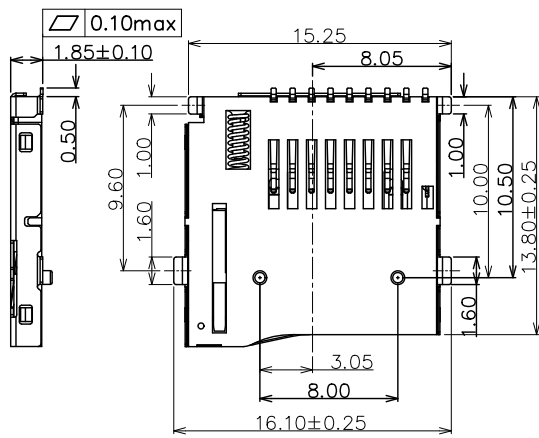


REV.	DESCRIPTION OF REVISIONS	APPR.	DRAW.	RELEASE	DATE
X1	NEW REVISION				Apr.19.2021

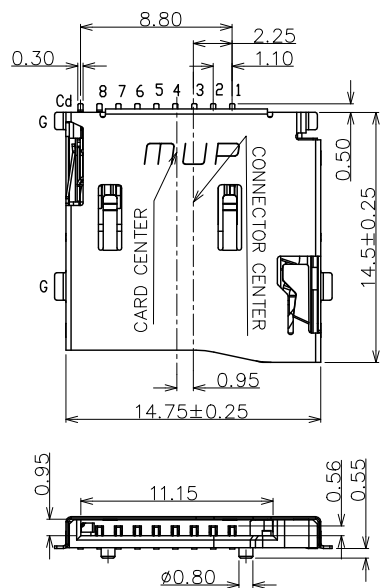

TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions: 14.50LX14.75WX1.85H mm
 Weight: Approx 0.45±0.2g
 Durability: 5,000 cycles min.

2.Electrical Characteristics

Contact resistance: 50mΩ typical, 100mΩ max
 Insulation resistance: >1000MΩ/500V DC

3.Solderability


Vaporphase: 215°C, 30sec. Max
 IR reflow: 250°C, 5sec. Max
 Manual soldering: 370°C, 3sec. Max

4.Environmental Characteristics

Operating temperature: -40°C~+85°C
 Operating humidity: 10%~+95%RH

Pin No.	Pin assignment	Pin No.	Pin assignment
1	DAT2	5	CLK
2	CD/DAT3	6	VSS
3	CMD	7	DAT0
4	VDD	8	DAT1
Cd	CARD DETECTION	G	GROUND

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	OPEN
CARD INSERTED	CLOSED



SWITCH OPERATION DIAGRAM

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	HOUSING	1	Hi-temp Thermoplastic	Black UL94V-0
2	TERMINAL	8	Copper Alloy	Contact area: Gold plated
3	SHELL	1	Stainless steel	SMT area: Gold plated
4	DETECT	1	Copper Alloy	Contact area: Gold plated
5	SLIDER	1	Hi-temp Thermoplastic	Black UL94V-0
6	SPRING	1	SWP	
7	CRANK-AXLE	1	Stainless Steel	

Unless otherwise specified, other tolerance are:

MUP MUP INDUSTRIAL CO.,LTD.

X ±0.35	X* ±5°	NAME: T-Flash Card Connector	
X.X ±0.25	X.X* ±4°	MODEL NO: MUP-M614-12	
X.XX ±0.15	X.XX* ±3°	TYPE: H=1.85 mm	
X.XXX ±0.10	X.XXX* ±2°		
PROJ.	UNIT	SCALE	DRAWN
⊕	mm	1:1	Herny Apr.19.2021
CUSTOMER DRAWING			CHECKED
			Herny Apr.19.2021
			APPROVAL
			Simon Apr.19.2021
			DWG NO.:
			DWG-MUP-M614-12
			SHEET
			1/1
			REVISION
			X1

